

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831432

Luminaire Tested: S123DIP-S340D805U850-4F0-1E-UDD-G

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831432
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-5)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-S340D805U850-4F0-1E-UDD-G
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 805 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5310.2 lumens
Efficiency: N/A
Efficacy: 160.9 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 33
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831432

CATALOG NUMBER: S123DIP-S340D805U850-4F0-1E-UDD-G

Luminous Intensity Polar Plot

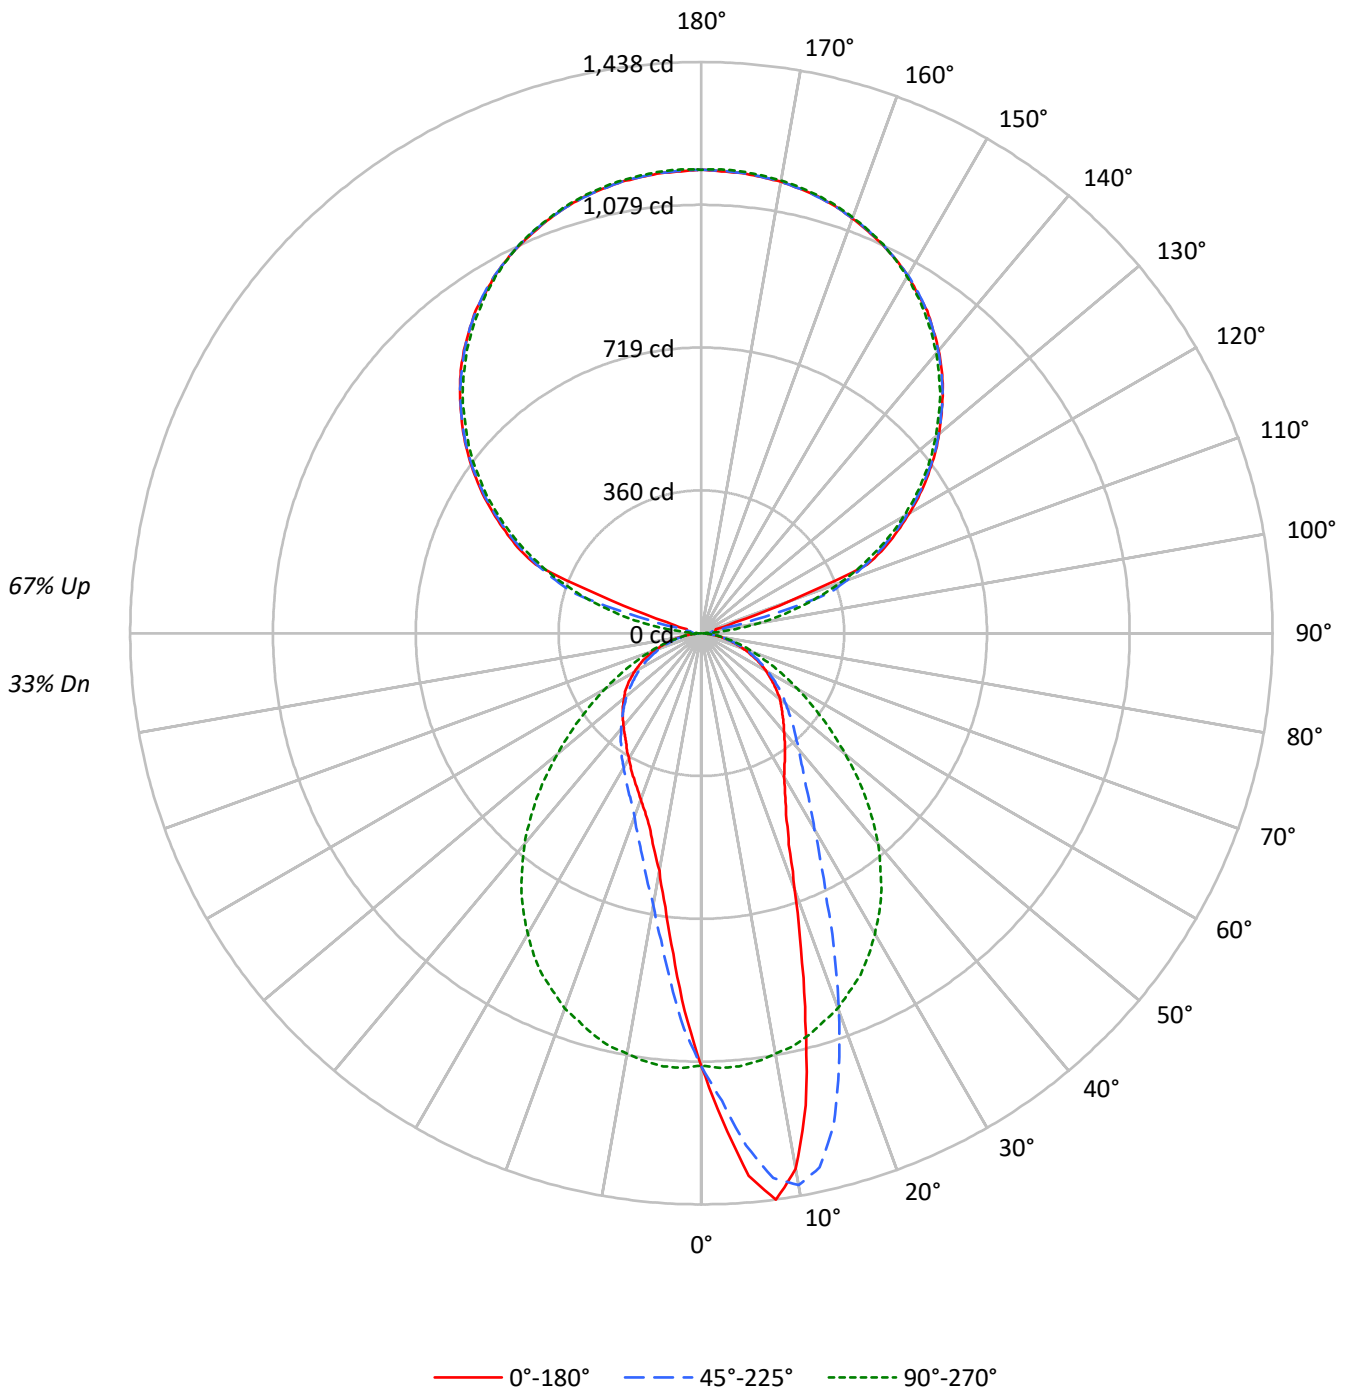



TEST NUMBER: P831432

CATALOG NUMBER: S123DIP-S340D805U850-4F0-1E-UDD-G

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	41	41	41	33
1	94	90	87	83	85	81	78	76	65	63	61	50	49	48	36	36	35	28
2	86	79	73	69	77	72	67	63	57	54	51	44	42	40	32	31	30	24
3	79	70	63	58	71	63	57	53	51	47	43	40	37	35	29	27	26	21
4	72	62	55	49	65	56	50	45	46	41	37	36	32	30	26	24	23	19
5	66	55	48	42	60	50	44	39	41	36	32	32	29	26	24	22	20	16
6	61	50	42	37	55	45	39	34	37	32	28	29	26	23	22	20	18	15
7	57	45	38	32	51	41	35	30	34	29	25	27	23	21	20	18	16	13
8	53	41	34	29	48	37	31	27	31	26	23	25	21	19	19	16	15	12
9	49	37	30	26	44	34	28	24	28	24	20	23	19	17	17	15	13	11
10	46	34	28	23	41	32	25	21	26	22	18	21	18	15	16	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	11720	11720	11720	11720	11720
5°	14822	13989	11825	9529	8756
10°	14966	15419	11746	7596	6638
15°	11272	14315	11666	6433	5613
20°	7853	11584	11518	5625	5098
25°	5989	8909	11264	5176	4783
30°	5180	7077	10858	4857	4528
35°	4807	5975	10390	4628	4348
40°	4551	5361	9733	4409	4288
45°	4399	4961	8899	4238	4261
50°	4324	4645	7911	4083	4238
55°	4162	4414	6942	3935	4258
60°	4013	4166	5983	3795	4187
65°	3769	3933	5160	3647	4106
70°	3484	3635	4390	3402	3865
75°	3152	3256	3760	3161	3531
80°	2597	2851	2975	2758	2975
85°	2062	2309	2186	2334	2371

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 10161 cd/sqm



TEST NUMBER: P831432

CATALOG NUMBER: S123DIP-S340D805U850-4F0-1E-UDD-G

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.9	1.9
10°-20°	256.1	4.8
20°-30°	303.2	5.7
30°-40°	304.9	5.7
40°-50°	279.7	5.3
50°-60°	230.9	4.3
60°-70°	163.3	3.1
70°-80°	87.2	1.6
80°-90°	24.5	0.5
90°-100°	41.1	0.8
100°-110°	198.9	3.7
110°-120°	487.5	9.2
120°-130°	618.9	11.7
130°-140°	661.2	12.5
140°-150°	618.3	11.6
150°-160°	498.7	9.4
160°-170°	321.9	6.1
170°-180°	110.9	2.1
0°-30°	662.3	12.5
0°-40°	967.1	18.2
0°-60°	1477.7	27.8
0°-90°	1752.7	33.0
90°-120°	727.6	13.7
90°-150°	2626.0	49.5
90°-180°	3558.0	67.0
0°-180°	5310.2	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	1089	1089	1089	1089	1089	
5°	1372	1295	1094	882	810	131
15°	1012	1285	1047	577	504	279
25°	504	750	948	436	403	238
35°	366	455	791	352	331	230
45°	289	326	585	278	280	224
55°	222	235	370	210	227	198
65°	148	154	203	143	161	147
75°	76	78	90	76	85	80
85°	17	19	18	19	19	19
90°	26	21	1	21	26	12
95°	33	27	53	27	33	28
105°	38	190	258	190	38	79
115°	510	498	485	498	510	479
125°	697	694	683	694	697	623
135°	859	859	850	859	859	663
145°	991	989	982	989	991	619
155°	1079	1080	1081	1080	1079	498
165°	1138	1137	1140	1137	1138	321
175°	1163	1164	1167	1164	1163	111
180°	1167	1167	1167	1167	1167	



TEST NUMBER: P831432

CATALOG NUMBER: S123DIP-S340D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8
2.5°	1227.3	1226.0	1224.8	1218.4	1212.1	1209.1	1206.1	1197.0	1187.9	1177.8	1167.7
5°	1371.8	1375.3	1378.9	1374.8	1370.8	1358.4	1346.0	1329.6	1313.2	1294.7	1276.3
7.5°	1438.5	1440.5	1442.5	1440.0	1437.5	1434.2	1430.9	1416.3	1401.6	1382.7	1363.7
10°	1369.3	1373.8	1378.4	1388.2	1398.1	1409.2	1420.3	1418.3	1416.3	1410.7	1405.1
12.5°	1217.2	1222.7	1228.3	1248.0	1267.7	1293.0	1318.2	1340.0	1361.7	1376.8	1392.0
15°	1011.5	1026.9	1042.4	1060.3	1078.2	1115.4	1152.5	1198.2	1244.0	1284.6	1325.3
17.5°	833.2	839.0	844.8	864.0	883.2	929.9	976.7	1029.5	1082.3	1149.7	1217.2
20°	685.6	690.9	696.3	721.5	746.8	783.4	820.0	879.4	938.8	1011.3	1083.8
22.5°	576.0	584.3	592.7	606.8	621.0	656.1	691.2	744.0	796.8	876.9	957.0
25°	504.3	510.3	516.4	525.0	533.6	561.6	589.6	633.1	676.5	750.1	823.6
27.5°	455.2	457.8	460.3	468.9	477.5	495.7	513.9	551.2	588.6	651.0	713.4
30°	416.8	418.6	420.4	428.0	435.5	447.9	460.3	487.3	514.4	569.4	624.5
32.5°	390.1	391.3	392.6	398.4	404.2	413.1	421.9	441.6	461.3	506.8	552.3
35°	365.8	366.6	367.3	371.6	375.9	382.5	389.1	404.0	418.9	454.7	490.6
37.5°	344.6	345.6	346.6	349.1	351.7	357.5	363.3	375.2	387.0	414.6	442.1
40°	323.9	325.6	327.4	329.2	330.9	335.7	340.5	349.6	358.7	381.5	404.2
42.5°	306.2	308.0	309.7	310.5	311.2	314.0	316.8	325.1	333.5	350.4	367.3
45°	289.0	289.8	290.5	291.3	292.0	294.3	296.6	303.9	311.2	325.9	340.5
47.5°	273.3	273.3	273.3	273.9	274.4	276.4	278.4	283.7	289.0	300.4	311.7
50°	258.2	258.2	258.2	257.4	256.7	257.9	259.2	263.2	267.3	277.4	287.5
52.5°	240.0	240.0	240.0	240.3	240.5	240.5	240.5	244.0	247.6	256.7	265.8
55°	221.8	222.8	223.8	223.1	222.3	222.8	223.3	225.6	227.9	235.2	242.5
57.5°	203.6	204.1	204.6	204.4	204.1	204.4	204.6	206.7	208.7	214.2	219.8
60°	186.4	186.4	186.4	185.9	185.4	185.9	186.4	187.5	188.5	193.5	198.6
62.5°	167.2	167.5	167.7	168.0	168.3	167.7	167.2	168.5	169.8	173.6	177.3
65°	148.0	148.3	148.5	149.3	150.1	149.6	149.1	150.3	151.6	154.4	157.1
67.5°	130.9	130.4	129.9	130.1	130.4	131.1	131.9	132.1	132.4	135.4	138.4
70°	110.7	111.2	111.7	111.4	111.2	111.4	111.7	112.4	113.2	115.5	117.7
72.5°	92.5	92.7	93.0	93.0	93.0	93.5	94.0	94.7	95.5	96.8	98.0
75°	75.8	75.8	75.8	76.3	76.8	77.1	77.3	77.3	77.3	78.3	79.3
77.5°	57.6	58.9	60.1	59.9	59.6	60.1	60.6	61.4	62.1	62.7	63.2
80°	41.9	41.9	41.9	42.2	42.4	43.2	44.0	44.5	45.0	46.0	47.0
82.5°	26.8	27.0	27.3	28.0	28.8	29.3	29.8	30.6	31.3	31.3	31.3
85°	16.7	16.2	15.7	16.2	16.7	17.2	17.7	17.9	18.2	18.7	19.2
87.5°	8.1	8.1	8.1	8.1	8.1	8.3	8.6	8.6	8.6	8.6	8.6
90°	26.0	25.6	25.2	24.9	24.5	23.9	23.1	22.3	21.6	20.8	18.3
92.5°	29.5	29.3	29.1	28.9	28.7	27.9	26.6	25.2	23.9	22.5	20.8
95°	32.9	32.9	32.9	32.9	32.9	32.3	30.9	29.6	28.2	26.9	24.8
97.5°	35.5	35.4	35.2	35.0	34.8	33.9	32.4	30.8	29.3	27.7	37.6
100°	36.4	36.2	36.0	35.8	35.6	34.8	33.2	31.7	30.2	28.6	58.7
102.5°	37.3	36.9	36.5	36.1	35.7	38.7	45.1	51.4	57.8	64.2	97.7
105°	38.1	37.8	37.4	37.0	36.6	53.5	87.6	121.7	155.8	189.9	207.2
107.5°	90.2	115.4	140.6	165.9	191.1	218.6	248.3	277.9	307.6	337.3	334.4
110°	238.4	266.0	293.5	321.1	348.6	365.6	371.9	378.3	384.7	391.0	388.9



TEST NUMBER: P831432

CATALOG NUMBER: S123DIP-S340D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	451.7	452.1	452.5	452.9	453.3	452.6	450.8	449.1	447.4	445.6	443.5
115°	509.8	509.0	508.3	507.5	506.7	505.4	503.4	501.5	499.6	497.7	495.9
117.5°	556.6	556.4	556.2	556.0	555.8	555.0	553.4	551.9	550.4	548.8	547.9
120°	605.2	605.2	605.2	605.2	605.2	604.4	602.9	601.3	599.8	598.2	597.7
122.5°	652.9	652.7	652.5	652.3	652.1	651.5	650.5	649.6	648.6	647.7	646.9
125°	697.1	696.7	696.3	695.9	695.5	695.1	694.8	694.4	694.0	693.6	692.8
127.5°	740.4	740.8	741.2	741.6	742.0	741.9	741.3	740.7	740.1	739.6	738.6
130°	782.0	782.4	782.8	783.2	783.6	783.4	782.6	781.9	781.1	780.3	779.5
132.5°	820.2	820.8	821.3	821.9	822.5	822.4	821.6	820.9	820.1	819.3	818.7
135°	859.2	859.8	860.4	860.9	861.5	861.5	860.9	860.4	859.8	859.2	858.4
137.5°	896.5	896.9	897.3	897.6	898.0	897.7	896.8	895.8	894.9	893.9	893.5
140°	929.4	929.8	930.2	930.6	931.0	930.8	930.0	929.2	928.5	927.7	927.1
142.5°	959.8	960.4	960.9	961.5	962.1	962.1	961.5	960.9	960.4	959.8	959.2
145°	991.0	991.0	991.0	991.0	991.0	990.8	990.4	990.0	989.6	989.3	988.9
147.5°	1013.5	1014.5	1015.5	1016.4	1017.4	1017.7	1017.3	1016.9	1016.5	1016.1	1015.8
150°	1039.5	1040.1	1040.7	1041.3	1041.9	1042.0	1041.6	1041.2	1040.8	1040.4	1040.0
152.5°	1060.4	1061.3	1062.3	1063.2	1064.2	1064.3	1063.5	1062.8	1062.0	1061.2	1061.0
155°	1079.4	1080.6	1081.7	1082.9	1084.1	1084.1	1083.2	1082.2	1081.3	1080.3	1080.1
157.5°	1095.9	1097.4	1099.0	1100.5	1102.1	1102.3	1101.1	1099.9	1098.8	1097.6	1097.8
160°	1111.5	1112.9	1114.2	1115.6	1116.9	1117.0	1115.8	1114.7	1113.5	1112.4	1112.6
162.5°	1126.2	1127.4	1128.6	1129.7	1130.9	1130.8	1129.4	1128.1	1126.7	1125.4	1125.6
165°	1137.5	1138.9	1140.2	1141.6	1142.9	1142.8	1141.3	1139.7	1138.2	1136.7	1136.8
167.5°	1146.2	1147.7	1149.3	1150.8	1152.4	1152.4	1150.8	1149.3	1147.7	1146.2	1146.2
170°	1154.0	1155.5	1157.1	1158.6	1160.2	1160.2	1158.6	1157.1	1155.5	1154.0	1154.0
172.5°	1158.3	1160.1	1161.8	1163.5	1165.3	1165.4	1163.8	1162.3	1160.7	1159.2	1159.0
175°	1162.7	1164.2	1165.7	1167.3	1168.8	1168.9	1167.6	1166.2	1164.9	1163.5	1163.3
177.5°	1163.5	1165.5	1167.4	1169.3	1171.2	1171.4	1169.9	1168.3	1166.8	1165.3	1165.1
180°	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0



TEST NUMBER: P831432

CATALOG NUMBER: S123DIP-S340D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8
2.5°	1164.6	1161.6	1150.5	1139.4	1126.7	1114.1	1104.8	1095.4	1081.5	1067.6	1056.3
5°	1262.1	1248.0	1224.5	1201.0	1169.2	1137.3	1115.9	1094.4	1065.6	1036.8	1013.8
7.5°	1339.5	1315.2	1282.4	1249.5	1207.8	1166.1	1126.7	1087.3	1043.4	999.4	963.5
10°	1388.7	1372.3	1334.4	1296.5	1240.7	1184.8	1129.8	1074.7	1018.1	961.5	914.0
12.5°	1393.5	1395.0	1360.2	1325.3	1262.1	1199.0	1132.0	1065.1	993.9	922.6	867.3
15°	1351.3	1377.3	1358.1	1338.9	1275.3	1211.6	1129.3	1046.9	964.8	882.7	818.8
17.5°	1273.0	1328.8	1331.6	1334.4	1270.7	1207.1	1115.9	1024.7	931.7	838.7	771.5
20°	1166.1	1248.5	1276.8	1305.1	1253.3	1201.5	1103.5	1005.5	901.4	797.3	726.8
22.5°	1057.0	1157.1	1208.8	1260.6	1222.2	1183.8	1079.5	975.2	865.3	755.4	683.9
25°	932.7	1041.9	1121.4	1201.0	1177.5	1154.0	1051.2	948.4	831.4	714.4	641.4
27.5°	824.3	935.2	1031.2	1127.2	1122.2	1117.1	1015.1	913.0	793.3	673.5	603.0
30°	727.8	831.2	938.5	1045.9	1058.3	1070.7	972.1	873.6	753.6	633.6	565.6
32.5°	642.4	732.6	847.8	963.0	987.3	1011.5	922.6	833.7	714.9	596.2	530.8
35°	572.5	654.3	769.5	884.7	915.0	945.3	868.0	790.7	675.0	559.3	496.9
37.5°	510.6	579.0	691.5	803.9	841.0	878.1	808.9	739.7	631.3	522.9	465.6
40°	459.3	514.4	617.7	721.0	764.0	806.9	749.8	692.7	589.9	487.1	434.3
42.5°	416.3	465.3	559.1	652.8	694.0	735.2	686.9	638.7	547.2	455.7	407.5
45°	379.7	418.9	504.0	589.1	628.3	667.5	626.0	584.6	504.0	423.4	378.4
47.5°	345.3	378.9	451.7	524.5	559.3	594.2	561.9	529.5	461.3	393.1	352.4
50°	314.5	341.6	405.2	468.9	499.2	529.5	501.0	472.4	416.3	360.3	324.9
52.5°	287.7	309.7	363.0	416.3	442.4	468.4	443.9	419.4	374.9	330.4	299.6
55°	261.2	279.9	326.1	372.4	390.1	407.7	388.8	369.9	334.0	298.1	272.1
57.5°	236.5	253.1	291.0	328.9	342.6	356.2	339.0	321.9	294.8	267.8	246.1
60°	212.2	225.9	257.4	289.0	297.3	305.7	291.8	277.9	258.9	240.0	220.5
62.5°	189.7	202.1	225.6	249.1	254.7	260.2	249.6	239.0	224.6	210.2	195.0
65°	166.5	175.8	195.0	214.2	217.8	221.3	212.0	202.6	191.7	180.9	169.8
67.5°	145.0	151.6	167.2	182.9	183.2	183.4	175.8	168.3	162.2	156.1	147.3
70°	124.0	130.4	140.7	151.1	151.3	151.6	145.5	139.5	134.9	130.4	123.8
72.5°	102.6	107.1	114.9	122.8	122.3	121.8	118.0	114.2	110.7	107.1	102.3
75°	83.1	86.9	92.2	97.5	96.0	94.5	92.5	90.4	87.4	84.4	81.3
77.5°	65.4	67.7	70.7	73.8	72.8	71.7	70.0	68.2	65.9	63.7	62.4
80°	48.0	49.0	51.0	53.1	52.5	52.0	50.0	48.0	47.5	47.0	45.2
82.5°	32.6	33.9	34.4	34.9	34.6	34.4	32.8	31.3	30.8	30.3	30.1
85°	19.5	19.7	20.0	20.2	19.5	18.7	18.2	17.7	17.7	17.7	17.4
87.5°	8.8	9.1	9.1	9.1	8.8	8.6	8.1	7.6	7.8	8.1	8.1
90°	15.8	13.3	10.8	8.6	6.6	4.7	2.8	0.9	2.8	4.7	6.6
92.5°	19.1	17.3	15.6	15.3	16.5	17.6	18.8	19.9	18.8	17.6	16.5
95°	22.6	20.5	18.4	21.3	29.2	37.1	45.0	52.9	45.0	37.1	29.2
97.5°	47.4	57.2	67.0	74.7	80.1	85.4	90.8	96.2	90.8	85.4	80.1
100°	88.7	118.8	148.8	161.9	158.1	154.2	150.4	146.5	150.4	154.2	158.1
102.5°	131.2	164.7	198.3	213.8	211.3	208.8	206.3	203.7	206.3	208.8	211.3
105°	224.6	241.9	259.2	266.8	264.7	262.6	260.5	258.4	260.5	262.6	264.7
107.5°	331.5	328.6	325.7	323.4	321.7	319.9	318.2	316.5	318.2	319.9	321.7
110°	386.8	384.7	382.5	380.7	379.2	377.6	376.1	374.5	376.1	377.6	379.2



TEST NUMBER: P831432

CATALOG NUMBER: S123DIP-S340D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	441.4	439.3	437.2	435.4	434.1	432.7	431.4	430.0	431.4	432.7	434.1
115°	494.2	492.5	490.7	489.3	488.1	487.0	485.8	484.7	485.8	487.0	488.1
117.5°	546.9	545.9	545.0	543.8	542.5	541.1	539.8	538.4	539.8	541.1	542.5
120°	597.1	596.5	595.9	594.8	593.0	591.3	589.6	587.8	589.6	591.3	593.0
122.5°	646.1	645.3	644.6	643.5	642.2	640.8	639.5	638.1	639.5	640.8	642.2
125°	692.1	691.3	690.5	689.4	687.8	686.3	684.7	683.2	684.7	686.3	687.8
127.5°	737.6	736.7	735.7	734.5	732.9	731.4	729.8	728.3	729.8	731.4	732.9
130°	778.8	778.0	777.2	776.1	774.5	773.0	771.4	769.9	771.4	773.0	774.5
132.5°	818.2	817.6	817.0	816.0	814.4	812.9	811.3	809.8	811.3	812.9	814.4
135°	857.7	856.9	856.1	855.2	854.0	852.8	851.7	850.5	851.7	852.8	854.0
137.5°	893.1	892.7	892.3	891.4	889.8	888.3	886.8	885.2	886.8	888.3	889.8
140°	926.5	926.0	925.4	924.5	923.4	922.2	921.1	919.9	921.1	922.2	923.4
142.5°	958.6	958.0	957.5	956.6	955.4	954.3	953.1	952.0	953.1	954.3	955.4
145°	988.5	988.1	987.7	986.9	985.5	984.2	982.8	981.5	982.8	984.2	985.5
147.5°	1015.4	1015.0	1014.6	1013.9	1013.0	1012.0	1011.0	1010.1	1011.0	1012.0	1013.0
150°	1039.6	1039.3	1038.9	1038.4	1037.8	1037.2	1036.7	1036.1	1036.7	1037.2	1037.8
152.5°	1060.8	1060.6	1060.4	1060.3	1060.1	1059.9	1059.7	1059.5	1059.7	1059.9	1060.1
155°	1079.9	1079.7	1079.5	1079.6	1080.0	1080.4	1080.8	1081.2	1080.8	1080.4	1080.0
157.5°	1098.0	1098.2	1098.4	1098.5	1098.5	1098.5	1098.5	1098.5	1098.5	1098.5	1098.5
160°	1112.8	1113.0	1113.1	1113.3	1113.5	1113.7	1113.9	1114.1	1113.9	1113.7	1113.5
162.5°	1125.8	1126.0	1126.1	1126.5	1127.1	1127.7	1128.3	1128.8	1128.3	1127.7	1127.1
165°	1137.0	1137.2	1137.4	1137.8	1138.4	1139.0	1139.5	1140.1	1139.5	1139.0	1138.4
167.5°	1146.2	1146.2	1146.2	1146.6	1147.3	1148.1	1148.9	1149.7	1148.9	1148.1	1147.3
170°	1154.0	1154.0	1154.0	1154.4	1155.1	1155.9	1156.7	1157.5	1156.7	1155.9	1155.1
172.5°	1158.8	1158.6	1158.4	1158.8	1159.8	1160.7	1161.7	1162.7	1161.7	1160.7	1159.8
175°	1163.1	1162.9	1162.8	1163.1	1164.1	1165.1	1166.0	1167.0	1166.0	1165.1	1164.1
177.5°	1164.9	1164.7	1164.5	1164.9	1165.8	1166.8	1167.8	1168.7	1167.8	1166.8	1165.8
180°	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0



TEST NUMBER: P831432

CATALOG NUMBER: S123DIP-S340D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8	1088.8
2.5°	1044.9	1035.0	1025.2	1017.6	1010.0	997.1	984.3	981.2	978.2	973.9	969.6
5°	990.8	966.6	942.3	920.6	898.9	881.9	865.0	853.9	842.8	834.7	826.6
7.5°	927.7	891.3	854.9	829.1	803.4	778.9	754.4	746.5	738.7	728.1	717.5
10°	866.5	826.4	786.2	752.6	719.0	695.0	671.0	661.4	651.8	638.4	625.0
12.5°	812.0	768.0	724.0	690.2	656.3	633.1	609.9	596.0	582.1	574.5	566.9
15°	754.9	707.9	660.9	629.6	598.2	577.3	556.3	544.2	532.0	524.7	517.4
17.5°	704.3	657.9	611.4	581.3	551.2	532.0	512.8	502.2	491.6	486.1	480.5
20°	656.3	610.9	565.4	536.1	506.8	491.1	475.5	468.6	461.8	457.3	452.7
22.5°	612.4	567.7	522.9	497.9	472.9	460.3	447.7	442.9	438.1	434.3	430.5
25°	568.4	528.5	488.6	467.4	446.1	435.8	425.4	420.6	415.8	412.0	408.3
27.5°	532.5	494.4	456.3	438.1	419.9	411.8	403.7	399.9	396.1	392.6	389.1
30°	497.7	463.6	429.5	413.8	398.1	390.8	383.5	379.7	375.9	372.6	369.3
32.5°	465.3	436.0	406.7	392.3	377.9	371.9	365.8	361.3	356.7	354.2	351.7
35°	434.5	408.3	382.0	370.1	358.2	352.2	346.1	342.3	338.5	336.5	334.5
37.5°	408.3	384.8	361.3	349.9	338.5	332.7	326.9	323.6	320.3	319.6	318.8
40°	381.5	361.3	341.1	329.9	318.8	313.8	308.7	306.7	304.7	304.2	303.7
42.5°	359.2	339.5	319.8	309.7	299.6	295.3	291.0	290.0	289.0	289.8	290.5
45°	333.5	317.1	300.6	291.3	281.9	278.4	274.9	274.1	273.3	274.9	276.4
47.5°	311.7	296.6	281.4	272.6	263.7	261.2	258.7	258.4	258.2	260.2	262.2
50°	289.5	274.9	260.2	253.1	246.1	243.8	241.5	242.3	243.0	246.3	249.6
52.5°	268.8	255.2	241.5	234.9	228.4	226.9	225.3	227.1	228.9	232.4	236.0
55°	246.1	233.7	221.3	216.3	211.2	209.7	208.2	211.7	215.2	218.5	221.8
57.5°	224.3	213.5	202.6	198.1	193.5	193.3	193.0	196.3	199.6	203.1	206.7
60°	201.1	192.0	182.9	179.4	175.8	176.3	176.8	180.6	184.4	187.2	190.0
62.5°	179.9	172.3	164.7	161.4	158.1	159.4	160.7	164.5	168.3	171.5	174.8
65°	158.7	152.3	146.0	143.7	141.5	143.2	145.0	148.3	151.6	153.9	156.1
67.5°	138.4	133.1	127.8	126.1	124.3	126.1	127.8	131.1	134.4	136.7	138.9
70°	117.2	112.9	108.6	107.4	106.1	108.1	110.1	112.9	115.7	118.0	120.3
72.5°	97.5	94.2	90.9	90.7	90.4	92.2	94.0	96.8	99.5	101.1	102.6
75°	78.3	76.5	74.8	74.5	74.3	76.0	77.8	79.3	80.8	82.1	83.4
77.5°	61.1	59.6	58.1	58.4	58.6	59.9	61.1	62.7	64.2	64.9	65.7
80°	43.5	42.9	42.4	42.9	43.5	44.5	45.5	46.5	47.5	48.0	48.5
82.5°	29.8	29.3	28.8	29.6	30.3	31.1	31.8	32.6	33.3	33.6	33.9
85°	17.2	17.9	18.7	18.7	18.7	18.9	19.2	19.5	19.7	19.5	19.2
87.5°	8.1	8.3	8.6	8.6	8.6	8.8	9.1	9.1	9.1	8.8	8.6
90°	8.6	10.8	13.3	15.8	18.3	20.8	21.6	22.3	23.1	23.9	24.5
92.5°	15.3	15.6	17.3	19.1	20.8	22.5	23.9	25.2	26.6	27.9	28.7
95°	21.3	18.4	20.5	22.6	24.8	26.9	28.2	29.6	30.9	32.3	32.9
97.5°	74.7	67.0	57.2	47.4	37.6	27.7	29.3	30.8	32.4	33.9	34.8
100°	161.9	148.8	118.8	88.7	58.7	28.6	30.2	31.7	33.2	34.8	35.6
102.5°	213.8	198.3	164.7	131.2	97.7	64.2	57.8	51.4	45.1	38.7	35.7
105°	266.8	259.2	241.9	224.6	207.2	189.9	155.8	121.7	87.6	53.5	36.6
107.5°	323.4	325.7	328.6	331.5	334.4	337.3	307.6	277.9	248.3	218.6	191.1
110°	380.7	382.5	384.7	386.8	388.9	391.0	384.7	378.3	371.9	365.6	348.6



TEST NUMBER: P831432

CATALOG NUMBER: S123DIP-S340D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	435.4	437.2	439.3	441.4	443.5	445.6	447.4	449.1	450.8	452.6	453.3
115°	489.3	490.7	492.5	494.2	495.9	497.7	499.6	501.5	503.4	505.4	506.7
117.5°	543.8	545.0	545.9	546.9	547.9	548.8	550.4	551.9	553.4	555.0	555.8
120°	594.8	595.9	596.5	597.1	597.7	598.2	599.8	601.3	602.9	604.4	605.2
122.5°	643.5	644.6	645.3	646.1	646.9	647.7	648.6	649.6	650.5	651.5	652.1
125°	689.4	690.5	691.3	692.1	692.8	693.6	694.0	694.4	694.8	695.1	695.5
127.5°	734.5	735.7	736.7	737.6	738.6	739.6	740.1	740.7	741.3	741.9	742.0
130°	776.1	777.2	778.0	778.8	779.5	780.3	781.1	781.9	782.6	783.4	783.6
132.5°	816.0	817.0	817.6	818.2	818.7	819.3	820.1	820.9	821.6	822.4	822.5
135°	855.2	856.1	856.9	857.7	858.4	859.2	859.8	860.4	860.9	861.5	861.5
137.5°	891.4	892.3	892.7	893.1	893.5	893.9	894.9	895.8	896.8	897.7	898.0
140°	924.5	925.4	926.0	926.5	927.1	927.7	928.5	929.2	930.0	930.8	931.0
142.5°	956.6	957.5	958.0	958.6	959.2	959.8	960.4	960.9	961.5	962.1	962.1
145°	986.9	987.7	988.1	988.5	988.9	989.3	989.6	990.0	990.4	990.8	991.0
147.5°	1013.9	1014.6	1015.0	1015.4	1015.8	1016.1	1016.5	1016.9	1017.3	1017.7	1017.4
150°	1038.4	1038.9	1039.3	1039.6	1040.0	1040.4	1040.8	1041.2	1041.6	1042.0	1041.9
152.5°	1060.3	1060.4	1060.6	1060.8	1061.0	1061.2	1062.0	1062.8	1063.5	1064.3	1064.2
155°	1079.6	1079.5	1079.7	1079.9	1080.1	1080.3	1081.3	1082.2	1083.2	1084.1	1084.1
157.5°	1098.5	1098.4	1098.2	1098.0	1097.8	1097.6	1098.8	1099.9	1101.1	1102.3	1102.1
160°	1113.3	1113.1	1113.0	1112.8	1112.6	1112.4	1113.5	1114.7	1115.8	1117.0	1116.9
162.5°	1126.5	1126.1	1126.0	1125.8	1125.6	1125.4	1126.7	1128.1	1129.4	1130.8	1130.9
165°	1137.8	1137.4	1137.2	1137.0	1136.8	1136.7	1138.2	1139.7	1141.3	1142.8	1142.9
167.5°	1146.6	1146.2	1146.2	1146.2	1146.2	1146.2	1147.7	1149.3	1150.8	1152.4	1152.4
170°	1154.4	1154.0	1154.0	1154.0	1154.0	1154.0	1155.5	1157.1	1158.6	1160.2	1160.2
172.5°	1158.8	1158.4	1158.6	1158.8	1159.0	1159.2	1160.7	1162.3	1163.8	1165.4	1165.3
175°	1163.1	1162.8	1162.9	1163.1	1163.3	1163.5	1164.9	1166.2	1167.6	1168.9	1168.8
177.5°	1164.9	1164.5	1164.7	1164.9	1165.1	1165.3	1166.8	1168.3	1169.9	1171.4	1171.2
180°	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0



TEST NUMBER: P831432

CATALOG NUMBER: S123DIP-S340D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	1088.8	1088.8	1088.8	1088.8
2.5°	967.8	966.1	959.0	951.9
5°	820.5	814.5	812.5	810.4
7.5°	717.0	716.5	705.9	695.2
10°	625.8	626.5	616.9	607.3
12.5°	560.6	554.3	553.5	552.8
15°	511.6	505.8	504.8	503.7
17.5°	477.0	473.4	472.4	471.4
20°	450.7	448.7	446.9	445.1
22.5°	428.0	425.4	423.9	422.4
25°	406.0	403.7	403.2	402.7
27.5°	386.3	383.5	383.5	383.5
30°	367.6	365.8	365.1	364.3
32.5°	350.1	348.6	348.6	348.6
35°	333.7	333.0	332.0	330.9
37.5°	318.8	318.8	318.3	317.8
40°	304.4	305.2	305.2	305.2
42.5°	291.3	292.0	292.0	292.0
45°	277.6	278.9	279.4	279.9
47.5°	264.3	266.3	266.8	267.3
50°	251.1	252.6	252.9	253.1
52.5°	237.7	239.5	240.8	242.0
55°	223.6	225.3	226.1	226.9
57.5°	208.4	210.2	210.4	210.7
60°	191.7	193.5	194.0	194.5
62.5°	175.8	176.8	177.3	177.9
65°	157.6	159.2	160.2	161.2
67.5°	140.2	141.5	141.5	141.5
70°	120.8	121.3	122.0	122.8
72.5°	102.8	103.1	103.1	103.1
75°	83.9	84.4	84.6	84.9
77.5°	65.9	66.2	66.2	66.2
80°	48.3	48.0	48.0	48.0
82.5°	33.1	32.3	32.3	32.3
85°	18.9	18.7	18.9	19.2
87.5°	8.6	8.6	8.6	8.6
90°	24.9	25.2	25.6	26.0
92.5°	28.9	29.1	29.3	29.5
95°	32.9	32.9	32.9	32.9
97.5°	35.0	35.2	35.4	35.5
100°	35.8	36.0	36.2	36.4
102.5°	36.1	36.5	36.9	37.3
105°	37.0	37.4	37.8	38.1
107.5°	165.9	140.6	115.4	90.2
110°	321.1	293.5	266.0	238.4



TEST NUMBER: P831432

CATALOG NUMBER: S123DIP-S340D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	452.9	452.5	452.1	451.7
115°	507.5	508.3	509.0	509.8
117.5°	556.0	556.2	556.4	556.6
120°	605.2	605.2	605.2	605.2
122.5°	652.3	652.5	652.7	652.9
125°	695.9	696.3	696.7	697.1
127.5°	741.6	741.2	740.8	740.4
130°	783.2	782.8	782.4	782.0
132.5°	821.9	821.3	820.8	820.2
135°	860.9	860.4	859.8	859.2
137.5°	897.6	897.3	896.9	896.5
140°	930.6	930.2	929.8	929.4
142.5°	961.5	960.9	960.4	959.8
145°	991.0	991.0	991.0	991.0
147.5°	1016.4	1015.5	1014.5	1013.5
150°	1041.3	1040.7	1040.1	1039.5
152.5°	1063.2	1062.3	1061.3	1060.4
155°	1082.9	1081.7	1080.6	1079.4
157.5°	1100.5	1099.0	1097.4	1095.9
160°	1115.6	1114.2	1112.9	1111.5
162.5°	1129.7	1128.6	1127.4	1126.2
165°	1141.6	1140.2	1138.9	1137.5
167.5°	1150.8	1149.3	1147.7	1146.2
170°	1158.6	1157.1	1155.5	1154.0
172.5°	1163.5	1161.8	1160.1	1158.3
175°	1167.3	1165.7	1164.2	1162.7
177.5°	1169.3	1167.4	1165.5	1163.5
180°	1167.0	1167.0	1167.0	1167.0



TEST NUMBER: P831432

CATALOG NUMBER: S123DIP-S340D805U850-4F0-1E-UDD-G

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.28	10.99	11.38	12.08	13.57	12.52	13.22	13.61	14.31	15.81
	3H	11.92	12.55	13.02	13.65	15.16	13.93	14.56	15.04	15.66	17.18
	4H	12.49	13.09	13.60	14.19	15.71	14.37	14.97	15.49	16.07	17.59
	6H	12.85	13.40	13.97	14.50	16.04	14.64	15.19	15.77	16.30	17.83
	8H	12.94	13.47	14.07	14.58	16.11	14.70	15.22	15.83	16.34	17.87
	12H	12.98	13.48	14.11	14.59	16.14	14.71	15.21	15.85	16.32	17.87
4H	2H	10.84	11.44	11.96	12.54	14.06	12.66	13.26	13.79	14.36	15.88
	3H	12.65	13.15	13.78	14.28	15.81	14.27	14.77	15.40	15.89	17.43
	4H	13.35	13.80	14.48	14.92	16.47	14.85	15.30	15.98	16.42	17.97
	6H	13.81	14.21	14.95	15.34	16.89	15.24	15.63	16.38	16.77	18.32
	8H	13.95	14.31	15.08	15.44	17.00	15.35	15.72	16.49	16.85	18.41
	12H	14.01	14.34	15.16	15.48	17.05	15.39	15.72	16.54	16.86	18.43
8H	4H	13.60	13.97	14.74	15.10	16.66	14.94	15.31	16.08	16.44	18.00
	6H	14.18	14.49	15.34	15.66	17.22	15.44	15.74	16.60	16.91	18.47
	8H	14.39	14.65	15.55	15.81	17.38	15.62	15.88	16.78	17.03	18.61
	12H	14.51	14.74	15.68	15.89	17.50	15.71	15.94	16.88	17.09	18.70
12H	4H	13.59	13.93	14.75	15.07	16.63	14.91	15.24	16.06	16.38	17.95
	6H	14.23	14.50	15.40	15.65	17.23	15.45	15.71	16.61	16.87	18.44
	8H	14.46	14.69	15.63	15.84	17.45	15.64	15.87	16.81	17.02	18.64