

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831460

Luminaire Tested: S123DIP-S560D1025U850-4F0-1E-UDD-G1

Issue Date: 05/03/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P831460  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 05/03/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S560D1025U850-4F0-1E-UDD-G1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, GRAZE OPTIC  
UPLIGHT 1025 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6785.2 lumens  
Efficiency: N/A  
Efficacy: 149.1 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 45.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P831460

CATALOG NUMBER: S123DIP-S560D1025U850-4F0-1E-UDD-G1

### Luminous Intensity Polar Plot

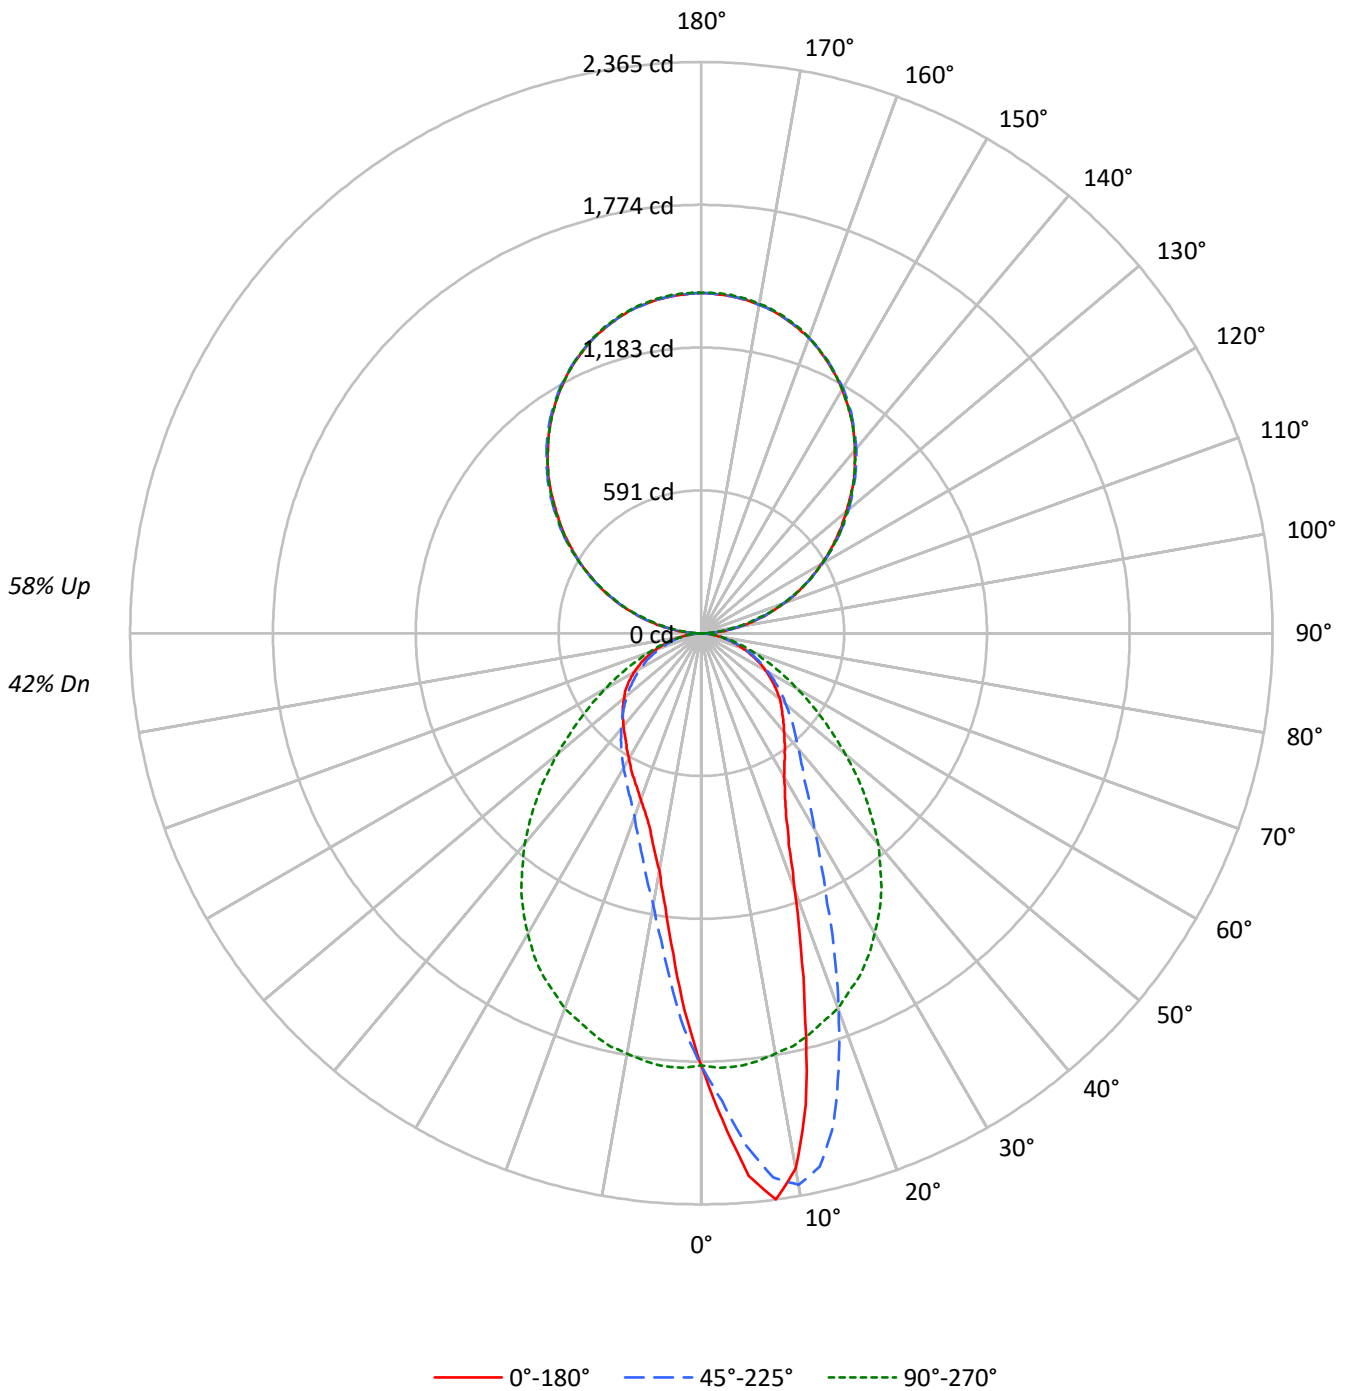



TEST NUMBER: P831460

CATALOG NUMBER: S123DIP-S560D1025U850-4F0-1E-UDD-G1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	42				
1	97	92	89	85	88	85	81	79	70	68	66	56	55	54	44	43	42	37				
2	88	81	75	71	80	74	70	65	62	58	55	50	48	46	39	38	36	31				
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	35	33	32	27				
4	74	64	56	51	68	59	52	47	49	44	41	40	37	34	32	30	28	24				
5	68	57	49	44	62	53	46	41	44	39	35	36	33	30	29	27	25	21				
6	63	52	44	38	58	48	41	36	40	35	31	33	29	27	27	24	22	19				
7	59	47	39	34	53	43	37	32	37	31	28	30	27	24	25	22	20	17				
8	54	43	35	30	50	40	33	28	34	28	25	28	24	21	23	20	18	16				
9	51	39	32	27	47	36	30	25	31	26	22	26	22	19	21	18	16	14				
10	48	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15	13				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	19268	19268	19268	19268	19268
5°	24368	23000	19440	15666	14397
10°	24604	25349	19311	12489	10912
15°	18532	23534	19179	10575	9229
20°	12912	19045	18935	9249	8383
25°	9846	14645	18517	8508	7862
30°	8518	11635	17851	7986	7444
35°	7903	9824	17082	7608	7150
40°	7481	8812	16002	7248	7050
45°	7232	8156	14630	6967	7005
50°	7109	7636	13006	6712	6970
55°	6844	7257	11410	6469	7000
60°	6598	6848	9836	6241	6885
65°	6199	6464	8484	5998	6749
70°	5725	5973	7216	5596	6351
75°	5182	5357	6184	5199	5802
80°	4271	4686	4891	4531	4891
85°	3384	3792	3594	3841	3903

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 80°  
 Vertical Angle: 45°  
 Luminance: 16704 cd/sqm



TEST NUMBER: P831460

CATALOG NUMBER: S123DIP-S560D1025U850-4F0-1E-UDD-G1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	169.2	2.5
10°-20°	421.0	6.2
20°-30°	498.5	7.3
30°-40°	501.2	7.4
40°-50°	459.9	6.8
50°-60°	379.6	5.6
60°-70°	268.5	4.0
70°-80°	143.3	2.1
80°-90°	39.3	0.6
90°-100°	90.7	1.3
100°-110°	274.6	4.0
110°-120°	467.4	6.9
120°-130°	614.9	9.1
130°-140°	691.2	10.2
140°-150°	679.5	10.0
150°-160°	572.1	8.4
160°-170°	380.9	5.6
170°-180°	133.4	2.0
0°-30°	1088.7	16.0
0°-40°	1590.0	23.4
0°-60°	2429.4	35.8
0°-90°	2880.5	42.5
90°-120°	832.7	12.3
90°-150°	2818.3	41.5
90°-180°	3905.0	57.6
0°-180°	6785.2	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	1790	1790	1790	1790	1790	
5°	2255	2129	1799	1450	1332	215
15°	1663	2112	1721	949	828	459
25°	829	1233	1559	716	662	391
35°	601	748	1300	579	544	378
45°	475	536	961	458	460	368
55°	365	387	608	345	373	326
65°	243	254	333	236	265	242
75°	125	129	149	125	140	131
85°	27	31	29	31	32	31
90°	33	27	1	27	33	17
95°	86	82	65	82	86	87
105°	264	261	249	261	264	279
115°	472	472	470	472	472	467
125°	681	690	689	690	681	609
135°	892	899	893	899	892	686
145°	1084	1089	1084	1089	1084	677
155°	1239	1242	1241	1242	1239	571
165°	1347	1348	1352	1348	1347	380
175°	1400	1402	1406	1402	1400	133
180°	1409	1409	1409	1409	1409	



TEST NUMBER: P831460

CATALOG NUMBER: S123DIP-S560D1025U850-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1
2.5°	2017.7	2015.6	2013.5	2003.1	1992.7	1987.8	1982.8	1967.8	1952.9	1936.3	1919.6
5°	2255.2	2261.0	2266.9	2260.2	2253.6	2233.2	2212.9	2185.9	2158.9	2128.6	2098.2
7.5°	2364.9	2368.2	2371.5	2367.4	2363.2	2357.8	2352.4	2328.3	2304.2	2273.1	2241.9
10°	2251.1	2258.5	2266.0	2282.2	2298.4	2316.7	2335.0	2331.6	2328.3	2319.2	2310.0
12.5°	2001.0	2010.2	2019.3	2051.7	2084.1	2125.6	2167.2	2202.9	2238.6	2263.5	2288.5
15°	1663.0	1688.3	1713.6	1743.1	1772.6	1833.7	1894.7	1969.9	2045.1	2111.9	2178.8
17.5°	1369.7	1379.3	1388.9	1420.4	1452.0	1528.8	1605.7	1692.5	1779.3	1890.2	2001.0
20°	1127.2	1135.9	1144.6	1186.2	1227.7	1287.9	1348.2	1445.8	1543.4	1662.6	1781.8
22.5°	946.9	960.7	974.4	997.6	1020.9	1078.6	1136.3	1223.1	1309.9	1441.6	1573.3
25°	829.0	839.0	848.9	863.0	877.2	923.3	969.4	1040.8	1112.2	1233.1	1354.0
27.5°	748.4	752.6	756.7	770.8	785.0	814.9	844.8	906.2	967.7	1070.3	1172.9
30°	685.3	688.2	691.1	703.6	716.0	736.4	756.7	801.2	845.6	936.1	1026.7
32.5°	641.3	643.3	645.4	655.0	664.5	679.1	693.6	726.0	758.4	833.1	907.9
35°	601.4	602.6	603.9	610.9	618.0	628.8	639.6	664.1	688.6	747.6	806.6
37.5°	566.5	568.2	569.8	574.0	578.1	587.7	597.2	616.8	636.3	681.6	726.8
40°	532.4	535.4	538.3	541.2	544.1	552.0	559.9	574.8	589.8	627.1	664.5
42.5°	503.4	506.3	509.2	510.4	511.7	516.3	520.8	534.5	548.2	576.1	603.9
45°	475.1	476.4	477.6	478.9	480.1	483.9	487.6	499.6	511.7	535.8	559.9
47.5°	449.4	449.4	449.4	450.2	451.0	454.4	457.7	466.4	475.1	493.8	512.5
50°	424.5	424.5	424.5	423.2	422.0	424.0	426.1	432.8	439.4	456.0	472.6
52.5°	394.6	394.6	394.6	395.0	395.4	395.4	395.4	401.2	407.0	422.0	436.9
55°	364.7	366.3	368.0	366.7	365.5	366.3	367.1	370.9	374.6	386.7	398.7
57.5°	334.8	335.6	336.4	336.0	335.6	336.0	336.4	339.7	343.1	352.2	361.3
60°	306.5	306.5	306.5	305.7	304.9	305.7	306.5	308.2	309.8	318.1	326.4
62.5°	274.9	275.4	275.8	276.2	276.6	275.8	274.9	277.0	279.1	285.3	291.6
65°	243.4	243.8	244.2	245.5	246.7	245.9	245.0	247.1	249.2	253.8	258.3
67.5°	215.1	214.3	213.5	213.9	214.3	215.6	216.8	217.2	217.6	222.6	227.6
70°	181.9	182.7	183.6	183.2	182.7	183.2	183.6	184.8	186.1	189.8	193.5
72.5°	152.0	152.4	152.8	152.8	152.8	153.7	154.5	155.7	157.0	159.1	161.1
75°	124.6	124.6	124.6	125.4	126.3	126.7	127.1	127.1	127.1	128.8	130.4
77.5°	94.7	96.8	98.8	98.4	98.0	98.8	99.7	100.9	102.2	103.0	103.8
80°	68.9	68.9	68.9	69.4	69.8	71.0	72.3	73.1	73.9	75.6	77.3
82.5°	44.0	44.4	44.9	46.1	47.3	48.2	49.0	50.3	51.5	51.5	51.5
85°	27.4	26.6	25.8	26.6	27.4	28.2	29.1	29.5	29.9	30.7	31.6
87.5°	13.3	13.3	13.3	13.3	13.3	13.7	14.1	14.1	14.1	14.1	14.1
90°	33.2	32.7	32.2	31.7	31.2	30.5	29.5	28.5	27.6	26.6	23.4
92.5°	47.6	48.1	48.6	49.1	49.6	49.4	48.7	48.0	47.2	46.5	45.0
95°	86.3	86.3	86.3	86.3	86.3	85.9	84.9	83.9	82.9	81.9	80.0
97.5°	124.0	124.2	124.5	124.7	125.0	124.5	123.2	122.0	120.8	119.6	118.1
100°	168.3	167.8	167.3	166.8	166.3	165.7	164.9	164.2	163.5	162.7	161.5
102.5°	213.7	213.9	214.1	214.4	214.6	214.4	213.7	212.9	212.2	211.4	209.7
105°	263.5	263.0	262.5	262.0	261.5	261.3	261.3	261.3	261.3	261.3	259.0
107.5°	314.4	314.6	314.9	315.1	315.4	315.1	314.4	313.7	312.9	312.2	311.2
110°	366.4	366.9	367.4	367.9	368.4	368.1	367.2	366.2	365.2	364.2	363.7



TEST NUMBER: P831460

CATALOG NUMBER: S123DIP-S560D1025U850-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	421.8	421.8	421.8	421.8	421.8	421.2	419.9	418.7	417.5	416.2	416.2
115°	471.6	471.8	472.1	472.3	472.6	472.6	472.3	472.1	471.8	471.6	472.1
117.5°	522.5	523.2	524.0	524.7	525.5	525.8	525.8	525.8	525.8	525.8	526.3
120°	576.8	577.2	577.7	578.2	578.7	579.1	579.3	579.6	579.8	580.1	581.3
122.5°	628.8	629.5	630.3	631.0	631.7	632.5	633.2	633.9	634.7	635.4	635.9
125°	680.8	681.8	682.8	683.8	684.7	685.7	686.7	687.7	688.7	689.7	690.2
127.5°	732.8	733.8	734.8	735.8	736.8	738.0	739.5	741.0	742.4	743.9	744.4
130°	783.8	785.5	787.2	788.9	790.7	792.0	793.0	794.0	795.0	795.9	796.7
132.5°	836.9	838.1	839.4	840.6	841.8	843.1	844.3	845.5	846.7	848.0	848.5
135°	892.3	892.7	893.2	893.7	894.2	895.0	895.9	896.9	897.9	898.9	899.1
137.5°	941.0	941.7	942.4	943.2	943.9	944.9	946.1	947.4	948.6	949.8	949.1
140°	988.6	990.3	992.0	993.7	995.5	996.4	996.7	996.9	997.2	997.4	997.2
142.5°	1037.3	1038.5	1039.7	1041.0	1042.2	1042.9	1043.2	1043.4	1043.7	1043.9	1043.4
145°	1083.8	1084.7	1085.7	1086.7	1087.7	1088.3	1088.6	1088.8	1089.1	1089.3	1088.6
147.5°	1125.8	1127.3	1128.8	1130.3	1131.7	1132.5	1132.5	1132.5	1132.5	1132.5	1131.7
150°	1165.7	1167.2	1168.6	1170.1	1171.6	1172.3	1172.3	1172.3	1172.3	1172.3	1171.8
152.5°	1204.4	1205.7	1206.9	1208.1	1209.4	1209.7	1209.2	1208.7	1208.2	1207.8	1207.5
155°	1238.7	1240.5	1242.2	1243.9	1245.6	1246.0	1245.0	1244.0	1243.1	1242.1	1241.8
157.5°	1270.9	1272.3	1273.8	1275.3	1276.8	1277.0	1276.0	1275.0	1274.0	1273.1	1272.8
160°	1301.8	1302.8	1303.8	1304.8	1305.8	1305.7	1304.4	1303.2	1302.0	1300.7	1300.7
162.5°	1325.1	1326.8	1328.5	1330.3	1332.0	1332.2	1331.0	1329.8	1328.5	1327.3	1327.1
165°	1347.2	1349.0	1350.7	1352.4	1354.1	1354.2	1352.8	1351.3	1349.8	1348.3	1348.3
167.5°	1367.2	1368.6	1370.1	1371.6	1373.1	1373.1	1371.6	1370.1	1368.6	1367.2	1366.9
170°	1381.6	1383.3	1385.0	1386.7	1388.4	1388.4	1386.7	1385.0	1383.3	1381.6	1381.6
172.5°	1392.6	1394.3	1396.1	1397.8	1399.5	1399.6	1398.2	1396.7	1395.2	1393.7	1393.7
175°	1400.4	1402.1	1403.8	1405.5	1407.3	1407.4	1405.9	1404.4	1403.0	1401.5	1401.5
177.5°	1404.8	1406.5	1408.2	1410.0	1411.7	1411.8	1410.3	1408.9	1407.4	1405.9	1405.9
180°	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2



TEST NUMBER: P831460

CATALOG NUMBER: S123DIP-S560D1025U850-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1
2.5°	1914.7	1909.7	1891.4	1873.1	1852.4	1831.6	1816.2	1800.9	1778.0	1755.2	1736.5
5°	2075.0	2051.7	2013.1	1974.5	1922.1	1869.8	1834.5	1799.2	1751.8	1704.5	1666.7
7.5°	2202.1	2162.2	2108.2	2054.2	1985.7	1917.1	1852.4	1787.6	1715.3	1643.0	1584.1
10°	2283.1	2256.1	2193.8	2131.5	2039.7	1947.9	1857.3	1766.8	1673.8	1580.7	1502.7
12.5°	2290.9	2293.4	2236.1	2178.8	2075.0	1971.1	1861.1	1751.0	1633.9	1516.8	1425.8
15°	2221.6	2264.4	2232.8	2201.2	2096.6	1991.9	1856.5	1721.1	1586.1	1451.2	1346.1
17.5°	2092.8	2184.6	2189.2	2193.8	2089.1	1984.4	1834.5	1684.6	1531.7	1378.9	1268.4
20°	1917.1	2052.5	2099.1	2145.6	2060.4	1975.3	1814.1	1653.0	1481.9	1310.8	1194.9
22.5°	1737.7	1902.2	1987.3	2072.5	2009.4	1946.2	1774.7	1603.2	1422.5	1241.8	1124.3
25°	1533.4	1712.8	1843.6	1974.5	1935.8	1897.2	1728.2	1559.1	1366.8	1174.5	1054.5
27.5°	1355.2	1537.5	1695.4	1853.2	1844.9	1836.6	1668.8	1501.0	1304.1	1107.3	991.4
30°	1196.6	1366.4	1542.9	1719.5	1739.8	1760.2	1598.2	1436.2	1238.9	1041.6	929.9
32.5°	1056.2	1204.4	1393.8	1583.2	1623.1	1663.0	1516.8	1370.6	1175.4	980.2	872.6
35°	941.1	1075.7	1265.1	1454.5	1504.3	1554.2	1427.1	1300.0	1109.8	919.5	816.9
37.5°	839.4	951.9	1136.8	1321.6	1382.6	1443.7	1329.9	1216.1	1037.9	859.7	765.4
40°	755.1	845.6	1015.5	1185.3	1255.9	1326.6	1232.7	1138.8	969.8	800.8	713.9
42.5°	684.5	765.0	919.1	1073.2	1140.9	1208.6	1129.3	1049.9	899.6	749.3	669.9
45°	624.2	688.6	828.6	968.5	1032.9	1097.3	1029.2	961.1	828.6	696.1	622.2
47.5°	567.8	623.0	742.6	862.2	919.5	976.8	923.7	870.5	758.4	646.2	579.4
50°	517.1	561.5	666.2	770.8	820.7	870.5	823.6	776.7	684.5	592.3	534.1
52.5°	473.1	509.2	596.8	684.5	727.2	770.0	729.7	689.4	616.3	543.2	492.6
55°	429.4	460.2	536.2	612.2	641.3	670.3	639.2	608.0	549.1	490.1	447.3
57.5°	388.7	416.2	478.5	540.8	563.2	585.6	557.4	529.1	484.7	440.2	404.5
60°	348.9	371.3	423.2	475.1	488.8	502.5	479.7	456.9	425.7	394.6	362.6
62.5°	311.9	332.3	370.9	409.5	418.6	427.8	410.3	392.9	369.2	345.6	320.6
65°	273.7	289.1	320.6	352.2	358.0	363.8	348.5	333.1	315.2	297.4	279.1
67.5°	238.4	249.2	274.9	300.7	301.1	301.5	289.1	276.6	266.6	256.7	242.1
70°	203.9	214.3	231.3	248.4	248.8	249.2	239.2	229.3	221.8	214.3	203.5
72.5°	168.6	176.1	189.0	201.8	201.0	200.2	194.0	187.7	181.9	176.1	168.2
75°	136.6	142.9	151.6	160.3	157.8	155.3	152.0	148.7	143.7	138.7	133.7
77.5°	107.6	111.3	116.3	121.3	119.6	118.0	115.0	112.1	108.4	104.7	102.6
80°	78.9	80.6	83.9	87.2	86.4	85.6	82.2	78.9	78.1	77.3	74.3
82.5°	53.6	55.7	56.5	57.3	56.9	56.5	54.0	51.5	50.7	49.8	49.4
85°	32.0	32.4	32.8	33.2	32.0	30.7	29.9	29.1	29.1	29.1	28.7
87.5°	14.5	15.0	15.0	15.0	14.5	14.1	13.3	12.5	12.9	13.3	13.3
90°	20.2	17.0	13.8	10.9	8.5	6.0	3.6	1.1	3.6	6.0	8.5
92.5°	43.5	42.1	40.6	39.1	37.6	36.2	34.7	33.2	34.7	36.2	37.6
95°	78.0	76.0	74.0	72.2	70.5	68.8	67.0	65.3	67.0	68.8	70.5
97.5°	116.6	115.1	113.7	112.3	111.1	109.8	108.6	107.4	108.6	109.8	111.1
100°	160.3	159.0	157.8	156.5	155.0	153.5	152.0	150.6	152.0	153.5	155.0
102.5°	208.0	206.3	204.6	203.3	202.6	201.8	201.1	200.4	201.1	201.8	202.6
105°	256.8	254.6	252.4	251.0	250.6	250.1	249.6	249.1	249.6	250.1	250.6
107.5°	310.2	309.2	308.2	307.6	307.4	307.1	306.9	306.6	306.9	307.1	307.4
110°	363.2	362.7	362.2	361.7	361.3	360.8	360.3	359.8	360.3	360.8	361.3





TEST NUMBER: P831460

CATALOG NUMBER: S123DIP-S560D1025U850-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	416.2	416.2	416.2	416.1	415.9	415.6	415.4	415.1	415.4	415.6	415.9
115°	472.6	473.1	473.6	473.4	472.7	472.0	471.2	470.5	471.2	472.0	472.7
117.5°	526.8	527.3	527.8	527.9	527.7	527.4	527.2	526.9	527.2	527.4	527.7
120°	582.5	583.8	585.0	584.9	583.4	581.9	580.4	579.0	580.4	581.9	583.4
122.5°	636.4	636.9	637.4	637.1	636.2	635.2	634.2	633.2	634.2	635.2	636.2
125°	690.7	691.1	691.6	691.5	690.8	690.0	689.3	688.6	689.3	690.0	690.8
127.5°	744.9	745.4	745.9	745.4	743.9	742.4	741.0	739.5	741.0	742.4	743.9
130°	797.4	798.2	798.9	798.3	796.3	794.3	792.4	790.4	792.4	794.3	796.3
132.5°	849.0	849.4	849.9	849.2	847.2	845.3	843.3	841.3	843.3	845.3	847.2
135°	899.4	899.6	899.9	899.3	897.8	896.3	894.8	893.4	894.8	896.3	897.8
137.5°	948.3	947.6	946.9	945.9	944.7	943.4	942.2	941.0	942.2	943.4	944.7
140°	996.9	996.7	996.4	995.7	994.5	993.2	992.0	990.8	992.0	993.2	994.5
142.5°	1042.9	1042.4	1041.9	1041.1	1039.9	1038.6	1037.4	1036.2	1037.4	1038.6	1039.9
145°	1087.8	1087.1	1086.3	1085.7	1085.2	1084.7	1084.3	1083.8	1084.3	1084.7	1085.2
147.5°	1131.0	1130.3	1129.5	1128.7	1127.7	1126.7	1125.7	1124.7	1125.7	1126.7	1127.7
150°	1171.3	1170.9	1170.4	1169.9	1169.4	1168.9	1168.4	1167.9	1168.4	1168.9	1169.4
152.5°	1207.3	1207.0	1206.8	1206.3	1205.5	1204.8	1204.1	1203.3	1204.1	1204.8	1205.5
155°	1241.6	1241.3	1241.1	1241.0	1241.0	1241.0	1241.0	1241.0	1241.0	1241.0	1241.0
157.5°	1272.6	1272.3	1272.1	1272.1	1272.3	1272.6	1272.8	1273.1	1272.8	1272.6	1272.3
160°	1300.7	1300.7	1300.7	1301.0	1301.5	1302.0	1302.5	1303.0	1302.5	1302.0	1301.5
162.5°	1326.8	1326.6	1326.3	1326.6	1327.3	1328.0	1328.8	1329.5	1328.8	1328.0	1327.3
165°	1348.3	1348.3	1348.3	1348.7	1349.4	1350.2	1350.9	1351.7	1350.9	1350.2	1349.4
167.5°	1366.7	1366.4	1366.2	1366.5	1367.5	1368.5	1369.5	1370.5	1369.5	1368.5	1367.5
170°	1381.6	1381.6	1381.6	1382.0	1383.0	1384.0	1385.0	1386.0	1385.0	1384.0	1383.0
172.5°	1393.7	1393.7	1393.7	1394.2	1395.2	1396.2	1397.2	1398.2	1397.2	1396.2	1395.2
175°	1401.5	1401.5	1401.5	1402.0	1403.0	1403.9	1404.9	1405.9	1404.9	1403.9	1403.0
177.5°	1405.9	1405.9	1405.9	1406.4	1407.4	1408.4	1409.4	1410.3	1409.4	1408.4	1407.4
180°	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2



TEST NUMBER: P831460

CATALOG NUMBER: S123DIP-S560D1025U850-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1	1790.1
2.5°	1717.8	1701.6	1685.4	1672.9	1660.5	1639.3	1618.1	1613.1	1608.1	1601.1	1594.0
5°	1628.9	1589.0	1549.2	1513.5	1477.7	1449.9	1422.1	1403.8	1385.5	1372.2	1359.0
7.5°	1525.1	1465.3	1405.5	1363.1	1320.7	1280.5	1240.2	1227.3	1214.4	1197.0	1179.5
10°	1424.6	1358.5	1292.5	1237.3	1182.0	1142.6	1103.1	1087.3	1071.5	1049.5	1027.5
12.5°	1334.9	1262.6	1190.3	1134.7	1079.0	1040.8	1002.6	979.8	956.9	944.5	932.0
15°	1241.0	1163.7	1086.5	1035.0	983.5	949.0	914.6	894.6	874.7	862.6	850.6
17.5°	1157.9	1081.5	1005.1	955.7	906.2	874.7	843.1	825.7	808.2	799.1	790.0
20°	1079.0	1004.3	929.5	881.3	833.1	807.4	781.6	770.4	759.2	751.7	744.3
22.5°	1006.8	933.2	859.7	818.6	777.5	756.7	736.0	728.1	720.2	713.9	707.7
25°	934.5	868.9	803.2	768.4	733.5	716.4	699.4	691.5	683.6	677.4	671.2
27.5°	875.5	812.8	750.1	720.2	690.3	677.0	663.7	657.5	651.2	645.4	639.6
30°	818.2	762.1	706.1	680.3	654.6	642.5	630.5	624.2	618.0	612.6	607.2
32.5°	765.0	716.9	668.7	645.0	621.3	611.4	601.4	593.9	586.4	582.3	578.1
35°	714.4	671.2	628.0	608.5	588.9	579.0	569.0	562.8	556.5	553.2	549.9
37.5°	671.2	632.5	593.9	575.2	556.5	547.0	537.4	532.0	526.6	525.4	524.1
40°	627.1	593.9	560.7	542.4	524.1	515.8	507.5	504.2	500.9	500.1	499.2
42.5°	590.6	558.2	525.8	509.2	492.6	485.5	478.5	476.8	475.1	476.4	477.6
45°	548.2	521.2	494.2	478.9	463.5	457.7	451.9	450.6	449.4	451.9	454.4
47.5°	512.5	487.6	462.7	448.1	433.6	429.4	425.3	424.9	424.5	427.8	431.1
50°	476.0	451.9	427.8	416.2	404.5	400.8	397.1	398.3	399.5	404.9	410.3
52.5°	441.9	419.5	397.1	386.3	375.5	373.0	370.5	373.4	376.3	382.1	387.9
55°	404.5	384.2	363.8	355.5	347.2	344.7	342.2	348.0	353.9	359.3	364.7
57.5°	368.8	351.0	333.1	325.6	318.1	317.7	317.3	322.7	328.1	333.9	339.7
60°	330.6	315.6	300.7	294.9	289.1	289.9	290.7	297.0	303.2	307.8	312.3
62.5°	295.7	283.3	270.8	265.4	260.0	262.1	264.1	270.4	276.6	282.0	287.4
65°	260.8	250.4	240.1	236.3	232.6	235.5	238.4	243.8	249.2	252.9	256.7
67.5°	227.6	218.9	210.2	207.2	204.3	207.2	210.2	215.6	221.0	224.7	228.4
70°	192.7	185.7	178.6	176.5	174.4	177.8	181.1	185.7	190.2	194.0	197.7
72.5°	160.3	154.9	149.5	149.1	148.7	151.6	154.5	159.1	163.6	166.1	168.6
75°	128.8	125.8	122.9	122.5	122.1	125.0	127.9	130.4	132.9	135.0	137.1
77.5°	100.5	98.0	95.5	95.9	96.4	98.4	100.5	103.0	105.5	106.7	108.0
80°	71.4	70.6	69.8	70.6	71.4	73.1	74.8	76.4	78.1	78.9	79.7
82.5°	49.0	48.2	47.3	48.6	49.8	51.1	52.3	53.6	54.8	55.2	55.7
85°	28.2	29.5	30.7	30.7	30.7	31.1	31.6	32.0	32.4	32.0	31.6
87.5°	13.3	13.7	14.1	14.1	14.1	14.5	15.0	15.0	15.0	14.5	14.1
90°	10.9	13.8	17.0	20.2	23.4	26.6	27.6	28.5	29.5	30.5	31.2
92.5°	39.1	40.6	42.1	43.5	45.0	46.5	47.2	48.0	48.7	49.4	49.6
95°	72.2	74.0	76.0	78.0	80.0	81.9	82.9	83.9	84.9	85.9	86.3
97.5°	112.3	113.7	115.1	116.6	118.1	119.6	120.8	122.0	123.2	124.5	125.0
100°	156.5	157.8	159.0	160.3	161.5	162.7	163.5	164.2	164.9	165.7	166.3
102.5°	203.3	204.6	206.3	208.0	209.7	211.4	212.2	212.9	213.7	214.4	214.6
105°	251.0	252.4	254.6	256.8	259.0	261.3	261.3	261.3	261.3	261.3	261.5
107.5°	307.6	308.2	309.2	310.2	311.2	312.2	312.9	313.7	314.4	315.1	315.4
110°	361.7	362.2	362.7	363.2	363.7	364.2	365.2	366.2	367.2	368.1	368.4



TEST NUMBER: P831460

CATALOG NUMBER: S123DIP-S560D1025U850-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	416.1	416.2	416.2	416.2	416.2	416.2	417.5	418.7	419.9	421.2	421.8
115°	473.4	473.6	473.1	472.6	472.1	471.6	471.8	472.1	472.3	472.6	472.6
117.5°	527.9	527.8	527.3	526.8	526.3	525.8	525.8	525.8	525.8	525.8	525.5
120°	584.9	585.0	583.8	582.5	581.3	580.1	579.8	579.6	579.3	579.1	578.7
122.5°	637.1	637.4	636.9	636.4	635.9	635.4	634.7	633.9	633.2	632.5	631.7
125°	691.5	691.6	691.1	690.7	690.2	689.7	688.7	687.7	686.7	685.7	684.7
127.5°	745.4	745.9	745.4	744.9	744.4	743.9	742.4	741.0	739.5	738.0	736.8
130°	798.3	798.9	798.2	797.4	796.7	795.9	795.0	794.0	793.0	792.0	790.7
132.5°	849.2	849.9	849.4	849.0	848.5	848.0	846.7	845.5	844.3	843.1	841.8
135°	899.3	899.9	899.6	899.4	899.1	898.9	897.9	896.9	895.9	895.0	894.2
137.5°	945.9	946.9	947.6	948.3	949.1	949.8	948.6	947.4	946.1	944.9	943.9
140°	995.7	996.4	996.7	996.9	997.2	997.4	997.2	996.9	996.7	996.4	995.5
142.5°	1041.1	1041.9	1042.4	1042.9	1043.4	1043.9	1043.7	1043.4	1043.2	1042.9	1042.2
145°	1085.7	1086.3	1087.1	1087.8	1088.6	1089.3	1089.1	1088.8	1088.6	1088.3	1087.7
147.5°	1128.7	1129.5	1130.3	1131.0	1131.7	1132.5	1132.5	1132.5	1132.5	1132.5	1131.7
150°	1169.9	1170.4	1170.9	1171.3	1171.8	1172.3	1172.3	1172.3	1172.3	1172.3	1171.6
152.5°	1206.3	1206.8	1207.0	1207.3	1207.5	1207.8	1208.2	1208.7	1209.2	1209.7	1209.4
155°	1241.0	1241.1	1241.3	1241.6	1241.8	1242.1	1243.1	1244.0	1245.0	1246.0	1245.6
157.5°	1272.1	1272.1	1272.3	1272.6	1272.8	1273.1	1274.0	1275.0	1276.0	1277.0	1276.8
160°	1301.0	1300.7	1300.7	1300.7	1300.7	1300.7	1302.0	1303.2	1304.4	1305.7	1305.8
162.5°	1326.6	1326.3	1326.6	1326.8	1327.1	1327.3	1328.5	1329.8	1331.0	1332.2	1332.0
165°	1348.7	1348.3	1348.3	1348.3	1348.3	1348.3	1349.8	1351.3	1352.8	1354.2	1354.1
167.5°	1366.5	1366.2	1366.4	1366.7	1366.9	1367.2	1368.6	1370.1	1371.6	1373.1	1373.1
170°	1382.0	1381.6	1381.6	1381.6	1381.6	1381.6	1383.3	1385.0	1386.7	1388.4	1388.4
172.5°	1394.2	1393.7	1393.7	1393.7	1393.7	1393.7	1395.2	1396.7	1398.2	1399.6	1399.5
175°	1402.0	1401.5	1401.5	1401.5	1401.5	1401.5	1403.0	1404.4	1405.9	1407.4	1407.3
177.5°	1406.4	1405.9	1405.9	1405.9	1405.9	1405.9	1407.4	1408.9	1410.3	1411.8	1411.7
180°	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2	1409.2



TEST NUMBER: P831460

CATALOG NUMBER: S123DIP-S560D1025U850-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
0°	1790.1	1790.1	1790.1	1790.1
2.5°	1591.1	1588.2	1576.6	1565.0
5°	1349.0	1339.0	1335.7	1332.4
7.5°	1178.7	1177.9	1160.4	1143.0
10°	1028.8	1030.0	1014.2	998.4
12.5°	921.6	911.2	910.0	908.7
15°	841.0	831.5	829.8	828.2
17.5°	784.1	778.3	776.7	775.0
20°	740.9	737.6	734.7	731.8
22.5°	703.6	699.4	696.9	694.4
25°	667.4	663.7	662.9	662.0
27.5°	635.0	630.5	630.5	630.5
30°	604.3	601.4	600.1	598.9
32.5°	575.6	573.2	573.2	573.2
35°	548.6	547.4	545.7	544.1
37.5°	524.1	524.1	523.3	522.5
40°	500.5	501.7	501.7	501.7
42.5°	478.9	480.1	480.1	480.1
45°	456.4	458.5	459.4	460.2
47.5°	434.4	437.8	438.6	439.4
50°	412.8	415.3	415.7	416.2
52.5°	390.8	393.7	395.8	397.9
55°	367.6	370.5	371.7	373.0
57.5°	342.6	345.6	346.0	346.4
60°	315.2	318.1	319.0	319.8
62.5°	289.1	290.7	291.6	292.4
65°	259.2	261.7	263.3	265.0
67.5°	230.5	232.6	232.6	232.6
70°	198.5	199.4	200.6	201.8
72.5°	169.0	169.5	169.5	169.5
75°	137.9	138.7	139.1	139.5
77.5°	108.4	108.8	108.8	108.8
80°	79.3	78.9	78.9	78.9
82.5°	54.4	53.2	53.2	53.2
85°	31.1	30.7	31.1	31.6
87.5°	14.1	14.1	14.1	14.1
90°	31.7	32.2	32.7	33.2
92.5°	49.1	48.6	48.1	47.6
95°	86.3	86.3	86.3	86.3
97.5°	124.7	124.5	124.2	124.0
100°	166.8	167.3	167.8	168.3
102.5°	214.4	214.1	213.9	213.7
105°	262.0	262.5	263.0	263.5
107.5°	315.1	314.9	314.6	314.4
110°	367.9	367.4	366.9	366.4



TEST NUMBER: P831460

CATALOG NUMBER: S123DIP-S560D1025U850-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
112.5°	421.8	421.8	421.8	421.8
115°	472.3	472.1	471.8	471.6
117.5°	524.7	524.0	523.2	522.5
120°	578.2	577.7	577.2	576.8
122.5°	631.0	630.3	629.5	628.8
125°	683.8	682.8	681.8	680.8
127.5°	735.8	734.8	733.8	732.8
130°	788.9	787.2	785.5	783.8
132.5°	840.6	839.4	838.1	836.9
135°	893.7	893.2	892.7	892.3
137.5°	943.2	942.4	941.7	941.0
140°	993.7	992.0	990.3	988.6
142.5°	1041.0	1039.7	1038.5	1037.3
145°	1086.7	1085.7	1084.7	1083.8
147.5°	1130.3	1128.8	1127.3	1125.8
150°	1170.1	1168.6	1167.2	1165.7
152.5°	1208.1	1206.9	1205.7	1204.4
155°	1243.9	1242.2	1240.5	1238.7
157.5°	1275.3	1273.8	1272.3	1270.9
160°	1304.8	1303.8	1302.8	1301.8
162.5°	1330.3	1328.5	1326.8	1325.1
165°	1352.4	1350.7	1349.0	1347.2
167.5°	1371.6	1370.1	1368.6	1367.2
170°	1386.7	1385.0	1383.3	1381.6
172.5°	1397.8	1396.1	1394.3	1392.6
175°	1405.5	1403.8	1402.1	1400.4
177.5°	1410.0	1408.2	1406.5	1404.8
180°	1409.2	1409.2	1409.2	1409.2

TEST NUMBER: P831460

CATALOG NUMBER: S123DIP-S560D1025U850-4F0-1E-UDD-G1

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.10	13.87	14.12	14.89	16.27	15.33	16.10	16.36	17.13	18.51
	3H	14.74	15.43	15.77	16.46	17.86	16.75	17.44	17.79	18.48	19.88
	4H	15.31	15.96	16.36	17.00	18.41	17.20	17.85	18.25	18.89	20.29
	6H	15.68	16.28	16.73	17.32	18.74	17.47	18.07	18.53	19.11	20.53
	8H	15.77	16.34	16.83	17.40	18.81	17.53	18.10	18.59	19.16	20.57
	12H	15.81	16.35	16.88	17.41	18.84	17.54	18.09	18.61	19.14	20.58
4H	2H	13.66	14.31	14.72	15.35	16.76	15.49	16.14	16.54	17.18	18.58
	3H	15.48	16.02	16.54	17.09	18.51	17.10	17.64	18.16	18.71	20.13
	4H	16.18	16.67	17.24	17.73	19.17	17.68	18.17	18.75	19.23	20.67
	6H	16.65	17.07	17.72	18.16	19.59	18.08	18.50	19.15	19.59	21.02
	8H	16.78	17.18	17.86	18.25	19.70	18.19	18.58	19.26	19.66	21.11
	12H	16.84	17.20	17.94	18.29	19.75	18.23	18.59	19.32	19.68	21.13
8H	4H	16.44	16.83	17.51	17.91	19.36	17.78	18.17	18.85	19.25	20.70
	6H	17.02	17.35	18.12	18.47	19.91	18.28	18.60	19.37	19.72	21.17
	8H	17.23	17.52	18.34	18.62	20.08	18.45	18.74	19.56	19.84	21.31
	12H	17.35	17.60	18.46	18.70	20.20	18.55	18.81	19.66	19.90	21.41
12H	4H	16.43	16.79	17.53	17.88	19.34	17.75	18.11	18.84	19.20	20.65
	6H	17.07	17.36	18.18	18.46	19.93	18.29	18.58	19.40	19.68	21.14
	8H	17.30	17.55	18.41	18.65	20.16	18.48	18.74	19.59	19.83	21.34