

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831965

Luminaire Tested: S123RDIP-S1165D365U850-4F0-1E-UDD-G4

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831965
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-2, G3-1807-864-17)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1165D365U850-4F0-1E-UDD-G4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 365 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6968.0 lumens
Efficiency: N/A
Efficacy: 133.5 lumens/watt
Spacing Criteria (0/90/45): 0.55 / 1.17 / 0.8
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 52.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831965
CATALOG NUMBER: S123RDIP-S1165D365U850-4F0-1E-UDD-G4

Luminous Intensity Polar Plot

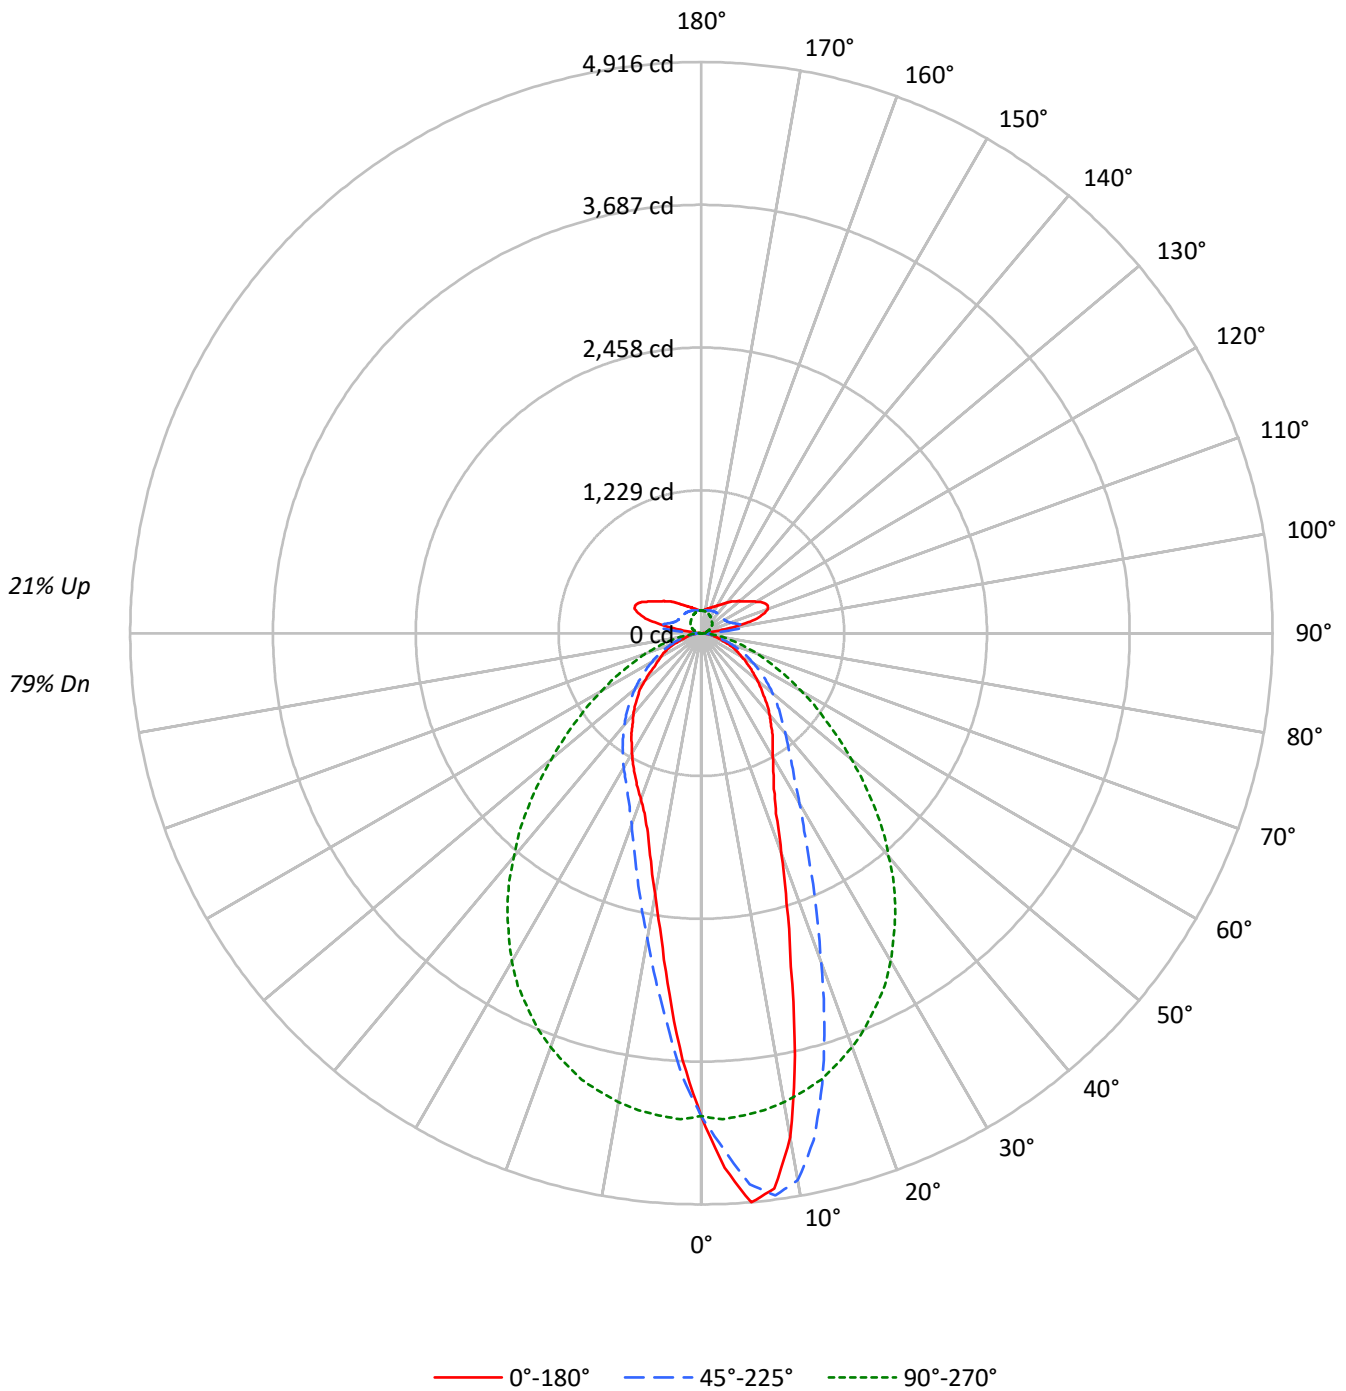



TEST NUMBER: P831965

CATALOG NUMBER: S123RDIP-S1165D365U850-4F0-1E-UDD-G4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	114	114	114	114	109	109	109	109	100	100	100	91	91	91	83	83	83	79				
1	106	102	98	95	101	97	94	91	89	87	85	82	80	78	75	74	72	69				
2	97	90	84	80	93	87	81	77	80	76	72	74	70	68	68	65	63	60				
3	90	81	74	68	86	78	71	66	72	67	63	66	62	59	61	58	55	53				
4	83	73	65	59	79	70	63	58	65	59	55	60	56	52	56	52	49	47				
5	77	66	58	52	74	64	56	51	59	53	49	55	50	46	51	47	44	42				
6	72	60	52	47	69	58	51	46	54	48	44	51	46	42	47	43	40	37				
7	67	55	47	42	64	53	46	41	50	44	39	47	42	38	44	39	36	34				
8	63	51	43	38	60	49	42	37	46	40	36	43	38	34	41	36	33	31				
9	59	47	40	35	56	46	39	34	43	37	33	40	35	32	38	34	30	29				
10	55	44	37	32	53	42	36	31	40	34	30	38	33	29	36	31	28	26				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	44738	44738	44738	44738	44738
5°	53121	51427	45019	36392	33787
10°	48129	52235	44794	29159	25014
15°	33137	44787	44323	23832	19788
20°	23053	34482	43432	20096	17392
25°	17568	26281	42137	17861	16029
30°	15293	21011	40518	16584	14848
35°	14040	17724	38224	15507	13771
40°	12811	15827	35222	14450	12787
45°	11569	14475	31984	13451	11804
50°	10501	13355	28165	12471	10587
55°	9498	12264	24496	11513	9083
60°	8510	11151	21278	10456	8585
65°	7855	9895	18315	9396	8117
70°	6382	8554	15981	8500	6596
75°	5598	6804	13537	7053	5810
80°	5071	5759	11089	5914	5492
85°	4631	5051	8423	5372	5051

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 33748 cd/sqm



TEST NUMBER: P831965

CATALOG NUMBER: S123RDIP-S1165D365U850-4F0-1E-UDD-G4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	378.8	5.4
10°-20°	876.6	12.6
20°-30°	1005.8	14.4
30°-40°	991.4	14.2
40°-50°	874.3	12.5
50°-60°	672.6	9.7
60°-70°	442.2	6.3
70°-80°	214.8	3.1
80°-90°	55.2	0.8
90°-100°	105.1	1.5
100°-110°	307.6	4.4
110°-120°	300.4	4.3
120°-130°	239.2	3.4
130°-140°	188.7	2.7
140°-150°	140.8	2.0
150°-160°	98.2	1.4
160°-170°	57.7	0.8
170°-180°	18.8	0.3
0°-30°	2261.3	32.5
0°-40°	3252.7	46.7
0°-60°	4799.5	68.9
0°-90°	5511.7	79.1
90°-120°	713.0	10.2
90°-150°	1281.7	18.4
90°-180°	1456.0	20.9
0°-180°	6968.0	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	4156	4156	4156	4156	4156	
5°	4916	4760	4166	3368	3127	449
15°	2974	4019	3977	2139	1776	839
25°	1479	2213	3548	1504	1350	699
35°	1068	1349	2909	1180	1048	666
45°	760	951	2101	884	775	590
55°	506	654	1305	614	484	454
65°	308	388	719	369	319	302
75°	135	164	326	170	140	145
85°	38	41	68	44	41	40
90°	11	10	1	10	11	8
95°	46	232	13	232	46	74
105°	498	315	46	315	498	497
115°	606	241	80	241	606	591
125°	478	225	112	225	478	433
135°	388	222	131	222	388	301
145°	303	219	149	219	303	192
155°	251	212	170	212	251	117
165°	219	203	185	203	219	63
175°	197	195	193	195	197	19
180°	194	194	194	194	194	



TEST NUMBER: P831965

CATALOG NUMBER: S123RDIP-S1165D365U850-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3
2.5°	4606.2	4591.7	4577.2	4572.9	4568.7	4555.0	4541.4	4510.7	4480.1	4448.5	4417.0
5°	4916.3	4918.0	4919.7	4915.5	4911.2	4893.3	4875.4	4837.9	4800.4	4759.5	4718.6
7.5°	4820.9	4848.1	4875.4	4880.5	4885.6	4899.3	4912.9	4904.4	4895.9	4880.5	4865.2
10°	4403.4	4401.7	4400.0	4430.6	4461.3	4552.5	4643.7	4690.5	4737.4	4779.1	4820.9
12.5°	3721.7	3724.3	3726.9	3827.4	3927.9	4014.0	4100.1	4219.3	4338.6	4467.3	4595.9
15°	2973.6	3015.4	3057.1	3146.6	3236.1	3365.6	3495.1	3655.3	3815.5	4019.1	4222.7
17.5°	2442.0	2459.9	2477.8	2563.8	2649.9	2772.6	2895.3	3076.7	3258.2	3520.7	3783.1
20°	2012.5	2028.7	2044.9	2107.1	2169.3	2286.9	2404.5	2577.4	2750.4	3010.3	3270.2
22.5°	1680.2	1711.8	1743.3	1785.0	1826.8	1912.0	1997.2	2173.6	2349.9	2586.8	2823.7
25°	1479.2	1493.6	1508.1	1543.9	1579.7	1661.5	1743.3	1860.0	1976.7	2212.8	2448.8
27.5°	1342.8	1347.1	1351.3	1377.8	1404.2	1457.0	1509.8	1618.0	1726.2	1920.5	2114.8
30°	1230.4	1238.0	1245.7	1266.1	1286.6	1324.9	1363.3	1440.0	1516.6	1690.5	1864.3
32.5°	1143.4	1147.7	1152.0	1169.0	1186.0	1214.2	1242.3	1302.8	1363.3	1496.2	1629.1
35°	1068.5	1069.3	1070.2	1083.0	1095.7	1123.0	1150.3	1200.5	1250.8	1348.8	1446.8
37.5°	983.3	989.2	995.2	1004.6	1013.9	1037.8	1061.7	1102.5	1143.4	1224.4	1305.3
40°	911.7	916.8	921.9	933.0	944.1	962.8	981.6	1019.0	1056.5	1126.4	1196.3
42.5°	840.1	843.5	846.9	858.0	869.1	892.1	915.1	944.9	974.7	1032.7	1090.6
45°	760.0	768.5	777.1	789.0	800.9	820.5	840.1	870.8	901.5	950.9	1000.3
47.5°	693.6	697.8	702.1	712.3	722.5	746.4	770.3	797.5	824.8	870.8	916.8
50°	627.1	628.8	630.5	639.9	649.3	670.6	691.9	723.4	754.9	797.5	840.1
52.5°	564.1	568.3	572.6	581.9	591.3	605.8	620.3	652.7	685.0	726.8	768.5
55°	506.1	508.7	511.2	518.0	524.9	541.9	558.9	587.1	615.2	653.5	691.9
57.5°	451.6	455.0	458.4	463.5	468.6	484.0	499.3	524.0	548.7	587.1	625.4
60°	395.3	399.6	403.9	409.8	415.8	427.7	439.7	461.8	484.0	518.0	552.1
62.5°	354.5	355.3	356.2	361.3	366.4	374.9	383.4	401.3	419.2	453.3	487.4
65°	308.4	311.0	313.6	316.1	318.7	325.5	332.3	347.6	363.0	388.5	414.1
67.5°	260.7	263.3	265.8	270.1	274.4	280.3	286.3	296.5	306.7	330.6	354.5
70°	202.8	202.8	202.8	209.6	216.4	226.6	236.9	244.5	252.2	271.8	291.4
72.5°	165.3	166.1	167.0	167.9	168.7	174.7	180.6	193.4	206.2	218.1	230.1
75°	134.6	135.5	136.3	137.2	138.0	139.7	141.4	145.7	150.0	163.6	177.2
77.5°	107.4	108.2	109.1	109.9	110.8	112.5	114.2	115.9	117.6	122.7	127.8
80°	81.8	82.6	83.5	84.4	85.2	86.1	86.9	88.6	90.3	92.9	95.4
82.5°	59.6	59.6	59.6	59.6	59.6	61.3	63.1	63.1	63.1	64.8	66.5
85°	37.5	37.5	37.5	38.3	39.2	39.2	39.2	40.0	40.9	40.9	40.9
87.5°	17.0	16.2	15.3	16.2	17.0	17.0	17.0	17.9	18.7	18.7	18.7
90°	11.4	11.8	11.4	11.0	11.4	10.6	10.2	9.8	9.4	9.8	8.6
92.5°	20.8	21.6	21.2	22.7	23.5	26.3	30.2	38.8	54.5	72.9	80.7
95°	45.5	47.0	49.8	53.3	60.7	74.9	95.6	141.1	188.5	232.4	206.9
97.5°	93.3	97.6	107.0	121.9	148.1	192.8	244.5	324.1	369.6	357.4	266.9
100°	245.7	245.3	260.6	289.2	328.8	384.5	430.3	462.0	448.3	371.1	250.8
102.5°	389.2	400.5	412.7	433.8	462.4	492.6	514.6	507.9	452.3	345.7	227.3
105°	498.5	500.5	513.0	527.9	545.9	556.1	548.7	509.5	427.6	315.1	208.9
107.5°	569.8	574.1	579.2	586.3	588.6	578.1	547.5	486.0	392.3	288.0	195.6
110°	610.6	611.4	612.1	609.0	598.0	570.6	521.2	449.1	359.4	265.7	188.5



TEST NUMBER: P831965

CATALOG NUMBER: S123RDIP-S1165D365U850-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	618.8	618.4	614.5	603.1	580.8	543.6	486.7	412.7	330.8	250.8	184.6
115°	606.3	604.3	596.5	579.2	549.8	507.1	449.5	381.3	308.8	241.0	184.2
117.5°	578.8	576.1	564.3	545.1	514.6	470.3	417.4	357.0	294.3	234.4	184.6
120°	542.8	540.4	531.0	509.1	478.1	438.5	391.5	338.6	283.3	230.0	186.2
122.5°	509.1	505.9	495.4	476.2	449.5	413.5	370.7	324.1	274.3	227.3	188.9
125°	478.1	475.4	465.6	448.3	423.3	391.9	354.3	311.6	266.9	225.0	191.6
127.5°	451.5	449.1	440.1	425.2	402.5	373.5	339.0	300.2	259.8	223.8	194.8
130°	429.5	426.4	418.2	404.0	383.3	356.6	324.9	289.6	254.3	222.6	197.9
132.5°	408.0	406.0	399.0	384.8	365.6	340.6	311.6	279.8	249.2	222.2	200.3
135°	387.6	384.8	377.8	366.0	346.8	324.5	299.0	271.2	244.9	221.8	202.6
137.5°	366.0	363.7	357.8	345.7	329.2	309.2	286.5	263.0	241.0	221.0	204.2
140°	343.3	343.7	337.4	326.5	311.6	294.7	275.9	255.9	237.5	220.6	205.7
142.5°	322.1	322.5	317.0	307.6	295.5	281.4	265.7	249.2	234.4	219.9	206.9
145°	302.9	302.2	299.0	290.8	281.0	269.6	257.1	244.2	231.6	219.1	207.3
147.5°	286.5	286.1	283.0	277.1	269.2	261.0	250.4	239.8	228.9	217.9	207.3
150°	272.4	272.4	270.0	265.7	259.8	252.4	244.2	235.1	226.1	216.3	207.3
152.5°	260.6	260.6	259.4	255.5	251.2	245.3	238.3	230.8	223.0	214.4	206.1
155°	251.2	250.8	250.0	246.9	243.4	238.7	232.8	226.5	219.9	212.0	205.4
157.5°	242.2	242.2	241.4	239.1	235.9	232.0	227.3	221.8	216.3	210.1	204.2
160°	233.6	234.0	234.0	231.6	228.9	226.1	222.2	217.9	212.8	207.7	203.4
162.5°	225.7	226.1	226.1	224.2	222.6	220.2	216.7	213.2	209.3	205.4	201.8
165°	219.1	219.1	219.5	217.9	216.3	214.4	211.6	209.3	206.1	203.0	200.3
167.5°	212.4	212.4	212.8	211.6	210.8	209.3	207.7	205.7	203.0	200.7	198.7
170°	206.5	206.5	206.9	206.1	205.7	205.0	203.4	202.2	200.3	198.3	197.1
172.5°	201.0	201.4	202.2	201.4	201.4	201.0	199.9	199.1	197.5	196.3	195.9
175°	197.1	197.5	197.9	197.5	197.5	197.5	196.7	196.3	195.6	194.8	194.8
177.5°	194.4	194.4	195.2	194.8	195.2	195.2	194.8	194.4	194.0	193.6	194.0
180°	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6



TEST NUMBER: P831965

CATALOG NUMBER: S123RDIP-S1165D365U850-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3
2.5°	4412.8	4408.5	4367.6	4326.7	4286.6	4246.6	4216.8	4187.0	4136.7	4086.4	4054.9
5°	4686.3	4653.9	4589.1	4524.4	4427.2	4330.1	4248.3	4166.5	4062.6	3958.6	3871.7
7.5°	4838.8	4812.4	4734.0	4655.6	4526.9	4398.3	4270.5	4142.7	3989.3	3835.9	3704.7
10°	4843.0	4865.2	4800.4	4735.7	4590.8	4446.0	4272.2	4098.3	3892.2	3686.0	3516.4
12.5°	4691.4	4786.8	4773.2	4759.5	4612.1	4464.7	4253.4	4042.1	3789.1	3536.0	3323.8
15°	4407.6	4592.5	4647.1	4701.6	4579.8	4457.9	4217.6	3977.4	3680.0	3382.6	3138.9
17.5°	4042.1	4301.1	4445.1	4589.1	4500.5	4411.9	4148.6	3885.3	3550.5	3215.6	2950.6
20°	3609.3	3948.4	4174.2	4400.0	4367.6	4335.2	4063.4	3791.6	3430.3	3069.1	2781.9
22.5°	3181.5	3539.4	3851.3	4163.1	4196.3	4229.6	3955.2	3680.8	3285.5	2890.1	2597.9
25°	2812.6	3176.4	3547.9	3919.4	3994.4	4069.4	3808.7	3547.9	3138.1	2728.3	2437.7
27.5°	2460.7	2806.6	3215.6	3624.6	3760.9	3897.3	3658.7	3420.1	2993.2	2566.4	2276.7
30°	2173.6	2482.9	2900.4	3317.9	3507.9	3697.9	3478.9	3259.9	2836.5	2413.0	2129.3
32.5°	1906.0	2182.9	2602.2	3021.4	3242.0	3462.7	3273.6	3084.4	2677.1	2269.9	1989.5
35°	1694.7	1942.7	2333.8	2724.8	2971.9	3219.0	3064.0	2908.9	2511.0	2113.1	1848.1
37.5°	1513.2	1721.1	2088.4	2455.6	2718.0	2980.5	2850.9	2721.4	2347.4	1973.3	1722.8
40°	1363.3	1530.3	1871.9	2213.6	2470.9	2728.3	2617.5	2506.7	2171.9	1837.0	1602.7
42.5°	1234.6	1378.6	1685.3	1992.1	2228.1	2464.1	2390.8	2317.6	2014.2	1710.9	1493.6
45°	1121.3	1242.3	1512.4	1782.5	1999.8	2217.0	2159.1	2101.1	1839.6	1578.0	1378.6
47.5°	1020.8	1124.7	1365.8	1607.0	1802.1	1997.2	1943.5	1889.8	1673.4	1457.0	1275.5
50°	928.7	1017.3	1218.4	1419.5	1595.0	1770.6	1726.2	1681.9	1503.0	1324.1	1167.3
52.5°	841.8	915.1	1095.7	1276.4	1417.8	1559.2	1525.2	1491.1	1353.1	1215.0	1072.7
55°	759.2	826.5	979.0	1131.5	1252.5	1373.5	1339.4	1305.3	1198.0	1090.6	965.4
57.5°	684.2	743.0	866.5	990.1	1086.4	1182.6	1166.5	1150.3	1060.8	971.3	868.2
60°	605.0	657.8	764.3	870.8	948.3	1025.9	1007.1	988.4	924.5	860.6	772.0
62.5°	534.2	581.1	666.3	751.5	814.6	877.6	864.0	850.3	801.8	753.2	679.9
65°	460.1	506.1	575.1	644.1	693.6	743.0	731.1	719.1	682.5	645.9	587.1
67.5°	392.8	431.1	490.8	550.4	583.7	616.9	610.1	603.2	575.1	547.0	501.0
70°	324.6	357.9	407.3	456.7	479.7	502.7	505.3	507.8	482.3	456.7	422.6
72.5°	256.5	282.9	328.9	374.9	392.8	410.7	409.8	409.0	393.6	378.3	347.6
75°	196.8	216.4	252.2	288.0	303.3	318.7	322.1	325.5	311.0	296.5	279.5
77.5°	141.4	155.1	182.3	209.6	226.6	243.7	245.4	247.1	240.3	233.5	217.3
80°	99.7	103.9	121.0	138.0	155.9	173.8	176.4	178.9	172.1	165.3	155.1
82.5°	69.0	71.6	77.5	83.5	98.0	112.5	115.9	119.3	115.9	112.5	101.4
85°	41.8	42.6	45.2	47.7	54.5	61.3	64.8	68.2	66.5	64.8	58.8
87.5°	18.7	18.7	19.6	20.4	22.2	23.9	28.1	32.4	29.8	27.3	24.7
90°	7.4	6.3	5.1	4.3	3.5	2.4	1.6	0.8	1.6	2.4	3.5
92.5°	60.4	39.6	27.0	20.0	16.1	12.5	8.6	5.9	8.6	12.5	16.1
95°	142.7	84.3	50.9	35.7	25.5	18.8	14.5	13.3	14.5	18.8	25.5
97.5°	158.7	90.9	58.0	41.1	31.0	25.1	21.6	21.2	21.6	25.1	31.0
100°	147.7	89.7	62.3	47.0	37.6	32.1	29.4	29.0	29.4	32.1	37.6
102.5°	138.3	91.3	67.4	53.7	45.5	40.4	38.0	37.2	38.0	40.4	45.5
105°	134.8	94.4	73.3	61.1	53.7	49.0	46.6	45.5	46.6	49.0	53.7
107.5°	134.0	99.5	80.7	69.4	62.3	57.6	55.3	54.1	55.3	57.6	62.3
110°	136.0	106.2	88.6	77.6	70.9	66.6	64.7	63.5	64.7	66.6	70.9



TEST NUMBER: P831965

CATALOG NUMBER: S123RDIP-S1165D365U850-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	139.9	112.9	96.8	86.2	79.6	75.2	73.3	72.1	73.3	75.2	79.6
115°	144.2	120.3	105.4	94.8	88.2	84.3	81.9	80.3	81.9	84.3	88.2
117.5°	149.7	128.2	113.3	103.5	96.0	92.5	90.5	88.6	90.5	92.5	96.0
120°	156.0	135.6	121.5	111.7	104.2	100.3	98.4	97.2	98.4	100.3	104.2
122.5°	161.9	143.4	129.7	119.1	112.1	107.8	105.8	104.6	105.8	107.8	112.1
125°	168.1	150.9	137.2	126.6	119.1	114.8	112.5	111.7	112.5	114.8	119.1
127.5°	173.2	157.5	144.2	133.6	125.4	121.1	118.4	117.2	118.4	121.1	125.4
130°	178.3	163.4	150.5	139.9	131.7	127.0	123.4	122.3	123.4	127.0	131.7
132.5°	183.0	168.5	156.0	145.8	137.6	131.7	127.8	126.2	127.8	131.7	137.6
135°	186.9	173.6	161.5	150.9	142.7	136.8	132.5	130.9	132.5	136.8	142.7
137.5°	190.1	177.1	165.4	155.6	147.4	141.1	136.8	135.2	136.8	141.1	147.4
140°	192.4	180.7	169.3	159.5	151.7	145.4	141.5	139.5	141.5	145.4	151.7
142.5°	194.8	183.4	172.4	163.4	155.6	150.1	145.8	144.2	145.8	150.1	155.6
145°	196.3	185.8	175.6	166.6	159.9	154.0	150.5	149.3	150.5	154.0	159.9
147.5°	197.5	187.7	178.3	170.5	163.8	158.7	155.2	154.4	155.2	158.7	163.8
150°	197.9	189.7	180.7	173.6	168.1	163.0	159.9	159.5	159.9	163.0	168.1
152.5°	198.7	190.9	183.4	176.7	172.0	167.7	164.6	164.6	164.6	167.7	172.0
155°	198.7	192.4	185.8	180.3	176.0	172.0	169.7	169.7	169.7	172.0	176.0
157.5°	199.1	193.2	187.7	183.4	179.5	176.0	174.0	173.6	174.0	176.0	179.5
160°	199.1	194.4	189.7	185.8	183.0	179.9	178.3	178.3	178.3	179.9	183.0
162.5°	198.7	194.8	190.9	187.7	185.4	183.0	181.8	181.8	181.8	183.0	185.4
165°	197.9	195.2	192.0	189.3	187.7	185.8	185.0	185.4	185.0	185.8	187.7
167.5°	197.5	195.2	192.8	190.9	189.7	188.1	187.7	188.1	187.7	188.1	189.7
170°	196.3	194.8	192.8	192.0	191.2	190.1	189.7	190.5	189.7	190.1	191.2
172.5°	195.9	194.8	193.2	192.8	192.4	191.6	191.6	192.0	191.6	191.6	192.4
175°	195.2	194.4	193.6	193.2	193.2	192.4	192.8	193.2	192.8	192.4	193.2
177.5°	194.8	194.0	193.6	193.6	193.6	193.2	193.6	194.0	193.6	193.2	193.6
180°	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6



TEST NUMBER: P831965

CATALOG NUMBER: S123RDIP-S1165D365U850-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3
2.5°	4023.4	3974.8	3926.2	3891.3	3856.4	3812.9	3769.5	3767.8	3766.0	3733.7	3701.3
5°	3784.8	3700.4	3616.1	3533.4	3450.8	3368.1	3285.5	3266.7	3248.0	3219.9	3191.8
7.5°	3573.5	3438.9	3304.2	3198.6	3092.9	3010.3	2927.6	2871.4	2815.2	2771.7	2728.3
10°	3346.8	3179.8	3012.8	2885.0	2757.2	2667.8	2578.3	2513.5	2448.8	2418.1	2387.4
12.5°	3111.7	2930.2	2748.7	2623.5	2498.2	2390.8	2283.5	2224.7	2165.9	2123.3	2080.7
15°	2895.3	2700.1	2505.0	2372.1	2239.2	2138.6	2038.1	1979.3	1920.5	1877.9	1835.3
17.5°	2685.7	2488.8	2292.0	2157.4	2022.8	1931.6	1840.4	1783.3	1726.2	1699.8	1673.4
20°	2494.8	2296.3	2097.7	1970.8	1843.8	1754.4	1664.9	1634.2	1603.6	1578.8	1554.1
22.5°	2305.6	2114.8	1923.9	1802.1	1680.2	1615.5	1550.7	1526.0	1501.3	1482.6	1463.8
25°	2147.2	1957.2	1767.1	1660.6	1554.1	1503.9	1453.6	1437.4	1421.2	1402.5	1383.7
27.5°	1987.0	1806.3	1625.7	1540.5	1455.3	1414.4	1373.5	1353.1	1332.6	1317.3	1301.9
30°	1845.5	1678.5	1511.5	1440.8	1370.1	1334.3	1298.5	1276.4	1254.2	1239.7	1225.2
32.5°	1709.2	1561.0	1412.7	1352.2	1291.7	1256.8	1221.8	1200.5	1179.2	1162.2	1145.2
35°	1583.1	1454.4	1325.8	1270.4	1215.0	1180.1	1145.2	1123.9	1102.5	1085.5	1068.5
37.5°	1472.3	1355.6	1238.9	1186.9	1134.9	1104.3	1073.6	1051.4	1029.3	1011.4	993.5
40°	1368.4	1265.3	1162.2	1111.9	1061.7	1028.4	995.2	975.6	956.0	939.8	923.6
42.5°	1276.4	1181.8	1087.2	1037.8	988.4	956.8	925.3	902.3	879.3	869.9	860.6
45°	1179.2	1095.7	1012.2	964.5	916.8	883.6	850.3	830.7	811.1	802.6	794.1
47.5°	1094.0	1016.5	939.0	892.1	845.2	815.4	785.6	770.3	754.9	743.0	731.1
50°	1010.5	935.5	860.6	815.4	770.3	744.7	719.1	700.4	681.6	673.1	664.6
52.5°	930.4	862.3	794.1	748.1	702.1	677.4	652.7	636.5	620.3	602.4	584.5
55°	840.1	780.5	720.8	679.9	639.0	613.5	587.9	569.2	550.4	531.7	512.9
57.5°	765.1	706.3	647.6	610.9	574.3	549.6	524.9	504.4	484.0	468.6	453.3
60°	683.3	632.2	581.1	545.3	509.5	485.7	461.8	442.2	422.6	414.9	407.3
62.5°	606.7	558.9	511.2	479.7	448.2	425.2	402.2	389.4	376.6	371.5	366.4
65°	528.3	487.4	446.5	417.5	388.5	368.9	349.3	343.4	337.4	333.2	328.9
67.5°	455.0	420.1	385.1	359.6	334.0	320.4	306.7	299.9	293.1	288.0	282.9
70°	388.5	357.9	327.2	305.0	282.9	270.1	257.3	251.4	245.4	236.0	226.6
72.5°	317.0	293.1	269.2	252.2	235.2	224.1	213.0	201.1	189.2	180.6	172.1
75°	262.4	238.6	214.7	198.5	182.3	169.6	156.8	152.5	148.3	145.7	143.1
77.5°	201.1	180.6	160.2	147.4	134.6	128.7	122.7	120.1	117.6	116.7	115.9
80°	144.8	127.8	110.8	103.9	97.1	95.4	93.7	92.0	90.3	89.5	88.6
82.5°	90.3	81.8	73.3	71.6	69.9	69.0	68.2	67.3	66.5	65.6	64.8
85°	52.8	49.4	46.0	45.2	44.3	43.5	42.6	42.6	42.6	42.6	42.6
87.5°	22.2	22.2	22.2	22.2	22.2	22.2	22.2	22.2	22.2	21.3	20.4
90°	4.3	5.1	6.3	7.4	8.6	9.8	9.4	9.8	10.2	10.6	11.4
92.5°	20.0	27.0	39.6	60.4	80.7	72.9	54.5	38.8	30.2	26.3	23.5
95°	35.7	50.9	84.3	142.7	206.9	232.4	188.5	141.1	95.6	74.9	60.7
97.5°	41.1	58.0	90.9	158.7	266.9	357.4	369.6	324.1	244.5	192.8	148.1
100°	47.0	62.3	89.7	147.7	250.8	371.1	448.3	462.0	430.3	384.5	328.8
102.5°	53.7	67.4	91.3	138.3	227.3	345.7	452.3	507.9	514.6	492.6	462.4
105°	61.1	73.3	94.4	134.8	208.9	315.1	427.6	509.5	548.7	556.1	545.9
107.5°	69.4	80.7	99.5	134.0	195.6	288.0	392.3	486.0	547.5	578.1	588.6
110°	77.6	88.6	106.2	136.0	188.5	265.7	359.4	449.1	521.2	570.6	598.0



TEST NUMBER: P831965

CATALOG NUMBER: S123RDIP-S1165D365U850-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	86.2	96.8	112.9	139.9	184.6	250.8	330.8	412.7	486.7	543.6	580.8
115°	94.8	105.4	120.3	144.2	184.2	241.0	308.8	381.3	449.5	507.1	549.8
117.5°	103.5	113.3	128.2	149.7	184.6	234.4	294.3	357.0	417.4	470.3	514.6
120°	111.7	121.5	135.6	156.0	186.2	230.0	283.3	338.6	391.5	438.5	478.1
122.5°	119.1	129.7	143.4	161.9	188.9	227.3	274.3	324.1	370.7	413.5	449.5
125°	126.6	137.2	150.9	168.1	191.6	225.0	266.9	311.6	354.3	391.9	423.3
127.5°	133.6	144.2	157.5	173.2	194.8	223.8	259.8	300.2	339.0	373.5	402.5
130°	139.9	150.5	163.4	178.3	197.9	222.6	254.3	289.6	324.9	356.6	383.3
132.5°	145.8	156.0	168.5	183.0	200.3	222.2	249.2	279.8	311.6	340.6	365.6
135°	150.9	161.5	173.6	186.9	202.6	221.8	244.9	271.2	299.0	324.5	346.8
137.5°	155.6	165.4	177.1	190.1	204.2	221.0	241.0	263.0	286.5	309.2	329.2
140°	159.5	169.3	180.7	192.4	205.7	220.6	237.5	255.9	275.9	294.7	311.6
142.5°	163.4	172.4	183.4	194.8	206.9	219.9	234.4	249.2	265.7	281.4	295.5
145°	166.6	175.6	185.8	196.3	207.3	219.1	231.6	244.2	257.1	269.6	281.0
147.5°	170.5	178.3	187.7	197.5	207.3	217.9	228.9	239.8	250.4	261.0	269.2
150°	173.6	180.7	189.7	197.9	207.3	216.3	226.1	235.1	244.2	252.4	259.8
152.5°	176.7	183.4	190.9	198.7	206.1	214.4	223.0	230.8	238.3	245.3	251.2
155°	180.3	185.8	192.4	198.7	205.4	212.0	219.9	226.5	232.8	238.7	243.4
157.5°	183.4	187.7	193.2	199.1	204.2	210.1	216.3	221.8	227.3	232.0	235.9
160°	185.8	189.7	194.4	199.1	203.4	207.7	212.8	217.9	222.2	226.1	228.9
162.5°	187.7	190.9	194.8	198.7	201.8	205.4	209.3	213.2	216.7	220.2	222.6
165°	189.3	192.0	195.2	197.9	200.3	203.0	206.1	209.3	211.6	214.4	216.3
167.5°	190.9	192.8	195.2	197.5	198.7	200.7	203.0	205.7	207.7	209.3	210.8
170°	192.0	192.8	194.8	196.3	197.1	198.3	200.3	202.2	203.4	205.0	205.7
172.5°	192.8	193.2	194.8	195.9	195.9	196.3	197.5	199.1	199.9	201.0	201.4
175°	193.2	193.6	194.4	195.2	194.8	194.8	195.6	196.3	196.7	197.5	197.5
177.5°	193.6	193.6	194.0	194.8	194.0	193.6	194.0	194.4	194.8	195.2	195.2
180°	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6



TEST NUMBER: P831965

CATALOG NUMBER: S123RDIP-S1165D365U850-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	4156.3	4156.3	4156.3	4156.3
2.5°	3692.8	3684.3	3680.8	3677.4
5°	3165.4	3138.9	3133.0	3127.0
7.5°	2717.2	2706.1	2669.5	2632.8
10°	2353.4	2319.3	2303.9	2288.6
12.5°	2049.2	2017.6	2012.5	2007.4
15°	1813.2	1791.0	1783.3	1775.7
17.5°	1658.1	1642.7	1633.4	1624.0
20°	1543.1	1532.0	1525.2	1518.3
22.5°	1455.3	1446.8	1441.7	1436.6
25°	1370.9	1358.2	1353.9	1349.6
27.5°	1290.9	1279.8	1275.5	1271.3
30°	1215.9	1206.5	1200.5	1194.6
32.5°	1134.1	1123.0	1119.6	1116.2
35°	1061.7	1054.8	1051.4	1048.0
37.5°	985.0	976.4	971.3	966.2
40°	919.4	915.1	912.5	910.0
42.5°	852.9	845.2	844.4	843.5
45°	786.4	778.8	777.1	775.4
47.5°	724.2	717.4	716.6	715.7
50°	655.2	645.9	639.0	632.2
52.5°	576.0	567.5	561.5	555.5
55°	503.6	494.2	489.1	484.0
57.5°	449.0	444.8	442.2	439.7
60°	404.7	402.2	400.5	398.8
62.5°	363.8	361.3	361.3	361.3
65°	326.3	323.8	321.2	318.7
67.5°	277.8	272.7	271.8	271.0
70°	219.0	211.3	210.5	209.6
72.5°	171.3	170.4	168.7	167.0
75°	141.4	139.7	139.7	139.7
77.5°	114.2	112.5	112.5	112.5
80°	87.8	86.9	87.8	88.6
82.5°	64.8	64.8	63.9	63.1
85°	41.8	40.9	40.9	40.9
87.5°	20.4	20.4	20.4	20.4
90°	11.0	11.4	11.8	11.4
92.5°	22.7	21.2	21.6	20.8
95°	53.3	49.8	47.0	45.5
97.5°	121.9	107.0	97.6	93.3
100°	289.2	260.6	245.3	245.7
102.5°	433.8	412.7	400.5	389.2
105°	527.9	513.0	500.5	498.5
107.5°	586.3	579.2	574.1	569.8
110°	609.0	612.1	611.4	610.6



TEST NUMBER: P831965

CATALOG NUMBER: S123RDIP-S1165D365U850-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	603.1	614.5	618.4	618.8
115°	579.2	596.5	604.3	606.3
117.5°	545.1	564.3	576.1	578.8
120°	509.1	531.0	540.4	542.8
122.5°	476.2	495.4	505.9	509.1
125°	448.3	465.6	475.4	478.1
127.5°	425.2	440.1	449.1	451.5
130°	404.0	418.2	426.4	429.5
132.5°	384.8	399.0	406.0	408.0
135°	366.0	377.8	384.8	387.6
137.5°	345.7	357.8	363.7	366.0
140°	326.5	337.4	343.7	343.3
142.5°	307.6	317.0	322.5	322.1
145°	290.8	299.0	302.2	302.9
147.5°	277.1	283.0	286.1	286.5
150°	265.7	270.0	272.4	272.4
152.5°	255.5	259.4	260.6	260.6
155°	246.9	250.0	250.8	251.2
157.5°	239.1	241.4	242.2	242.2
160°	231.6	234.0	234.0	233.6
162.5°	224.2	226.1	226.1	225.7
165°	217.9	219.5	219.1	219.1
167.5°	211.6	212.8	212.4	212.4
170°	206.1	206.9	206.5	206.5
172.5°	201.4	202.2	201.4	201.0
175°	197.5	197.9	197.5	197.1
177.5°	194.8	195.2	194.4	194.4
180°	193.6	193.6	193.6	193.6



TEST NUMBER: P831965

CATALOG NUMBER: S123RDIP-S1165D365U850-4F0-1E-UDD-G4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.36	17.46	17.03	18.14	18.93	21.03	22.12	21.70	22.80	23.59
	3H	17.60	18.58	18.29	19.27	20.10	22.54	23.53	23.23	24.22	25.04
	4H	18.00	18.92	18.70	19.62	20.46	23.05	23.97	23.75	24.67	25.51
	6H	18.29	19.14	19.01	19.85	20.70	23.37	24.22	24.09	24.93	25.78
	8H	18.38	19.19	19.11	19.92	20.78	23.46	24.26	24.19	24.99	25.85
	12H	18.44	19.21	19.18	19.94	20.82	23.50	24.27	24.23	24.99	25.87
4H	2H	17.12	18.04	17.82	18.74	19.58	21.05	21.98	21.76	22.68	23.51
	3H	18.51	19.27	19.23	20.01	20.86	22.73	23.50	23.45	24.24	25.09
	4H	18.97	19.66	19.71	20.41	21.29	23.35	24.04	24.08	24.78	25.67
	6H	19.35	19.95	20.11	20.72	21.61	23.80	24.40	24.55	25.16	26.06
	8H	19.48	20.04	20.24	20.80	21.71	23.94	24.49	24.69	25.25	26.16
	12H	19.57	20.07	20.35	20.86	21.76	24.01	24.51	24.79	25.29	26.20
8H	4H	19.30	19.86	20.06	20.62	21.53	23.33	23.89	24.09	24.65	25.56
	6H	19.78	20.24	20.57	21.04	21.95	23.84	24.30	24.63	25.10	26.01
	8H	19.97	20.38	20.77	21.18	22.11	24.03	24.43	24.83	25.24	26.16
	12H	20.12	20.48	20.92	21.27	22.26	24.15	24.51	24.95	25.31	26.29
12H	4H	19.33	19.83	20.11	20.61	21.52	23.30	23.80	24.07	24.58	25.49
	6H	19.84	20.25	20.64	21.05	21.97	23.81	24.22	24.61	25.03	25.95
	8H	20.07	20.43	20.87	21.22	22.20	24.02	24.38	24.82	25.17	26.15