

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P832017

Luminaire Tested: S123RDIP-S1165D805U850-4F0-1E-UDD-G

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P832017
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-2, G3-1807-864-5)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1165D805U850-4F0-1E-UDD-G
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 805 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9070.5 lumens
Efficiency: N/A
Efficacy: 144.4 lumens/watt
Spacing Criteria (0/90/45): 0.55 / 1.17 / 0.8
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 62.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P832017

CATALOG NUMBER: S123RDIP-S1165D805U850-4F0-1E-UDD-G

Luminous Intensity Polar Plot

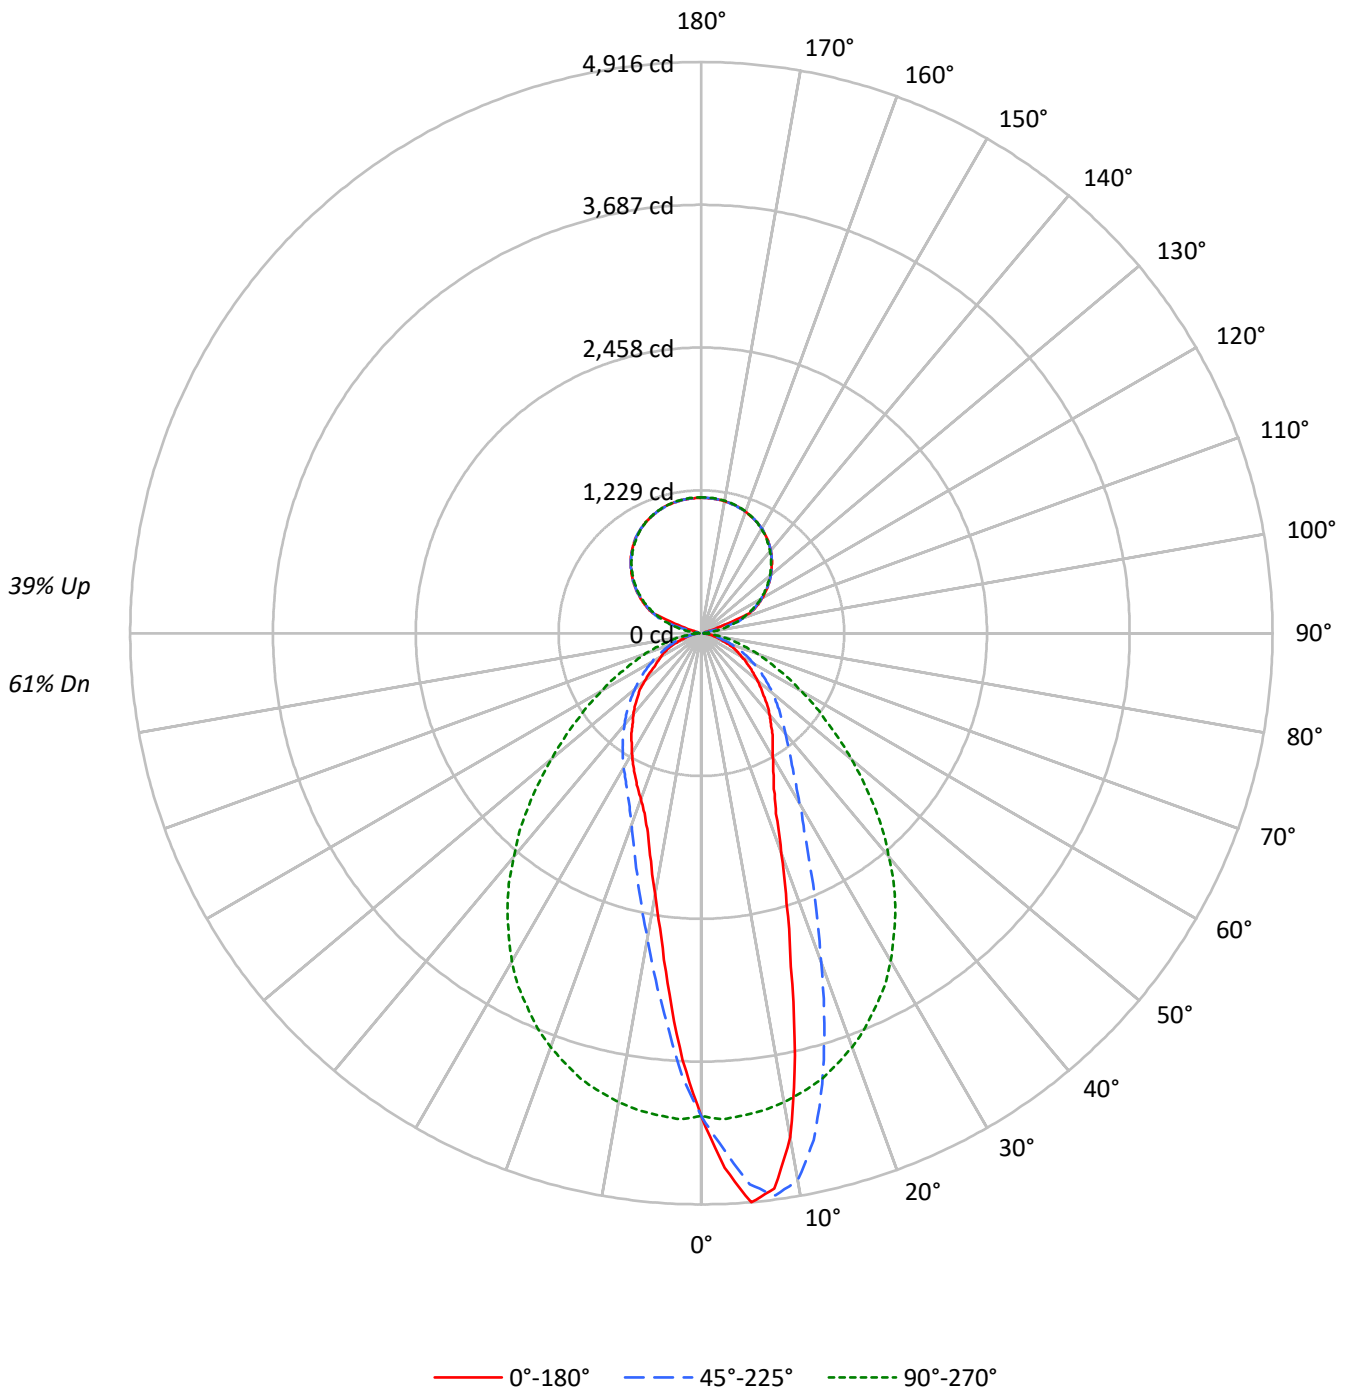



TEST NUMBER: P832017

CATALOG NUMBER: S123RDIP-S1165D805U850-4F0-1E-UDD-G

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	66	66	66	61	
1	101	97	94	90	95	91	88	85	80	78	75	69	68	66	60	59	58	58	58	58	53	
2	93	86	80	75	87	81	76	72	71	67	64	62	59	57	54	52	50	50	50	50	46	
3	86	77	70	64	80	72	66	61	64	59	55	56	52	50	49	46	44	44	44	44	40	
4	79	69	61	56	74	65	58	53	58	52	48	51	47	44	44	41	39	39	39	39	36	
5	73	62	54	49	68	59	52	47	52	47	43	46	42	39	41	37	35	35	35	35	32	
6	68	56	48	43	63	53	46	41	48	42	38	42	38	35	37	34	31	31	31	31	29	
7	63	51	44	38	59	49	42	37	44	38	34	39	35	31	35	31	28	28	28	28	26	
8	59	47	40	35	55	45	38	33	40	35	31	36	32	28	32	29	26	26	26	26	24	
9	55	43	36	31	52	41	35	30	37	32	28	34	29	26	30	27	24	24	24	24	22	
10	52	40	33	29	49	38	32	28	35	29	26	31	27	24	28	25	22	22	22	22	20	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	44738	44738	44738	44738	44738
5°	53121	51427	45019	36392	33787
10°	48129	52235	44794	29159	25014
15°	33137	44787	44323	23832	19788
20°	23053	34482	43432	20096	17392
25°	17568	26281	42137	17861	16029
30°	15293	21011	40518	16584	14848
35°	14040	17724	38224	15507	13771
40°	12811	15827	35222	14450	12787
45°	11569	14475	31984	13451	11804
50°	10501	13355	28165	12471	10587
55°	9498	12264	24496	11513	9083
60°	8510	11151	21278	10456	8585
65°	7855	9895	18315	9396	8117
70°	6382	8554	15981	8500	6596
75°	5598	6804	13537	7053	5810
80°	5071	5759	11089	5914	5492
85°	4631	5051	8423	5372	5051

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 33748 cd/sqm



TEST NUMBER: P832017

CATALOG NUMBER: S123RDIP-S1165D805U850-4F0-1E-UDD-G

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	378.8	4.2
10°-20°	876.6	9.7
20°-30°	1005.8	11.1
30°-40°	991.4	10.9
40°-50°	874.3	9.6
50°-60°	672.6	7.4
60°-70°	442.2	4.9
70°-80°	214.8	2.4
80°-90°	56.5	0.6
90°-100°	41.1	0.5
100°-110°	198.9	2.2
110°-120°	487.5	5.4
120°-130°	618.9	6.8
130°-140°	661.2	7.3
140°-150°	618.3	6.8
150°-160°	498.7	5.5
160°-170°	321.9	3.5
170°-180°	110.9	1.2
0°-30°	2261.3	24.9
0°-40°	3252.7	35.9
0°-60°	4799.5	52.9
0°-90°	5513.0	60.8
90°-120°	727.6	8.0
90°-150°	2626.0	29.0
90°-180°	3558.0	39.2
0°-180°	9070.5	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	4156	4156	4156	4156	4156	
5°	4916	4760	4166	3368	3127	449
15°	2974	4019	3977	2139	1776	839
25°	1479	2213	3548	1504	1350	699
35°	1068	1349	2909	1180	1048	666
45°	760	951	2101	884	775	590
55°	506	654	1305	614	484	454
65°	308	388	719	369	319	302
75°	135	164	326	170	140	145
85°	38	41	68	44	41	40
90°	26	21	1	21	26	13
95°	33	27	53	27	33	28
105°	38	190	258	190	38	79
115°	510	498	485	498	510	479
125°	697	694	683	694	697	623
135°	859	859	850	859	859	663
145°	991	989	982	989	991	619
155°	1079	1080	1081	1080	1079	498
165°	1138	1137	1140	1137	1138	321
175°	1163	1164	1167	1164	1163	111
180°	1167	1167	1167	1167	1167	



TEST NUMBER: P832017

CATALOG NUMBER: S123RDIP-S1165D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3
2.5°	4606.2	4591.7	4577.2	4572.9	4568.7	4555.0	4541.4	4510.7	4480.1	4448.5	4417.0
5°	4916.3	4918.0	4919.7	4915.5	4911.2	4893.3	4875.4	4837.9	4800.4	4759.5	4718.6
7.5°	4820.9	4848.1	4875.4	4880.5	4885.6	4899.3	4912.9	4904.4	4895.9	4880.5	4865.2
10°	4403.4	4401.7	4400.0	4430.6	4461.3	4552.5	4643.7	4690.5	4737.4	4779.1	4820.9
12.5°	3721.7	3724.3	3726.9	3827.4	3927.9	4014.0	4100.1	4219.3	4338.6	4467.3	4595.9
15°	2973.6	3015.4	3057.1	3146.6	3236.1	3365.6	3495.1	3655.3	3815.5	4019.1	4222.7
17.5°	2442.0	2459.9	2477.8	2563.8	2649.9	2772.6	2895.3	3076.7	3258.2	3520.7	3783.1
20°	2012.5	2028.7	2044.9	2107.1	2169.3	2286.9	2404.5	2577.4	2750.4	3010.3	3270.2
22.5°	1680.2	1711.8	1743.3	1785.0	1826.8	1912.0	1997.2	2173.6	2349.9	2586.8	2823.7
25°	1479.2	1493.6	1508.1	1543.9	1579.7	1661.5	1743.3	1860.0	1976.7	2212.8	2448.8
27.5°	1342.8	1347.1	1351.3	1377.8	1404.2	1457.0	1509.8	1618.0	1726.2	1920.5	2114.8
30°	1230.4	1238.0	1245.7	1266.1	1286.6	1324.9	1363.3	1440.0	1516.6	1690.5	1864.3
32.5°	1143.4	1147.7	1152.0	1169.0	1186.0	1214.2	1242.3	1302.8	1363.3	1496.2	1629.1
35°	1068.5	1069.3	1070.2	1083.0	1095.7	1123.0	1150.3	1200.5	1250.8	1348.8	1446.8
37.5°	983.3	989.2	995.2	1004.6	1013.9	1037.8	1061.7	1102.5	1143.4	1224.4	1305.3
40°	911.7	916.8	921.9	933.0	944.1	962.8	981.6	1019.0	1056.5	1126.4	1196.3
42.5°	840.1	843.5	846.9	858.0	869.1	892.1	915.1	944.9	974.7	1032.7	1090.6
45°	760.0	768.5	777.1	789.0	800.9	820.5	840.1	870.8	901.5	950.9	1000.3
47.5°	693.6	697.8	702.1	712.3	722.5	746.4	770.3	797.5	824.8	870.8	916.8
50°	627.1	628.8	630.5	639.9	649.3	670.6	691.9	723.4	754.9	797.5	840.1
52.5°	564.1	568.3	572.6	581.9	591.3	605.8	620.3	652.7	685.0	726.8	768.5
55°	506.1	508.7	511.2	518.0	524.9	541.9	558.9	587.1	615.2	653.5	691.9
57.5°	451.6	455.0	458.4	463.5	468.6	484.0	499.3	524.0	548.7	587.1	625.4
60°	395.3	399.6	403.9	409.8	415.8	427.7	439.7	461.8	484.0	518.0	552.1
62.5°	354.5	355.3	356.2	361.3	366.4	374.9	383.4	401.3	419.2	453.3	487.4
65°	308.4	311.0	313.6	316.1	318.7	325.5	332.3	347.6	363.0	388.5	414.1
67.5°	260.7	263.3	265.8	270.1	274.4	280.3	286.3	296.5	306.7	330.6	354.5
70°	202.8	202.8	202.8	209.6	216.4	226.6	236.9	244.5	252.2	271.8	291.4
72.5°	165.3	166.1	167.0	167.9	168.7	174.7	180.6	193.4	206.2	218.1	230.1
75°	134.6	135.5	136.3	137.2	138.0	139.7	141.4	145.7	150.0	163.6	177.2
77.5°	107.4	108.2	109.1	109.9	110.8	112.5	114.2	115.9	117.6	122.7	127.8
80°	81.8	82.6	83.5	84.4	85.2	86.1	86.9	88.6	90.3	92.9	95.4
82.5°	59.6	59.6	59.6	59.6	59.6	61.3	63.1	63.1	63.1	64.8	66.5
85°	37.5	37.5	37.5	38.3	39.2	39.2	39.2	40.0	40.9	40.9	40.9
87.5°	17.0	16.2	15.3	16.2	17.0	17.0	17.0	17.9	18.7	18.7	18.7
90°	26.0	25.6	25.2	24.9	24.5	23.9	23.1	22.3	21.6	20.8	18.3
92.5°	29.5	29.3	29.1	28.9	28.7	27.9	26.6	25.2	23.9	22.5	20.8
95°	32.9	32.9	32.9	32.9	32.9	32.3	30.9	29.6	28.2	26.9	24.8
97.5°	35.5	35.4	35.2	35.0	34.8	33.9	32.4	30.8	29.3	27.7	37.6
100°	36.4	36.2	36.0	35.8	35.6	34.8	33.2	31.7	30.2	28.6	58.7
102.5°	37.3	36.9	36.5	36.1	35.7	38.7	45.1	51.4	57.8	64.2	97.7
105°	38.1	37.8	37.4	37.0	36.6	53.5	87.6	121.7	155.8	189.9	207.2
107.5°	90.2	115.4	140.6	165.9	191.1	218.6	248.3	277.9	307.6	337.3	334.4
110°	238.4	266.0	293.5	321.1	348.6	365.6	371.9	378.3	384.7	391.0	388.9



TEST NUMBER: P832017

CATALOG NUMBER: S123RDIP-S1165D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	451.7	452.1	452.5	452.9	453.3	452.6	450.8	449.1	447.4	445.6	443.5
115°	509.8	509.0	508.3	507.5	506.7	505.4	503.4	501.5	499.6	497.7	495.9
117.5°	556.6	556.4	556.2	556.0	555.8	555.0	553.4	551.9	550.4	548.8	547.9
120°	605.2	605.2	605.2	605.2	605.2	604.4	602.9	601.3	599.8	598.2	597.7
122.5°	652.9	652.7	652.5	652.3	652.1	651.5	650.5	649.6	648.6	647.7	646.9
125°	697.1	696.7	696.3	695.9	695.5	695.1	694.8	694.4	694.0	693.6	692.8
127.5°	740.4	740.8	741.2	741.6	742.0	741.9	741.3	740.7	740.1	739.6	738.6
130°	782.0	782.4	782.8	783.2	783.6	783.4	782.6	781.9	781.1	780.3	779.5
132.5°	820.2	820.8	821.3	821.9	822.5	822.4	821.6	820.9	820.1	819.3	818.7
135°	859.2	859.8	860.4	860.9	861.5	861.5	860.9	860.4	859.8	859.2	858.4
137.5°	896.5	896.9	897.3	897.6	898.0	897.7	896.8	895.8	894.9	893.9	893.5
140°	929.4	929.8	930.2	930.6	931.0	930.8	930.0	929.2	928.5	927.7	927.1
142.5°	959.8	960.4	960.9	961.5	962.1	962.1	961.5	960.9	960.4	959.8	959.2
145°	991.0	991.0	991.0	991.0	991.0	990.8	990.4	990.0	989.6	989.3	988.9
147.5°	1013.5	1014.5	1015.5	1016.4	1017.4	1017.7	1017.3	1016.9	1016.5	1016.1	1015.8
150°	1039.5	1040.1	1040.7	1041.3	1041.9	1042.0	1041.6	1041.2	1040.8	1040.4	1040.0
152.5°	1060.4	1061.3	1062.3	1063.2	1064.2	1064.3	1063.5	1062.8	1062.0	1061.2	1061.0
155°	1079.4	1080.6	1081.7	1082.9	1084.1	1084.1	1083.2	1082.2	1081.3	1080.3	1080.1
157.5°	1095.9	1097.4	1099.0	1100.5	1102.1	1102.3	1101.1	1099.9	1098.8	1097.6	1097.8
160°	1111.5	1112.9	1114.2	1115.6	1116.9	1117.0	1115.8	1114.7	1113.5	1112.4	1112.6
162.5°	1126.2	1127.4	1128.6	1129.7	1130.9	1130.8	1129.4	1128.1	1126.7	1125.4	1125.6
165°	1137.5	1138.9	1140.2	1141.6	1142.9	1142.8	1141.3	1139.7	1138.2	1136.7	1136.8
167.5°	1146.2	1147.7	1149.3	1150.8	1152.4	1152.4	1150.8	1149.3	1147.7	1146.2	1146.2
170°	1154.0	1155.5	1157.1	1158.6	1160.2	1160.2	1158.6	1157.1	1155.5	1154.0	1154.0
172.5°	1158.3	1160.1	1161.8	1163.5	1165.3	1165.4	1163.8	1162.3	1160.7	1159.2	1159.0
175°	1162.7	1164.2	1165.7	1167.3	1168.8	1168.9	1167.6	1166.2	1164.9	1163.5	1163.3
177.5°	1163.5	1165.5	1167.4	1169.3	1171.2	1171.4	1169.9	1168.3	1166.8	1165.3	1165.1
180°	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0



TEST NUMBER: P832017

CATALOG NUMBER: S123RDIP-S1165D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3
2.5°	4412.8	4408.5	4367.6	4326.7	4286.6	4246.6	4216.8	4187.0	4136.7	4086.4	4054.9
5°	4686.3	4653.9	4589.1	4524.4	4427.2	4330.1	4248.3	4166.5	4062.6	3958.6	3871.7
7.5°	4838.8	4812.4	4734.0	4655.6	4526.9	4398.3	4270.5	4142.7	3989.3	3835.9	3704.7
10°	4843.0	4865.2	4800.4	4735.7	4590.8	4446.0	4272.2	4098.3	3892.2	3686.0	3516.4
12.5°	4691.4	4786.8	4773.2	4759.5	4612.1	4464.7	4253.4	4042.1	3789.1	3536.0	3323.8
15°	4407.6	4592.5	4647.1	4701.6	4579.8	4457.9	4217.6	3977.4	3680.0	3382.6	3138.9
17.5°	4042.1	4301.1	4445.1	4589.1	4500.5	4411.9	4148.6	3885.3	3550.5	3215.6	2950.6
20°	3609.3	3948.4	4174.2	4400.0	4367.6	4335.2	4063.4	3791.6	3430.3	3069.1	2781.9
22.5°	3181.5	3539.4	3851.3	4163.1	4196.3	4229.6	3955.2	3680.8	3285.5	2890.1	2597.9
25°	2812.6	3176.4	3547.9	3919.4	3994.4	4069.4	3808.7	3547.9	3138.1	2728.3	2437.7
27.5°	2460.7	2806.6	3215.6	3624.6	3760.9	3897.3	3658.7	3420.1	2993.2	2566.4	2276.7
30°	2173.6	2482.9	2900.4	3317.9	3507.9	3697.9	3478.9	3259.9	2836.5	2413.0	2129.3
32.5°	1906.0	2182.9	2602.2	3021.4	3242.0	3462.7	3273.6	3084.4	2677.1	2269.9	1989.5
35°	1694.7	1942.7	2333.8	2724.8	2971.9	3219.0	3064.0	2908.9	2511.0	2113.1	1848.1
37.5°	1513.2	1721.1	2088.4	2455.6	2718.0	2980.5	2850.9	2721.4	2347.4	1973.3	1722.8
40°	1363.3	1530.3	1871.9	2213.6	2470.9	2728.3	2617.5	2506.7	2171.9	1837.0	1602.7
42.5°	1234.6	1378.6	1685.3	1992.1	2228.1	2464.1	2390.8	2317.6	2014.2	1710.9	1493.6
45°	1121.3	1242.3	1512.4	1782.5	1999.8	2217.0	2159.1	2101.1	1839.6	1578.0	1378.6
47.5°	1020.8	1124.7	1365.8	1607.0	1802.1	1997.2	1943.5	1889.8	1673.4	1457.0	1275.5
50°	928.7	1017.3	1218.4	1419.5	1595.0	1770.6	1726.2	1681.9	1503.0	1324.1	1167.3
52.5°	841.8	915.1	1095.7	1276.4	1417.8	1559.2	1525.2	1491.1	1353.1	1215.0	1072.7
55°	759.2	826.5	979.0	1131.5	1252.5	1373.5	1339.4	1305.3	1198.0	1090.6	965.4
57.5°	684.2	743.0	866.5	990.1	1086.4	1182.6	1166.5	1150.3	1060.8	971.3	868.2
60°	605.0	657.8	764.3	870.8	948.3	1025.9	1007.1	988.4	924.5	860.6	772.0
62.5°	534.2	581.1	666.3	751.5	814.6	877.6	864.0	850.3	801.8	753.2	679.9
65°	460.1	506.1	575.1	644.1	693.6	743.0	731.1	719.1	682.5	645.9	587.1
67.5°	392.8	431.1	490.8	550.4	583.7	616.9	610.1	603.2	575.1	547.0	501.0
70°	324.6	357.9	407.3	456.7	479.7	502.7	505.3	507.8	482.3	456.7	422.6
72.5°	256.5	282.9	328.9	374.9	392.8	410.7	409.8	409.0	393.6	378.3	347.6
75°	196.8	216.4	252.2	288.0	303.3	318.7	322.1	325.5	311.0	296.5	279.5
77.5°	141.4	155.1	182.3	209.6	226.6	243.7	245.4	247.1	240.3	233.5	217.3
80°	99.7	103.9	121.0	138.0	155.9	173.8	176.4	178.9	172.1	165.3	155.1
82.5°	69.0	71.6	77.5	83.5	98.0	112.5	115.9	119.3	115.9	112.5	101.4
85°	41.8	42.6	45.2	47.7	54.5	61.3	64.8	68.2	66.5	64.8	58.8
87.5°	18.7	18.7	19.6	20.4	22.2	23.9	28.1	32.4	29.8	27.3	24.7
90°	15.8	13.3	10.8	8.6	6.6	4.7	2.8	0.9	2.8	4.7	6.6
92.5°	19.1	17.3	15.6	15.3	16.5	17.6	18.8	19.9	18.8	17.6	16.5
95°	22.6	20.5	18.4	21.3	29.2	37.1	45.0	52.9	45.0	37.1	29.2
97.5°	47.4	57.2	67.0	74.7	80.1	85.4	90.8	96.2	90.8	85.4	80.1
100°	88.7	118.8	148.8	161.9	158.1	154.2	150.4	146.5	150.4	154.2	158.1
102.5°	131.2	164.7	198.3	213.8	211.3	208.8	206.3	203.7	206.3	208.8	211.3
105°	224.6	241.9	259.2	266.8	264.7	262.6	260.5	258.4	260.5	262.6	264.7
107.5°	331.5	328.6	325.7	323.4	321.7	319.9	318.2	316.5	318.2	319.9	321.7
110°	386.8	384.7	382.5	380.7	379.2	377.6	376.1	374.5	376.1	377.6	379.2



TEST NUMBER: P832017

CATALOG NUMBER: S123RDIP-S1165D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	441.4	439.3	437.2	435.4	434.1	432.7	431.4	430.0	431.4	432.7	434.1
115°	494.2	492.5	490.7	489.3	488.1	487.0	485.8	484.7	485.8	487.0	488.1
117.5°	546.9	545.9	545.0	543.8	542.5	541.1	539.8	538.4	539.8	541.1	542.5
120°	597.1	596.5	595.9	594.8	593.0	591.3	589.6	587.8	589.6	591.3	593.0
122.5°	646.1	645.3	644.6	643.5	642.2	640.8	639.5	638.1	639.5	640.8	642.2
125°	692.1	691.3	690.5	689.4	687.8	686.3	684.7	683.2	684.7	686.3	687.8
127.5°	737.6	736.7	735.7	734.5	732.9	731.4	729.8	728.3	729.8	731.4	732.9
130°	778.8	778.0	777.2	776.1	774.5	773.0	771.4	769.9	771.4	773.0	774.5
132.5°	818.2	817.6	817.0	816.0	814.4	812.9	811.3	809.8	811.3	812.9	814.4
135°	857.7	856.9	856.1	855.2	854.0	852.8	851.7	850.5	851.7	852.8	854.0
137.5°	893.1	892.7	892.3	891.4	889.8	888.3	886.8	885.2	886.8	888.3	889.8
140°	926.5	926.0	925.4	924.5	923.4	922.2	921.1	919.9	921.1	922.2	923.4
142.5°	958.6	958.0	957.5	956.6	955.4	954.3	953.1	952.0	953.1	954.3	955.4
145°	988.5	988.1	987.7	986.9	985.5	984.2	982.8	981.5	982.8	984.2	985.5
147.5°	1015.4	1015.0	1014.6	1013.9	1013.0	1012.0	1011.0	1010.1	1011.0	1012.0	1013.0
150°	1039.6	1039.3	1038.9	1038.4	1037.8	1037.2	1036.7	1036.1	1036.7	1037.2	1037.8
152.5°	1060.8	1060.6	1060.4	1060.3	1060.1	1059.9	1059.7	1059.5	1059.7	1059.9	1060.1
155°	1079.9	1079.7	1079.5	1079.6	1080.0	1080.4	1080.8	1081.2	1080.8	1080.4	1080.0
157.5°	1098.0	1098.2	1098.4	1098.5	1098.5	1098.5	1098.5	1098.5	1098.5	1098.5	1098.5
160°	1112.8	1113.0	1113.1	1113.3	1113.5	1113.7	1113.9	1114.1	1113.9	1113.7	1113.5
162.5°	1125.8	1126.0	1126.1	1126.5	1127.1	1127.7	1128.3	1128.8	1128.3	1127.7	1127.1
165°	1137.0	1137.2	1137.4	1137.8	1138.4	1139.0	1139.5	1140.1	1139.5	1139.0	1138.4
167.5°	1146.2	1146.2	1146.2	1146.6	1147.3	1148.1	1148.9	1149.7	1148.9	1148.1	1147.3
170°	1154.0	1154.0	1154.0	1154.4	1155.1	1155.9	1156.7	1157.5	1156.7	1155.9	1155.1
172.5°	1158.8	1158.6	1158.4	1158.8	1159.8	1160.7	1161.7	1162.7	1161.7	1160.7	1159.8
175°	1163.1	1162.9	1162.8	1163.1	1164.1	1165.1	1166.0	1167.0	1166.0	1165.1	1164.1
177.5°	1164.9	1164.7	1164.5	1164.9	1165.8	1166.8	1167.8	1168.7	1167.8	1166.8	1165.8
180°	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0



TEST NUMBER: P832017

CATALOG NUMBER: S123RDIP-S1165D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3	4156.3
2.5°	4023.4	3974.8	3926.2	3891.3	3856.4	3812.9	3769.5	3767.8	3766.0	3733.7	3701.3
5°	3784.8	3700.4	3616.1	3533.4	3450.8	3368.1	3285.5	3266.7	3248.0	3219.9	3191.8
7.5°	3573.5	3438.9	3304.2	3198.6	3092.9	3010.3	2927.6	2871.4	2815.2	2771.7	2728.3
10°	3346.8	3179.8	3012.8	2885.0	2757.2	2667.8	2578.3	2513.5	2448.8	2418.1	2387.4
12.5°	3111.7	2930.2	2748.7	2623.5	2498.2	2390.8	2283.5	2224.7	2165.9	2123.3	2080.7
15°	2895.3	2700.1	2505.0	2372.1	2239.2	2138.6	2038.1	1979.3	1920.5	1877.9	1835.3
17.5°	2685.7	2488.8	2292.0	2157.4	2022.8	1931.6	1840.4	1783.3	1726.2	1699.8	1673.4
20°	2494.8	2296.3	2097.7	1970.8	1843.8	1754.4	1664.9	1634.2	1603.6	1578.8	1554.1
22.5°	2305.6	2114.8	1923.9	1802.1	1680.2	1615.5	1550.7	1526.0	1501.3	1482.6	1463.8
25°	2147.2	1957.2	1767.1	1660.6	1554.1	1503.9	1453.6	1437.4	1421.2	1402.5	1383.7
27.5°	1987.0	1806.3	1625.7	1540.5	1455.3	1414.4	1373.5	1353.1	1332.6	1317.3	1301.9
30°	1845.5	1678.5	1511.5	1440.8	1370.1	1334.3	1298.5	1276.4	1254.2	1239.7	1225.2
32.5°	1709.2	1561.0	1412.7	1352.2	1291.7	1256.8	1221.8	1200.5	1179.2	1162.2	1145.2
35°	1583.1	1454.4	1325.8	1270.4	1215.0	1180.1	1145.2	1123.9	1102.5	1085.5	1068.5
37.5°	1472.3	1355.6	1238.9	1186.9	1134.9	1104.3	1073.6	1051.4	1029.3	1011.4	993.5
40°	1368.4	1265.3	1162.2	1111.9	1061.7	1028.4	995.2	975.6	956.0	939.8	923.6
42.5°	1276.4	1181.8	1087.2	1037.8	988.4	956.8	925.3	902.3	879.3	869.9	860.6
45°	1179.2	1095.7	1012.2	964.5	916.8	883.6	850.3	830.7	811.1	802.6	794.1
47.5°	1094.0	1016.5	939.0	892.1	845.2	815.4	785.6	770.3	754.9	743.0	731.1
50°	1010.5	935.5	860.6	815.4	770.3	744.7	719.1	700.4	681.6	673.1	664.6
52.5°	930.4	862.3	794.1	748.1	702.1	677.4	652.7	636.5	620.3	602.4	584.5
55°	840.1	780.5	720.8	679.9	639.0	613.5	587.9	569.2	550.4	531.7	512.9
57.5°	765.1	706.3	647.6	610.9	574.3	549.6	524.9	504.4	484.0	468.6	453.3
60°	683.3	632.2	581.1	545.3	509.5	485.7	461.8	442.2	422.6	414.9	407.3
62.5°	606.7	558.9	511.2	479.7	448.2	425.2	402.2	389.4	376.6	371.5	366.4
65°	528.3	487.4	446.5	417.5	388.5	368.9	349.3	343.4	337.4	333.2	328.9
67.5°	455.0	420.1	385.1	359.6	334.0	320.4	306.7	299.9	293.1	288.0	282.9
70°	388.5	357.9	327.2	305.0	282.9	270.1	257.3	251.4	245.4	236.0	226.6
72.5°	317.0	293.1	269.2	252.2	235.2	224.1	213.0	201.1	189.2	180.6	172.1
75°	262.4	238.6	214.7	198.5	182.3	169.6	156.8	152.5	148.3	145.7	143.1
77.5°	201.1	180.6	160.2	147.4	134.6	128.7	122.7	120.1	117.6	116.7	115.9
80°	144.8	127.8	110.8	103.9	97.1	95.4	93.7	92.0	90.3	89.5	88.6
82.5°	90.3	81.8	73.3	71.6	69.9	69.0	68.2	67.3	66.5	65.6	64.8
85°	52.8	49.4	46.0	45.2	44.3	43.5	42.6	42.6	42.6	42.6	42.6
87.5°	22.2	22.2	22.2	22.2	22.2	22.2	22.2	22.2	22.2	21.3	20.4
90°	8.6	10.8	13.3	15.8	18.3	20.8	21.6	22.3	23.1	23.9	24.5
92.5°	15.3	15.6	17.3	19.1	20.8	22.5	23.9	25.2	26.6	27.9	28.7
95°	21.3	18.4	20.5	22.6	24.8	26.9	28.2	29.6	30.9	32.3	32.9
97.5°	74.7	67.0	57.2	47.4	37.6	27.7	29.3	30.8	32.4	33.9	34.8
100°	161.9	148.8	118.8	88.7	58.7	28.6	30.2	31.7	33.2	34.8	35.6
102.5°	213.8	198.3	164.7	131.2	97.7	64.2	57.8	51.4	45.1	38.7	35.7
105°	266.8	259.2	241.9	224.6	207.2	189.9	155.8	121.7	87.6	53.5	36.6
107.5°	323.4	325.7	328.6	331.5	334.4	337.3	307.6	277.9	248.3	218.6	191.1
110°	380.7	382.5	384.7	386.8	388.9	391.0	384.7	378.3	371.9	365.6	348.6



TEST NUMBER: P832017

CATALOG NUMBER: S123RDIP-S1165D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	435.4	437.2	439.3	441.4	443.5	445.6	447.4	449.1	450.8	452.6	453.3
115°	489.3	490.7	492.5	494.2	495.9	497.7	499.6	501.5	503.4	505.4	506.7
117.5°	543.8	545.0	545.9	546.9	547.9	548.8	550.4	551.9	553.4	555.0	555.8
120°	594.8	595.9	596.5	597.1	597.7	598.2	599.8	601.3	602.9	604.4	605.2
122.5°	643.5	644.6	645.3	646.1	646.9	647.7	648.6	649.6	650.5	651.5	652.1
125°	689.4	690.5	691.3	692.1	692.8	693.6	694.0	694.4	694.8	695.1	695.5
127.5°	734.5	735.7	736.7	737.6	738.6	739.6	740.1	740.7	741.3	741.9	742.0
130°	776.1	777.2	778.0	778.8	779.5	780.3	781.1	781.9	782.6	783.4	783.6
132.5°	816.0	817.0	817.6	818.2	818.7	819.3	820.1	820.9	821.6	822.4	822.5
135°	855.2	856.1	856.9	857.7	858.4	859.2	859.8	860.4	860.9	861.5	861.5
137.5°	891.4	892.3	892.7	893.1	893.5	893.9	894.9	895.8	896.8	897.7	898.0
140°	924.5	925.4	926.0	926.5	927.1	927.7	928.5	929.2	930.0	930.8	931.0
142.5°	956.6	957.5	958.0	958.6	959.2	959.8	960.4	960.9	961.5	962.1	962.1
145°	986.9	987.7	988.1	988.5	988.9	989.3	989.6	990.0	990.4	990.8	991.0
147.5°	1013.9	1014.6	1015.0	1015.4	1015.8	1016.1	1016.5	1016.9	1017.3	1017.7	1017.4
150°	1038.4	1038.9	1039.3	1039.6	1040.0	1040.4	1040.8	1041.2	1041.6	1042.0	1041.9
152.5°	1060.3	1060.4	1060.6	1060.8	1061.0	1061.2	1062.0	1062.8	1063.5	1064.3	1064.2
155°	1079.6	1079.5	1079.7	1079.9	1080.1	1080.3	1081.3	1082.2	1083.2	1084.1	1084.1
157.5°	1098.5	1098.4	1098.2	1098.0	1097.8	1097.6	1098.8	1099.9	1101.1	1102.3	1102.1
160°	1113.3	1113.1	1113.0	1112.8	1112.6	1112.4	1113.5	1114.7	1115.8	1117.0	1116.9
162.5°	1126.5	1126.1	1126.0	1125.8	1125.6	1125.4	1126.7	1128.1	1129.4	1130.8	1130.9
165°	1137.8	1137.4	1137.2	1137.0	1136.8	1136.7	1138.2	1139.7	1141.3	1142.8	1142.9
167.5°	1146.6	1146.2	1146.2	1146.2	1146.2	1146.2	1147.7	1149.3	1150.8	1152.4	1152.4
170°	1154.4	1154.0	1154.0	1154.0	1154.0	1154.0	1155.5	1157.1	1158.6	1160.2	1160.2
172.5°	1158.8	1158.4	1158.6	1158.8	1159.0	1159.2	1160.7	1162.3	1163.8	1165.4	1165.3
175°	1163.1	1162.8	1162.9	1163.1	1163.3	1163.5	1164.9	1166.2	1167.6	1168.9	1168.8
177.5°	1164.9	1164.5	1164.7	1164.9	1165.1	1165.3	1166.8	1168.3	1169.9	1171.4	1171.2
180°	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0	1167.0



TEST NUMBER: P832017

CATALOG NUMBER: S123RDIP-S1165D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	4156.3	4156.3	4156.3	4156.3
2.5°	3692.8	3684.3	3680.8	3677.4
5°	3165.4	3138.9	3133.0	3127.0
7.5°	2717.2	2706.1	2669.5	2632.8
10°	2353.4	2319.3	2303.9	2288.6
12.5°	2049.2	2017.6	2012.5	2007.4
15°	1813.2	1791.0	1783.3	1775.7
17.5°	1658.1	1642.7	1633.4	1624.0
20°	1543.1	1532.0	1525.2	1518.3
22.5°	1455.3	1446.8	1441.7	1436.6
25°	1370.9	1358.2	1353.9	1349.6
27.5°	1290.9	1279.8	1275.5	1271.3
30°	1215.9	1206.5	1200.5	1194.6
32.5°	1134.1	1123.0	1119.6	1116.2
35°	1061.7	1054.8	1051.4	1048.0
37.5°	985.0	976.4	971.3	966.2
40°	919.4	915.1	912.5	910.0
42.5°	852.9	845.2	844.4	843.5
45°	786.4	778.8	777.1	775.4
47.5°	724.2	717.4	716.6	715.7
50°	655.2	645.9	639.0	632.2
52.5°	576.0	567.5	561.5	555.5
55°	503.6	494.2	489.1	484.0
57.5°	449.0	444.8	442.2	439.7
60°	404.7	402.2	400.5	398.8
62.5°	363.8	361.3	361.3	361.3
65°	326.3	323.8	321.2	318.7
67.5°	277.8	272.7	271.8	271.0
70°	219.0	211.3	210.5	209.6
72.5°	171.3	170.4	168.7	167.0
75°	141.4	139.7	139.7	139.7
77.5°	114.2	112.5	112.5	112.5
80°	87.8	86.9	87.8	88.6
82.5°	64.8	64.8	63.9	63.1
85°	41.8	40.9	40.9	40.9
87.5°	20.4	20.4	20.4	20.4
90°	24.9	25.2	25.6	26.0
92.5°	28.9	29.1	29.3	29.5
95°	32.9	32.9	32.9	32.9
97.5°	35.0	35.2	35.4	35.5
100°	35.8	36.0	36.2	36.4
102.5°	36.1	36.5	36.9	37.3
105°	37.0	37.4	37.8	38.1
107.5°	165.9	140.6	115.4	90.2
110°	321.1	293.5	266.0	238.4



TEST NUMBER: P832017

CATALOG NUMBER: S123RDIP-S1165D805U850-4F0-1E-UDD-G

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	452.9	452.5	452.1	451.7
115°	507.5	508.3	509.0	509.8
117.5°	556.0	556.2	556.4	556.6
120°	605.2	605.2	605.2	605.2
122.5°	652.3	652.5	652.7	652.9
125°	695.9	696.3	696.7	697.1
127.5°	741.6	741.2	740.8	740.4
130°	783.2	782.8	782.4	782.0
132.5°	821.9	821.3	820.8	820.2
135°	860.9	860.4	859.8	859.2
137.5°	897.6	897.3	896.9	896.5
140°	930.6	930.2	929.8	929.4
142.5°	961.5	960.9	960.4	959.8
145°	991.0	991.0	991.0	991.0
147.5°	1016.4	1015.5	1014.5	1013.5
150°	1041.3	1040.7	1040.1	1039.5
152.5°	1063.2	1062.3	1061.3	1060.4
155°	1082.9	1081.7	1080.6	1079.4
157.5°	1100.5	1099.0	1097.4	1095.9
160°	1115.6	1114.2	1112.9	1111.5
162.5°	1129.7	1128.6	1127.4	1126.2
165°	1141.6	1140.2	1138.9	1137.5
167.5°	1150.8	1149.3	1147.7	1146.2
170°	1158.6	1157.1	1155.5	1154.0
172.5°	1163.5	1161.8	1160.1	1158.3
175°	1167.3	1165.7	1164.2	1162.7
177.5°	1169.3	1167.4	1165.5	1163.5
180°	1167.0	1167.0	1167.0	1167.0



TEST NUMBER: P832017

CATALOG NUMBER: S123RDIP-S1165D805U850-4F0-1E-UDD-G

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.91	15.81	15.78	16.69	17.80	19.57	20.47	20.45	21.36	22.47
	3H	16.14	16.94	17.02	17.83	18.97	21.08	21.88	21.96	22.77	23.91
	4H	16.52	17.28	17.42	18.18	19.33	21.57	22.33	22.47	23.23	24.38
	6H	16.81	17.50	17.72	18.41	19.57	21.89	22.58	22.80	23.49	24.65
	8H	16.90	17.56	17.81	18.48	19.64	21.97	22.63	22.89	23.55	24.71
	12H	16.95	17.58	17.87	18.49	19.68	22.00	22.63	22.92	23.55	24.73
4H	2H	15.64	16.40	16.55	17.30	18.45	19.58	20.33	20.48	21.23	22.38
	3H	17.02	17.64	17.93	18.57	19.74	21.24	21.87	22.16	22.80	23.96
	4H	17.47	18.05	18.40	18.97	20.16	21.85	22.42	22.78	23.35	24.54
	6H	17.85	18.34	18.78	19.29	20.48	22.29	22.78	23.23	23.73	24.92
	8H	17.97	18.43	18.91	19.37	20.58	22.42	22.88	23.36	23.83	25.03
	12H	18.05	18.46	19.01	19.42	20.63	22.49	22.90	23.45	23.86	25.07
8H	4H	17.79	18.25	18.73	19.19	20.40	21.82	22.28	22.76	23.22	24.43
	6H	18.26	18.64	19.23	19.62	20.83	22.32	22.70	23.29	23.68	24.89
	8H	18.45	18.79	19.43	19.76	20.98	22.51	22.84	23.48	23.82	25.04
	12H	18.59	18.89	19.57	19.86	21.13	22.63	22.92	23.60	23.89	25.16
12H	4H	17.81	18.22	18.77	19.18	20.39	21.78	22.19	22.73	23.15	24.36
	6H	18.32	18.65	19.29	19.63	20.85	22.30	22.63	23.27	23.60	24.83
	8H	18.54	18.83	19.52	19.80	21.07	22.49	22.78	23.47	23.75	25.02