

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831124

Luminaire Tested: S123DIP-S1000D365U950-4F0-1E-UDD-G1

Issue Date: 05/03/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P831124  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 05/03/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S1000D365U950-4F0-1E-UDD-G1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, GRAZE OPTIC  
UPLIGHT 365 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5588.2 lumens  
Efficiency: N/A  
Efficacy: 123.9 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Direct

Input Watts (W): 45.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P831124

CATALOG NUMBER: S123DIP-S1000D365U950-4F0-1E-UDD-G1

### Luminous Intensity Polar Plot

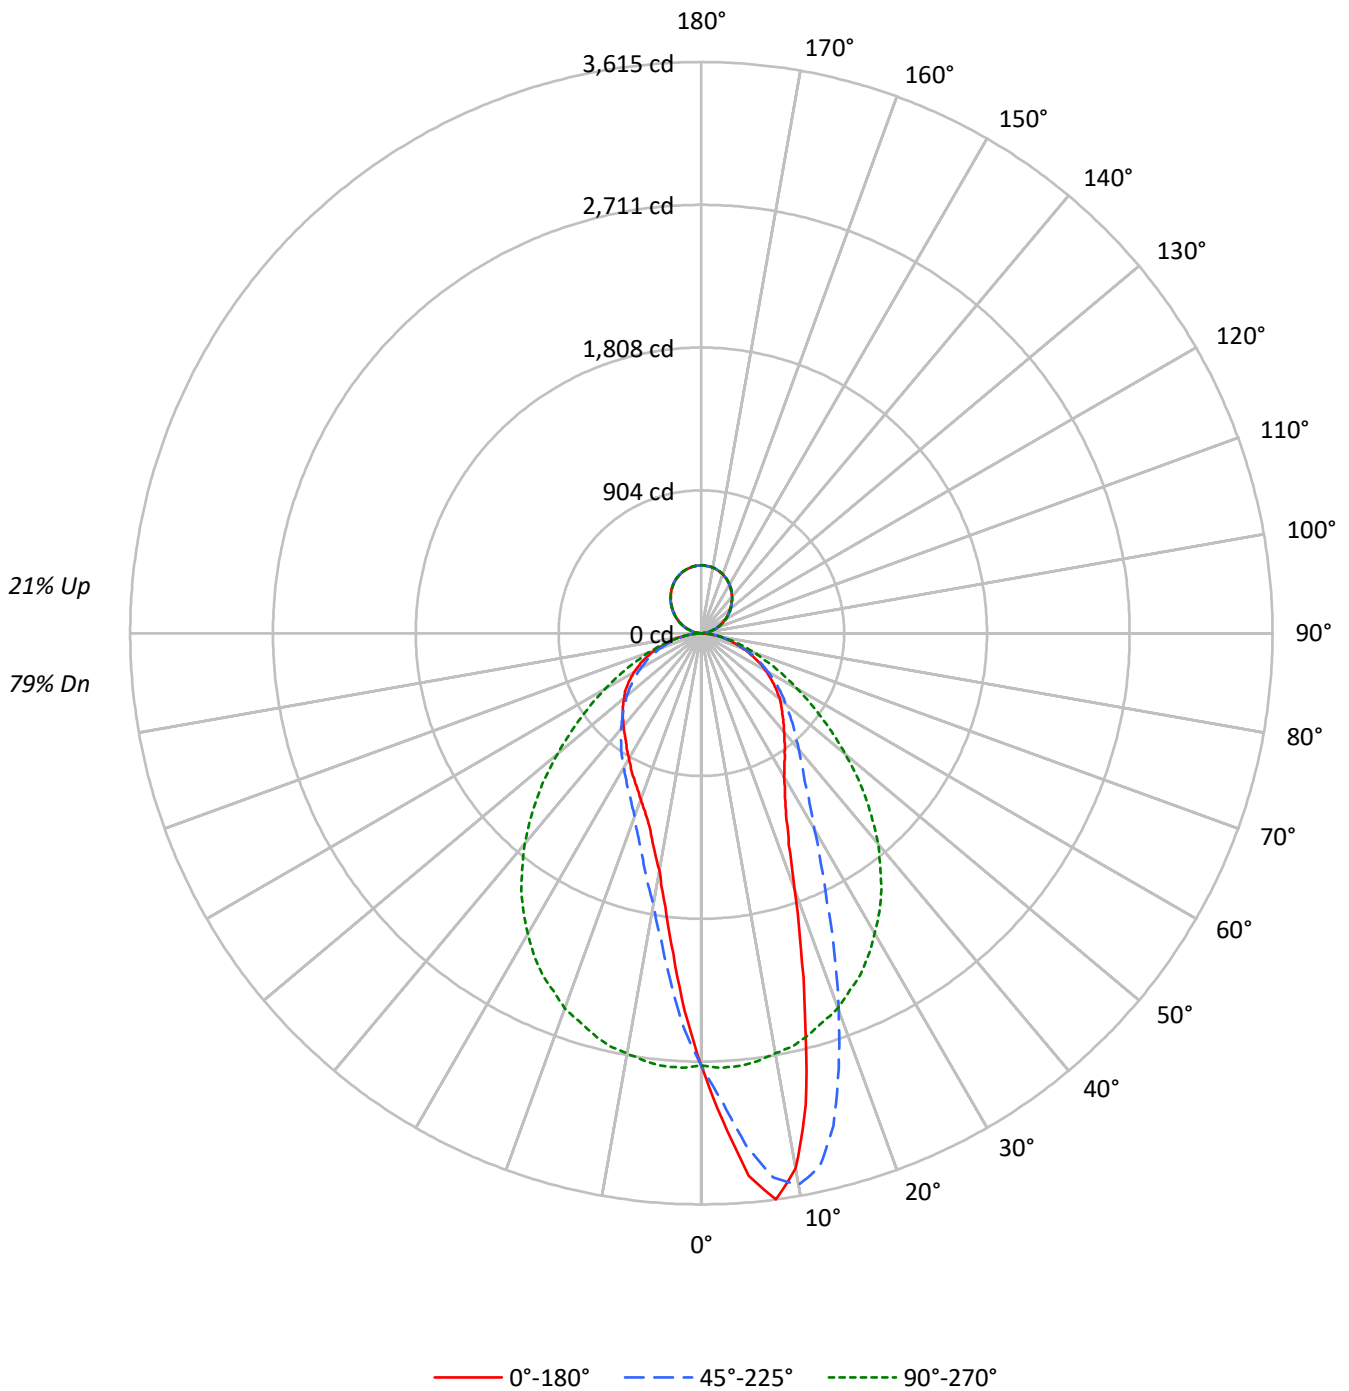



TEST NUMBER: P831124

CATALOG NUMBER: S123DIP-S1000D365U950-4F0-1E-UDD-G1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20				
RC	80					70					50					30				
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																				
0	114	114	114	114	109	109	109	109	99	99	99	91	91	91	82	82	82	79		
1	105	101	97	94	100	96	93	90	88	86	83	81	79	77	74	73	71	68		
2	96	89	83	78	92	85	80	75	79	74	71	72	69	66	66	64	61	58		
3	89	79	72	66	84	76	70	64	70	65	61	65	61	57	60	56	53	51		
4	82	71	63	57	78	68	61	56	63	57	53	59	54	50	54	50	47	44		
5	76	64	56	50	72	62	54	49	57	51	46	53	48	44	49	45	42	39		
6	70	58	50	44	67	56	49	43	52	46	41	49	43	39	45	41	38	35		
7	65	53	45	40	63	51	44	39	48	42	37	45	40	36	42	37	34	32		
8	61	49	41	36	59	47	40	35	44	38	34	42	36	32	39	34	31	29		
9	57	45	38	33	55	44	37	32	41	35	31	39	33	30	36	32	28	27		
10	54	42	35	30	52	41	34	29	38	32	28	36	31	27	34	29	26	24		

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	29450	29450	29450	29450	29450
5°	37245	35152	29714	23945	22003
10°	37606	38743	29515	19087	16680
15°	28324	35972	29314	16164	14106
20°	19734	29108	28940	14136	12812
25°	15049	22384	28302	13005	12018
30°	13018	17784	27283	12205	11378
35°	12079	15014	26108	11628	10927
40°	11435	13468	24458	11078	10775
45°	11055	12466	22360	10648	10707
50°	10865	11672	19879	10258	10652
55°	10460	11091	17440	9888	10699
60°	10086	10469	15033	9539	10523
65°	9475	9880	12967	9167	10315
70°	8749	9130	11028	8551	9709
75°	7918	8185	9453	7948	8871
80°	6533	7159	7476	6924	7476
85°	5175	5805	5483	5879	5953

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 80°  
 Vertical Angle: 45°  
 Luminance: 25530 cd/sqm



TEST NUMBER: P831124

CATALOG NUMBER: S123DIP-S1000D365U950-4F0-1E-UDD-G1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	258.7	4.6
10°-20°	643.5	11.5
20°-30°	761.9	13.6
30°-40°	766.1	13.7
40°-50°	702.9	12.6
50°-60°	580.1	10.4
60°-70°	410.4	7.3
70°-80°	219.1	3.9
80°-90°	56.5	1.0
90°-100°	27.6	0.5
100°-110°	83.6	1.5
110°-120°	142.3	2.5
120°-130°	187.3	3.4
130°-140°	210.5	3.8
140°-150°	206.9	3.7
150°-160°	174.2	3.1
160°-170°	116.0	2.1
170°-180°	40.6	0.7
0°-30°	1664.1	29.8
0°-40°	2430.2	43.5
0°-60°	3713.2	66.4
0°-90°	4399.1	78.7
90°-120°	253.6	4.5
90°-150°	858.3	15.4
90°-180°	1189.0	21.3
0°-180°	5588.2	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	2736	2736	2736	2736	2736	
5°	3447	3253	2750	2216	2036	328
15°	2542	3228	2631	1450	1266	702
25°	1267	1885	2383	1095	1012	598
35°	919	1143	1987	885	832	578
45°	726	819	1469	700	703	562
55°	557	591	929	527	570	499
65°	372	388	509	360	405	370
75°	190	197	227	191	213	200
85°	42	47	44	48	48	47
90°	10	8	0	8	10	8
95°	26	25	20	25	26	26
105°	80	80	76	80	80	85
115°	144	144	143	144	144	142
125°	207	210	210	210	207	185
135°	272	274	272	274	272	209
145°	330	332	330	332	330	206
155°	377	378	378	378	377	174
165°	410	411	412	411	410	116
175°	426	427	428	427	426	41
180°	429	429	429	429	429	



TEST NUMBER: P831124

CATALOG NUMBER: S123DIP-S1000D365U950-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0
2.5°	3083.9	3080.7	3077.5	3061.6	3045.8	3038.2	3030.5	3007.7	2984.8	2959.4	2934.0
5°	3447.0	3455.9	3464.7	3454.6	3444.4	3413.3	3382.2	3341.0	3299.7	3253.3	3207.0
7.5°	3614.6	3619.6	3624.7	3618.4	3612.0	3603.8	3595.5	3558.7	3521.9	3474.3	3426.6
10°	3440.6	3452.0	3463.5	3488.2	3513.0	3540.9	3568.8	3563.8	3558.7	3544.7	3530.8
12.5°	3058.5	3072.4	3086.4	3135.9	3185.4	3248.9	3312.4	3367.0	3421.6	3459.7	3497.7
15°	2541.7	2580.5	2619.2	2664.3	2709.3	2802.6	2896.0	3010.9	3125.8	3228.0	3330.2
17.5°	2093.6	2108.2	2122.8	2171.0	2219.3	2336.7	2454.1	2586.8	2719.5	2889.0	3058.5
20°	1722.8	1736.2	1749.5	1813.0	1876.5	1968.5	2060.6	2209.7	2358.9	2541.1	2723.3
22.5°	1447.3	1468.3	1489.2	1524.8	1560.3	1648.6	1736.8	1869.5	2002.2	2203.4	2404.6
25°	1267.1	1282.3	1297.5	1319.1	1340.7	1411.2	1481.6	1590.8	1700.0	1884.7	2069.4
27.5°	1143.9	1150.3	1156.6	1178.2	1199.8	1245.5	1291.2	1385.1	1479.1	1635.9	1792.7
30°	1047.4	1051.9	1056.3	1075.4	1094.4	1125.5	1156.6	1224.5	1292.5	1430.8	1569.2
32.5°	980.1	983.3	986.5	1001.1	1015.7	1037.9	1060.1	1109.6	1159.1	1273.4	1387.7
35°	919.2	921.1	923.0	933.8	944.6	961.1	977.6	1015.0	1052.5	1142.6	1232.8
37.5°	865.9	868.4	870.9	877.3	883.6	898.2	912.8	942.7	972.5	1041.7	1110.9
40°	813.8	818.3	822.7	827.1	831.6	843.6	855.7	878.6	901.4	958.5	1015.7
42.5°	769.4	773.8	778.3	780.2	782.1	789.1	796.0	817.0	837.9	880.5	923.0
45°	726.2	728.1	730.0	731.9	733.8	739.5	745.3	763.7	782.1	818.9	855.7
47.5°	686.9	686.9	686.9	688.1	689.4	694.5	699.5	712.9	726.2	754.8	783.3
50°	648.8	648.8	648.8	646.9	645.0	648.1	651.3	661.5	671.6	697.0	722.4
52.5°	603.1	603.1	603.1	603.7	604.3	604.3	604.3	613.2	622.1	645.0	667.8
55°	557.4	559.9	562.4	560.5	558.6	559.9	561.2	566.9	572.6	591.0	609.4
57.5°	511.6	512.9	514.2	513.6	512.9	513.6	514.2	519.3	524.3	538.3	552.3
60°	468.5	468.5	468.5	467.2	465.9	467.2	468.5	471.0	473.6	486.3	499.0
62.5°	420.2	420.9	421.5	422.1	422.8	421.5	420.2	423.4	426.6	436.1	445.6
65°	372.0	372.6	373.3	375.2	377.1	375.8	374.5	377.7	380.9	387.9	394.8
67.5°	328.8	327.6	326.3	326.9	327.6	329.5	331.4	332.0	332.6	340.3	347.9
70°	278.0	279.3	280.6	279.9	279.3	279.9	280.6	282.5	284.4	290.1	295.8
72.5°	232.3	233.0	233.6	233.6	233.6	234.9	236.1	238.0	240.0	243.1	246.3
75°	190.4	190.4	190.4	191.7	193.0	193.6	194.2	194.2	194.2	196.8	199.3
77.5°	144.7	147.9	151.1	150.4	149.8	151.1	152.4	154.3	156.2	157.4	158.7
80°	105.4	105.4	105.4	106.0	106.6	108.6	110.5	111.7	113.0	115.5	118.1
82.5°	67.3	67.9	68.6	70.5	72.4	73.6	74.9	76.8	78.7	78.7	78.7
85°	41.9	40.6	39.4	40.6	41.9	43.2	44.4	45.1	45.7	47.0	48.2
87.5°	20.3	20.3	20.3	20.3	20.3	20.9	21.6	21.6	21.6	21.6	21.6
90°	10.1	10.0	9.8	9.7	9.5	9.3	9.0	8.7	8.4	8.1	7.1
92.5°	14.5	14.6	14.8	14.9	15.1	15.1	14.8	14.6	14.4	14.2	13.7
95°	26.3	26.3	26.3	26.3	26.3	26.1	25.8	25.5	25.2	24.9	24.3
97.5°	37.8	37.8	37.9	38.0	38.1	37.9	37.5	37.2	36.8	36.4	36.0
100°	51.2	51.1	50.9	50.8	50.6	50.5	50.2	50.0	49.8	49.6	49.2
102.5°	65.1	65.1	65.2	65.3	65.4	65.3	65.1	64.8	64.6	64.4	63.9
105°	80.2	80.1	79.9	79.8	79.6	79.6	79.6	79.6	79.6	79.6	78.9
107.5°	95.7	95.8	95.9	96.0	96.0	96.0	95.7	95.5	95.3	95.1	94.8
110°	111.6	111.7	111.9	112.0	112.2	112.1	111.8	111.5	111.2	110.9	110.8



TEST NUMBER: P831124

CATALOG NUMBER: S123DIP-S1000D365U950-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	128.4	128.4	128.4	128.4	128.4	128.3	127.9	127.5	127.1	126.8	126.8
115°	143.6	143.7	143.8	143.8	143.9	143.9	143.8	143.8	143.7	143.6	143.8
117.5°	159.1	159.4	159.6	159.8	160.0	160.1	160.1	160.1	160.1	160.1	160.3
120°	175.6	175.8	175.9	176.1	176.2	176.4	176.4	176.5	176.6	176.7	177.0
122.5°	191.5	191.7	191.9	192.2	192.4	192.6	192.8	193.1	193.3	193.5	193.7
125°	207.3	207.6	207.9	208.2	208.5	208.8	209.1	209.4	209.7	210.0	210.2
127.5°	223.2	223.5	223.8	224.1	224.4	224.8	225.2	225.7	226.1	226.6	226.7
130°	238.7	239.2	239.7	240.3	240.8	241.2	241.5	241.8	242.1	242.4	242.6
132.5°	254.9	255.2	255.6	256.0	256.4	256.7	257.1	257.5	257.9	258.2	258.4
135°	271.7	271.9	272.0	272.2	272.3	272.6	272.9	273.2	273.5	273.8	273.8
137.5°	286.6	286.8	287.0	287.2	287.5	287.8	288.1	288.5	288.9	289.3	289.0
140°	301.1	301.6	302.1	302.6	303.2	303.5	303.5	303.6	303.7	303.8	303.7
142.5°	315.9	316.3	316.6	317.0	317.4	317.6	317.7	317.8	317.8	317.9	317.8
145°	330.1	330.4	330.7	331.0	331.3	331.4	331.5	331.6	331.7	331.7	331.5
147.5°	342.9	343.3	343.8	344.2	344.7	344.9	344.9	344.9	344.9	344.9	344.7
150°	355.0	355.5	355.9	356.4	356.8	357.0	357.0	357.0	357.0	357.0	356.9
152.5°	366.8	367.2	367.6	367.9	368.3	368.4	368.3	368.1	368.0	367.8	367.7
155°	377.3	377.8	378.3	378.8	379.4	379.5	379.2	378.9	378.6	378.3	378.2
157.5°	387.0	387.5	387.9	388.4	388.8	388.9	388.6	388.3	388.0	387.7	387.6
160°	396.5	396.8	397.1	397.4	397.7	397.6	397.3	396.9	396.5	396.1	396.1
162.5°	403.6	404.1	404.6	405.1	405.6	405.7	405.3	405.0	404.6	404.2	404.2
165°	410.3	410.8	411.3	411.9	412.4	412.4	412.0	411.5	411.1	410.6	410.6
167.5°	416.4	416.8	417.3	417.7	418.2	418.2	417.7	417.3	416.8	416.4	416.3
170°	420.7	421.3	421.8	422.3	422.8	422.8	422.3	421.8	421.3	420.7	420.7
172.5°	424.1	424.6	425.2	425.7	426.2	426.3	425.8	425.4	424.9	424.5	424.5
175°	426.5	427.0	427.5	428.0	428.6	428.6	428.2	427.7	427.3	426.8	426.8
177.5°	427.8	428.3	428.9	429.4	429.9	430.0	429.5	429.1	428.6	428.2	428.2
180°	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2



TEST NUMBER: P831124

CATALOG NUMBER: S123DIP-S1000D365U950-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0
2.5°	2926.4	2918.8	2890.9	2862.9	2831.2	2799.5	2776.0	2752.5	2717.6	2682.7	2654.1
5°	3171.5	3135.9	3076.9	3017.8	2937.9	2857.9	2803.9	2750.0	2677.6	2605.2	2547.5
7.5°	3365.7	3304.8	3222.2	3139.7	3035.0	2930.2	2831.2	2732.2	2621.7	2511.3	2421.1
10°	3489.5	3448.2	3353.0	3257.8	3117.5	2977.2	2838.8	2700.4	2558.2	2416.0	2296.7
12.5°	3501.6	3505.4	3417.8	3330.2	3171.5	3012.8	2844.5	2676.3	2497.3	2318.3	2179.3
15°	3395.5	3460.9	3412.7	3364.4	3204.5	3044.5	2837.6	2630.6	2424.3	2218.0	2057.4
17.5°	3198.8	3339.0	3346.0	3353.0	3193.0	3033.1	2803.9	2574.7	2341.1	2107.5	1938.7
20°	2930.2	3137.2	3208.3	3279.4	3149.2	3019.1	2772.8	2526.5	2265.0	2003.4	1826.3
22.5°	2656.0	2907.4	3037.5	3167.7	3071.2	2974.7	2712.5	2450.3	2174.2	1898.1	1718.4
25°	2343.7	2617.9	2817.9	3017.8	2958.8	2899.8	2641.4	2383.0	2089.1	1795.2	1611.8
27.5°	2071.4	2350.0	2591.3	2832.5	2819.8	2807.1	2550.6	2294.2	1993.3	1692.4	1515.3
30°	1828.9	2088.5	2358.3	2628.1	2659.2	2690.3	2442.7	2195.1	1893.6	1592.1	1421.3
32.5°	1614.3	1840.9	2130.4	2419.9	2480.8	2541.7	2318.3	2094.8	1796.5	1498.1	1333.7
35°	1438.5	1644.1	1933.6	2223.1	2299.2	2375.4	2181.2	1986.9	1696.2	1405.4	1248.7
37.5°	1282.9	1455.0	1737.4	2019.9	2113.2	2206.6	2032.6	1858.7	1586.4	1314.0	1169.9
40°	1154.1	1292.5	1552.1	1811.7	1919.6	2027.6	1884.1	1740.6	1482.3	1223.9	1091.2
42.5°	1046.2	1169.3	1404.8	1640.3	1743.8	1847.3	1726.0	1604.8	1375.0	1145.2	1023.9
45°	954.1	1052.5	1266.4	1480.4	1578.7	1677.1	1573.0	1468.9	1266.4	1063.9	950.9
47.5°	867.8	952.2	1135.0	1317.8	1405.4	1493.0	1411.8	1330.5	1159.1	987.7	885.5
50°	790.3	858.2	1018.2	1178.2	1254.4	1330.5	1258.8	1187.1	1046.2	905.2	816.4
52.5°	723.0	778.3	912.2	1046.2	1111.5	1176.9	1115.3	1053.8	942.0	830.3	752.9
55°	656.4	703.4	819.5	935.7	980.1	1024.6	977.0	929.3	839.2	749.1	683.7
57.5°	594.2	636.1	731.3	826.5	860.8	895.1	851.9	808.7	740.8	672.9	618.3
60°	533.2	567.5	646.9	726.2	747.2	768.1	733.2	698.3	650.7	603.1	554.2
62.5°	476.7	507.8	566.9	625.9	639.9	653.8	627.2	600.5	564.3	528.2	490.1
65°	418.3	441.8	490.1	538.3	547.2	556.1	532.6	509.1	481.8	454.5	426.6
67.5°	364.4	380.9	420.2	459.6	460.2	460.9	441.8	422.8	407.5	392.3	370.1
70°	311.7	327.6	353.6	379.6	380.2	380.9	365.6	350.4	339.0	327.6	311.1
72.5°	257.7	269.2	288.8	308.5	307.2	306.0	296.5	286.9	278.0	269.2	257.1
75°	208.8	218.4	231.7	245.0	241.2	237.4	232.3	227.3	219.6	212.0	204.4
77.5°	164.4	170.1	177.7	185.4	182.8	180.3	175.8	171.4	165.7	160.0	156.8
80°	120.6	123.2	128.2	133.3	132.0	130.8	125.7	120.6	119.3	118.1	113.6
82.5°	81.9	85.1	86.3	87.6	87.0	86.3	82.5	78.7	77.4	76.2	75.5
85°	48.9	49.5	50.1	50.8	48.9	47.0	45.7	44.4	44.4	44.4	43.8
87.5°	22.2	22.9	22.9	22.9	22.2	21.6	20.3	19.0	19.7	20.3	20.3
90°	6.1	5.2	4.2	3.3	2.6	1.8	1.1	0.3	1.1	1.8	2.6
92.5°	13.3	12.8	12.4	11.9	11.5	11.0	10.6	10.1	10.6	11.0	11.5
95°	23.7	23.1	22.6	22.0	21.5	20.9	20.4	19.9	20.4	20.9	21.5
97.5°	35.5	35.1	34.6	34.2	33.8	33.5	33.1	32.7	33.1	33.5	33.8
100°	48.8	48.4	48.1	47.6	47.2	46.7	46.3	45.9	46.3	46.7	47.2
102.5°	63.3	62.8	62.3	61.9	61.7	61.5	61.2	61.0	61.2	61.5	61.7
105°	78.2	77.5	76.9	76.5	76.3	76.2	76.0	75.9	76.0	76.2	76.3
107.5°	94.5	94.2	93.9	93.7	93.6	93.5	93.5	93.4	93.5	93.5	93.6
110°	110.6	110.5	110.3	110.2	110.0	109.9	109.7	109.6	109.7	109.9	110.0





TEST NUMBER: P831124

CATALOG NUMBER: S123DIP-S1000D365U950-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	126.8	126.8	126.8	126.7	126.7	126.6	126.5	126.4	126.5	126.6	126.7
115°	143.9	144.1	144.2	144.2	144.0	143.7	143.5	143.3	143.5	143.7	144.0
117.5°	160.4	160.6	160.7	160.8	160.7	160.6	160.6	160.5	160.6	160.6	160.7
120°	177.4	177.8	178.2	178.1	177.7	177.2	176.8	176.3	176.8	177.2	177.7
122.5°	193.8	194.0	194.1	194.0	193.7	193.4	193.1	192.8	193.1	193.4	193.7
125°	210.3	210.5	210.6	210.6	210.4	210.1	209.9	209.7	209.9	210.1	210.4
127.5°	226.9	227.0	227.2	227.0	226.6	226.1	225.7	225.2	225.7	226.1	226.6
130°	242.8	243.1	243.3	243.1	242.5	241.9	241.3	240.7	241.3	241.9	242.5
132.5°	258.5	258.7	258.8	258.6	258.0	257.4	256.8	256.2	256.8	257.4	258.0
135°	273.9	274.0	274.1	273.9	273.4	273.0	272.5	272.1	272.5	273.0	273.4
137.5°	288.8	288.6	288.4	288.1	287.7	287.3	286.9	286.6	286.9	287.3	287.7
140°	303.6	303.5	303.5	303.2	302.9	302.5	302.1	301.7	302.1	302.5	302.9
142.5°	317.6	317.5	317.3	317.1	316.7	316.3	315.9	315.6	315.9	316.3	316.7
145°	331.3	331.1	330.8	330.7	330.5	330.4	330.2	330.1	330.2	330.4	330.5
147.5°	344.4	344.2	344.0	343.7	343.4	343.1	342.8	342.5	342.8	343.1	343.4
150°	356.7	356.6	356.4	356.3	356.1	356.0	355.8	355.7	355.8	356.0	356.1
152.5°	367.7	367.6	367.5	367.4	367.1	366.9	366.7	366.5	366.7	366.9	367.1
155°	378.1	378.0	378.0	377.9	377.9	377.9	377.9	377.9	377.9	377.9	377.9
157.5°	387.6	387.5	387.4	387.4	387.5	387.6	387.6	387.7	387.6	387.6	387.5
160°	396.1	396.1	396.1	396.2	396.4	396.5	396.7	396.8	396.7	396.5	396.4
162.5°	404.1	404.0	403.9	404.0	404.2	404.4	404.7	404.9	404.7	404.4	404.2
165°	410.6	410.6	410.6	410.7	411.0	411.2	411.4	411.6	411.4	411.2	411.0
167.5°	416.2	416.1	416.1	416.2	416.5	416.8	417.1	417.4	417.1	416.8	416.5
170°	420.7	420.7	420.7	420.9	421.2	421.5	421.8	422.1	421.8	421.5	421.2
172.5°	424.5	424.5	424.5	424.6	424.9	425.2	425.5	425.8	425.5	425.2	424.9
175°	426.8	426.8	426.8	427.0	427.3	427.6	427.9	428.2	427.9	427.6	427.3
177.5°	428.2	428.2	428.2	428.3	428.6	428.9	429.2	429.5	429.2	428.9	428.6
180°	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2



TEST NUMBER: P831124

CATALOG NUMBER: S123DIP-S1000D365U950-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0	2736.0
2.5°	2625.5	2600.8	2576.0	2557.0	2537.9	2505.6	2473.2	2465.6	2457.9	2447.2	2436.4
5°	2489.7	2428.7	2367.8	2313.2	2258.6	2216.1	2173.6	2145.6	2117.7	2097.4	2077.1
7.5°	2331.0	2239.6	2148.2	2083.4	2018.7	1957.1	1895.5	1875.8	1856.2	1829.5	1802.8
10°	2177.4	2076.4	1975.5	1891.1	1806.6	1746.3	1686.0	1661.9	1637.8	1604.1	1570.5
12.5°	2040.2	1929.8	1819.3	1734.3	1649.2	1590.8	1532.4	1497.5	1462.6	1443.5	1424.5
15°	1896.8	1778.7	1660.6	1581.9	1503.2	1450.5	1397.8	1367.4	1336.9	1318.5	1300.1
17.5°	1769.8	1653.0	1536.2	1460.7	1385.1	1336.9	1288.6	1262.0	1235.3	1221.4	1207.4
20°	1649.2	1534.9	1420.7	1347.0	1273.4	1234.1	1194.7	1177.6	1160.4	1149.0	1137.6
22.5°	1538.8	1426.4	1314.0	1251.2	1188.3	1156.6	1124.9	1112.8	1100.7	1091.2	1081.7
25°	1428.3	1328.0	1227.7	1174.4	1121.1	1095.0	1069.0	1056.9	1044.9	1035.4	1025.8
27.5°	1338.2	1242.3	1146.4	1100.7	1055.0	1034.7	1014.4	1004.9	995.4	986.5	977.6
30°	1250.6	1164.9	1079.2	1039.8	1000.4	982.0	963.6	954.1	944.6	936.3	928.1
32.5°	1169.3	1095.7	1022.0	985.8	949.7	934.4	919.2	907.8	896.3	890.0	883.6
35°	1091.9	1025.8	959.8	930.0	900.1	884.9	869.7	860.2	850.6	845.6	840.5
37.5°	1025.8	966.8	907.8	879.2	850.6	836.0	821.4	813.2	804.9	803.0	801.1
40°	958.5	907.8	857.0	829.0	801.1	788.4	775.7	770.6	765.6	764.3	763.0
42.5°	902.7	853.2	803.7	778.3	752.9	742.1	731.3	728.8	726.2	728.1	730.0
45°	837.9	796.7	755.4	731.9	708.4	699.5	690.7	688.8	686.9	690.7	694.5
47.5°	783.3	745.3	707.2	684.9	662.7	656.4	650.0	649.4	648.8	653.8	658.9
50°	727.5	690.7	653.8	636.1	618.3	612.6	606.9	608.8	610.7	618.9	627.2
52.5°	675.4	641.1	606.9	590.4	573.9	570.1	566.2	570.7	575.1	584.0	592.9
55°	618.3	587.2	556.1	543.4	530.7	526.9	523.1	532.0	540.8	549.1	557.4
57.5°	563.7	536.4	509.1	497.7	486.3	485.6	485.0	493.2	501.5	510.4	519.3
60°	505.3	482.4	459.6	450.7	441.8	443.1	444.4	453.9	463.4	470.4	477.4
62.5°	452.0	432.9	413.9	405.6	397.4	400.6	403.7	413.3	422.8	431.0	439.3
65°	398.7	382.8	366.9	361.2	355.5	359.9	364.4	372.6	380.9	386.6	392.3
67.5°	347.9	334.5	321.2	316.8	312.3	316.8	321.2	329.5	337.7	343.4	349.1
70°	294.5	283.8	273.0	269.8	266.6	271.7	276.8	283.8	290.7	296.5	302.2
72.5°	245.0	236.8	228.5	227.9	227.3	231.7	236.1	243.1	250.1	253.9	257.7
75°	196.8	192.3	187.9	187.3	186.6	191.1	195.5	199.3	203.1	206.3	209.5
77.5°	153.6	149.8	146.0	146.6	147.3	150.4	153.6	157.4	161.2	163.1	165.0
80°	109.2	107.9	106.6	107.9	109.2	111.7	114.3	116.8	119.3	120.6	121.9
82.5°	74.9	73.6	72.4	74.3	76.2	78.1	80.0	81.9	83.8	84.4	85.1
85°	43.2	45.1	47.0	47.0	47.0	47.6	48.2	48.9	49.5	48.9	48.2
87.5°	20.3	20.9	21.6	21.6	21.6	22.2	22.9	22.9	22.9	22.2	21.6
90°	3.3	4.2	5.2	6.1	7.1	8.1	8.4	8.7	9.0	9.3	9.5
92.5°	11.9	12.4	12.8	13.3	13.7	14.2	14.4	14.6	14.8	15.1	15.1
95°	22.0	22.6	23.1	23.7	24.3	24.9	25.2	25.5	25.8	26.1	26.3
97.5°	34.2	34.6	35.1	35.5	36.0	36.4	36.8	37.2	37.5	37.9	38.1
100°	47.6	48.1	48.4	48.8	49.2	49.6	49.8	50.0	50.2	50.5	50.6
102.5°	61.9	62.3	62.8	63.3	63.9	64.4	64.6	64.8	65.1	65.3	65.4
105°	76.5	76.9	77.5	78.2	78.9	79.6	79.6	79.6	79.6	79.6	79.6
107.5°	93.7	93.9	94.2	94.5	94.8	95.1	95.3	95.5	95.7	96.0	96.0
110°	110.2	110.3	110.5	110.6	110.8	110.9	111.2	111.5	111.8	112.1	112.2

TEST NUMBER: P831124

CATALOG NUMBER: S123DIP-S1000D365U950-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	126.7	126.8	126.8	126.8	126.8	126.8	127.1	127.5	127.9	128.3	128.4
115°	144.2	144.2	144.1	143.9	143.8	143.6	143.7	143.8	143.8	143.9	143.9
117.5°	160.8	160.7	160.6	160.4	160.3	160.1	160.1	160.1	160.1	160.1	160.0
120°	178.1	178.2	177.8	177.4	177.0	176.7	176.6	176.5	176.4	176.4	176.2
122.5°	194.0	194.1	194.0	193.8	193.7	193.5	193.3	193.1	192.8	192.6	192.4
125°	210.6	210.6	210.5	210.3	210.2	210.0	209.7	209.4	209.1	208.8	208.5
127.5°	227.0	227.2	227.0	226.9	226.7	226.6	226.1	225.7	225.2	224.8	224.4
130°	243.1	243.3	243.1	242.8	242.6	242.4	242.1	241.8	241.5	241.2	240.8
132.5°	258.6	258.8	258.7	258.5	258.4	258.2	257.9	257.5	257.1	256.7	256.4
135°	273.9	274.1	274.0	273.9	273.8	273.8	273.5	273.2	272.9	272.6	272.3
137.5°	288.1	288.4	288.6	288.8	289.0	289.3	288.9	288.5	288.1	287.8	287.5
140°	303.2	303.5	303.5	303.6	303.7	303.8	303.7	303.6	303.5	303.5	303.2
142.5°	317.1	317.3	317.5	317.6	317.8	317.9	317.8	317.8	317.7	317.6	317.4
145°	330.7	330.8	331.1	331.3	331.5	331.7	331.7	331.6	331.5	331.4	331.3
147.5°	343.7	344.0	344.2	344.4	344.7	344.9	344.9	344.9	344.9	344.9	344.7
150°	356.3	356.4	356.6	356.7	356.9	357.0	357.0	357.0	357.0	357.0	356.8
152.5°	367.4	367.5	367.6	367.7	367.7	367.8	368.0	368.1	368.3	368.4	368.3
155°	377.9	378.0	378.0	378.1	378.2	378.3	378.6	378.9	379.2	379.5	379.4
157.5°	387.4	387.4	387.5	387.6	387.6	387.7	388.0	388.3	388.6	388.9	388.8
160°	396.2	396.1	396.1	396.1	396.1	396.1	396.5	396.9	397.3	397.6	397.7
162.5°	404.0	403.9	404.0	404.1	404.2	404.2	404.6	405.0	405.3	405.7	405.6
165°	410.7	410.6	410.6	410.6	410.6	410.6	411.1	411.5	412.0	412.4	412.4
167.5°	416.2	416.1	416.1	416.2	416.3	416.4	416.8	417.3	417.7	418.2	418.2
170°	420.9	420.7	420.7	420.7	420.7	420.7	421.3	421.8	422.3	422.8	422.8
172.5°	424.6	424.5	424.5	424.5	424.5	424.5	424.9	425.4	425.8	426.3	426.2
175°	427.0	426.8	426.8	426.8	426.8	426.8	427.3	427.7	428.2	428.6	428.6
177.5°	428.3	428.2	428.2	428.2	428.2	428.2	428.6	429.1	429.5	430.0	429.9
180°	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2



TEST NUMBER: P831124

CATALOG NUMBER: S123DIP-S1000D365U950-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
0°	2736.0	2736.0	2736.0	2736.0
2.5°	2431.9	2427.5	2409.7	2391.9
5°	2061.8	2046.6	2041.5	2036.4
7.5°	1801.6	1800.3	1773.6	1747.0
10°	1572.4	1574.3	1550.2	1526.1
12.5°	1408.6	1392.8	1390.8	1388.9
15°	1285.5	1270.9	1268.3	1265.8
17.5°	1198.5	1189.6	1187.1	1184.5
20°	1132.5	1127.4	1123.0	1118.5
22.5°	1075.4	1069.0	1065.2	1061.4
25°	1020.1	1014.4	1013.1	1011.9
27.5°	970.6	963.6	963.6	963.6
30°	923.6	919.2	917.3	915.4
32.5°	879.8	876.0	876.0	876.0
35°	838.6	836.7	834.1	831.6
37.5°	801.1	801.1	799.8	798.6
40°	764.9	766.8	766.8	766.8
42.5°	731.9	733.8	733.8	733.8
45°	697.6	700.8	702.1	703.4
47.5°	664.0	669.1	670.3	671.6
50°	631.0	634.8	635.4	636.1
52.5°	597.3	601.8	605.0	608.1
55°	561.8	566.2	568.1	570.1
57.5°	523.7	528.2	528.8	529.4
60°	481.8	486.3	487.5	488.8
62.5°	441.8	444.4	445.6	446.9
65°	396.1	399.9	402.5	405.0
67.5°	352.3	355.5	355.5	355.5
70°	303.4	304.7	306.6	308.5
72.5°	258.4	259.0	259.0	259.0
75°	210.8	212.0	212.7	213.3
77.5°	165.7	166.3	166.3	166.3
80°	121.2	120.6	120.6	120.6
82.5°	83.2	81.3	81.3	81.3
85°	47.6	47.0	47.6	48.2
87.5°	21.6	21.6	21.6	21.6
90°	9.7	9.8	10.0	10.1
92.5°	14.9	14.8	14.6	14.5
95°	26.3	26.3	26.3	26.3
97.5°	38.0	37.9	37.8	37.8
100°	50.8	50.9	51.1	51.2
102.5°	65.3	65.2	65.1	65.1
105°	79.8	79.9	80.1	80.2
107.5°	96.0	95.9	95.8	95.7
110°	112.0	111.9	111.7	111.6



TEST NUMBER: P831124

CATALOG NUMBER: S123DIP-S1000D365U950-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
112.5°	128.4	128.4	128.4	128.4
115°	143.8	143.8	143.7	143.6
117.5°	159.8	159.6	159.4	159.1
120°	176.1	175.9	175.8	175.6
122.5°	192.2	191.9	191.7	191.5
125°	208.2	207.9	207.6	207.3
127.5°	224.1	223.8	223.5	223.2
130°	240.3	239.7	239.2	238.7
132.5°	256.0	255.6	255.2	254.9
135°	272.2	272.0	271.9	271.7
137.5°	287.2	287.0	286.8	286.6
140°	302.6	302.1	301.6	301.1
142.5°	317.0	316.6	316.3	315.9
145°	331.0	330.7	330.4	330.1
147.5°	344.2	343.8	343.3	342.9
150°	356.4	355.9	355.5	355.0
152.5°	367.9	367.6	367.2	366.8
155°	378.8	378.3	377.8	377.3
157.5°	388.4	387.9	387.5	387.0
160°	397.4	397.1	396.8	396.5
162.5°	405.1	404.6	404.1	403.6
165°	411.9	411.3	410.8	410.3
167.5°	417.7	417.3	416.8	416.4
170°	422.3	421.8	421.3	420.7
172.5°	425.7	425.2	424.6	424.1
175°	428.0	427.5	427.0	426.5
177.5°	429.4	428.9	428.3	427.8
180°	429.2	429.2	429.2	429.2

TEST NUMBER: P831124

CATALOG NUMBER: S123DIP-S1000D365U950-4F0-1E-UDD-G1

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	17.68	18.81	18.35	19.49	20.29	19.92	21.05	20.59	21.73	22.52
	3H	19.35	20.36	20.03	21.05	21.88	21.36	22.37	22.05	23.07	23.89
	4H	19.94	20.89	20.64	21.59	22.43	21.82	22.78	22.53	23.48	24.32
	6H	20.32	21.20	21.04	21.91	22.77	22.11	22.99	22.83	23.70	24.56
	8H	20.42	21.26	21.15	21.99	22.85	22.18	23.02	22.91	23.75	24.61
	12H	20.48	21.27	21.21	22.00	22.89	22.21	23.01	22.94	23.73	24.62
4H	2H	18.29	19.24	18.99	19.94	20.79	20.11	21.06	20.82	21.77	22.61
	3H	20.14	20.93	20.86	21.67	22.53	21.75	22.55	22.47	23.29	24.15
	4H	20.85	21.56	21.58	22.31	23.20	22.35	23.07	23.08	23.81	24.70
	6H	21.34	21.96	22.09	22.72	23.62	22.77	23.39	23.52	24.16	25.05
	8H	21.48	22.06	22.24	22.82	23.73	22.88	23.46	23.64	24.23	25.14
	12H	21.56	22.08	22.33	22.86	23.78	22.94	23.46	23.72	24.25	25.16
8H	4H	21.13	21.71	21.89	22.48	23.39	22.47	23.05	23.23	23.82	24.73
	6H	21.73	22.21	22.52	23.02	23.93	22.98	23.46	23.77	24.27	25.18
	8H	21.94	22.36	22.74	23.17	24.10	23.17	23.59	23.97	24.40	25.33
	12H	22.07	22.45	22.88	23.25	24.23	23.28	23.65	24.08	24.45	25.44
12H	4H	21.14	21.66	21.92	22.45	23.37	22.46	22.98	23.24	23.77	24.68
	6H	21.78	22.21	22.58	23.02	23.94	23.00	23.43	23.80	24.23	25.16
	8H	22.03	22.40	22.83	23.20	24.19	23.21	23.59	24.01	24.38	25.37