

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831259

Luminaire Tested: S123DIP-S1165D365U950-4F0-1E-UDD-G1

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831259
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-9)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-S1165D365U950-4F0-1E-UDD-G1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 365 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6269.6 lumens
Efficiency: N/A
Efficacy: 120.1 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 52.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831259

CATALOG NUMBER: S123DIP-S1165D365U950-4F0-1E-UDD-G1

Luminous Intensity Polar Plot

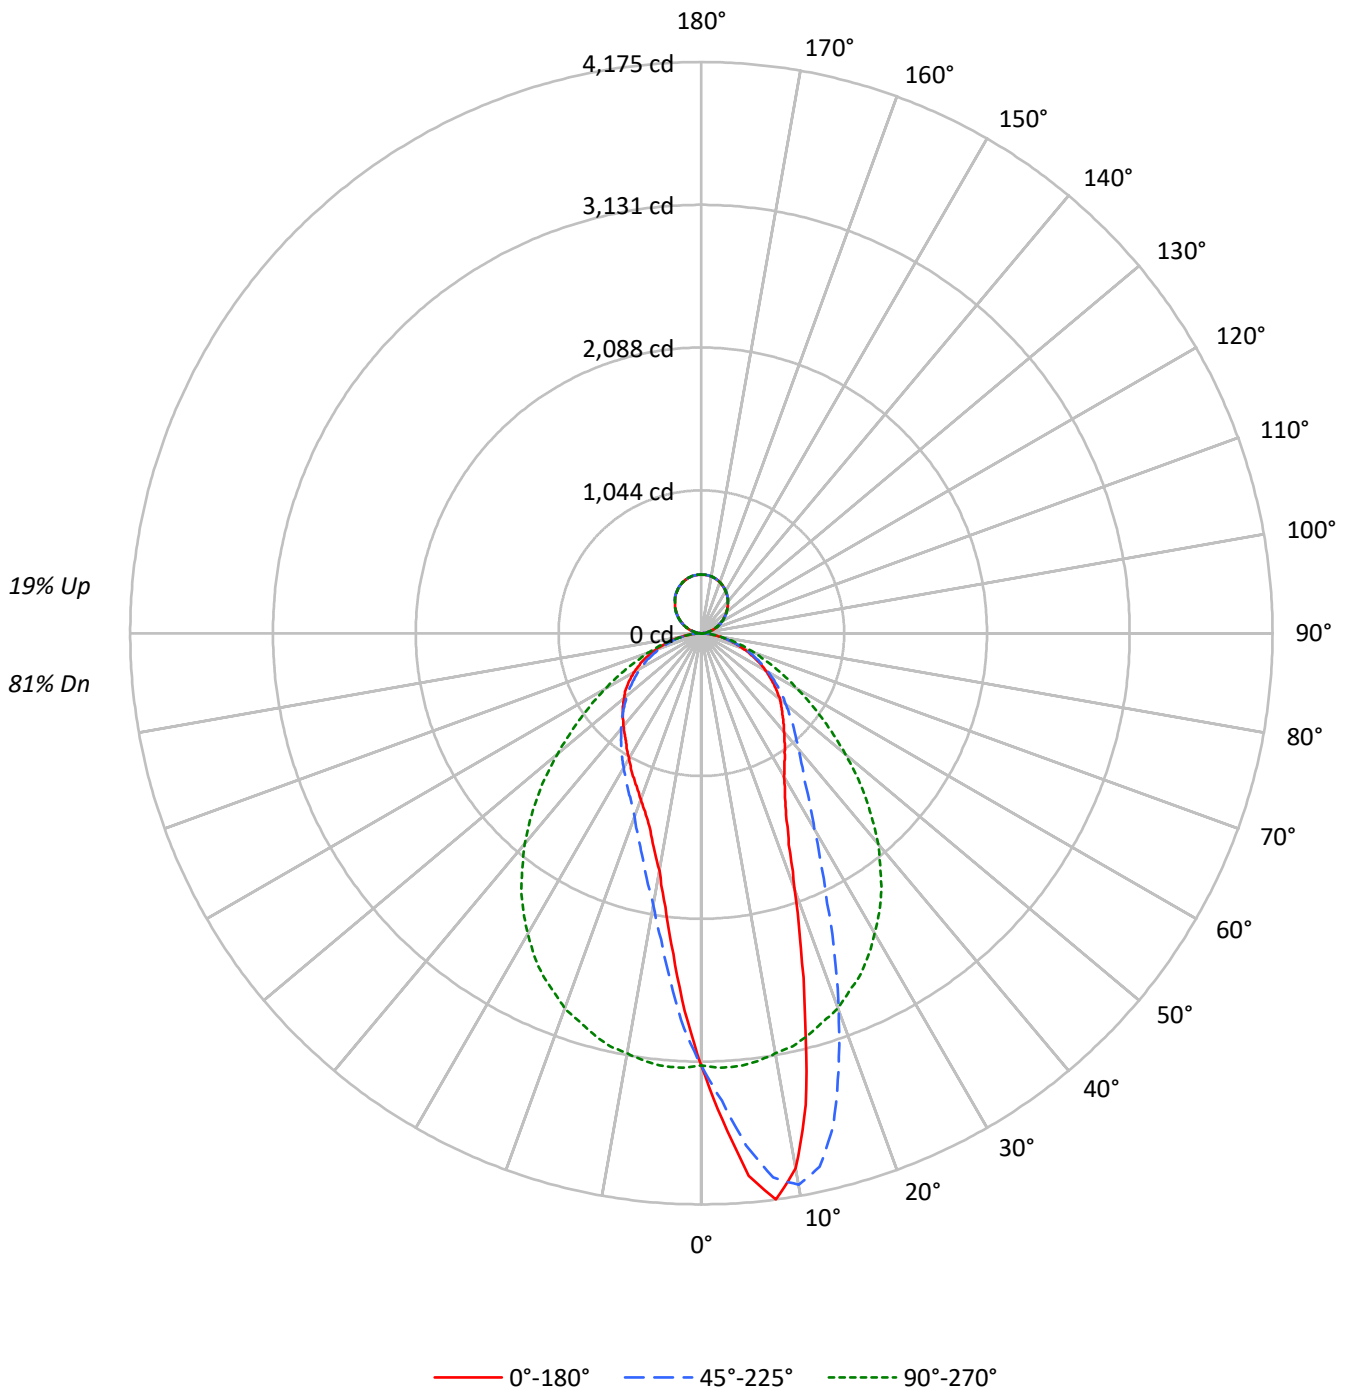



TEST NUMBER: P831259

CATALOG NUMBER: S123DIP-S1165D365U950-4F0-1E-UDD-G1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	115	115	115	115	110	110	110	110	101	101	101	92	92	92	85	85	85	81		
1	106	101	98	94	101	97	94	91	90	87	85	83	81	79	76	75	73	70		
2	97	90	84	79	93	86	81	76	80	75	72	74	70	67	68	65	63	60		
3	89	80	73	67	85	77	70	65	71	66	61	66	62	58	61	58	55	52		
4	82	72	64	58	79	69	62	56	64	58	54	60	55	51	56	52	48	46		
5	76	65	56	51	73	62	55	49	58	52	47	54	49	45	51	46	43	40		
6	71	59	51	45	68	57	49	44	53	47	42	50	44	40	47	42	39	36		
7	66	54	46	40	63	52	45	39	49	42	38	46	40	36	43	38	35	33		
8	62	49	42	36	59	48	41	36	45	39	34	42	37	33	40	35	32	30		
9	58	46	38	33	56	44	37	32	42	36	31	39	34	30	37	33	29	27		
10	54	42	35	30	52	41	34	30	39	33	29	37	32	28	35	30	27	25		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	34013	34013	34013	34013	34013
5°	43015	40599	34317	27654	25412
10°	43432	44746	34088	22045	19264
15°	32712	41545	33857	18668	16291
20°	22793	33617	33424	16325	14797
25°	17380	25852	32687	15020	13879
30°	15035	20539	31510	14097	13140
35°	13950	17341	30154	13429	12620
40°	13207	15556	28247	12795	12444
45°	12767	14397	25825	12298	12365
50°	12548	13480	22958	11848	12301
55°	12080	12810	20142	11419	12356
60°	11649	12090	17362	11016	12152
65°	10942	11410	14976	10588	11915
70°	10106	10543	12737	9876	11213
75°	9145	9453	10917	9179	10243
80°	7544	8269	8635	7996	8635
85°	5978	6706	6336	6793	6879

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 29486 cd/sqm



TEST NUMBER: P831259

CATALOG NUMBER: S123DIP-S1165D365U950-4F0-1E-UDD-G1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	298.7	4.8
10°-20°	743.2	11.9
20°-30°	880.0	14.0
30°-40°	884.8	14.1
40°-50°	811.8	12.9
50°-60°	670.0	10.7
60°-70°	474.0	7.6
70°-80°	253.0	4.0
80°-90°	65.1	1.0
90°-100°	27.6	0.4
100°-110°	83.6	1.3
110°-120°	142.3	2.3
120°-130°	187.3	3.0
130°-140°	210.5	3.4
140°-150°	206.9	3.3
150°-160°	174.2	2.8
160°-170°	116.0	1.9
170°-180°	40.6	0.6
0°-30°	1921.9	30.7
0°-40°	2806.7	44.8
0°-60°	4288.4	68.4
0°-90°	5080.5	81.0
90°-120°	253.6	4.0
90°-150°	858.3	13.7
90°-180°	1189.0	19.0
0°-180°	6269.6	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	3160	3160	3160	3160	3160	
5°	3981	3757	3176	2559	2352	379
15°	2936	3728	3038	1675	1462	811
25°	1463	2177	2752	1265	1169	691
35°	1062	1320	2295	1022	960	667
45°	839	946	1696	808	812	650
55°	644	683	1073	608	658	576
65°	430	448	588	416	468	427
75°	220	227	262	221	246	231
85°	48	54	51	55	56	54
90°	10	8	0	8	10	8
95°	26	25	20	25	26	26
105°	80	80	76	80	80	85
115°	144	144	143	144	144	142
125°	207	210	210	210	207	185
135°	272	274	272	274	272	209
145°	330	332	330	332	330	206
155°	377	378	378	378	377	174
165°	410	411	412	411	410	116
175°	426	427	428	427	426	41
180°	429	429	429	429	429	



TEST NUMBER: P831259

CATALOG NUMBER: S123DIP-S1165D365U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9
2.5°	3561.6	3558.0	3554.3	3536.0	3517.7	3508.9	3500.1	3473.7	3447.3	3417.9	3388.6
5°	3981.0	3991.3	4001.5	3989.8	3978.1	3942.2	3906.2	3858.6	3810.9	3757.4	3703.9
7.5°	4174.6	4180.4	4186.3	4179.0	4171.6	4162.1	4152.6	4110.0	4067.5	4012.5	3957.5
10°	3973.7	3986.9	4000.1	4028.7	4057.3	4089.5	4121.8	4115.9	4110.0	4093.9	4077.8
12.5°	3532.3	3548.4	3564.6	3621.8	3679.0	3752.3	3825.6	3888.6	3951.7	3995.7	4039.7
15°	2935.5	2980.3	3025.0	3077.0	3129.1	3236.9	3344.6	3477.3	3610.0	3728.1	3846.1
17.5°	2417.9	2434.8	2451.7	2507.4	2563.1	2698.7	2834.4	2987.6	3140.8	3336.6	3532.3
20°	1989.8	2005.2	2020.6	2093.9	2167.2	2273.5	2379.8	2552.1	2724.4	2934.8	3145.2
22.5°	1671.6	1695.8	1720.0	1761.0	1802.1	1904.0	2005.9	2159.1	2312.4	2544.8	2777.2
25°	1463.4	1481.0	1498.6	1523.5	1548.4	1629.8	1711.2	1837.3	1963.4	2176.7	2390.1
27.5°	1321.1	1328.5	1335.8	1360.7	1385.7	1438.4	1491.2	1599.7	1708.2	1889.3	2070.4
30°	1209.7	1214.8	1220.0	1242.0	1264.0	1299.9	1335.8	1414.2	1492.7	1652.5	1812.3
32.5°	1132.0	1135.7	1139.3	1156.2	1173.0	1198.7	1224.4	1281.5	1338.7	1470.7	1602.7
35°	1061.6	1063.8	1066.0	1078.5	1090.9	1110.0	1129.1	1172.3	1215.6	1319.7	1423.8
37.5°	1000.0	1003.0	1005.9	1013.2	1020.5	1037.4	1054.3	1088.7	1123.2	1203.1	1283.0
40°	939.9	945.0	950.2	955.3	960.4	974.4	988.3	1014.7	1041.1	1107.1	1173.0
42.5°	888.6	893.7	898.8	901.0	903.2	911.3	919.4	943.6	967.8	1016.9	1066.0
45°	838.7	840.9	843.1	845.3	847.5	854.1	860.7	882.0	903.2	945.8	988.3
47.5°	793.3	793.3	793.3	794.7	796.2	802.1	807.9	823.3	838.7	871.7	904.7
50°	749.3	749.3	749.3	747.1	744.9	748.5	752.2	763.9	775.7	805.0	834.3
52.5°	696.5	696.5	696.5	697.2	698.0	698.0	698.0	708.2	718.5	744.9	771.3
55°	643.7	646.6	649.6	647.4	645.2	646.6	648.1	654.7	661.3	682.6	703.8
57.5°	590.9	592.4	593.9	593.1	592.4	593.1	593.9	599.7	605.6	621.7	637.8
60°	541.1	541.1	541.1	539.6	538.1	539.6	541.1	544.0	546.9	561.6	576.3
62.5°	485.3	486.1	486.8	487.5	488.3	486.8	485.3	489.0	492.7	503.7	514.7
65°	429.6	430.4	431.1	433.3	435.5	434.0	432.6	436.2	439.9	448.0	456.0
67.5°	379.8	378.3	376.8	377.6	378.3	380.5	382.7	383.4	384.2	393.0	401.8
70°	321.1	322.6	324.1	323.3	322.6	323.3	324.1	326.3	328.5	335.0	341.6
72.5°	268.3	269.1	269.8	269.8	269.8	271.3	272.7	274.9	277.1	280.8	284.5
75°	219.9	219.9	219.9	221.4	222.9	223.6	224.3	224.3	224.3	227.3	230.2
77.5°	167.2	170.8	174.5	173.8	173.0	174.5	176.0	178.2	180.4	181.8	183.3
80°	121.7	121.7	121.7	122.4	123.2	125.4	127.6	129.0	130.5	133.4	136.4
82.5°	77.7	78.4	79.2	81.4	83.6	85.0	86.5	88.7	90.9	90.9	90.9
85°	48.4	46.9	45.5	46.9	48.4	49.9	51.3	52.1	52.8	54.3	55.7
87.5°	23.5	23.5	23.5	23.5	23.5	24.2	24.9	24.9	24.9	24.9	24.9
90°	10.1	10.0	9.8	9.7	9.5	9.3	9.0	8.7	8.4	8.1	7.1
92.5°	14.5	14.6	14.8	14.9	15.1	15.1	14.8	14.6	14.4	14.2	13.7
95°	26.3	26.3	26.3	26.3	26.3	26.1	25.8	25.5	25.2	24.9	24.3
97.5°	37.8	37.8	37.9	38.0	38.1	37.9	37.5	37.2	36.8	36.4	36.0
100°	51.2	51.1	50.9	50.8	50.6	50.5	50.2	50.0	49.8	49.6	49.2
102.5°	65.1	65.1	65.2	65.3	65.4	65.3	65.1	64.8	64.6	64.4	63.9
105°	80.2	80.1	79.9	79.8	79.6	79.6	79.6	79.6	79.6	79.6	78.9
107.5°	95.7	95.8	95.9	96.0	96.0	96.0	95.7	95.5	95.3	95.1	94.8
110°	111.6	111.7	111.9	112.0	112.2	112.1	111.8	111.5	111.2	110.9	110.8



TEST NUMBER: P831259

CATALOG NUMBER: S123DIP-S1165D365U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	128.4	128.4	128.4	128.4	128.4	128.3	127.9	127.5	127.1	126.8	126.8
115°	143.6	143.7	143.8	143.8	143.9	143.9	143.8	143.8	143.7	143.6	143.8
117.5°	159.1	159.4	159.6	159.8	160.0	160.1	160.1	160.1	160.1	160.1	160.3
120°	175.6	175.8	175.9	176.1	176.2	176.4	176.4	176.5	176.6	176.7	177.0
122.5°	191.5	191.7	191.9	192.2	192.4	192.6	192.8	193.1	193.3	193.5	193.7
125°	207.3	207.6	207.9	208.2	208.5	208.8	209.1	209.4	209.7	210.0	210.2
127.5°	223.2	223.5	223.8	224.1	224.4	224.8	225.2	225.7	226.1	226.6	226.7
130°	238.7	239.2	239.7	240.3	240.8	241.2	241.5	241.8	242.1	242.4	242.6
132.5°	254.9	255.2	255.6	256.0	256.4	256.7	257.1	257.5	257.9	258.2	258.4
135°	271.7	271.9	272.0	272.2	272.3	272.6	272.9	273.2	273.5	273.8	273.8
137.5°	286.6	286.8	287.0	287.2	287.5	287.8	288.1	288.5	288.9	289.3	289.0
140°	301.1	301.6	302.1	302.6	303.2	303.5	303.5	303.6	303.7	303.8	303.7
142.5°	315.9	316.3	316.6	317.0	317.4	317.6	317.7	317.8	317.8	317.9	317.8
145°	330.1	330.4	330.7	331.0	331.3	331.4	331.5	331.6	331.7	331.7	331.5
147.5°	342.9	343.3	343.8	344.2	344.7	344.9	344.9	344.9	344.9	344.9	344.7
150°	355.0	355.5	355.9	356.4	356.8	357.0	357.0	357.0	357.0	357.0	356.9
152.5°	366.8	367.2	367.6	367.9	368.3	368.4	368.3	368.1	368.0	367.8	367.7
155°	377.3	377.8	378.3	378.8	379.4	379.5	379.2	378.9	378.6	378.3	378.2
157.5°	387.0	387.5	387.9	388.4	388.8	388.9	388.6	388.3	388.0	387.7	387.6
160°	396.5	396.8	397.1	397.4	397.7	397.6	397.3	396.9	396.5	396.1	396.1
162.5°	403.6	404.1	404.6	405.1	405.6	405.7	405.3	405.0	404.6	404.2	404.2
165°	410.3	410.8	411.3	411.9	412.4	412.4	412.0	411.5	411.1	410.6	410.6
167.5°	416.4	416.8	417.3	417.7	418.2	418.2	417.7	417.3	416.8	416.4	416.3
170°	420.7	421.3	421.8	422.3	422.8	422.8	422.3	421.8	421.3	420.7	420.7
172.5°	424.1	424.6	425.2	425.7	426.2	426.3	425.8	425.4	424.9	424.5	424.5
175°	426.5	427.0	427.5	428.0	428.6	428.6	428.2	427.7	427.3	426.8	426.8
177.5°	427.8	428.3	428.9	429.4	429.9	430.0	429.5	429.1	428.6	428.2	428.2
180°	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2



TEST NUMBER: P831259

CATALOG NUMBER: S123DIP-S1165D365U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9
2.5°	3379.8	3371.0	3338.8	3306.5	3269.9	3233.2	3206.1	3178.9	3138.6	3098.3	3065.3
5°	3662.8	3621.8	3553.6	3485.4	3393.0	3300.6	3238.3	3176.0	3092.4	3008.9	2942.1
7.5°	3887.2	3816.8	3721.5	3626.2	3505.2	3384.2	3269.9	3155.5	3027.9	2900.3	2796.2
10°	4030.1	3982.5	3872.5	3762.5	3600.5	3438.5	3278.6	3118.8	2954.6	2790.4	2652.5
12.5°	4044.1	4048.5	3947.3	3846.1	3662.8	3479.5	3285.2	3091.0	2884.2	2677.5	2516.9
15°	3921.6	3997.1	3941.4	3885.7	3700.9	3516.2	3277.2	3038.2	2799.9	2561.6	2376.1
17.5°	3694.3	3856.4	3864.4	3872.5	3687.7	3503.0	3238.3	2973.7	2703.9	2434.1	2239.0
20°	3384.2	3623.2	3705.3	3787.5	3637.2	3486.9	3202.4	2917.9	2615.9	2313.8	2109.3
22.5°	3067.5	3357.8	3508.1	3658.4	3547.0	3435.5	3132.8	2830.0	2511.0	2192.1	1984.6
25°	2706.8	3023.5	3254.5	3485.4	3417.2	3349.0	3050.6	2752.2	2412.8	2073.4	1861.5
27.5°	2392.3	2714.1	2992.7	3271.3	3256.7	3242.0	2945.8	2649.6	2302.1	1954.6	1750.0
30°	2112.2	2412.1	2723.7	3035.2	3071.2	3107.1	2821.2	2535.2	2187.0	1838.7	1641.5
32.5°	1864.4	2126.1	2460.5	2794.8	2865.2	2935.5	2677.5	2419.4	2074.8	1730.2	1540.3
35°	1661.3	1898.9	2233.2	2567.5	2655.5	2743.4	2519.1	2294.8	1959.0	1623.2	1442.1
37.5°	1481.7	1680.4	2006.6	2332.9	2440.7	2548.4	2347.5	2146.7	1832.1	1517.6	1351.2
40°	1332.9	1492.7	1792.6	2092.4	2217.0	2341.7	2176.0	2010.3	1711.9	1413.5	1260.3
42.5°	1208.2	1350.5	1622.5	1894.5	2014.0	2133.5	1993.4	1853.4	1588.0	1322.6	1182.6
45°	1101.9	1215.6	1462.6	1709.7	1823.3	1937.0	1816.7	1696.5	1462.6	1228.8	1098.3
47.5°	1002.2	1099.7	1310.9	1522.0	1623.2	1724.4	1630.5	1536.7	1338.7	1140.8	1022.7
50°	912.8	991.2	1176.0	1360.7	1448.7	1536.7	1453.8	1371.0	1208.2	1045.5	942.8
52.5°	835.1	898.8	1053.5	1208.2	1283.7	1359.3	1288.1	1217.0	1088.0	959.0	869.5
55°	758.1	812.3	946.5	1080.7	1132.0	1183.3	1128.3	1073.3	969.2	865.1	789.6
57.5°	686.2	734.6	844.6	954.6	994.2	1033.7	983.9	934.0	855.6	777.1	714.1
60°	615.8	655.4	747.1	838.7	862.9	887.1	846.8	806.5	751.5	696.5	640.0
62.5°	550.6	586.5	654.7	722.9	739.0	755.1	724.4	693.6	651.8	610.0	566.0
65°	483.1	510.3	566.0	621.7	632.0	642.2	615.1	588.0	556.5	524.9	492.7
67.5°	420.8	439.9	485.3	530.8	531.5	532.3	510.3	488.3	470.7	453.1	427.4
70°	360.0	378.3	408.4	438.4	439.2	439.9	422.3	404.7	391.5	378.3	359.2
72.5°	297.7	310.9	333.6	356.3	354.8	353.4	342.4	331.4	321.1	310.9	296.9
75°	241.2	252.2	267.6	283.0	278.6	274.2	268.3	262.5	253.7	244.9	236.1
77.5°	189.9	196.5	205.3	214.1	211.1	208.2	203.1	198.0	191.4	184.8	181.1
80°	139.3	142.2	148.1	154.0	152.5	151.0	145.2	139.3	137.8	136.4	131.2
82.5°	94.6	98.2	99.7	101.2	100.4	99.7	95.3	90.9	89.4	88.0	87.2
85°	56.5	57.2	57.9	58.7	56.5	54.3	52.8	51.3	51.3	51.3	50.6
87.5°	25.7	26.4	26.4	26.4	25.7	24.9	23.5	22.0	22.7	23.5	23.5
90°	6.1	5.2	4.2	3.3	2.6	1.8	1.1	0.3	1.1	1.8	2.6
92.5°	13.3	12.8	12.4	11.9	11.5	11.0	10.6	10.1	10.6	11.0	11.5
95°	23.7	23.1	22.6	22.0	21.5	20.9	20.4	19.9	20.4	20.9	21.5
97.5°	35.5	35.1	34.6	34.2	33.8	33.5	33.1	32.7	33.1	33.5	33.8
100°	48.8	48.4	48.1	47.6	47.2	46.7	46.3	45.9	46.3	46.7	47.2
102.5°	63.3	62.8	62.3	61.9	61.7	61.5	61.2	61.0	61.2	61.5	61.7
105°	78.2	77.5	76.9	76.5	76.3	76.2	76.0	75.9	76.0	76.2	76.3
107.5°	94.5	94.2	93.9	93.7	93.6	93.5	93.5	93.4	93.5	93.5	93.6
110°	110.6	110.5	110.3	110.2	110.0	109.9	109.7	109.6	109.7	109.9	110.0



TEST NUMBER: P831259

CATALOG NUMBER: S123DIP-S1165D365U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	126.8	126.8	126.8	126.7	126.7	126.6	126.5	126.4	126.5	126.6	126.7
115°	143.9	144.1	144.2	144.2	144.0	143.7	143.5	143.3	143.5	143.7	144.0
117.5°	160.4	160.6	160.7	160.8	160.7	160.6	160.6	160.5	160.6	160.6	160.7
120°	177.4	177.8	178.2	178.1	177.7	177.2	176.8	176.3	176.8	177.2	177.7
122.5°	193.8	194.0	194.1	194.0	193.7	193.4	193.1	192.8	193.1	193.4	193.7
125°	210.3	210.5	210.6	210.6	210.4	210.1	209.9	209.7	209.9	210.1	210.4
127.5°	226.9	227.0	227.2	227.0	226.6	226.1	225.7	225.2	225.7	226.1	226.6
130°	242.8	243.1	243.3	243.1	242.5	241.9	241.3	240.7	241.3	241.9	242.5
132.5°	258.5	258.7	258.8	258.6	258.0	257.4	256.8	256.2	256.8	257.4	258.0
135°	273.9	274.0	274.1	273.9	273.4	273.0	272.5	272.1	272.5	273.0	273.4
137.5°	288.8	288.6	288.4	288.1	287.7	287.3	286.9	286.6	286.9	287.3	287.7
140°	303.6	303.5	303.5	303.2	302.9	302.5	302.1	301.7	302.1	302.5	302.9
142.5°	317.6	317.5	317.3	317.1	316.7	316.3	315.9	315.6	315.9	316.3	316.7
145°	331.3	331.1	330.8	330.7	330.5	330.4	330.2	330.1	330.2	330.4	330.5
147.5°	344.4	344.2	344.0	343.7	343.4	343.1	342.8	342.5	342.8	343.1	343.4
150°	356.7	356.6	356.4	356.3	356.1	356.0	355.8	355.7	355.8	356.0	356.1
152.5°	367.7	367.6	367.5	367.4	367.1	366.9	366.7	366.5	366.7	366.9	367.1
155°	378.1	378.0	378.0	377.9	377.9	377.9	377.9	377.9	377.9	377.9	377.9
157.5°	387.6	387.5	387.4	387.4	387.5	387.6	387.6	387.7	387.6	387.6	387.5
160°	396.1	396.1	396.1	396.2	396.4	396.5	396.7	396.8	396.7	396.5	396.4
162.5°	404.1	404.0	403.9	404.0	404.2	404.4	404.7	404.9	404.7	404.4	404.2
165°	410.6	410.6	410.6	410.7	411.0	411.2	411.4	411.6	411.4	411.2	411.0
167.5°	416.2	416.1	416.1	416.2	416.5	416.8	417.1	417.4	417.1	416.8	416.5
170°	420.7	420.7	420.7	420.9	421.2	421.5	421.8	422.1	421.8	421.5	421.2
172.5°	424.5	424.5	424.5	424.6	424.9	425.2	425.5	425.8	425.5	425.2	424.9
175°	426.8	426.8	426.8	427.0	427.3	427.6	427.9	428.2	427.9	427.6	427.3
177.5°	428.2	428.2	428.2	428.3	428.6	428.9	429.2	429.5	429.2	428.9	428.6
180°	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2



TEST NUMBER: P831259

CATALOG NUMBER: S123DIP-S1165D365U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9	3159.9
2.5°	3032.3	3003.7	2975.1	2953.1	2931.1	2893.7	2856.4	2847.6	2838.8	2826.3	2813.8
5°	2875.4	2805.0	2734.7	2671.6	2608.6	2559.4	2510.3	2478.0	2445.8	2422.3	2398.9
7.5°	2692.1	2586.6	2481.0	2406.2	2331.4	2260.3	2189.2	2166.5	2143.7	2112.9	2082.1
10°	2514.7	2398.1	2281.6	2184.1	2086.5	2016.9	1947.2	1919.4	1891.5	1852.7	1813.8
12.5°	2356.3	2228.8	2101.2	2003.0	1904.7	1837.3	1769.8	1729.5	1689.2	1667.2	1645.2
15°	2190.7	2054.3	1917.9	1827.0	1736.1	1675.2	1614.4	1579.2	1544.0	1522.8	1501.5
17.5°	2044.0	1909.1	1774.2	1687.0	1599.7	1544.0	1488.3	1457.5	1426.7	1410.6	1394.5
20°	1904.7	1772.8	1640.8	1555.7	1470.7	1425.2	1379.8	1360.0	1340.2	1327.0	1313.8
22.5°	1777.2	1647.4	1517.6	1445.0	1372.5	1335.8	1299.1	1285.2	1271.3	1260.3	1249.3
25°	1649.6	1533.8	1417.9	1356.3	1294.7	1264.7	1234.6	1220.7	1206.8	1195.8	1184.8
27.5°	1545.5	1434.8	1324.1	1271.3	1218.5	1195.0	1171.6	1160.6	1149.6	1139.3	1129.1
30°	1444.3	1345.3	1246.4	1200.9	1155.4	1134.2	1112.9	1101.9	1090.9	1081.4	1071.9
32.5°	1350.5	1265.4	1180.4	1138.6	1096.8	1079.2	1061.6	1048.4	1035.2	1027.9	1020.5
35°	1261.0	1184.8	1108.5	1074.1	1039.6	1022.0	1004.4	993.4	982.4	976.6	970.7
37.5°	1184.8	1116.6	1048.4	1015.4	982.4	965.6	948.7	939.2	929.6	927.4	925.2
40°	1107.1	1048.4	989.8	957.5	925.2	910.6	895.9	890.0	884.2	882.7	881.2
42.5°	1042.5	985.4	928.2	898.8	869.5	857.1	844.6	841.7	838.7	840.9	843.1
45°	967.8	920.1	872.4	845.3	818.2	807.9	797.7	795.5	793.3	797.7	802.1
47.5°	904.7	860.7	816.7	791.1	765.4	758.1	750.7	750.0	749.3	755.1	761.0
50°	840.2	797.7	755.1	734.6	714.1	707.5	700.9	703.1	705.3	714.8	724.4
52.5°	780.1	740.5	700.9	681.8	662.8	658.4	654.0	659.1	664.2	674.5	684.8
55°	714.1	678.2	642.2	627.6	612.9	608.5	604.1	614.4	624.6	634.2	643.7
57.5°	651.0	619.5	588.0	574.8	561.6	560.9	560.1	569.7	579.2	589.5	599.7
60°	583.6	557.2	530.8	520.5	510.3	511.7	513.2	524.2	535.2	543.3	551.3
62.5°	522.0	500.0	478.0	468.5	459.0	462.6	466.3	477.3	488.3	497.8	507.3
65°	460.4	442.1	423.8	417.2	410.6	415.7	420.8	430.4	439.9	446.5	453.1
67.5°	401.8	386.4	371.0	365.8	360.7	365.8	371.0	380.5	390.0	396.6	403.2
70°	340.2	327.7	315.3	311.6	307.9	313.8	319.7	327.7	335.8	342.4	349.0
72.5°	283.0	273.5	263.9	263.2	262.5	267.6	272.7	280.8	288.9	293.3	297.7
75°	227.3	222.1	217.0	216.3	215.5	220.7	225.8	230.2	234.6	238.3	241.9
77.5°	177.4	173.0	168.6	169.4	170.1	173.8	177.4	181.8	186.2	188.4	190.6
80°	126.1	124.6	123.2	124.6	126.1	129.0	132.0	134.9	137.8	139.3	140.8
82.5°	86.5	85.0	83.6	85.8	88.0	90.2	92.4	94.6	96.8	97.5	98.2
85°	49.9	52.1	54.3	54.3	54.3	55.0	55.7	56.5	57.2	56.5	55.7
87.5°	23.5	24.2	24.9	24.9	24.9	25.7	26.4	26.4	26.4	25.7	24.9
90°	3.3	4.2	5.2	6.1	7.1	8.1	8.4	8.7	9.0	9.3	9.5
92.5°	11.9	12.4	12.8	13.3	13.7	14.2	14.4	14.6	14.8	15.1	15.1
95°	22.0	22.6	23.1	23.7	24.3	24.9	25.2	25.5	25.8	26.1	26.3
97.5°	34.2	34.6	35.1	35.5	36.0	36.4	36.8	37.2	37.5	37.9	38.1
100°	47.6	48.1	48.4	48.8	49.2	49.6	49.8	50.0	50.2	50.5	50.6
102.5°	61.9	62.3	62.8	63.3	63.9	64.4	64.6	64.8	65.1	65.3	65.4
105°	76.5	76.9	77.5	78.2	78.9	79.6	79.6	79.6	79.6	79.6	79.6
107.5°	93.7	93.9	94.2	94.5	94.8	95.1	95.3	95.5	95.7	96.0	96.0
110°	110.2	110.3	110.5	110.6	110.8	110.9	111.2	111.5	111.8	112.1	112.2



TEST NUMBER: P831259

CATALOG NUMBER: S123DIP-S1165D365U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	126.7	126.8	126.8	126.8	126.8	126.8	127.1	127.5	127.9	128.3	128.4
115°	144.2	144.2	144.1	143.9	143.8	143.6	143.7	143.8	143.8	143.9	143.9
117.5°	160.8	160.7	160.6	160.4	160.3	160.1	160.1	160.1	160.1	160.1	160.0
120°	178.1	178.2	177.8	177.4	177.0	176.7	176.6	176.5	176.4	176.4	176.2
122.5°	194.0	194.1	194.0	193.8	193.7	193.5	193.3	193.1	192.8	192.6	192.4
125°	210.6	210.6	210.5	210.3	210.2	210.0	209.7	209.4	209.1	208.8	208.5
127.5°	227.0	227.2	227.0	226.9	226.7	226.6	226.1	225.7	225.2	224.8	224.4
130°	243.1	243.3	243.1	242.8	242.6	242.4	242.1	241.8	241.5	241.2	240.8
132.5°	258.6	258.8	258.7	258.5	258.4	258.2	257.9	257.5	257.1	256.7	256.4
135°	273.9	274.1	274.0	273.9	273.8	273.8	273.5	273.2	272.9	272.6	272.3
137.5°	288.1	288.4	288.6	288.8	289.0	289.3	288.9	288.5	288.1	287.8	287.5
140°	303.2	303.5	303.5	303.6	303.7	303.8	303.7	303.6	303.5	303.5	303.2
142.5°	317.1	317.3	317.5	317.6	317.8	317.9	317.8	317.8	317.7	317.6	317.4
145°	330.7	330.8	331.1	331.3	331.5	331.7	331.7	331.6	331.5	331.4	331.3
147.5°	343.7	344.0	344.2	344.4	344.7	344.9	344.9	344.9	344.9	344.9	344.7
150°	356.3	356.4	356.6	356.7	356.9	357.0	357.0	357.0	357.0	357.0	356.8
152.5°	367.4	367.5	367.6	367.7	367.7	367.8	368.0	368.1	368.3	368.4	368.3
155°	377.9	378.0	378.0	378.1	378.2	378.3	378.6	378.9	379.2	379.5	379.4
157.5°	387.4	387.4	387.5	387.6	387.6	387.7	388.0	388.3	388.6	388.9	388.8
160°	396.2	396.1	396.1	396.1	396.1	396.1	396.5	396.9	397.3	397.6	397.7
162.5°	404.0	403.9	404.0	404.1	404.2	404.2	404.6	405.0	405.3	405.7	405.6
165°	410.7	410.6	410.6	410.6	410.6	410.6	411.1	411.5	412.0	412.4	412.4
167.5°	416.2	416.1	416.1	416.2	416.3	416.4	416.8	417.3	417.7	418.2	418.2
170°	420.9	420.7	420.7	420.7	420.7	420.7	421.3	421.8	422.3	422.8	422.8
172.5°	424.6	424.5	424.5	424.5	424.5	424.5	424.9	425.4	425.8	426.3	426.2
175°	427.0	426.8	426.8	426.8	426.8	426.8	427.3	427.7	428.2	428.6	428.6
177.5°	428.3	428.2	428.2	428.2	428.2	428.2	428.6	429.1	429.5	430.0	429.9
180°	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2	429.2



TEST NUMBER: P831259

CATALOG NUMBER: S123DIP-S1165D365U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	3159.9	3159.9	3159.9	3159.9
2.5°	2808.7	2803.6	2783.0	2762.5
5°	2381.3	2363.7	2357.8	2351.9
7.5°	2080.7	2079.2	2048.4	2017.6
10°	1816.0	1818.2	1790.4	1762.5
12.5°	1626.9	1608.5	1606.3	1604.1
15°	1484.6	1467.8	1464.8	1461.9
17.5°	1384.2	1373.9	1371.0	1368.1
20°	1307.9	1302.1	1296.9	1291.8
22.5°	1242.0	1234.6	1230.2	1225.8
25°	1178.2	1171.6	1170.1	1168.6
27.5°	1121.0	1112.9	1112.9	1112.9
30°	1066.7	1061.6	1059.4	1057.2
32.5°	1016.1	1011.7	1011.7	1011.7
35°	968.5	966.3	963.4	960.4
37.5°	925.2	925.2	923.8	922.3
40°	883.4	885.6	885.6	885.6
42.5°	845.3	847.5	847.5	847.5
45°	805.7	809.4	810.9	812.3
47.5°	766.9	772.7	774.2	775.7
50°	728.8	733.2	733.9	734.6
52.5°	689.9	695.0	698.7	702.4
55°	648.8	654.0	656.2	658.4
57.5°	604.8	610.0	610.7	611.4
60°	556.5	561.6	563.1	564.5
62.5°	510.3	513.2	514.7	516.1
65°	457.5	461.9	464.8	467.8
67.5°	406.9	410.6	410.6	410.6
70°	350.4	351.9	354.1	356.3
72.5°	298.4	299.1	299.1	299.1
75°	243.4	244.9	245.6	246.3
77.5°	191.4	192.1	192.1	192.1
80°	140.0	139.3	139.3	139.3
82.5°	96.0	93.8	93.8	93.8
85°	55.0	54.3	55.0	55.7
87.5°	24.9	24.9	24.9	24.9
90°	9.7	9.8	10.0	10.1
92.5°	14.9	14.8	14.6	14.5
95°	26.3	26.3	26.3	26.3
97.5°	38.0	37.9	37.8	37.8
100°	50.8	50.9	51.1	51.2
102.5°	65.3	65.2	65.1	65.1
105°	79.8	79.9	80.1	80.2
107.5°	96.0	95.9	95.8	95.7
110°	112.0	111.9	111.7	111.6



TEST NUMBER: P831259

CATALOG NUMBER: S123DIP-S1165D365U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	128.4	128.4	128.4	128.4
115°	143.8	143.8	143.7	143.6
117.5°	159.8	159.6	159.4	159.1
120°	176.1	175.9	175.8	175.6
122.5°	192.2	191.9	191.7	191.5
125°	208.2	207.9	207.6	207.3
127.5°	224.1	223.8	223.5	223.2
130°	240.3	239.7	239.2	238.7
132.5°	256.0	255.6	255.2	254.9
135°	272.2	272.0	271.9	271.7
137.5°	287.2	287.0	286.8	286.6
140°	302.6	302.1	301.6	301.1
142.5°	317.0	316.6	316.3	315.9
145°	331.0	330.7	330.4	330.1
147.5°	344.2	343.8	343.3	342.9
150°	356.4	355.9	355.5	355.0
152.5°	367.9	367.6	367.2	366.8
155°	378.8	378.3	377.8	377.3
157.5°	388.4	387.9	387.5	387.0
160°	397.4	397.1	396.8	396.5
162.5°	405.1	404.6	404.1	403.6
165°	411.9	411.3	410.8	410.3
167.5°	417.7	417.3	416.8	416.4
170°	422.3	421.8	421.3	420.7
172.5°	425.7	425.2	424.6	424.1
175°	428.0	427.5	427.0	426.5
177.5°	429.4	428.9	428.3	427.8
180°	429.2	429.2	429.2	429.2

TEST NUMBER: P831259

CATALOG NUMBER: S123DIP-S1165D365U950-4F0-1E-UDD-G1

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.35	19.51	19.00	20.17	20.91	20.59	21.75	21.23	22.40	23.15
	3H	20.02	21.06	20.68	21.72	22.51	22.04	23.08	22.69	23.74	24.52
	4H	20.61	21.59	21.29	22.27	23.06	22.50	23.48	23.18	24.15	24.95
	6H	21.00	21.90	21.69	22.59	23.40	22.79	23.69	23.48	24.38	25.19
	8H	21.10	21.96	21.80	22.67	23.48	22.86	23.72	23.56	24.42	25.24
	12H	21.16	21.98	21.86	22.67	23.52	22.89	23.71	23.59	24.41	25.25
4H	2H	18.96	19.94	19.64	20.62	21.41	20.79	21.77	21.47	22.44	23.24
	3H	20.82	21.63	21.51	22.34	23.16	22.43	23.25	23.12	23.96	24.77
	4H	21.53	22.26	22.23	22.98	23.83	23.03	23.77	23.74	24.48	25.33
	6H	22.02	22.66	22.74	23.40	24.25	23.45	24.09	24.18	24.83	25.68
	8H	22.16	22.76	22.89	23.49	24.36	23.56	24.16	24.30	24.90	25.77
	12H	22.24	22.77	22.99	23.54	24.41	23.62	24.16	24.38	24.92	25.79
8H	4H	21.81	22.41	22.55	23.15	24.01	23.15	23.75	23.89	24.49	25.36
	6H	22.41	22.91	23.18	23.69	24.56	23.67	24.16	24.43	24.94	25.81
	8H	22.62	23.06	23.40	23.84	24.73	23.85	24.29	24.62	25.07	25.95
	12H	22.76	23.15	23.53	23.91	24.86	23.96	24.35	24.74	25.12	26.07
12H	4H	21.83	22.36	22.58	23.12	24.00	23.14	23.68	23.89	24.44	25.31
	6H	22.46	22.90	23.24	23.69	24.57	23.68	24.12	24.46	24.90	25.79
	8H	22.71	23.10	23.49	23.87	24.82	23.90	24.28	24.67	25.05	26.00