

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831341

Luminaire Tested: S123DIP-S340D1025U950-4F0-1E-UDD-G4

Issue Date: 05/03/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P831341  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-17)  
Test Lab: INNOVATION CENTER  
Issue Date: 05/03/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S340D1025U950-4F0-1E-UDD-G4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, GRAZE OPTIC  
UPLIGHT 1025 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5046.8 lumens  
Efficiency: N/A  
Efficacy: 131.8 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 38.3  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P831341

CATALOG NUMBER: S123DIP-S340D1025U950-4F0-1E-UDD-G4

### Luminous Intensity Polar Plot

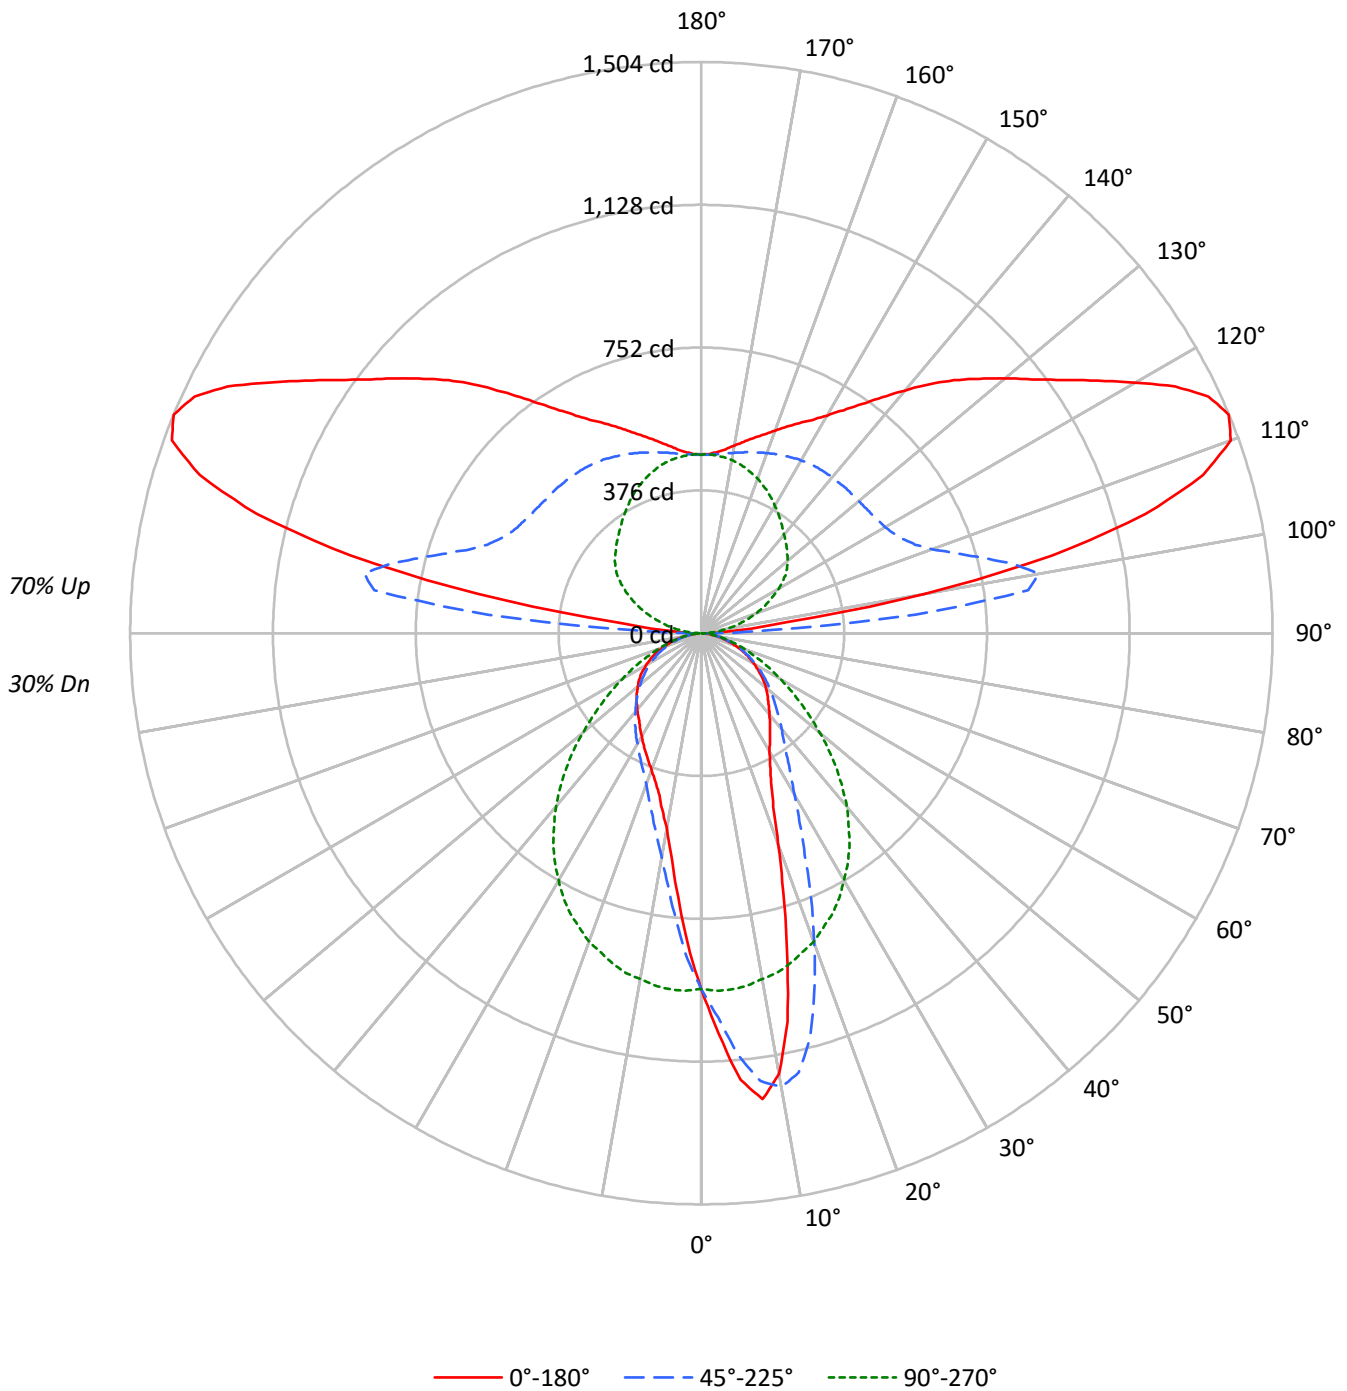



TEST NUMBER: P831341

CATALOG NUMBER: S123DIP-S340D1025U950-4F0-1E-UDD-G4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38	30				30
1	94	89	86	83	84	80	77	75	64	62	60	48	47	46	34	33	32	26				26
2	85	78	73	68	76	71	66	62	56	53	50	43	40	39	30	29	28	22				22
3	78	69	62	57	70	62	57	52	50	46	42	38	35	33	27	25	24	19				19
4	72	61	54	48	64	56	49	44	44	40	36	34	31	29	24	23	21	17				17
5	66	55	47	42	59	50	43	38	40	35	31	31	27	25	22	20	19	15				15
6	61	49	42	36	54	45	38	33	36	31	28	28	25	22	20	18	17	13				13
7	56	45	37	32	50	40	34	29	33	28	24	25	22	20	19	17	15	12				12
8	52	40	33	28	47	37	30	26	30	25	22	23	20	18	17	15	13	11				11
9	49	37	30	25	44	34	27	23	27	23	20	22	18	16	16	14	12	10				10
10	45	34	27	22	41	31	25	21	25	21	18	20	17	14	15	13	11	9				9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	10083	10083	10083	10083	10083
5°	12751	12035	10172	8198	7533
10°	12874	13264	10105	6535	5710
15°	9697	12315	10036	5534	4829
20°	6756	9964	9907	4840	4386
25°	5152	7663	9689	4453	4114
30°	4457	6088	9340	4179	3895
35°	4135	5140	8938	3980	3741
40°	3915	4612	8373	3792	3688
45°	3784	4267	7655	3646	3666
50°	3719	3996	6805	3512	3647
55°	3581	3796	5971	3385	3663
60°	3453	3584	5147	3266	3602
65°	3245	3382	4439	3138	3533
70°	2996	3125	3777	2927	3323
75°	2712	2803	3236	2720	3036
80°	2238	2455	2560	2368	2560
85°	1766	1988	1877	2013	2038

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 80°  
 Vertical Angle: 45°  
 Luminance: 8741 cd/sqm



TEST NUMBER: P831341

CATALOG NUMBER: S123DIP-S340D1025U950-4F0-1E-UDD-G4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	88.6	1.8
10°-20°	220.3	4.4
20°-30°	260.8	5.2
30°-40°	262.3	5.2
40°-50°	240.6	4.8
50°-60°	198.6	3.9
60°-70°	140.5	2.8
70°-80°	75.0	1.5
80°-90°	21.6	0.4
90°-100°	255.3	5.1
100°-110°	747.4	14.8
110°-120°	729.8	14.5
120°-130°	581.2	11.5
130°-140°	458.6	9.1
140°-150°	342.1	6.8
150°-160°	238.5	4.7
160°-170°	140.1	2.8
170°-180°	45.6	0.9
0°-30°	569.7	11.3
0°-40°	832.0	16.5
0°-60°	1271.2	25.2
0°-90°	1508.3	29.9
90°-120°	1732.4	34.3
90°-150°	3114.3	61.7
90°-180°	3539.0	70.1
0°-180°	5046.8	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	937	937	937	937	937	
5°	1180	1114	941	759	697	112
15°	870	1105	901	497	433	240
25°	434	645	816	375	346	205
35°	315	391	680	303	285	198
45°	249	280	503	240	241	193
55°	191	202	318	180	195	171
65°	127	133	174	123	139	127
75°	65	67	78	65	73	68
85°	14	16	15	16	16	16
90°	28	24	2	24	28	15
95°	110	565	32	565	110	180
105°	1211	766	110	766	1211	1208
115°	1473	586	195	586	1473	1437
125°	1162	547	271	547	1162	1051
135°	942	539	318	539	942	730
145°	736	532	363	532	736	467
155°	610	515	412	515	610	284
165°	532	493	450	493	532	152
175°	479	473	470	473	479	46
180°	470	470	470	470	470	



TEST NUMBER: P831341

CATALOG NUMBER: S123DIP-S340D1025U950-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	936.7	936.7	936.7	936.7	936.7	936.7	936.7	936.7	936.7	936.7	936.7
2.5°	1055.8	1054.7	1053.6	1048.1	1042.7	1040.1	1037.5	1029.7	1021.9	1013.2	1004.5
5°	1180.1	1183.1	1186.1	1182.7	1179.2	1168.5	1157.9	1143.8	1129.6	1113.8	1097.9
7.5°	1237.4	1239.2	1240.9	1238.7	1236.6	1233.7	1230.9	1218.3	1205.7	1189.4	1173.1
10°	1177.9	1181.8	1185.7	1194.2	1202.7	1212.2	1221.8	1220.1	1218.3	1213.5	1208.7
12.5°	1047.1	1051.8	1056.6	1073.6	1090.5	1112.3	1134.0	1152.7	1171.4	1184.4	1197.4
15°	870.2	883.4	896.7	912.1	927.5	959.5	991.4	1030.8	1070.1	1105.1	1140.1
17.5°	716.7	721.7	726.7	743.2	759.8	800.0	840.2	885.6	931.0	989.0	1047.1
20°	589.8	594.4	598.9	620.7	642.4	673.9	705.4	756.5	807.6	869.9	932.3
22.5°	495.5	502.7	509.8	522.0	534.2	564.4	594.6	640.0	685.4	754.3	823.2
25°	433.8	439.0	444.2	451.6	459.0	483.1	507.2	544.6	582.0	645.2	708.5
27.5°	391.6	393.8	396.0	403.4	410.7	426.4	442.0	474.2	506.4	560.0	613.7
30°	358.6	360.1	361.6	368.1	374.7	385.3	396.0	419.2	442.5	489.8	537.2
32.5°	335.5	336.6	337.7	342.7	347.7	355.3	362.9	379.9	396.8	435.9	475.1
35°	314.7	315.3	316.0	319.7	323.4	329.0	334.7	347.5	360.3	391.2	422.0
37.5°	296.4	297.3	298.2	300.3	302.5	307.5	312.5	322.7	332.9	356.6	380.3
40°	278.6	280.1	281.7	283.2	284.7	288.8	293.0	300.8	308.6	328.2	347.7
42.5°	263.4	264.9	266.4	267.1	267.7	270.1	272.5	279.7	286.9	301.4	316.0
45°	248.6	249.3	249.9	250.6	251.2	253.2	255.1	261.4	267.7	280.3	293.0
47.5°	235.1	235.1	235.1	235.6	236.0	237.8	239.5	244.1	248.6	258.4	268.2
50°	222.1	222.1	222.1	221.5	220.8	221.9	223.0	226.5	229.9	238.6	247.3
52.5°	206.5	206.5	206.5	206.7	206.9	206.9	206.9	209.9	213.0	220.8	228.6
55°	190.8	191.7	192.5	191.9	191.2	191.7	192.1	194.1	196.0	202.3	208.6
57.5°	175.2	175.6	176.0	175.8	175.6	175.8	176.0	177.8	179.5	184.3	189.1
60°	160.4	160.4	160.4	159.9	159.5	159.9	160.4	161.3	162.1	166.5	170.8
62.5°	143.9	144.1	144.3	144.5	144.7	144.3	143.9	145.0	146.0	149.3	152.6
65°	127.4	127.6	127.8	128.4	129.1	128.7	128.2	129.3	130.4	132.8	135.2
67.5°	112.6	112.1	111.7	111.9	112.1	112.8	113.4	113.7	113.9	116.5	119.1
70°	95.2	95.6	96.1	95.8	95.6	95.8	96.1	96.7	97.4	99.3	101.3
72.5°	79.5	79.8	80.0	80.0	80.0	80.4	80.8	81.5	82.1	83.2	84.3
75°	65.2	65.2	65.2	65.6	66.1	66.3	66.5	66.5	66.5	67.4	68.2
77.5°	49.5	50.6	51.7	51.5	51.3	51.7	52.2	52.8	53.5	53.9	54.3
80°	36.1	36.1	36.1	36.3	36.5	37.2	37.8	38.2	38.7	39.6	40.4
82.5°	23.0	23.3	23.5	24.1	24.8	25.2	25.6	26.3	26.9	26.9	26.9
85°	14.3	13.9	13.5	13.9	14.3	14.8	15.2	15.4	15.6	16.1	16.5
87.5°	7.0	7.0	7.0	7.0	7.0	7.2	7.4	7.4	7.4	7.4	7.4
90°	27.6	28.6	27.6	26.7	27.6	25.7	24.8	23.8	22.9	23.8	20.9
92.5°	50.5	52.4	51.4	55.2	57.1	63.8	73.3	94.3	132.4	177.1	196.2
95°	110.5	114.3	120.9	129.5	147.6	181.9	232.4	342.8	458.0	564.7	502.8
97.5°	226.6	237.1	260.0	296.2	360.0	468.5	594.2	787.5	898.0	868.5	648.5
100°	597.1	596.1	633.3	702.8	798.9	934.2	1045.6	1122.7	1089.4	901.8	609.4
102.5°	945.6	973.2	1002.7	1054.2	1123.7	1197.0	1250.3	1234.1	1098.9	839.9	552.3
105°	1211.3	1216.0	1246.5	1282.7	1326.5	1351.3	1333.2	1237.9	1038.9	765.6	507.6
107.5°	1384.6	1395.1	1407.4	1424.6	1430.3	1404.6	1330.3	1180.8	953.2	699.9	475.2
110°	1483.6	1485.5	1487.4	1479.8	1453.2	1386.5	1266.5	1091.3	873.2	645.6	458.0



TEST NUMBER: P831341

CATALOG NUMBER: S123DIP-S340D1025U950-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	1503.6	1502.7	1493.1	1465.5	1411.3	1320.8	1182.7	1002.7	803.7	609.4	448.5
115°	1473.2	1468.4	1449.3	1407.4	1336.0	1232.2	1092.2	926.6	750.4	585.6	447.6
117.5°	1406.5	1399.8	1371.3	1324.6	1250.3	1142.7	1014.2	867.5	715.1	569.5	448.5
120°	1318.9	1313.2	1290.3	1237.0	1161.8	1065.6	951.3	822.8	688.5	559.0	452.3
122.5°	1237.0	1229.4	1203.7	1157.0	1092.2	1004.6	900.8	787.5	666.6	552.3	459.0
125°	1161.8	1155.1	1131.3	1089.4	1028.4	952.3	860.8	757.0	648.5	546.6	465.7
127.5°	1097.0	1091.3	1069.4	1033.2	978.0	907.5	823.7	729.4	631.4	543.7	473.3
130°	1043.7	1036.1	1016.1	981.8	931.3	866.6	789.4	703.7	618.0	540.9	480.9
132.5°	991.3	986.5	969.4	935.1	888.5	827.5	757.0	679.9	605.6	539.9	486.6
135°	941.8	935.1	918.0	889.4	842.8	788.5	726.6	659.0	595.2	539.0	492.3
137.5°	889.4	883.7	869.4	839.9	799.9	751.3	696.1	639.0	585.6	537.1	496.1
140°	834.2	835.1	819.9	793.2	757.0	716.1	670.4	621.8	577.1	536.1	499.9
142.5°	782.8	783.7	770.4	747.5	718.0	683.7	645.6	605.6	569.5	534.2	502.8
145°	736.1	734.2	726.6	706.6	682.8	655.2	624.7	593.3	562.8	532.3	503.7
147.5°	696.1	695.2	687.5	673.2	654.2	634.2	608.5	582.8	556.1	529.5	503.7
150°	661.8	661.8	656.1	645.6	631.4	613.3	593.3	571.4	549.5	525.6	503.7
152.5°	633.3	633.3	630.4	620.9	610.4	596.1	579.0	560.9	541.8	520.9	500.9
155°	610.4	609.4	607.5	599.9	591.4	579.9	565.6	550.4	534.2	515.2	499.0
157.5°	588.5	588.5	586.6	580.9	573.3	563.7	552.3	539.0	525.6	510.4	496.1
160°	567.5	568.5	568.5	562.8	556.1	549.5	539.9	529.5	517.1	504.7	494.2
162.5°	548.5	549.5	549.5	544.7	540.9	535.2	526.6	518.0	508.5	499.0	490.4
165°	532.3	532.3	533.3	529.5	525.6	520.9	514.2	508.5	500.9	493.3	486.6
167.5°	516.1	516.1	517.1	514.2	512.3	508.5	504.7	499.9	493.3	487.6	482.8
170°	501.8	501.8	502.8	500.9	499.9	498.0	494.2	491.4	486.6	481.8	479.0
172.5°	488.5	489.5	491.4	489.5	489.5	488.5	485.7	483.7	479.9	477.1	476.1
175°	479.0	479.9	480.9	479.9	479.9	479.9	478.0	477.1	475.2	473.3	473.3
177.5°	472.3	472.3	474.2	473.3	474.2	474.2	473.3	472.3	471.4	470.4	471.4
180°	470.4	470.4	470.4	470.4	470.4	470.4	470.4	470.4	470.4	470.4	470.4



TEST NUMBER: P831341

CATALOG NUMBER: S123DIP-S340D1025U950-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	936.7	936.7	936.7	936.7	936.7	936.7	936.7	936.7	936.7	936.7	936.7
2.5°	1001.9	999.3	989.7	980.1	969.3	958.4	950.4	942.3	930.4	918.4	908.6
5°	1085.7	1073.6	1053.4	1033.2	1005.8	978.4	959.9	941.4	916.7	891.9	872.1
7.5°	1152.2	1131.4	1103.1	1074.9	1039.0	1003.2	969.3	935.4	897.5	859.7	828.9
10°	1194.6	1180.5	1147.9	1115.3	1067.3	1019.2	971.9	924.5	875.8	827.1	786.3
12.5°	1198.8	1200.1	1170.1	1140.1	1085.7	1031.4	973.8	916.2	854.9	793.7	746.1
15°	1162.5	1184.8	1168.3	1151.8	1097.0	1042.3	971.4	900.6	830.0	759.3	704.3
17.5°	1095.1	1143.1	1145.5	1147.9	1093.1	1038.4	959.9	881.5	801.5	721.5	663.7
20°	1003.2	1074.0	1098.3	1122.7	1078.1	1033.6	949.3	864.9	775.4	685.9	625.2
22.5°	909.3	995.3	1039.9	1084.4	1051.4	1018.4	928.6	838.9	744.3	649.8	588.3
25°	802.4	896.2	964.7	1033.2	1012.9	992.7	904.3	815.8	715.2	614.6	551.8
27.5°	709.1	804.5	887.1	969.7	965.3	961.0	873.2	785.4	682.4	579.4	518.7
30°	626.1	715.0	807.4	899.7	910.4	921.0	836.3	751.5	648.3	545.0	486.6
32.5°	552.7	630.2	729.3	828.4	849.3	870.2	793.7	717.2	615.0	512.9	456.6
35°	492.5	562.9	662.0	761.1	787.1	813.2	746.7	680.2	580.7	481.2	427.5
37.5°	439.2	498.1	594.8	691.5	723.5	755.4	695.9	636.3	543.1	449.9	400.5
40°	395.1	442.5	531.4	620.2	657.2	694.1	645.0	595.9	507.4	419.0	373.6
42.5°	358.1	400.3	480.9	561.6	597.0	632.4	590.9	549.4	470.7	392.1	350.5
45°	326.6	360.3	433.6	506.8	540.5	574.2	538.5	502.9	433.6	364.2	325.5
47.5°	297.1	326.0	388.6	451.2	481.2	511.1	483.3	455.5	396.8	338.2	303.2
50°	270.6	293.8	348.6	403.4	429.4	455.5	431.0	406.4	358.1	309.9	279.5
52.5°	247.5	266.4	312.3	358.1	380.5	402.9	381.8	360.8	322.5	284.3	257.7
55°	224.7	240.8	280.6	320.3	335.5	350.8	334.5	318.2	287.3	256.4	234.1
57.5°	203.4	217.8	250.4	283.0	294.7	306.4	291.6	276.9	253.6	230.4	211.7
60°	182.6	194.3	221.5	248.6	255.8	263.0	251.0	239.1	222.8	206.5	189.7
62.5°	163.2	173.9	194.1	214.3	219.1	223.8	214.7	205.6	193.2	180.8	167.8
65°	143.2	151.3	167.8	184.3	187.3	190.4	182.3	174.3	164.9	155.6	146.0
67.5°	124.7	130.4	143.9	157.3	157.6	157.8	151.3	144.7	139.5	134.3	126.7
70°	106.7	112.1	121.0	130.0	130.2	130.4	125.2	120.0	116.1	112.1	106.5
72.5°	88.2	92.1	98.9	105.6	105.2	104.7	101.5	98.2	95.2	92.1	88.0
75°	71.5	74.8	79.3	83.9	82.6	81.3	79.5	77.8	75.2	72.6	70.0
77.5°	56.3	58.2	60.9	63.5	62.6	61.7	60.2	58.7	56.7	54.8	53.7
80°	41.3	42.2	43.9	45.6	45.2	44.8	43.0	41.3	40.9	40.4	38.9
82.5°	28.0	29.1	29.6	30.0	29.8	29.6	28.3	26.9	26.5	26.1	25.9
85°	16.7	17.0	17.2	17.4	16.7	16.1	15.6	15.2	15.2	15.2	15.0
87.5°	7.6	7.8	7.8	7.8	7.6	7.4	7.0	6.5	6.7	7.0	7.0
90°	18.1	15.2	12.4	10.5	8.6	5.7	3.8	1.9	3.8	5.7	8.6
92.5°	146.6	96.2	65.7	48.6	39.0	30.5	20.9	14.3	20.9	30.5	39.0
95°	346.6	204.7	123.8	86.7	61.9	45.7	35.2	32.4	35.2	45.7	61.9
97.5°	385.7	220.9	140.9	100.0	75.2	60.9	52.4	51.4	52.4	60.9	75.2
100°	359.0	218.1	151.4	114.3	91.4	78.1	71.4	70.5	71.4	78.1	91.4
102.5°	336.1	221.9	163.8	130.5	110.5	98.1	92.4	90.5	92.4	98.1	110.5
105°	327.6	229.5	178.1	148.6	130.5	119.0	113.3	110.5	113.3	119.0	130.5
107.5°	325.7	241.9	196.2	168.6	151.4	140.0	134.3	131.4	134.3	140.0	151.4
110°	330.4	258.1	215.2	188.5	172.4	161.9	157.1	154.3	157.1	161.9	172.4





TEST NUMBER: P831341

CATALOG NUMBER: S123DIP-S340D1025U950-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	340.0	274.3	235.2	209.5	193.3	182.8	178.1	175.2	178.1	182.8	193.3
115°	350.4	292.3	256.2	230.4	214.3	204.7	199.0	195.2	199.0	204.7	214.3
117.5°	363.8	311.4	275.2	251.4	233.3	224.7	220.0	215.2	220.0	224.7	233.3
120°	379.0	329.5	295.2	271.4	253.3	243.8	239.0	236.2	239.0	243.8	253.3
122.5°	393.3	348.5	315.2	289.5	272.3	261.9	257.1	254.3	257.1	261.9	272.3
125°	408.5	366.6	333.3	307.6	289.5	279.0	273.3	271.4	273.3	279.0	289.5
127.5°	420.9	382.8	350.4	324.7	304.7	294.2	287.6	284.7	287.6	294.2	304.7
130°	433.3	397.1	365.7	340.0	320.0	308.5	300.0	297.1	300.0	308.5	320.0
132.5°	444.7	409.5	379.0	354.2	334.2	320.0	310.4	306.6	310.4	320.0	334.2
135°	454.2	421.9	392.3	366.6	346.6	332.3	321.9	318.1	321.9	332.3	346.6
137.5°	461.8	430.4	401.9	378.0	358.1	342.8	332.3	328.5	332.3	342.8	358.1
140°	467.6	439.0	411.4	387.6	368.5	353.3	343.8	339.0	343.8	353.3	368.5
142.5°	473.3	445.7	419.0	397.1	378.0	364.7	354.2	350.4	354.2	364.7	378.0
145°	477.1	451.4	426.6	404.7	388.5	374.2	365.7	362.8	365.7	374.2	388.5
147.5°	479.9	456.1	433.3	414.2	398.0	385.7	377.1	375.2	377.1	385.7	398.0
150°	480.9	460.9	439.0	421.9	408.5	396.1	388.5	387.6	388.5	396.1	408.5
152.5°	482.8	463.8	445.7	429.5	418.0	407.6	400.0	400.0	400.0	407.6	418.0
155°	482.8	467.6	451.4	438.0	427.6	418.0	412.3	412.3	412.3	418.0	427.6
157.5°	483.7	469.5	456.1	445.7	436.1	427.6	422.8	421.9	422.8	427.6	436.1
160°	483.7	472.3	460.9	451.4	444.7	437.1	433.3	433.3	433.3	437.1	444.7
162.5°	482.8	473.3	463.8	456.1	450.4	444.7	441.8	441.8	441.8	444.7	450.4
165°	480.9	474.2	466.6	459.9	456.1	451.4	449.5	450.4	449.5	451.4	456.1
167.5°	479.9	474.2	468.5	463.8	460.9	457.1	456.1	457.1	456.1	457.1	460.9
170°	477.1	473.3	468.5	466.6	464.7	461.8	460.9	462.8	460.9	461.8	464.7
172.5°	476.1	473.3	469.5	468.5	467.6	465.7	465.7	466.6	465.7	465.7	467.6
175°	474.2	472.3	470.4	469.5	469.5	467.6	468.5	469.5	468.5	467.6	469.5
177.5°	473.3	471.4	470.4	470.4	470.4	469.5	470.4	471.4	470.4	469.5	470.4
180°	470.4	470.4	470.4	470.4	470.4	470.4	470.4	470.4	470.4	470.4	470.4



TEST NUMBER: P831341

CATALOG NUMBER: S123DIP-S340D1025U950-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	936.7	936.7	936.7	936.7	936.7	936.7	936.7	936.7	936.7	936.7	936.7
2.5°	898.8	890.4	881.9	875.4	868.9	857.8	846.7	844.1	841.5	837.8	834.1
5°	852.3	831.5	810.6	791.9	773.2	758.7	744.1	734.6	725.0	718.0	711.1
7.5°	798.0	766.7	735.4	713.3	691.1	670.0	648.9	642.2	635.5	626.3	617.2
10°	745.4	710.9	676.3	647.4	618.5	597.9	577.2	569.0	560.7	549.2	537.7
12.5°	698.5	660.7	622.8	593.7	564.6	544.6	524.6	512.7	500.7	494.2	487.7
15°	649.4	608.9	568.5	541.6	514.6	496.6	478.5	468.1	457.7	451.4	445.1
17.5°	605.9	565.9	525.9	500.1	474.2	457.7	441.2	432.0	422.9	418.1	413.3
20°	564.6	525.5	486.4	461.2	435.9	422.5	409.0	403.1	397.3	393.4	389.4
22.5°	526.8	488.3	449.9	428.3	406.8	396.0	385.1	381.0	376.8	373.6	370.3
25°	489.0	454.6	420.3	402.0	383.8	374.9	366.0	361.8	357.7	354.5	351.2
27.5°	458.1	425.3	392.5	376.8	361.2	354.2	347.3	344.0	340.8	337.7	334.7
30°	428.1	398.8	369.4	356.0	342.5	336.2	329.9	326.6	323.4	320.6	317.7
32.5°	400.3	375.1	349.9	337.5	325.1	319.9	314.7	310.8	306.9	304.7	302.5
35°	373.8	351.2	328.6	318.4	308.2	302.9	297.7	294.5	291.2	289.5	287.7
37.5°	351.2	331.0	310.8	301.0	291.2	286.2	281.2	278.4	275.6	274.9	274.3
40°	328.2	310.8	293.4	283.8	274.3	269.9	265.6	263.8	262.1	261.7	261.2
42.5°	309.0	292.1	275.1	266.4	257.7	254.1	250.4	249.5	248.6	249.3	249.9
45°	286.9	272.7	258.6	250.6	242.5	239.5	236.4	235.8	235.1	236.4	237.8
47.5°	268.2	255.1	242.1	234.5	226.9	224.7	222.5	222.3	222.1	223.8	225.6
50°	249.1	236.4	223.8	217.8	211.7	209.7	207.8	208.4	209.1	211.9	214.7
52.5°	231.2	219.5	207.8	202.1	196.5	195.2	193.9	195.4	196.9	199.9	203.0
55°	211.7	201.0	190.4	186.0	181.7	180.4	179.1	182.1	185.2	188.0	190.8
57.5°	193.0	183.6	174.3	170.4	166.5	166.3	166.0	168.9	171.7	174.7	177.8
60°	173.0	165.2	157.3	154.3	151.3	151.7	152.1	155.4	158.6	161.0	163.4
62.5°	154.7	148.2	141.7	138.9	136.0	137.1	138.2	141.5	144.7	147.6	150.4
65°	136.5	131.0	125.6	123.7	121.7	123.2	124.7	127.6	130.4	132.3	134.3
67.5°	119.1	114.5	110.0	108.4	106.9	108.4	110.0	112.8	115.6	117.6	119.5
70°	100.8	97.1	93.4	92.4	91.3	93.0	94.8	97.1	99.5	101.5	103.4
72.5°	83.9	81.1	78.2	78.0	77.8	79.3	80.8	83.2	85.6	86.9	88.2
75°	67.4	65.8	64.3	64.1	63.9	65.4	66.9	68.2	69.5	70.6	71.7
77.5°	52.6	51.3	50.0	50.2	50.4	51.5	52.6	53.9	55.2	55.9	56.5
80°	37.4	36.9	36.5	36.9	37.4	38.2	39.1	40.0	40.9	41.3	41.7
82.5°	25.6	25.2	24.8	25.4	26.1	26.7	27.4	28.0	28.7	28.9	29.1
85°	14.8	15.4	16.1	16.1	16.1	16.3	16.5	16.7	17.0	16.7	16.5
87.5°	7.0	7.2	7.4	7.4	7.4	7.6	7.8	7.8	7.8	7.6	7.4
90°	10.5	12.4	15.2	18.1	20.9	23.8	22.9	23.8	24.8	25.7	27.6
92.5°	48.6	65.7	96.2	146.6	196.2	177.1	132.4	94.3	73.3	63.8	57.1
95°	86.7	123.8	204.7	346.6	502.8	564.7	458.0	342.8	232.4	181.9	147.6
97.5°	100.0	140.9	220.9	385.7	648.5	868.5	898.0	787.5	594.2	468.5	360.0
100°	114.3	151.4	218.1	359.0	609.4	901.8	1089.4	1122.7	1045.6	934.2	798.9
102.5°	130.5	163.8	221.9	336.1	552.3	839.9	1098.9	1234.1	1250.3	1197.0	1123.7
105°	148.6	178.1	229.5	327.6	507.6	765.6	1038.9	1237.9	1333.2	1351.3	1326.5
107.5°	168.6	196.2	241.9	325.7	475.2	699.9	953.2	1180.8	1330.3	1404.6	1430.3
110°	188.5	215.2	258.1	330.4	458.0	645.6	873.2	1091.3	1266.5	1386.5	1453.2



TEST NUMBER: P831341

CATALOG NUMBER: S123DIP-S340D1025U950-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	209.5	235.2	274.3	340.0	448.5	609.4	803.7	1002.7	1182.7	1320.8	1411.3
115°	230.4	256.2	292.3	350.4	447.6	585.6	750.4	926.6	1092.2	1232.2	1336.0
117.5°	251.4	275.2	311.4	363.8	448.5	569.5	715.1	867.5	1014.2	1142.7	1250.3
120°	271.4	295.2	329.5	379.0	452.3	559.0	688.5	822.8	951.3	1065.6	1161.8
122.5°	289.5	315.2	348.5	393.3	459.0	552.3	666.6	787.5	900.8	1004.6	1092.2
125°	307.6	333.3	366.6	408.5	465.7	546.6	648.5	757.0	860.8	952.3	1028.4
127.5°	324.7	350.4	382.8	420.9	473.3	543.7	631.4	729.4	823.7	907.5	978.0
130°	340.0	365.7	397.1	433.3	480.9	540.9	618.0	703.7	789.4	866.6	931.3
132.5°	354.2	379.0	409.5	444.7	486.6	539.9	605.6	679.9	757.0	827.5	888.5
135°	366.6	392.3	421.9	454.2	492.3	539.0	595.2	659.0	726.6	788.5	842.8
137.5°	378.0	401.9	430.4	461.8	496.1	537.1	585.6	639.0	696.1	751.3	799.9
140°	387.6	411.4	439.0	467.6	499.9	536.1	577.1	621.8	670.4	716.1	757.0
142.5°	397.1	419.0	445.7	473.3	502.8	534.2	569.5	605.6	645.6	683.7	718.0
145°	404.7	426.6	451.4	477.1	503.7	532.3	562.8	593.3	624.7	655.2	682.8
147.5°	414.2	433.3	456.1	479.9	503.7	529.5	556.1	582.8	608.5	634.2	654.2
150°	421.9	439.0	460.9	480.9	503.7	525.6	549.5	571.4	593.3	613.3	631.4
152.5°	429.5	445.7	463.8	482.8	500.9	520.9	541.8	560.9	579.0	596.1	610.4
155°	438.0	451.4	467.6	482.8	499.0	515.2	534.2	550.4	565.6	579.9	591.4
157.5°	445.7	456.1	469.5	483.7	496.1	510.4	525.6	539.0	552.3	563.7	573.3
160°	451.4	460.9	472.3	483.7	494.2	504.7	517.1	529.5	539.9	549.5	556.1
162.5°	456.1	463.8	473.3	482.8	490.4	499.0	508.5	518.0	526.6	535.2	540.9
165°	459.9	466.6	474.2	480.9	486.6	493.3	500.9	508.5	514.2	520.9	525.6
167.5°	463.8	468.5	474.2	479.9	482.8	487.6	493.3	499.9	504.7	508.5	512.3
170°	466.6	468.5	473.3	477.1	479.0	481.8	486.6	491.4	494.2	498.0	499.9
172.5°	468.5	469.5	473.3	476.1	476.1	477.1	479.9	483.7	485.7	488.5	489.5
175°	469.5	470.4	472.3	474.2	473.3	473.3	475.2	477.1	478.0	479.9	479.9
177.5°	470.4	470.4	471.4	473.3	471.4	470.4	471.4	472.3	473.3	474.2	474.2
180°	470.4	470.4	470.4	470.4	470.4	470.4	470.4	470.4	470.4	470.4	470.4



TEST NUMBER: P831341

CATALOG NUMBER: S123DIP-S340D1025U950-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
0°	936.7	936.7	936.7	936.7
2.5°	832.6	831.0	825.0	818.9
5°	705.9	700.6	698.9	697.2
7.5°	616.8	616.3	607.2	598.1
10°	538.3	539.0	530.7	522.4
12.5°	482.2	476.8	476.2	475.5
15°	440.1	435.1	434.2	433.3
17.5°	410.3	407.3	406.4	405.5
20°	387.7	386.0	384.4	382.9
22.5°	368.1	366.0	364.7	363.4
25°	349.2	347.3	346.8	346.4
27.5°	332.3	329.9	329.9	329.9
30°	316.2	314.7	314.0	313.4
32.5°	301.2	299.9	299.9	299.9
35°	287.1	286.4	285.6	284.7
37.5°	274.3	274.3	273.8	273.4
40°	261.9	262.5	262.5	262.5
42.5°	250.6	251.2	251.2	251.2
45°	238.8	239.9	240.4	240.8
47.5°	227.3	229.1	229.5	229.9
50°	216.0	217.3	217.5	217.8
52.5°	204.5	206.0	207.1	208.2
55°	192.3	193.9	194.5	195.2
57.5°	179.3	180.8	181.0	181.2
60°	164.9	166.5	166.9	167.3
62.5°	151.3	152.1	152.6	153.0
65°	135.6	136.9	137.8	138.7
67.5°	120.6	121.7	121.7	121.7
70°	103.9	104.3	105.0	105.6
72.5°	88.5	88.7	88.7	88.7
75°	72.2	72.6	72.8	73.0
77.5°	56.7	56.9	56.9	56.9
80°	41.5	41.3	41.3	41.3
82.5°	28.5	27.8	27.8	27.8
85°	16.3	16.1	16.3	16.5
87.5°	7.4	7.4	7.4	7.4
90°	26.7	27.6	28.6	27.6
92.5°	55.2	51.4	52.4	50.5
95°	129.5	120.9	114.3	110.5
97.5°	296.2	260.0	237.1	226.6
100°	702.8	633.3	596.1	597.1
102.5°	1054.2	1002.7	973.2	945.6
105°	1282.7	1246.5	1216.0	1211.3
107.5°	1424.6	1407.4	1395.1	1384.6
110°	1479.8	1487.4	1485.5	1483.6



TEST NUMBER: P831341

CATALOG NUMBER: S123DIP-S340D1025U950-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
112.5°	1465.5	1493.1	1502.7	1503.6
115°	1407.4	1449.3	1468.4	1473.2
117.5°	1324.6	1371.3	1399.8	1406.5
120°	1237.0	1290.3	1313.2	1318.9
122.5°	1157.0	1203.7	1229.4	1237.0
125°	1089.4	1131.3	1155.1	1161.8
127.5°	1033.2	1069.4	1091.3	1097.0
130°	981.8	1016.1	1036.1	1043.7
132.5°	935.1	969.4	986.5	991.3
135°	889.4	918.0	935.1	941.8
137.5°	839.9	869.4	883.7	889.4
140°	793.2	819.9	835.1	834.2
142.5°	747.5	770.4	783.7	782.8
145°	706.6	726.6	734.2	736.1
147.5°	673.2	687.5	695.2	696.1
150°	645.6	656.1	661.8	661.8
152.5°	620.9	630.4	633.3	633.3
155°	599.9	607.5	609.4	610.4
157.5°	580.9	586.6	588.5	588.5
160°	562.8	568.5	568.5	567.5
162.5°	544.7	549.5	549.5	548.5
165°	529.5	533.3	532.3	532.3
167.5°	514.2	517.1	516.1	516.1
170°	500.9	502.8	501.8	501.8
172.5°	489.5	491.4	489.5	488.5
175°	479.9	480.9	479.9	479.0
177.5°	473.3	474.2	472.3	472.3
180°	470.4	470.4	470.4	470.4

TEST NUMBER: P831341

CATALOG NUMBER: S123DIP-S340D1025U950-4F0-1E-UDD-G4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.34	10.03	10.46	11.14	12.67	11.58	12.27	12.70	13.38	14.91
	3H	10.98	11.59	12.10	12.71	14.26	12.99	13.61	14.12	14.72	16.28
	4H	11.55	12.13	12.68	13.25	14.80	13.44	14.02	14.57	15.14	16.69
	6H	11.91	12.45	13.05	13.57	15.13	13.70	14.24	14.85	15.36	16.93
	8H	12.00	12.51	13.15	13.65	15.21	13.76	14.27	14.91	15.41	16.97
	12H	12.04	12.52	13.19	13.65	15.24	13.77	14.26	14.92	15.39	16.97
4H	2H	9.90	10.48	11.04	11.60	13.16	11.72	12.31	12.87	13.43	14.98
	3H	11.71	12.20	12.86	13.34	14.91	13.33	13.81	14.48	14.96	16.53
	4H	12.40	12.85	13.55	13.98	15.57	13.91	14.35	15.06	15.48	17.07
	6H	12.87	13.25	14.03	14.41	15.99	14.30	14.68	15.46	15.84	17.42
	8H	13.00	13.36	14.16	14.51	16.10	14.41	14.77	15.56	15.91	17.51
	12H	13.06	13.39	14.23	14.54	16.14	14.45	14.77	15.62	15.93	17.53
8H	4H	12.66	13.01	13.81	14.16	15.76	14.00	14.35	15.15	15.50	17.10
	6H	13.24	13.53	14.42	14.72	16.31	14.49	14.79	15.67	15.98	17.57
	8H	13.45	13.70	14.63	14.87	16.48	14.67	14.93	15.85	16.10	17.71
	12H	13.56	13.79	14.75	14.95	16.60	14.77	14.99	15.95	16.16	17.80
12H	4H	12.65	12.97	13.82	14.13	15.73	13.96	14.29	15.14	15.45	17.05
	6H	13.29	13.55	14.47	14.71	16.33	14.51	14.76	15.69	15.93	17.54
	8H	13.52	13.74	14.70	14.91	16.55	14.70	14.92	15.88	16.09	17.73