

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831610

Luminaire Tested: S123DIP-S775D1025U950-4F0-1E-UDD-G1

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831610
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-9)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DIP-S775D1025U950-4F0-1E-UDD-G1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 1025 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6745.1 lumens
Efficiency: N/A
Efficacy: 130.2 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 51.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831610
CATALOG NUMBER: S123DIP-S775D1025U950-4F0-1E-UDD-G1

Luminous Intensity Polar Plot

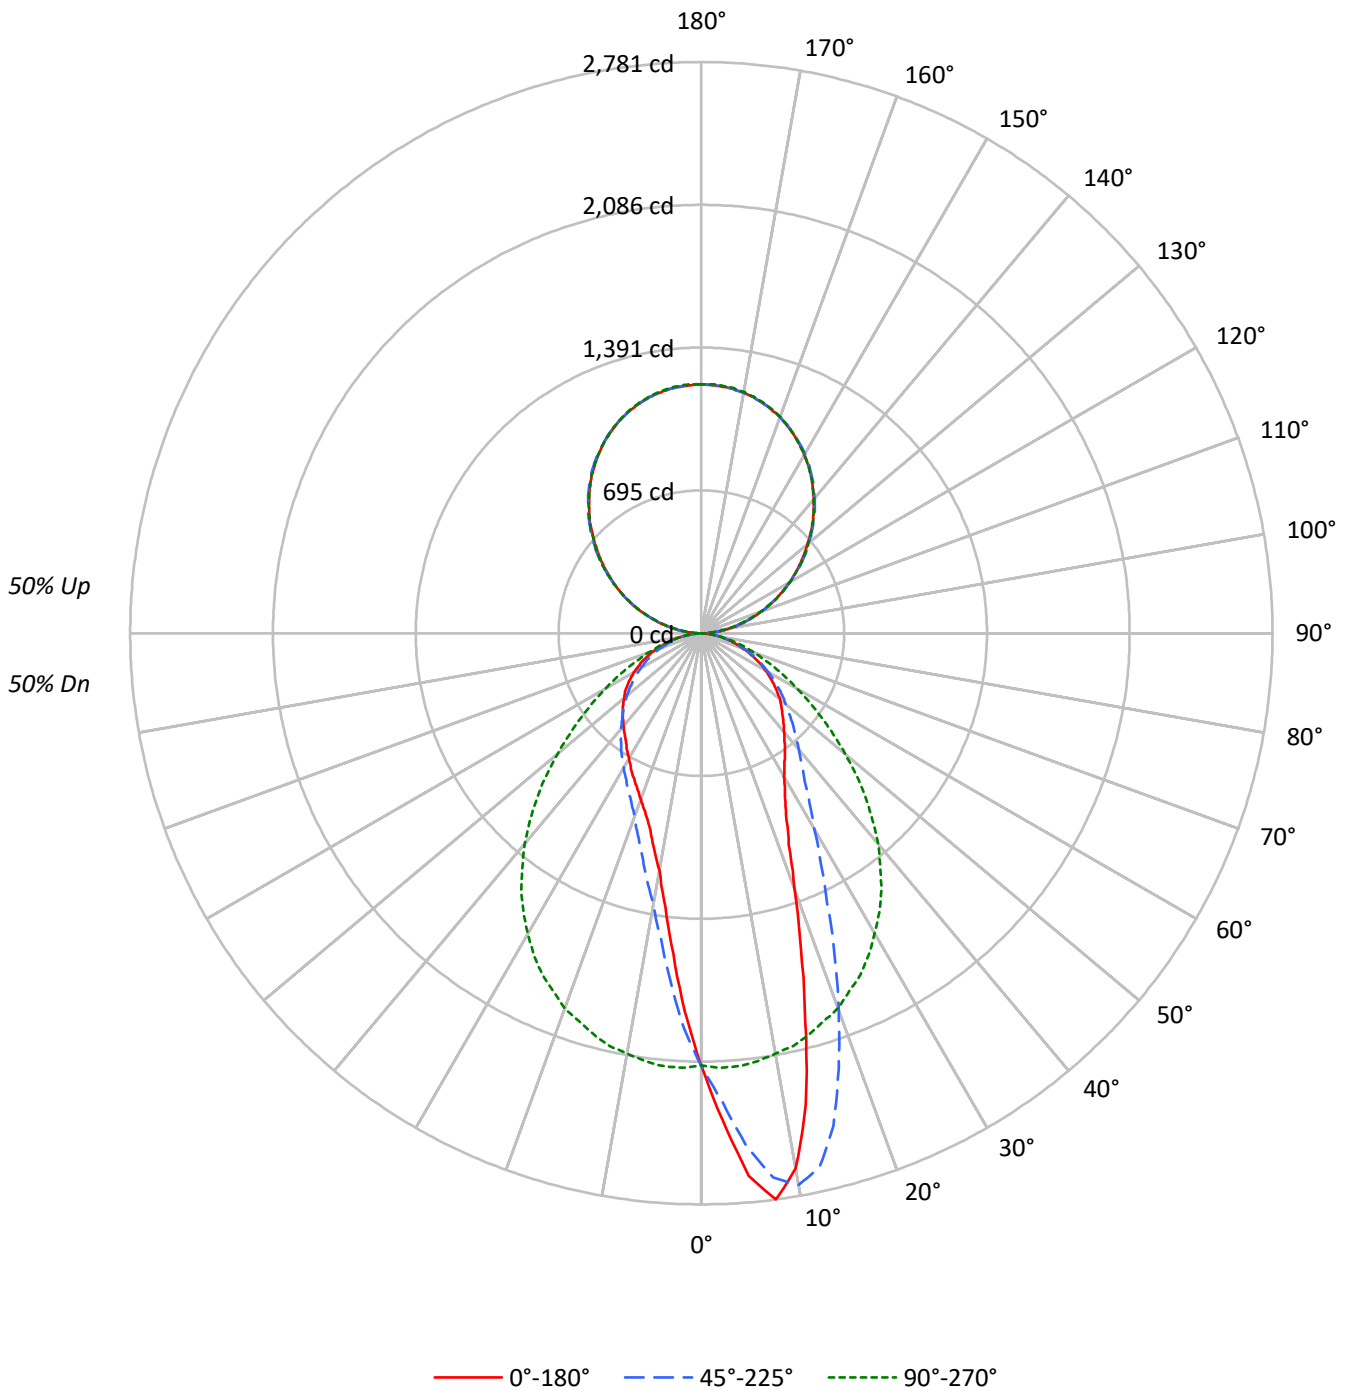



TEST NUMBER: P831610

CATALOG NUMBER: S123DIP-S775D1025U950-4F0-1E-UDD-G1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50				
1	98	94	90	87	91	87	84	81	74	72	70	62	60	59	51	49	49	43				
2	90	83	77	72	83	77	72	67	65	62	58	55	52	50	45	43	42	37				
3	83	73	66	61	76	68	62	57	58	54	50	49	46	43	41	38	36	32				
4	76	65	58	52	70	61	54	49	52	47	43	44	40	37	37	34	32	28				
5	70	59	51	45	64	55	48	43	47	42	38	40	36	33	33	31	28	25				
6	65	53	45	40	60	49	43	37	43	37	33	37	32	29	31	28	25	22				
7	60	48	40	35	55	45	38	33	39	34	30	34	29	26	28	25	23	20				
8	56	44	36	31	52	41	34	30	36	31	27	31	27	24	26	23	21	18				
9	52	40	33	28	48	38	31	27	33	28	24	29	25	22	24	21	19	17				
10	49	37	30	26	45	35	29	24	31	26	22	27	23	20	23	20	17	16				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	22657	22657	22657	22657	22657
5°	28653	27044	22859	18421	16928
10°	28931	29806	22707	14684	12832
15°	21790	27673	22552	12435	10852
20°	15182	22393	22265	10875	9857
25°	11577	17221	21773	10005	9246
30°	10015	13682	20990	9390	8753
35°	9293	11552	20086	8946	8407
40°	8798	10361	18816	8524	8289
45°	8505	9590	17203	8193	8237
50°	8358	8979	15292	7892	8194
55°	8047	8533	13418	7606	8231
60°	7759	8054	11565	7339	8094
65°	7289	7600	9976	7053	7936
70°	6732	7024	8485	6578	7468
75°	6093	6297	7270	6114	6825
80°	5027	5511	5752	5331	5752
85°	3977	4458	4224	4520	4582

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 19642 cd/sqm



TEST NUMBER: P831610

CATALOG NUMBER: S123DIP-S775D1025U950-4F0-1E-UDD-G1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	199.0	3.0
10°-20°	495.1	7.3
20°-30°	586.2	8.7
30°-40°	589.4	8.7
40°-50°	540.7	8.0
50°-60°	446.3	6.6
60°-70°	315.7	4.7
70°-80°	168.5	2.5
80°-90°	45.3	0.7
90°-100°	78.0	1.2
100°-110°	236.2	3.5
110°-120°	402.1	6.0
120°-130°	529.0	7.8
130°-140°	594.6	8.8
140°-150°	584.6	8.7
150°-160°	492.1	7.3
160°-170°	327.6	4.9
170°-180°	114.7	1.7
0°-30°	1280.2	19.0
0°-40°	1869.6	27.7
0°-60°	2856.6	42.4
0°-90°	3386.2	50.2
90°-120°	716.3	10.6
90°-150°	2424.4	35.9
90°-180°	3359.0	49.8
0°-180°	6745.1	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	2105	2105	2105	2105	2105	
5°	2652	2503	2116	1705	1567	253
15°	1955	2483	2024	1116	974	540
25°	975	1450	1833	842	778	460
35°	707	879	1529	681	640	444
45°	559	630	1130	538	541	433
55°	429	455	715	405	439	384
65°	286	298	392	277	312	284
75°	146	151	175	147	164	154
85°	32	36	34	37	37	36
90°	29	23	1	23	29	16
95°	74	70	56	70	74	74
105°	227	225	214	225	227	240
115°	406	406	405	406	406	402
125°	586	593	592	593	586	524
135°	768	773	768	773	768	590
145°	932	937	932	937	932	582
155°	1066	1068	1068	1068	1066	491
165°	1159	1160	1163	1160	1159	327
175°	1205	1206	1209	1206	1205	114
180°	1212	1212	1212	1212	1212	



TEST NUMBER: P831610

CATALOG NUMBER: S123DIP-S775D1025U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9
2.5°	2372.5	2370.0	2367.6	2355.4	2343.2	2337.3	2331.5	2313.9	2296.3	2276.8	2257.2
5°	2651.8	2658.7	2665.5	2657.7	2649.9	2625.9	2602.0	2570.3	2538.5	2502.9	2467.2
7.5°	2780.8	2784.7	2788.6	2783.7	2778.8	2772.5	2766.1	2737.8	2709.5	2672.8	2636.2
10°	2646.9	2655.7	2664.5	2683.6	2702.6	2724.1	2745.6	2741.7	2737.8	2727.0	2716.3
12.5°	2353.0	2363.7	2374.4	2412.5	2450.6	2499.5	2548.3	2590.3	2632.3	2661.6	2690.9
15°	1955.4	1985.2	2015.0	2049.7	2084.3	2156.1	2227.9	2316.3	2404.7	2483.3	2562.0
17.5°	1610.6	1621.9	1633.1	1670.2	1707.3	1797.7	1888.0	1990.1	2092.2	2222.6	2353.0
20°	1325.4	1335.7	1345.9	1394.8	1443.6	1514.4	1585.2	1700.0	1814.8	1954.9	2095.1
22.5°	1113.5	1129.6	1145.7	1173.1	1200.4	1268.3	1336.2	1438.2	1540.3	1695.1	1849.9
25°	974.8	986.5	998.2	1014.8	1031.4	1085.6	1139.8	1223.8	1307.8	1450.0	1592.1
27.5°	880.0	884.9	889.8	906.4	923.0	958.2	993.3	1065.6	1137.9	1258.5	1379.1
30°	805.8	809.2	812.6	827.3	841.9	865.9	889.8	942.1	994.3	1100.8	1207.2
32.5°	754.0	756.5	758.9	770.2	781.4	798.5	815.6	853.7	891.8	979.7	1067.6
35°	707.2	708.6	710.1	718.4	726.7	739.4	752.1	780.9	809.7	879.1	948.4
37.5°	666.1	668.1	670.0	674.9	679.8	691.0	702.3	725.2	748.2	801.4	854.6
40°	626.1	629.5	632.9	636.3	639.8	649.0	658.3	675.9	693.5	737.4	781.4
42.5°	591.9	595.3	598.7	600.2	601.7	607.0	612.4	628.5	644.6	677.4	710.1
45°	558.7	560.2	561.6	563.1	564.6	568.9	573.3	587.5	601.7	630.0	658.3
47.5°	528.4	528.4	528.4	529.4	530.4	534.3	538.2	548.4	558.7	580.7	602.6
50°	499.1	499.1	499.1	497.6	496.2	498.6	501.1	508.9	516.7	536.2	555.8
52.5°	463.9	463.9	463.9	464.4	464.9	464.9	464.9	471.8	478.6	496.2	513.8
55°	428.8	430.7	432.7	431.2	429.8	430.7	431.7	436.1	440.5	454.7	468.8
57.5°	393.6	394.6	395.6	395.1	394.6	395.1	395.6	399.5	403.4	414.1	424.9
60°	360.4	360.4	360.4	359.4	358.5	359.4	360.4	362.4	364.3	374.1	383.9
62.5°	323.3	323.8	324.3	324.8	325.3	324.3	323.3	325.7	328.2	335.5	342.8
65°	286.2	286.7	287.2	288.6	290.1	289.1	288.1	290.6	293.0	298.4	303.8
67.5°	253.0	252.0	251.0	251.5	252.0	253.5	254.9	255.4	255.9	261.8	267.6
70°	213.9	214.9	215.9	215.4	214.9	215.4	215.9	217.3	218.8	223.2	227.6
72.5°	178.7	179.2	179.7	179.7	179.7	180.7	181.7	183.1	184.6	187.0	189.5
75°	146.5	146.5	146.5	147.5	148.5	149.0	149.4	149.4	149.4	151.4	153.3
77.5°	111.3	113.8	116.2	115.7	115.3	116.2	117.2	118.7	120.1	121.1	122.1
80°	81.1	81.1	81.1	81.6	82.0	83.5	85.0	86.0	86.9	88.9	90.8
82.5°	51.8	52.3	52.7	54.2	55.7	56.7	57.6	59.1	60.6	60.6	60.6
85°	32.2	31.3	30.3	31.3	32.2	33.2	34.2	34.7	35.2	36.1	37.1
87.5°	15.6	15.6	15.6	15.6	15.6	16.1	16.6	16.6	16.6	16.6	16.6
90°	28.6	28.1	27.7	27.3	26.9	26.2	25.4	24.5	23.7	22.9	20.1
92.5°	40.9	41.4	41.8	42.2	42.6	42.5	41.9	41.3	40.6	40.0	38.7
95°	74.3	74.3	74.3	74.3	74.3	73.9	73.0	72.2	71.3	70.5	68.8
97.5°	106.7	106.9	107.1	107.3	107.5	107.1	106.0	105.0	103.9	102.8	101.6
100°	144.7	144.3	143.9	143.5	143.1	142.5	141.9	141.3	140.6	140.0	138.9
102.5°	183.8	184.0	184.2	184.4	184.6	184.4	183.8	183.2	182.5	181.9	180.4
105°	226.6	226.2	225.8	225.4	225.0	224.7	224.7	224.7	224.7	224.7	222.8
107.5°	270.5	270.7	270.9	271.1	271.3	271.1	270.5	269.8	269.2	268.5	267.7
110°	315.2	315.6	316.1	316.5	316.9	316.7	315.8	315.0	314.2	313.3	312.9



TEST NUMBER: P831610

CATALOG NUMBER: S123DIP-S775D1025U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	362.8	362.8	362.8	362.8	362.8	362.3	361.2	360.2	359.1	358.1	358.1
115°	405.7	405.9	406.1	406.3	406.5	406.5	406.3	406.1	405.9	405.7	406.1
117.5°	449.5	450.1	450.8	451.4	452.0	452.3	452.3	452.3	452.3	452.3	452.8
120°	496.1	496.6	497.0	497.4	497.8	498.2	498.4	498.6	498.8	499.0	500.1
122.5°	540.9	541.5	542.2	542.8	543.4	544.1	544.7	545.3	546.0	546.6	547.0
125°	585.7	586.5	587.4	588.2	589.0	589.9	590.7	591.6	592.4	593.3	593.7
127.5°	630.4	631.3	632.1	633.0	633.8	634.9	636.1	637.4	638.7	639.9	640.4
130°	674.2	675.7	677.2	678.7	680.1	681.3	682.2	683.0	683.9	684.7	685.3
132.5°	719.9	721.0	722.0	723.1	724.2	725.2	726.3	727.3	728.4	729.5	729.9
135°	767.5	768.0	768.4	768.8	769.2	769.9	770.7	771.6	772.4	773.3	773.5
137.5°	809.4	810.1	810.7	811.4	812.0	812.8	813.9	814.9	816.0	817.1	816.4
140°	850.4	851.9	853.4	854.8	856.3	857.2	857.4	857.6	857.8	858.0	857.8
142.5°	892.3	893.4	894.4	895.5	896.5	897.2	897.4	897.6	897.8	898.0	897.6
145°	932.3	933.1	934.0	934.8	935.7	936.2	936.4	936.6	936.8	937.1	936.4
147.5°	968.5	969.7	971.0	972.3	973.6	974.2	974.2	974.2	974.2	974.2	973.6
150°	1002.8	1004.0	1005.3	1006.6	1007.8	1008.5	1008.5	1008.5	1008.5	1008.5	1008.1
152.5°	1036.1	1037.2	1038.2	1039.3	1040.3	1040.6	1040.2	1039.8	1039.4	1038.9	1038.7
155°	1065.6	1067.1	1068.6	1070.1	1071.5	1071.9	1071.0	1070.2	1069.3	1068.5	1068.3
157.5°	1093.2	1094.5	1095.8	1097.0	1098.3	1098.5	1097.7	1096.8	1096.0	1095.1	1094.9
160°	1119.9	1120.7	1121.6	1122.4	1123.3	1123.2	1122.1	1121.1	1120.0	1118.9	1118.9
162.5°	1139.9	1141.4	1142.9	1144.3	1145.8	1146.0	1145.0	1143.9	1142.9	1141.8	1141.6
165°	1158.9	1160.4	1161.9	1163.4	1164.9	1165.0	1163.7	1162.4	1161.2	1159.9	1159.9
167.5°	1176.1	1177.3	1178.6	1179.9	1181.2	1181.2	1179.9	1178.6	1177.3	1176.1	1175.9
170°	1188.5	1189.9	1191.4	1192.9	1194.4	1194.4	1192.9	1191.4	1189.9	1188.5	1188.5
172.5°	1198.0	1199.5	1200.9	1202.4	1203.9	1204.0	1202.7	1201.5	1200.2	1198.9	1198.9
175°	1204.6	1206.1	1207.6	1209.1	1210.6	1210.7	1209.4	1208.1	1206.9	1205.6	1205.6
177.5°	1208.5	1209.9	1211.4	1212.9	1214.4	1214.5	1213.2	1211.9	1210.7	1209.4	1209.4
180°	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3



TEST NUMBER: P831610

CATALOG NUMBER: S123DIP-S775D1025U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9
2.5°	2251.4	2245.5	2224.0	2202.5	2178.1	2153.7	2135.6	2117.6	2090.7	2063.8	2041.9
5°	2439.9	2412.5	2367.1	2321.7	2260.2	2198.6	2157.1	2115.6	2059.9	2004.3	1959.8
7.5°	2589.3	2542.4	2478.9	2415.5	2334.9	2254.3	2178.1	2101.9	2017.0	1932.0	1862.6
10°	2684.6	2652.8	2579.6	2506.3	2398.4	2290.4	2184.0	2077.5	1968.1	1858.7	1766.9
12.5°	2693.8	2696.8	2629.4	2562.0	2439.9	2317.8	2188.4	2059.0	1921.2	1783.5	1676.6
15°	2612.3	2662.6	2625.5	2588.3	2465.3	2342.2	2183.0	2023.8	1865.1	1706.4	1582.8
17.5°	2460.9	2568.8	2574.2	2579.6	2456.5	2333.4	2157.1	1980.8	1801.1	1621.4	1491.5
20°	2254.3	2413.5	2468.2	2522.9	2422.8	2322.7	2133.2	1943.7	1742.5	1541.3	1405.0
22.5°	2043.3	2236.7	2336.8	2437.0	2362.7	2288.5	2086.8	1885.1	1672.7	1460.2	1322.0
25°	1803.1	2014.0	2167.9	2321.7	2276.3	2230.9	2032.1	1833.3	1607.2	1381.1	1240.0
27.5°	1593.5	1807.9	1993.5	2179.1	2169.3	2159.6	1962.3	1765.0	1533.5	1302.0	1165.7
30°	1407.0	1606.7	1814.3	2021.8	2045.8	2069.7	1879.2	1688.8	1456.8	1224.8	1093.5
32.5°	1241.9	1416.3	1639.0	1861.7	1908.5	1955.4	1783.5	1611.6	1382.1	1152.5	1026.1
35°	1106.6	1264.9	1487.6	1710.3	1768.9	1827.5	1678.0	1528.6	1304.9	1081.2	960.6
37.5°	987.0	1119.3	1336.7	1554.0	1625.8	1697.6	1563.8	1429.9	1220.4	1010.9	900.1
40°	887.9	994.3	1194.1	1393.8	1476.8	1559.8	1449.5	1339.1	1140.3	941.6	839.5
42.5°	804.8	899.6	1080.8	1261.9	1341.5	1421.1	1327.9	1234.6	1057.8	881.0	787.7
45°	734.0	809.7	974.3	1138.9	1214.6	1290.3	1210.2	1130.1	974.3	818.5	731.6
47.5°	667.6	732.6	873.2	1013.8	1081.2	1148.6	1086.1	1023.6	891.8	759.9	681.3
50°	608.0	660.3	783.3	906.4	965.0	1023.6	968.4	913.2	804.8	696.4	628.0
52.5°	556.2	598.7	701.8	804.8	855.1	905.4	858.1	810.7	724.7	638.8	579.2
55°	505.0	541.1	630.5	719.9	754.0	788.2	751.6	715.0	645.6	576.3	526.0
57.5°	457.1	489.3	562.6	635.9	662.2	688.6	655.4	622.2	569.9	517.7	475.7
60°	410.2	436.6	497.6	558.7	574.8	590.9	564.1	537.2	500.6	463.9	426.3
62.5°	366.8	390.7	436.1	481.5	492.3	503.0	482.5	462.0	434.2	406.3	377.0
65°	321.8	339.9	377.0	414.1	421.0	427.8	409.7	391.7	370.7	349.7	328.2
67.5°	280.3	293.0	323.3	353.6	354.1	354.6	339.9	325.3	313.5	301.8	284.7
70°	239.8	252.0	272.0	292.0	292.5	293.0	281.3	269.6	260.8	252.0	239.3
72.5°	198.3	207.1	222.2	237.3	236.4	235.4	228.1	220.7	213.9	207.1	197.8
75°	160.7	168.0	178.3	188.5	185.6	182.6	178.7	174.8	169.0	163.1	157.3
77.5°	126.5	130.9	136.7	142.6	140.6	138.7	135.3	131.9	127.5	123.1	120.6
80°	92.8	94.7	98.7	102.6	101.6	100.6	96.7	92.8	91.8	90.8	87.4
82.5°	63.0	65.4	66.4	67.4	66.9	66.4	63.5	60.6	59.6	58.6	58.1
85°	37.6	38.1	38.6	39.1	37.6	36.1	35.2	34.2	34.2	34.2	33.7
87.5°	17.1	17.6	17.6	17.6	17.1	16.6	15.6	14.7	15.1	15.6	15.6
90°	17.4	14.6	11.9	9.4	7.3	5.2	3.1	1.0	3.1	5.2	7.3
92.5°	37.5	36.2	34.9	33.6	32.4	31.1	29.8	28.6	29.8	31.1	32.4
95°	67.1	65.4	63.7	62.1	60.6	59.1	57.7	56.2	57.7	59.1	60.6
97.5°	100.3	99.0	97.8	96.6	95.5	94.5	93.4	92.4	93.4	94.5	95.5
100°	137.9	136.8	135.8	134.6	133.3	132.1	130.8	129.5	130.8	132.1	133.3
102.5°	178.9	177.4	176.0	174.9	174.3	173.6	173.0	172.4	173.0	173.6	174.3
105°	220.9	219.0	217.1	216.0	215.5	215.1	214.7	214.3	214.7	215.1	215.5
107.5°	266.9	266.0	265.2	264.6	264.4	264.2	264.0	263.8	264.0	264.2	264.4
110°	312.5	312.0	311.6	311.2	310.8	310.3	309.9	309.5	309.9	310.3	310.8



TEST NUMBER: P831610

CATALOG NUMBER: S123DIP-S775D1025U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	358.1	358.1	358.1	358.0	357.7	357.5	357.3	357.1	357.3	357.5	357.7
115°	406.5	406.9	407.4	407.3	406.6	406.0	405.4	404.7	405.4	406.0	406.6
117.5°	453.2	453.6	454.0	454.1	453.9	453.7	453.5	453.3	453.5	453.7	453.9
120°	501.1	502.2	503.2	503.1	501.9	500.6	499.3	498.0	499.3	500.6	501.9
122.5°	547.5	547.9	548.3	548.1	547.2	546.4	545.6	544.7	545.6	546.4	547.2
125°	594.1	594.5	595.0	594.9	594.2	593.6	593.0	592.3	593.0	593.6	594.2
127.5°	640.8	641.2	641.6	641.2	639.9	638.7	637.4	636.1	637.4	638.7	639.9
130°	686.0	686.6	687.2	686.7	685.0	683.3	681.6	679.9	681.6	683.3	685.0
132.5°	730.3	730.7	731.1	730.5	728.8	727.1	725.4	723.7	725.4	727.1	728.8
135°	773.7	773.9	774.1	773.6	772.3	771.0	769.8	768.5	769.8	771.0	772.3
137.5°	815.8	815.2	814.5	813.7	812.6	811.6	810.5	809.4	810.5	811.6	812.6
140°	857.6	857.4	857.2	856.5	855.5	854.4	853.4	852.3	853.4	854.4	855.5
142.5°	897.2	896.7	896.3	895.6	894.5	893.5	892.4	891.3	892.4	893.5	894.5
145°	935.8	935.1	934.5	934.0	933.6	933.1	932.7	932.3	932.7	933.1	933.6
147.5°	972.9	972.3	971.7	970.9	970.1	969.2	968.4	967.5	968.4	969.2	970.1
150°	1007.6	1007.2	1006.8	1006.4	1005.9	1005.5	1005.1	1004.7	1005.1	1005.5	1005.9
152.5°	1038.5	1038.3	1038.1	1037.7	1037.0	1036.4	1035.8	1035.1	1035.8	1036.4	1037.0
155°	1068.0	1067.8	1067.6	1067.5	1067.5	1067.5	1067.5	1067.5	1067.5	1067.5	1067.5
157.5°	1094.7	1094.5	1094.3	1094.3	1094.5	1094.7	1094.9	1095.1	1094.9	1094.7	1094.5
160°	1118.9	1118.9	1118.9	1119.2	1119.6	1120.0	1120.4	1120.8	1120.4	1120.0	1119.6
162.5°	1141.4	1141.2	1141.0	1141.2	1141.8	1142.4	1143.1	1143.7	1143.1	1142.4	1141.8
165°	1159.9	1159.9	1159.9	1160.2	1160.8	1161.5	1162.1	1162.7	1162.1	1161.5	1160.8
167.5°	1175.7	1175.4	1175.2	1175.5	1176.4	1177.2	1178.1	1178.9	1178.1	1177.2	1176.4
170°	1188.5	1188.5	1188.5	1188.9	1189.7	1190.6	1191.4	1192.3	1191.4	1190.6	1189.7
172.5°	1198.9	1198.9	1198.9	1199.4	1200.2	1201.1	1201.9	1202.7	1201.9	1201.1	1200.2
175°	1205.6	1205.6	1205.6	1206.0	1206.9	1207.7	1208.6	1209.4	1208.6	1207.7	1206.9
177.5°	1209.4	1209.4	1209.4	1209.8	1210.7	1211.5	1212.4	1213.2	1212.4	1211.5	1210.7
180°	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3



TEST NUMBER: P831610

CATALOG NUMBER: S123DIP-S775D1025U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9	2104.9
2.5°	2019.9	2000.8	1981.8	1967.1	1952.5	1927.6	1902.7	1896.8	1891.0	1882.7	1874.4
5°	1915.4	1868.5	1821.6	1779.6	1737.6	1704.9	1672.2	1650.7	1629.2	1613.6	1597.9
7.5°	1793.3	1723.0	1652.6	1602.8	1553.0	1505.6	1458.3	1443.1	1428.0	1407.5	1387.0
10°	1675.1	1597.4	1519.8	1454.8	1389.9	1343.5	1297.1	1278.5	1260.0	1234.1	1208.2
12.5°	1569.6	1484.6	1399.7	1334.2	1268.8	1223.8	1178.9	1152.1	1125.2	1110.5	1095.9
15°	1459.2	1368.4	1277.6	1217.0	1156.5	1115.9	1075.4	1051.9	1028.5	1014.3	1000.2
17.5°	1361.6	1271.7	1181.8	1123.7	1065.6	1028.5	991.4	970.9	950.4	939.6	928.9
20°	1268.8	1180.9	1093.0	1036.3	979.7	949.4	919.1	905.9	892.7	883.9	875.2
22.5°	1183.8	1097.4	1010.9	962.6	914.2	889.8	865.4	856.1	846.8	839.5	832.2
25°	1098.8	1021.7	944.5	903.5	862.5	842.4	822.4	813.1	803.9	796.5	789.2
27.5°	1029.5	955.7	882.0	846.8	811.7	796.0	780.4	773.1	765.8	758.9	752.1
30°	962.1	896.2	830.2	799.9	769.7	755.5	741.3	734.0	726.7	720.3	714.0
32.5°	899.6	842.9	786.3	758.4	730.6	718.9	707.2	698.4	689.6	684.7	679.8
35°	840.0	789.2	738.4	715.5	692.5	680.8	669.1	661.7	654.4	650.5	646.6
37.5°	789.2	743.8	698.4	676.4	654.4	643.2	631.9	625.6	619.2	617.8	616.3
40°	737.4	698.4	659.3	637.8	616.3	606.6	596.8	592.9	589.0	588.0	587.0
42.5°	694.5	656.4	618.3	598.7	579.2	570.9	562.6	560.6	558.7	560.2	561.6
45°	644.6	612.9	581.2	563.1	545.0	538.2	531.3	529.9	528.4	531.3	534.3
47.5°	602.6	573.3	544.0	526.9	509.9	505.0	500.1	499.6	499.1	503.0	506.9
50°	559.7	531.3	503.0	489.3	475.7	471.3	466.9	468.3	469.8	476.2	482.5
52.5°	519.6	493.3	466.9	454.2	441.5	438.6	435.6	439.0	442.5	449.3	456.1
55°	475.7	451.7	427.8	418.0	408.3	405.3	402.4	409.3	416.1	422.4	428.8
57.5°	433.7	412.7	391.7	382.9	374.1	373.6	373.1	379.5	385.8	392.6	399.5
60°	388.7	371.2	353.6	346.7	339.9	340.9	341.9	349.2	356.5	361.9	367.3
62.5°	347.7	333.1	318.4	312.1	305.7	308.2	310.6	317.9	325.3	331.6	337.9
65°	306.7	294.5	282.3	277.9	273.5	276.9	280.3	286.7	293.0	297.4	301.8
67.5°	267.6	257.4	247.1	243.7	240.3	243.7	247.1	253.5	259.8	264.2	268.6
70°	226.6	218.3	210.0	207.6	205.1	209.0	212.9	218.3	223.7	228.1	232.5
72.5°	188.5	182.2	175.8	175.3	174.8	178.3	181.7	187.0	192.4	195.3	198.3
75°	151.4	148.0	144.6	144.1	143.6	147.0	150.4	153.3	156.3	158.7	161.2
77.5°	118.2	115.3	112.3	112.8	113.3	115.7	118.2	121.1	124.0	125.5	127.0
80°	84.0	83.0	82.0	83.0	84.0	86.0	87.9	89.9	91.8	92.8	93.8
82.5°	57.6	56.7	55.7	57.1	58.6	60.1	61.5	63.0	64.5	65.0	65.4
85°	33.2	34.7	36.1	36.1	36.1	36.6	37.1	37.6	38.1	37.6	37.1
87.5°	15.6	16.1	16.6	16.6	16.6	17.1	17.6	17.6	17.6	17.1	16.6
90°	9.4	11.9	14.6	17.4	20.1	22.9	23.7	24.5	25.4	26.2	26.9
92.5°	33.6	34.9	36.2	37.5	38.7	40.0	40.6	41.3	41.9	42.5	42.6
95°	62.1	63.7	65.4	67.1	68.8	70.5	71.3	72.2	73.0	73.9	74.3
97.5°	96.6	97.8	99.0	100.3	101.6	102.8	103.9	105.0	106.0	107.1	107.5
100°	134.6	135.8	136.8	137.9	138.9	140.0	140.6	141.3	141.9	142.5	143.1
102.5°	174.9	176.0	177.4	178.9	180.4	181.9	182.5	183.2	183.8	184.4	184.6
105°	216.0	217.1	219.0	220.9	222.8	224.7	224.7	224.7	224.7	224.7	225.0
107.5°	264.6	265.2	266.0	266.9	267.7	268.5	269.2	269.8	270.5	271.1	271.3
110°	311.2	311.6	312.0	312.5	312.9	313.3	314.2	315.0	315.8	316.7	316.9



TEST NUMBER: P831610

CATALOG NUMBER: S123DIP-S775D1025U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	358.0	358.1	358.1	358.1	358.1	358.1	359.1	360.2	361.2	362.3	362.8
115°	407.3	407.4	406.9	406.5	406.1	405.7	405.9	406.1	406.3	406.5	406.5
117.5°	454.1	454.0	453.6	453.2	452.8	452.3	452.3	452.3	452.3	452.3	452.0
120°	503.1	503.2	502.2	501.1	500.1	499.0	498.8	498.6	498.4	498.2	497.8
122.5°	548.1	548.3	547.9	547.5	547.0	546.6	546.0	545.3	544.7	544.1	543.4
125°	594.9	595.0	594.5	594.1	593.7	593.3	592.4	591.6	590.7	589.9	589.0
127.5°	641.2	641.6	641.2	640.8	640.4	639.9	638.7	637.4	636.1	634.9	633.8
130°	686.7	687.2	686.6	686.0	685.3	684.7	683.9	683.0	682.2	681.3	680.1
132.5°	730.5	731.1	730.7	730.3	729.9	729.5	728.4	727.3	726.3	725.2	724.2
135°	773.6	774.1	773.9	773.7	773.5	773.3	772.4	771.6	770.7	769.9	769.2
137.5°	813.7	814.5	815.2	815.8	816.4	817.1	816.0	814.9	813.9	812.8	812.0
140°	856.5	857.2	857.4	857.6	857.8	858.0	857.8	857.6	857.4	857.2	856.3
142.5°	895.6	896.3	896.7	897.2	897.6	898.0	897.8	897.6	897.4	897.2	896.5
145°	934.0	934.5	935.1	935.8	936.4	937.1	936.8	936.6	936.4	936.2	935.7
147.5°	970.9	971.7	972.3	972.9	973.6	974.2	974.2	974.2	974.2	974.2	973.6
150°	1006.4	1006.8	1007.2	1007.6	1008.1	1008.5	1008.5	1008.5	1008.5	1008.5	1007.8
152.5°	1037.7	1038.1	1038.3	1038.5	1038.7	1038.9	1039.4	1039.8	1040.2	1040.6	1040.3
155°	1067.5	1067.6	1067.8	1068.0	1068.3	1068.5	1069.3	1070.2	1071.0	1071.9	1071.5
157.5°	1094.3	1094.3	1094.5	1094.7	1094.9	1095.1	1096.0	1096.8	1097.7	1098.5	1098.3
160°	1119.2	1118.9	1118.9	1118.9	1118.9	1118.9	1120.0	1121.1	1122.1	1123.2	1123.3
162.5°	1141.2	1141.0	1141.2	1141.4	1141.6	1141.8	1142.9	1143.9	1145.0	1146.0	1145.8
165°	1160.2	1159.9	1159.9	1159.9	1159.9	1159.9	1161.2	1162.4	1163.7	1165.0	1164.9
167.5°	1175.5	1175.2	1175.4	1175.7	1175.9	1176.1	1177.3	1178.6	1179.9	1181.2	1181.2
170°	1188.9	1188.5	1188.5	1188.5	1188.5	1188.5	1189.9	1191.4	1192.9	1194.4	1194.4
172.5°	1199.4	1198.9	1198.9	1198.9	1198.9	1198.9	1200.2	1201.5	1202.7	1204.0	1203.9
175°	1206.0	1205.6	1205.6	1205.6	1205.6	1205.6	1206.9	1208.1	1209.4	1210.7	1210.6
177.5°	1209.8	1209.4	1209.4	1209.4	1209.4	1209.4	1210.7	1211.9	1213.2	1214.5	1214.4
180°	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3	1212.3



TEST NUMBER: P831610

CATALOG NUMBER: S123DIP-S775D1025U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	2104.9	2104.9	2104.9	2104.9
2.5°	1870.9	1867.5	1853.8	1840.2
5°	1586.2	1574.5	1570.6	1566.7
7.5°	1386.0	1385.0	1364.5	1344.0
10°	1209.7	1211.1	1192.6	1174.0
12.5°	1083.7	1071.5	1070.0	1068.5
15°	988.9	977.7	975.8	973.8
17.5°	922.0	915.2	913.2	911.3
20°	871.2	867.3	863.9	860.5
22.5°	827.3	822.4	819.5	816.5
25°	784.8	780.4	779.4	778.5
27.5°	746.7	741.3	741.3	741.3
30°	710.6	707.2	705.7	704.2
32.5°	676.9	673.9	673.9	673.9
35°	645.1	643.7	641.7	639.8
37.5°	616.3	616.3	615.3	614.4
40°	588.5	589.9	589.9	589.9
42.5°	563.1	564.6	564.6	564.6
45°	536.7	539.2	540.1	541.1
47.5°	510.8	514.7	515.7	516.7
50°	485.4	488.4	488.9	489.3
52.5°	459.6	463.0	465.4	467.9
55°	432.2	435.6	437.1	438.6
57.5°	402.9	406.3	406.8	407.3
60°	370.7	374.1	375.1	376.0
62.5°	339.9	341.9	342.8	343.8
65°	304.7	307.7	309.6	311.6
67.5°	271.0	273.5	273.5	273.5
70°	233.4	234.4	235.9	237.3
72.5°	198.8	199.3	199.3	199.3
75°	162.1	163.1	163.6	164.1
77.5°	127.5	128.0	128.0	128.0
80°	93.3	92.8	92.8	92.8
82.5°	64.0	62.5	62.5	62.5
85°	36.6	36.1	36.6	37.1
87.5°	16.6	16.6	16.6	16.6
90°	27.3	27.7	28.1	28.6
92.5°	42.2	41.8	41.4	40.9
95°	74.3	74.3	74.3	74.3
97.5°	107.3	107.1	106.9	106.7
100°	143.5	143.9	144.3	144.7
102.5°	184.4	184.2	184.0	183.8
105°	225.4	225.8	226.2	226.6
107.5°	271.1	270.9	270.7	270.5
110°	316.5	316.1	315.6	315.2



TEST NUMBER: P831610

CATALOG NUMBER: S123DIP-S775D1025U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	362.8	362.8	362.8	362.8
115°	406.3	406.1	405.9	405.7
117.5°	451.4	450.8	450.1	449.5
120°	497.4	497.0	496.6	496.1
122.5°	542.8	542.2	541.5	540.9
125°	588.2	587.4	586.5	585.7
127.5°	633.0	632.1	631.3	630.4
130°	678.7	677.2	675.7	674.2
132.5°	723.1	722.0	721.0	719.9
135°	768.8	768.4	768.0	767.5
137.5°	811.4	810.7	810.1	809.4
140°	854.8	853.4	851.9	850.4
142.5°	895.5	894.4	893.4	892.3
145°	934.8	934.0	933.1	932.3
147.5°	972.3	971.0	969.7	968.5
150°	1006.6	1005.3	1004.0	1002.8
152.5°	1039.3	1038.2	1037.2	1036.1
155°	1070.1	1068.6	1067.1	1065.6
157.5°	1097.0	1095.8	1094.5	1093.2
160°	1122.4	1121.6	1120.7	1119.9
162.5°	1144.3	1142.9	1141.4	1139.9
165°	1163.4	1161.9	1160.4	1158.9
167.5°	1179.9	1178.6	1177.3	1176.1
170°	1192.9	1191.4	1189.9	1188.5
172.5°	1202.4	1200.9	1199.5	1198.0
175°	1209.1	1207.6	1206.1	1204.6
177.5°	1212.9	1211.4	1209.9	1208.5
180°	1212.3	1212.3	1212.3	1212.3

TEST NUMBER: P831610

CATALOG NUMBER: S123DIP-S775D1025U950-4F0-1E-UDD-G1

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.43	15.25	15.39	16.23	17.50	16.66	17.49	17.63	18.46	19.74
	3H	16.07	16.81	17.05	17.79	19.09	18.09	18.83	19.06	19.81	21.10
	4H	16.65	17.35	17.64	18.33	19.64	18.54	19.24	19.52	20.22	21.52
	6H	17.02	17.66	18.02	18.65	19.97	18.81	19.45	19.81	20.44	21.76
	8H	17.11	17.73	18.12	18.73	20.04	18.87	19.48	19.88	20.49	21.80
	12H	17.16	17.74	18.17	18.74	20.08	18.89	19.47	19.90	20.47	21.81
4H	2H	15.00	15.70	15.99	16.68	17.99	16.82	17.52	17.82	18.51	19.81
	3H	16.82	17.41	17.83	18.42	19.74	18.44	19.02	19.44	20.04	21.35
	4H	17.52	18.05	18.53	19.06	20.40	19.02	19.56	20.03	20.56	21.90
	6H	18.00	18.45	19.02	19.48	20.82	19.43	19.88	20.45	20.91	22.25
	8H	18.13	18.56	19.15	19.58	20.93	19.54	19.96	20.56	20.99	22.34
	12H	18.20	18.58	19.24	19.62	20.98	19.58	19.97	20.62	21.00	22.36
8H	4H	17.79	18.21	18.81	19.24	20.59	19.13	19.55	20.15	20.58	21.93
	6H	18.37	18.73	19.42	19.79	21.14	19.63	19.98	20.67	21.05	22.39
	8H	18.58	18.89	19.63	19.94	21.31	19.81	20.12	20.86	21.17	22.54
	12H	18.70	18.98	19.76	20.02	21.43	19.91	20.18	20.96	21.23	22.64
12H	4H	17.78	18.17	18.82	19.21	20.57	19.10	19.48	20.14	20.52	21.88
	6H	18.42	18.73	19.48	19.79	21.15	19.64	19.95	20.69	21.00	22.37
	8H	18.66	18.93	19.71	19.97	21.39	19.84	20.11	20.90	21.16	22.57