

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831952

Luminaire Tested: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P831952
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-2, G3-1807-864-9)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8653.1 lumens
Efficiency: N/A
Efficacy: 118.2 lumens/watt
Spacing Criteria (0/90/45): 0.55 / 1.17 / 0.8
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 73.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P831952

CATALOG NUMBER: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1

Luminous Intensity Polar Plot

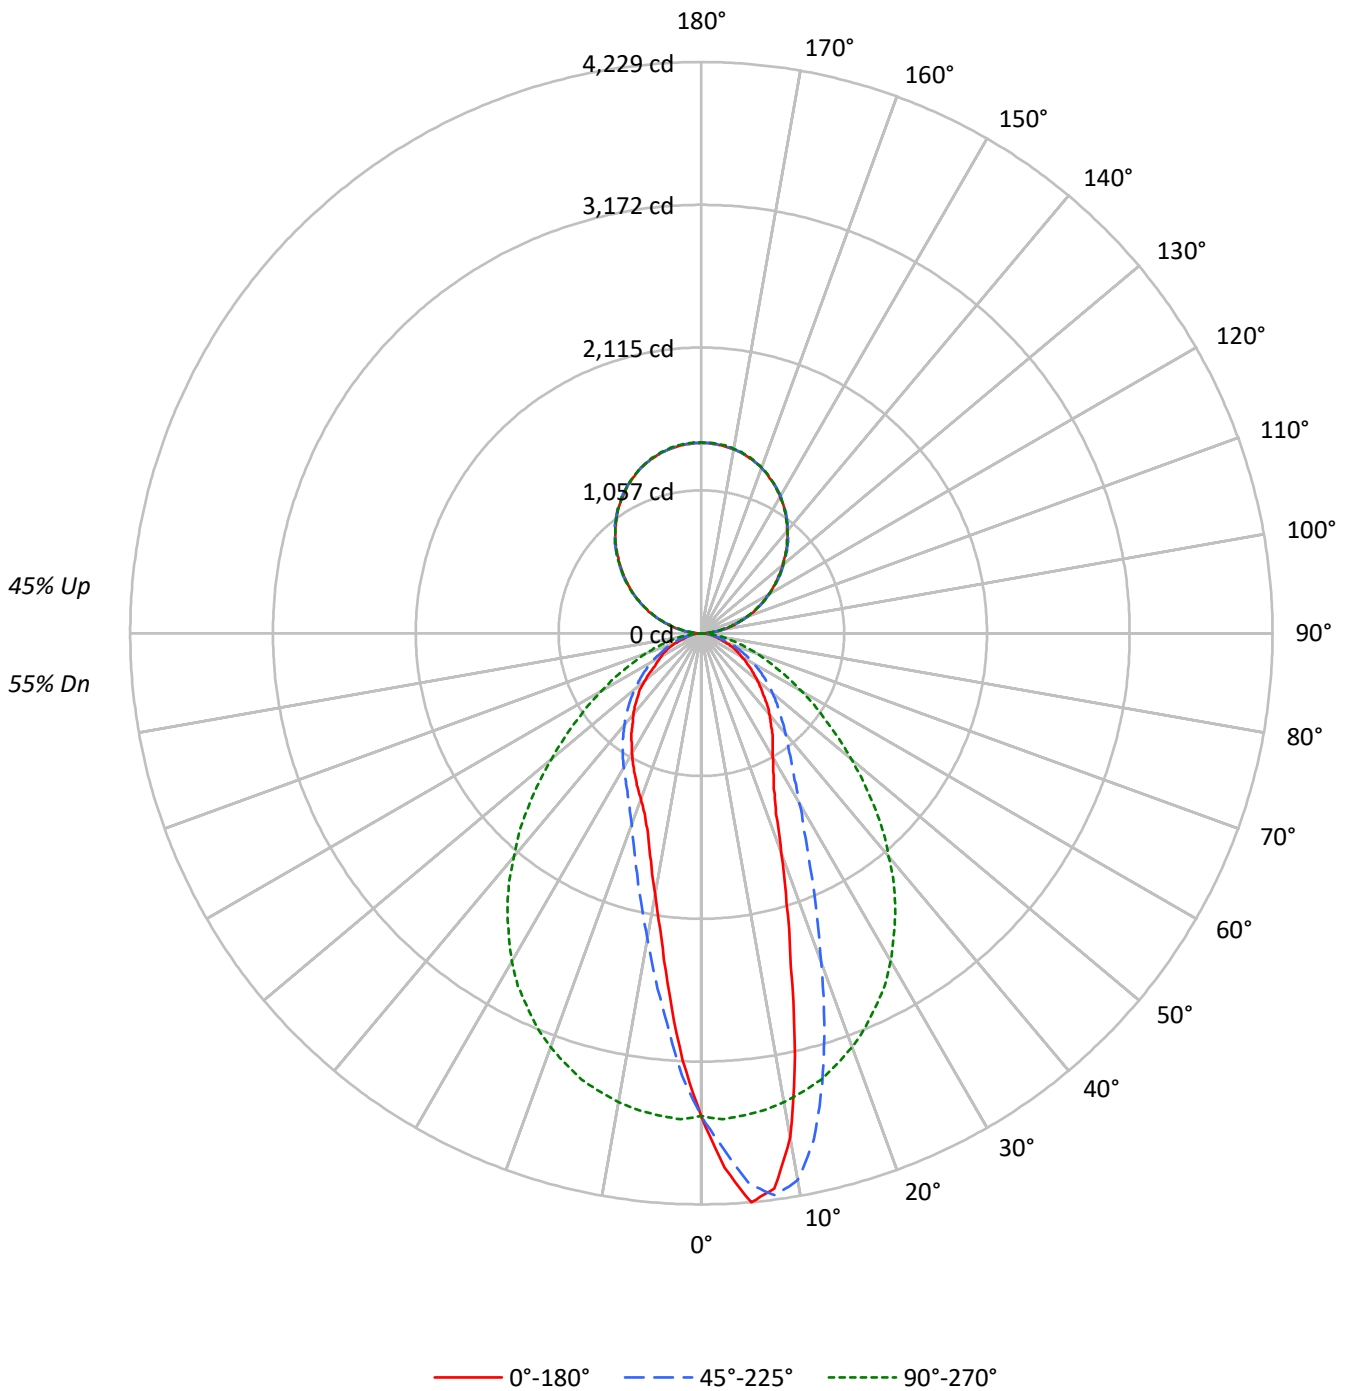



TEST NUMBER: P831952

CATALOG NUMBER: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55				
1	100	96	92	89	93	89	86	83	77	74	72	65	64	62	55	54	53	48				
2	92	85	79	74	85	79	74	70	68	65	61	58	56	54	49	48	46	42				
3	84	75	68	63	78	70	64	60	61	57	53	53	49	46	45	42	40	36				
4	78	67	60	54	72	63	57	51	55	50	46	48	44	41	41	38	36	32				
5	72	61	53	47	67	57	50	45	50	45	41	43	39	36	37	34	32	29				
6	66	55	47	42	62	52	45	40	46	40	36	40	36	32	34	31	29	26				
7	62	50	43	37	58	47	40	36	42	36	32	37	32	29	32	28	26	24				
8	58	46	39	33	54	43	37	32	38	33	29	34	30	26	29	26	24	22				
9	54	42	35	30	50	40	33	29	36	30	27	31	27	24	28	24	22	20				
10	51	39	32	28	47	37	31	26	33	28	24	29	25	22	26	23	20	18				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	38485	38485	38485	38485	38485
5°	45697	44239	38727	31306	29066
10°	41402	44935	38534	25083	21518
15°	28505	38528	38128	20501	17022
20°	19832	29662	37362	17287	14961
25°	15112	22607	36248	15365	13789
30°	13155	18074	34855	14266	12772
35°	12077	15247	32881	13340	11846
40°	11020	13616	30300	12431	10999
45°	9952	12452	27515	11571	10153
50°	9034	11489	24229	10727	9108
55°	8171	10550	21073	9903	7812
60°	7322	9593	18303	8994	7384
65°	6757	8512	15755	8084	6981
70°	5489	7358	13747	7311	5674
75°	4816	5852	11645	6068	4999
80°	4364	4953	9540	5089	4723
85°	3989	4347	7237	4619	4347

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 29032 cd/sqm



TEST NUMBER: P831952

CATALOG NUMBER: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	325.9	3.8
10°-20°	754.1	8.7
20°-30°	865.2	10.0
30°-40°	852.8	9.9
40°-50°	752.1	8.7
50°-60°	578.6	6.7
60°-70°	380.4	4.4
70°-80°	184.7	2.1
80°-90°	49.6	0.6
90°-100°	90.8	1.0
100°-110°	274.9	3.2
110°-120°	468.0	5.4
120°-130°	615.7	7.1
130°-140°	692.1	8.0
140°-150°	680.4	7.9
150°-160°	572.8	6.6
160°-170°	381.4	4.4
170°-180°	133.5	1.5
0°-30°	1945.2	22.5
0°-40°	2798.0	32.3
0°-60°	4128.7	47.7
0°-90°	4743.4	54.8
90°-120°	833.8	9.6
90°-150°	2822.0	32.6
90°-180°	3910.0	45.2
0°-180°	8653.1	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	3575	3575	3575	3575	3575	
5°	4229	4094	3584	2897	2690	386
15°	2558	3457	3422	1840	1528	722
25°	1272	1904	3052	1294	1161	601
35°	919	1160	2502	1015	902	573
45°	654	818	1808	760	667	508
55°	435	562	1123	528	416	391
65°	265	334	619	317	274	260
75°	116	141	280	146	120	125
85°	32	35	59	37	35	34
90°	33	27	1	27	33	18
95°	86	82	65	82	86	87
105°	264	262	249	262	264	280
115°	472	472	471	472	472	468
125°	682	691	689	691	682	610
135°	893	900	894	900	893	687
145°	1085	1091	1085	1091	1085	678
155°	1240	1244	1243	1244	1240	571
165°	1349	1350	1353	1350	1349	381
175°	1402	1403	1408	1403	1402	133
180°	1411	1411	1411	1411	1411	



TEST NUMBER: P831952

CATALOG NUMBER: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4
2.5°	3962.4	3949.9	3937.5	3933.8	3930.1	3918.4	3906.7	3880.3	3853.9	3826.8	3799.7
5°	4229.2	4230.6	4232.1	4228.4	4224.8	4209.4	4194.0	4161.7	4129.5	4094.3	4059.1
7.5°	4147.1	4170.5	4194.0	4198.4	4202.8	4214.5	4226.2	4218.9	4211.6	4198.4	4185.2
10°	3787.9	3786.5	3785.0	3811.4	3837.8	3916.2	3994.6	4034.9	4075.3	4111.2	4147.1
12.5°	3201.6	3203.8	3206.0	3292.5	3378.9	3453.0	3527.0	3629.6	3732.2	3842.9	3953.6
15°	2558.0	2593.9	2629.9	2706.8	2783.8	2895.2	3006.6	3144.4	3282.2	3457.4	3632.6
17.5°	2100.7	2116.1	2131.4	2205.5	2279.5	2385.1	2490.6	2646.7	2802.8	3028.6	3254.3
20°	1731.3	1745.2	1759.1	1812.6	1866.1	1967.3	2068.4	2217.2	2366.0	2589.5	2813.1
22.5°	1445.4	1472.5	1499.6	1535.6	1571.5	1644.8	1718.1	1869.8	2021.5	2225.3	2429.0
25°	1272.4	1284.9	1297.3	1328.1	1358.9	1429.3	1499.6	1600.1	1700.5	1903.5	2106.5
27.5°	1155.1	1158.8	1162.5	1185.2	1207.9	1253.4	1298.8	1391.9	1485.0	1652.1	1819.2
30°	1058.4	1065.0	1071.6	1089.2	1106.8	1139.8	1172.7	1238.7	1304.7	1454.2	1603.7
32.5°	983.6	987.3	991.0	1005.6	1020.3	1044.5	1068.7	1120.7	1172.7	1287.1	1401.4
35°	919.1	919.9	920.6	931.6	942.6	966.0	989.5	1032.7	1076.0	1160.3	1244.6
37.5°	845.8	851.0	856.1	864.2	872.2	892.7	913.3	948.5	983.6	1053.3	1122.9
40°	784.3	788.7	793.1	802.6	812.1	828.2	844.4	876.6	908.9	969.0	1029.1
42.5°	722.7	725.6	728.6	738.1	747.6	767.4	787.2	812.9	838.5	888.3	938.2
45°	653.8	661.1	668.5	678.7	689.0	705.8	722.7	749.1	775.5	818.0	860.5
47.5°	596.6	600.3	604.0	612.8	621.6	642.1	662.6	686.1	709.5	749.1	788.7
50°	539.5	540.9	542.4	550.5	558.5	576.8	595.2	622.3	649.4	686.1	722.7
52.5°	485.2	488.9	492.5	500.6	508.7	521.1	533.6	561.4	589.3	625.2	661.1
55°	435.4	437.6	439.8	445.6	451.5	466.2	480.8	505.0	529.2	562.2	595.2
57.5°	388.5	391.4	394.3	398.7	403.1	416.3	429.5	450.8	472.0	505.0	538.0
60°	340.1	343.8	347.4	352.6	357.7	367.9	378.2	397.3	416.3	445.6	475.0
62.5°	304.9	305.6	306.4	310.8	315.2	322.5	329.8	345.2	360.6	389.9	419.3
65°	265.3	267.5	269.7	271.9	274.1	280.0	285.9	299.0	312.2	334.2	356.2
67.5°	224.3	226.5	228.7	232.3	236.0	241.1	246.3	255.1	263.9	284.4	304.9
70°	174.4	174.4	174.4	180.3	186.2	195.0	203.8	210.4	217.0	233.8	250.7
72.5°	142.2	142.9	143.7	144.4	145.1	150.3	155.4	166.4	177.4	187.6	197.9
75°	115.8	116.5	117.3	118.0	118.7	120.2	121.7	125.3	129.0	140.7	152.5
77.5°	92.4	93.1	93.8	94.6	95.3	96.8	98.2	99.7	101.1	105.5	109.9
80°	70.4	71.1	71.8	72.6	73.3	74.0	74.8	76.2	77.7	79.9	82.1
82.5°	51.3	51.3	51.3	51.3	51.3	52.8	54.2	54.2	54.2	55.7	57.2
85°	32.3	32.3	32.3	33.0	33.7	33.7	33.7	34.4	35.2	35.2	35.2
87.5°	14.7	13.9	13.2	13.9	14.7	14.7	14.7	15.4	16.1	16.1	16.1
90°	33.3	32.8	32.3	31.8	31.3	30.5	29.6	28.6	27.6	26.6	23.4
92.5°	47.7	48.2	48.6	49.1	49.6	49.5	48.8	48.0	47.3	46.6	45.1
95°	86.5	86.5	86.5	86.5	86.5	86.0	85.0	84.0	83.0	82.0	80.1
97.5°	124.1	124.4	124.6	124.9	125.1	124.6	123.4	122.2	120.9	119.7	118.2
100°	168.5	168.0	167.5	167.0	166.5	165.9	165.2	164.4	163.7	162.9	161.7
102.5°	213.9	214.2	214.4	214.7	214.9	214.7	213.9	213.2	212.5	211.7	210.0
105°	263.8	263.3	262.8	262.3	261.8	261.6	261.6	261.6	261.6	261.6	259.4
107.5°	314.8	315.0	315.3	315.5	315.8	315.5	314.8	314.1	313.3	312.6	311.6
110°	366.9	367.4	367.9	368.4	368.9	368.6	367.6	366.6	365.7	364.7	364.2



TEST NUMBER: P831952

CATALOG NUMBER: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	422.3	422.3	422.3	422.3	422.3	421.7	420.5	419.2	418.0	416.8	416.8
115°	472.2	472.4	472.7	472.9	473.2	473.2	472.9	472.7	472.4	472.2	472.7
117.5°	523.2	523.9	524.7	525.4	526.1	526.5	526.5	526.5	526.5	526.5	527.0
120°	577.5	578.0	578.5	579.0	579.5	579.8	580.1	580.3	580.6	580.8	582.1
122.5°	629.6	630.3	631.1	631.8	632.5	633.3	634.0	634.8	635.5	636.2	636.7
125°	681.7	682.7	683.7	684.6	685.6	686.6	687.6	688.6	689.6	690.6	691.0
127.5°	733.8	734.8	735.8	736.7	737.7	739.0	740.4	741.9	743.4	744.9	745.4
130°	784.8	786.5	788.2	789.9	791.7	793.0	794.0	795.0	796.0	797.0	797.7
132.5°	838.0	839.2	840.4	841.7	842.9	844.1	845.4	846.6	847.8	849.1	849.6
135°	893.4	893.9	894.4	894.9	895.4	896.1	897.1	898.1	899.1	900.0	900.3
137.5°	942.2	942.9	943.6	944.4	945.1	946.1	947.3	948.6	949.8	951.0	950.3
140°	989.8	991.6	993.3	995.0	996.7	997.7	998.0	998.2	998.5	998.7	998.5
142.5°	1038.6	1039.8	1041.1	1042.3	1043.5	1044.3	1044.5	1044.8	1045.0	1045.3	1044.8
145°	1085.2	1086.1	1087.1	1088.1	1089.1	1089.7	1090.0	1090.2	1090.5	1090.7	1090.0
147.5°	1127.3	1128.8	1130.2	1131.7	1133.2	1133.9	1133.9	1133.9	1133.9	1133.9	1133.2
150°	1167.2	1168.7	1170.1	1171.6	1173.1	1173.8	1173.8	1173.8	1173.8	1173.8	1173.3
152.5°	1206.0	1207.2	1208.4	1209.7	1210.9	1211.3	1210.8	1210.3	1209.8	1209.3	1209.1
155°	1240.3	1242.1	1243.8	1245.5	1247.2	1247.6	1246.6	1245.6	1244.6	1243.7	1243.4
157.5°	1272.5	1274.0	1275.4	1276.9	1278.4	1278.6	1277.7	1276.7	1275.7	1274.7	1274.5
160°	1303.5	1304.5	1305.5	1306.5	1307.5	1307.3	1306.1	1304.9	1303.6	1302.4	1302.4
162.5°	1326.8	1328.5	1330.2	1332.0	1333.7	1333.9	1332.7	1331.5	1330.2	1329.0	1328.8
165°	1349.0	1350.7	1352.4	1354.1	1355.9	1356.0	1354.5	1353.0	1351.6	1350.1	1350.1
167.5°	1368.9	1370.4	1371.9	1373.4	1374.8	1374.8	1373.4	1371.9	1370.4	1368.9	1368.7
170°	1383.3	1385.1	1386.8	1388.5	1390.2	1390.2	1388.5	1386.8	1385.1	1383.3	1383.3
172.5°	1394.4	1396.1	1397.9	1399.6	1401.3	1401.4	1400.0	1398.5	1397.0	1395.5	1395.5
175°	1402.2	1403.9	1405.6	1407.3	1409.1	1409.2	1407.7	1406.2	1404.8	1403.3	1403.3
177.5°	1406.6	1408.3	1410.1	1411.8	1413.5	1413.6	1412.1	1410.7	1409.2	1407.7	1407.7
180°	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0



TEST NUMBER: P831952

CATALOG NUMBER: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4
2.5°	3796.0	3792.3	3757.2	3722.0	3687.5	3653.1	3627.4	3601.8	3558.5	3515.3	3488.2
5°	4031.3	4003.4	3947.7	3892.0	3808.5	3724.9	3654.5	3584.2	3494.8	3405.3	3330.6
7.5°	4162.5	4139.8	4072.3	4004.9	3894.2	3783.5	3673.6	3563.7	3431.7	3299.8	3186.9
10°	4166.1	4185.2	4129.5	4073.8	3949.2	3824.6	3675.1	3525.5	3348.2	3170.8	3024.9
12.5°	4035.7	4117.8	4106.0	4094.3	3967.5	3840.7	3658.9	3477.2	3259.5	3041.8	2859.3
15°	3791.6	3950.7	3997.6	4044.5	3939.7	3834.8	3628.2	3421.5	3165.7	2909.9	2700.2
17.5°	3477.2	3700.0	3823.9	3947.7	3871.5	3795.3	3568.8	3342.3	3054.2	2766.2	2538.2
20°	3104.8	3396.5	3590.8	3785.0	3757.2	3729.3	3495.5	3261.7	2950.9	2640.1	2393.1
22.5°	2736.9	3044.7	3313.0	3581.2	3609.8	3638.4	3402.4	3166.4	2826.3	2486.2	2234.8
25°	2419.5	2732.5	3052.0	3371.6	3436.1	3500.6	3276.3	3052.0	2699.5	2346.9	2097.0
27.5°	2116.8	2414.4	2766.2	3118.0	3235.3	3352.6	3147.3	2942.1	2574.9	2207.7	1958.5
30°	1869.8	2135.8	2495.0	2854.1	3017.6	3181.0	2992.7	2804.3	2440.0	2075.7	1831.7
32.5°	1639.6	1877.8	2238.5	2599.1	2788.9	2978.8	2816.0	2653.3	2303.0	1952.6	1711.5
35°	1457.9	1671.1	2007.6	2344.0	2556.6	2769.1	2635.7	2502.3	2160.0	1817.7	1589.8
37.5°	1301.7	1480.6	1796.5	2112.4	2338.1	2563.9	2452.5	2341.1	2019.3	1697.5	1482.0
40°	1172.7	1316.4	1610.3	1904.2	2125.6	2346.9	2251.7	2156.4	1868.3	1580.3	1378.7
42.5°	1062.1	1185.9	1449.8	1713.7	1916.7	2119.7	2056.7	1993.7	1732.7	1471.8	1284.9
45°	964.6	1068.7	1301.0	1533.4	1720.3	1907.2	1857.3	1807.5	1582.5	1357.4	1185.9
47.5°	878.1	967.5	1174.9	1382.4	1550.2	1718.1	1671.9	1625.7	1439.5	1253.4	1097.2
50°	798.9	875.2	1048.1	1221.1	1372.1	1523.1	1485.0	1446.9	1292.9	1139.0	1004.2
52.5°	724.2	787.2	942.6	1098.0	1219.6	1341.3	1312.0	1282.7	1163.9	1045.2	922.8
55°	653.1	711.0	842.2	973.4	1077.5	1181.5	1152.2	1122.9	1030.5	938.2	830.4
57.5°	588.6	639.1	745.4	851.7	934.5	1017.3	1003.4	989.5	912.5	835.6	746.9
60°	520.4	565.8	657.5	749.1	815.8	882.5	866.4	850.2	795.3	740.3	664.1
62.5°	459.6	499.9	573.2	646.5	700.7	754.9	743.2	731.5	689.7	647.9	584.9
65°	395.8	435.4	494.7	554.1	596.6	639.1	628.9	618.6	587.1	555.6	505.0
67.5°	337.9	370.9	422.2	473.5	502.1	530.7	524.8	518.9	494.7	470.6	431.0
70°	279.3	307.8	350.4	392.9	412.7	432.4	434.6	436.8	414.9	392.9	363.5
72.5°	220.6	243.3	282.9	322.5	337.9	353.3	352.6	351.8	338.6	325.4	299.0
75°	169.3	186.2	217.0	247.7	260.9	274.1	277.1	280.0	267.5	255.1	240.4
77.5°	121.7	133.4	156.9	180.3	195.0	209.6	211.1	212.6	206.7	200.8	186.9
80°	85.8	89.4	104.1	118.7	134.1	149.5	151.7	153.9	148.1	142.2	133.4
82.5°	59.4	61.6	66.7	71.8	84.3	96.8	99.7	102.6	99.7	96.8	87.2
85°	35.9	36.6	38.8	41.0	46.9	52.8	55.7	58.6	57.2	55.7	50.6
87.5°	16.1	16.1	16.9	17.6	19.1	20.5	24.2	27.9	25.7	23.5	21.3
90°	20.2	17.0	13.8	11.0	8.5	6.0	3.6	1.1	3.6	6.0	8.5
92.5°	43.6	42.1	40.6	39.2	37.7	36.2	34.7	33.3	34.7	36.2	37.7
95°	78.1	76.1	74.1	72.3	70.6	68.8	67.1	65.4	67.1	68.8	70.6
97.5°	116.8	115.3	113.8	112.4	111.2	110.0	108.7	107.5	108.7	110.0	111.2
100°	160.5	159.2	158.0	156.7	155.2	153.7	152.2	150.7	152.2	153.7	155.2
102.5°	208.3	206.5	204.8	203.6	202.8	202.1	201.4	200.6	201.4	202.1	202.8
105°	257.2	254.9	252.7	251.4	250.9	250.4	249.9	249.4	249.9	250.4	250.9
107.5°	310.6	309.6	308.6	308.0	307.8	307.5	307.3	307.0	307.3	307.5	307.8
110°	363.7	363.2	362.7	362.2	361.7	361.2	360.7	360.2	360.7	361.2	361.7



TEST NUMBER: P831952

CATALOG NUMBER: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	416.8	416.8	416.8	416.6	416.4	416.2	415.9	415.7	415.9	416.2	416.4
115°	473.2	473.7	474.2	474.0	473.3	472.6	471.8	471.1	471.8	472.6	473.3
117.5°	527.5	528.0	528.5	528.6	528.4	528.1	527.9	527.6	527.9	528.1	528.4
120°	583.3	584.5	585.7	585.6	584.1	582.7	581.2	579.7	581.2	582.7	584.1
122.5°	637.2	637.7	638.2	638.0	637.0	636.0	635.0	634.0	635.0	636.0	637.0
125°	691.5	692.0	692.5	692.4	691.7	690.9	690.2	689.4	690.2	690.9	691.7
127.5°	745.9	746.3	746.8	746.3	744.9	743.4	741.9	740.4	741.9	743.4	744.9
130°	798.4	799.2	799.9	799.3	797.3	795.4	793.4	791.4	793.4	795.4	797.3
132.5°	850.0	850.5	851.0	850.3	848.3	846.4	844.4	842.4	844.4	846.4	848.3
135°	900.5	900.8	901.0	900.4	898.9	897.5	896.0	894.5	896.0	897.5	898.9
137.5°	949.6	948.8	948.1	947.1	945.9	944.6	943.4	942.2	943.4	944.6	945.9
140°	998.2	998.0	997.7	997.0	995.7	994.5	993.3	992.0	993.3	994.5	995.7
142.5°	1044.3	1043.8	1043.3	1042.4	1041.2	1040.0	1038.7	1037.5	1038.7	1040.0	1041.2
145°	1089.2	1088.5	1087.7	1087.1	1086.6	1086.1	1085.7	1085.2	1085.7	1086.1	1086.6
147.5°	1132.5	1131.7	1131.0	1130.1	1129.1	1128.1	1127.2	1126.2	1127.2	1128.1	1129.1
150°	1172.8	1172.4	1171.9	1171.4	1170.9	1170.4	1169.9	1169.4	1169.9	1170.4	1170.9
152.5°	1208.8	1208.6	1208.3	1207.8	1207.1	1206.3	1205.6	1204.9	1205.6	1206.3	1207.1
155°	1243.2	1242.9	1242.7	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6	1242.6
157.5°	1274.2	1274.0	1273.7	1273.7	1274.0	1274.2	1274.5	1274.7	1274.5	1274.2	1274.0
160°	1302.4	1302.4	1302.4	1302.7	1303.2	1303.6	1304.1	1304.6	1304.1	1303.6	1303.2
162.5°	1328.5	1328.3	1328.0	1328.3	1329.0	1329.8	1330.5	1331.2	1330.5	1329.8	1329.0
165°	1350.1	1350.1	1350.1	1350.4	1351.2	1351.9	1352.7	1353.4	1352.7	1351.9	1351.2
167.5°	1368.4	1368.2	1367.9	1368.3	1369.3	1370.3	1371.3	1372.2	1371.3	1370.3	1369.3
170°	1383.3	1383.3	1383.3	1383.8	1384.8	1385.8	1386.8	1387.8	1386.8	1385.8	1384.8
172.5°	1395.5	1395.5	1395.5	1396.0	1397.0	1398.0	1399.0	1400.0	1399.0	1398.0	1397.0
175°	1403.3	1403.3	1403.3	1403.8	1404.8	1405.7	1406.7	1407.7	1406.7	1405.7	1404.8
177.5°	1407.7	1407.7	1407.7	1408.2	1409.2	1410.2	1411.2	1412.1	1411.2	1410.2	1409.2
180°	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0



TEST NUMBER: P831952

CATALOG NUMBER: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4	3575.4
2.5°	3461.0	3419.3	3377.5	3347.4	3317.4	3280.0	3242.6	3241.2	3239.7	3211.8	3184.0
5°	3255.8	3183.2	3110.7	3039.6	2968.5	2897.4	2826.3	2810.2	2794.0	2769.9	2745.7
7.5°	3074.0	2958.2	2842.4	2751.5	2660.6	2589.5	2518.5	2470.1	2421.7	2384.3	2346.9
10°	2879.1	2735.4	2591.7	2481.8	2371.9	2294.9	2217.9	2162.2	2106.5	2080.1	2053.8
12.5°	2676.8	2520.7	2364.5	2256.8	2149.0	2056.7	1964.3	1913.8	1863.2	1826.5	1789.9
15°	2490.6	2322.8	2154.9	2040.6	1926.2	1839.7	1753.2	1702.7	1652.1	1615.4	1578.8
17.5°	2310.3	2141.0	1971.7	1855.9	1740.0	1661.6	1583.2	1534.1	1485.0	1462.3	1439.5
20°	2146.1	1975.3	1804.5	1695.3	1586.1	1509.2	1432.2	1405.8	1379.4	1358.2	1336.9
22.5°	1983.4	1819.2	1655.0	1550.2	1445.4	1389.7	1334.0	1312.7	1291.5	1275.4	1259.2
25°	1847.1	1683.6	1520.2	1428.5	1336.9	1293.7	1250.4	1236.5	1222.6	1206.5	1190.3
27.5°	1709.3	1553.9	1398.5	1325.2	1251.9	1216.7	1181.5	1163.9	1146.3	1133.2	1120.0
30°	1587.6	1443.9	1300.3	1239.4	1178.6	1147.8	1117.0	1098.0	1078.9	1066.5	1054.0
32.5°	1470.3	1342.8	1215.2	1163.2	1111.2	1081.1	1051.1	1032.7	1014.4	999.8	985.1
35°	1361.8	1251.2	1140.5	1092.8	1045.2	1015.2	985.1	966.8	948.5	933.8	919.1
37.5°	1266.6	1166.1	1065.7	1021.0	976.3	949.9	923.5	904.5	885.4	870.0	854.6
40°	1177.1	1088.4	999.8	956.5	913.3	884.7	856.1	839.2	822.4	808.5	794.5
42.5°	1098.0	1016.6	935.3	892.7	850.2	823.1	796.0	776.2	756.4	748.4	740.3
45°	1014.4	942.6	870.8	829.7	788.7	760.1	731.5	714.6	697.8	690.4	683.1
47.5°	941.1	874.4	807.7	767.4	727.1	701.4	675.8	662.6	649.4	639.1	628.9
50°	869.3	804.8	740.3	701.4	662.6	640.6	618.6	602.5	586.4	579.0	571.7
52.5°	800.4	741.8	683.1	643.5	604.0	582.7	561.4	547.5	533.6	518.2	502.8
55°	722.7	671.4	620.1	584.9	549.7	527.7	505.7	489.6	473.5	457.4	441.2
57.5°	658.2	607.6	557.0	525.5	494.0	472.8	451.5	433.9	416.3	403.1	389.9
60°	587.8	543.9	499.9	469.1	438.3	417.8	397.3	380.4	363.5	357.0	350.4
62.5°	521.9	480.8	439.8	412.7	385.5	365.7	346.0	335.0	324.0	319.6	315.2
65°	454.4	419.3	384.1	359.2	334.2	317.4	300.5	295.4	290.3	286.6	282.9
67.5°	391.4	361.3	331.3	309.3	287.3	275.6	263.9	258.0	252.1	247.7	243.3
70°	334.2	307.8	281.5	262.4	243.3	232.3	221.4	216.2	211.1	203.0	195.0
72.5°	272.7	252.1	231.6	217.0	202.3	192.8	183.2	173.0	162.7	155.4	148.1
75°	225.8	205.2	184.7	170.8	156.9	145.9	134.9	131.2	127.5	125.3	123.1
77.5°	173.0	155.4	137.8	126.8	115.8	110.7	105.5	103.3	101.1	100.4	99.7
80°	124.6	109.9	95.3	89.4	83.6	82.1	80.6	79.2	77.7	77.0	76.2
82.5°	77.7	70.4	63.0	61.6	60.1	59.4	58.6	57.9	57.2	56.4	55.7
85°	45.4	42.5	39.6	38.8	38.1	37.4	36.6	36.6	36.6	36.6	36.6
87.5°	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	18.3	17.6
90°	11.0	13.8	17.0	20.2	23.4	26.6	27.6	28.6	29.6	30.5	31.3
92.5°	39.2	40.6	42.1	43.6	45.1	46.6	47.3	48.0	48.8	49.5	49.6
95°	72.3	74.1	76.1	78.1	80.1	82.0	83.0	84.0	85.0	86.0	86.5
97.5°	112.4	113.8	115.3	116.8	118.2	119.7	120.9	122.2	123.4	124.6	125.1
100°	156.7	158.0	159.2	160.5	161.7	162.9	163.7	164.4	165.2	165.9	166.5
102.5°	203.6	204.8	206.5	208.3	210.0	211.7	212.5	213.2	213.9	214.7	214.9
105°	251.4	252.7	254.9	257.2	259.4	261.6	261.6	261.6	261.6	261.6	261.8
107.5°	308.0	308.6	309.6	310.6	311.6	312.6	313.3	314.1	314.8	315.5	315.8
110°	362.2	362.7	363.2	363.7	364.2	364.7	365.7	366.6	367.6	368.6	368.9



TEST NUMBER: P831952

CATALOG NUMBER: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	416.6	416.8	416.8	416.8	416.8	416.8	418.0	419.2	420.5	421.7	422.3
115°	474.0	474.2	473.7	473.2	472.7	472.2	472.4	472.7	472.9	473.2	473.2
117.5°	528.6	528.5	528.0	527.5	527.0	526.5	526.5	526.5	526.5	526.5	526.1
120°	585.6	585.7	584.5	583.3	582.1	580.8	580.6	580.3	580.1	579.8	579.5
122.5°	638.0	638.2	637.7	637.2	636.7	636.2	635.5	634.8	634.0	633.3	632.5
125°	692.4	692.5	692.0	691.5	691.0	690.6	689.6	688.6	687.6	686.6	685.6
127.5°	746.3	746.8	746.3	745.9	745.4	744.9	743.4	741.9	740.4	739.0	737.7
130°	799.3	799.9	799.2	798.4	797.7	797.0	796.0	795.0	794.0	793.0	791.7
132.5°	850.3	851.0	850.5	850.0	849.6	849.1	847.8	846.6	845.4	844.1	842.9
135°	900.4	901.0	900.8	900.5	900.3	900.0	899.1	898.1	897.1	896.1	895.4
137.5°	947.1	948.1	948.8	949.6	950.3	951.0	949.8	948.6	947.3	946.1	945.1
140°	997.0	997.7	998.0	998.2	998.5	998.7	998.5	998.2	998.0	997.7	996.7
142.5°	1042.4	1043.3	1043.8	1044.3	1044.8	1045.3	1045.0	1044.8	1044.5	1044.3	1043.5
145°	1087.1	1087.7	1088.5	1089.2	1090.0	1090.7	1090.5	1090.2	1090.0	1089.7	1089.1
147.5°	1130.1	1131.0	1131.7	1132.5	1133.2	1133.9	1133.9	1133.9	1133.9	1133.9	1133.2
150°	1171.4	1171.9	1172.4	1172.8	1173.3	1173.8	1173.8	1173.8	1173.8	1173.8	1173.1
152.5°	1207.8	1208.3	1208.6	1208.8	1209.1	1209.3	1209.8	1210.3	1210.8	1211.3	1210.9
155°	1242.6	1242.7	1242.9	1243.2	1243.4	1243.7	1244.6	1245.6	1246.6	1247.6	1247.2
157.5°	1273.7	1273.7	1274.0	1274.2	1274.5	1274.7	1275.7	1276.7	1277.7	1278.6	1278.4
160°	1302.7	1302.4	1302.4	1302.4	1302.4	1302.4	1303.6	1304.9	1306.1	1307.3	1307.5
162.5°	1328.3	1328.0	1328.3	1328.5	1328.8	1329.0	1330.2	1331.5	1332.7	1333.9	1333.7
165°	1350.4	1350.1	1350.1	1350.1	1350.1	1350.1	1351.6	1353.0	1354.5	1356.0	1355.9
167.5°	1368.3	1367.9	1368.2	1368.4	1368.7	1368.9	1370.4	1371.9	1373.4	1374.8	1374.8
170°	1383.8	1383.3	1383.3	1383.3	1383.3	1383.3	1385.1	1386.8	1388.5	1390.2	1390.2
172.5°	1396.0	1395.5	1395.5	1395.5	1395.5	1395.5	1397.0	1398.5	1400.0	1401.4	1401.3
175°	1403.8	1403.3	1403.3	1403.3	1403.3	1403.3	1404.8	1406.2	1407.7	1409.2	1409.1
177.5°	1408.2	1407.7	1407.7	1407.7	1407.7	1407.7	1409.2	1410.7	1412.1	1413.6	1413.5
180°	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0	1411.0



TEST NUMBER: P831952

CATALOG NUMBER: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	3575.4	3575.4	3575.4	3575.4
2.5°	3176.7	3169.3	3166.4	3163.5
5°	2722.9	2700.2	2695.1	2690.0
7.5°	2337.4	2327.9	2296.4	2264.8
10°	2024.4	1995.1	1981.9	1968.7
12.5°	1762.8	1735.7	1731.3	1726.9
15°	1559.7	1540.7	1534.1	1527.5
17.5°	1426.3	1413.1	1405.1	1397.0
20°	1327.4	1317.9	1312.0	1306.1
22.5°	1251.9	1244.6	1240.2	1235.8
25°	1179.3	1168.3	1164.7	1161.0
27.5°	1110.4	1100.9	1097.2	1093.6
30°	1045.9	1037.9	1032.7	1027.6
32.5°	975.6	966.0	963.1	960.2
35°	913.3	907.4	904.5	901.5
37.5°	847.3	840.0	835.6	831.2
40°	790.9	787.2	785.0	782.8
42.5°	733.7	727.1	726.4	725.6
45°	676.5	669.9	668.5	667.0
47.5°	623.0	617.2	616.4	615.7
50°	563.6	555.6	549.7	543.9
52.5°	495.5	488.2	483.0	477.9
55°	433.2	425.1	420.7	416.3
57.5°	386.3	382.6	380.4	378.2
60°	348.2	346.0	344.5	343.0
62.5°	313.0	310.8	310.8	310.8
65°	280.7	278.5	276.3	274.1
67.5°	238.9	234.5	233.8	233.1
70°	188.4	181.8	181.0	180.3
72.5°	147.3	146.6	145.1	143.7
75°	121.7	120.2	120.2	120.2
77.5°	98.2	96.8	96.8	96.8
80°	75.5	74.8	75.5	76.2
82.5°	55.7	55.7	55.0	54.2
85°	35.9	35.2	35.2	35.2
87.5°	17.6	17.6	17.6	17.6
90°	31.8	32.3	32.8	33.3
92.5°	49.1	48.6	48.2	47.7
95°	86.5	86.5	86.5	86.5
97.5°	124.9	124.6	124.4	124.1
100°	167.0	167.5	168.0	168.5
102.5°	214.7	214.4	214.2	213.9
105°	262.3	262.8	263.3	263.8
107.5°	315.5	315.3	315.0	314.8
110°	368.4	367.9	367.4	366.9



TEST NUMBER: P831952

CATALOG NUMBER: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	422.3	422.3	422.3	422.3
115°	472.9	472.7	472.4	472.2
117.5°	525.4	524.7	523.9	523.2
120°	579.0	578.5	578.0	577.5
122.5°	631.8	631.1	630.3	629.6
125°	684.6	683.7	682.7	681.7
127.5°	736.7	735.8	734.8	733.8
130°	789.9	788.2	786.5	784.8
132.5°	841.7	840.4	839.2	838.0
135°	894.9	894.4	893.9	893.4
137.5°	944.4	943.6	942.9	942.2
140°	995.0	993.3	991.6	989.8
142.5°	1042.3	1041.1	1039.8	1038.6
145°	1088.1	1087.1	1086.1	1085.2
147.5°	1131.7	1130.2	1128.8	1127.3
150°	1171.6	1170.1	1168.7	1167.2
152.5°	1209.7	1208.4	1207.2	1206.0
155°	1245.5	1243.8	1242.1	1240.3
157.5°	1276.9	1275.4	1274.0	1272.5
160°	1306.5	1305.5	1304.5	1303.5
162.5°	1332.0	1330.2	1328.5	1326.8
165°	1354.1	1352.4	1350.7	1349.0
167.5°	1373.4	1371.9	1370.4	1368.9
170°	1388.5	1386.8	1385.1	1383.3
172.5°	1399.6	1397.9	1396.1	1394.4
175°	1407.3	1405.6	1403.9	1402.2
177.5°	1411.8	1410.1	1408.3	1406.6
180°	1411.0	1411.0	1411.0	1411.0



TEST NUMBER: P831952

CATALOG NUMBER: S123RDIP-S1165D1195U950-4F0-1E-UDD-G1

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.87	14.72	14.80	15.65	16.86	18.53	19.38	19.46	20.32	21.52
	3H	15.09	15.85	16.03	16.79	18.02	20.03	20.79	20.97	21.74	22.97
	4H	15.48	16.19	16.43	17.14	18.38	20.53	21.24	21.48	22.19	23.43
	6H	15.76	16.41	16.72	17.37	18.62	20.84	21.49	21.80	22.45	23.70
	8H	15.85	16.47	16.82	17.44	18.69	20.92	21.54	21.89	22.51	23.76
	12H	15.90	16.49	16.87	17.46	18.73	20.95	21.54	21.92	22.51	23.78
4H	2H	14.59	15.31	15.55	16.26	17.50	18.53	19.24	19.49	20.19	21.43
	3H	15.97	16.56	16.93	17.54	18.79	20.19	20.78	21.16	21.76	23.02
	4H	16.42	16.96	17.40	17.94	19.21	20.80	21.34	21.77	22.31	23.59
	6H	16.79	17.25	17.78	18.25	19.53	21.24	21.70	22.23	22.70	23.97
	8H	16.92	17.35	17.91	18.34	19.63	21.37	21.80	22.36	22.79	24.08
	12H	16.99	17.38	18.00	18.39	19.68	21.43	21.82	22.44	22.83	24.12
8H	4H	16.74	17.17	17.73	18.16	19.45	20.77	21.20	21.76	22.19	23.48
	6H	17.20	17.56	18.22	18.59	19.88	21.26	21.62	22.28	22.65	23.94
	8H	17.39	17.71	18.42	18.73	20.04	21.45	21.76	22.47	22.78	24.09
	12H	17.54	17.81	18.56	18.83	20.18	21.57	21.84	22.59	22.86	24.21
12H	4H	16.75	17.14	17.76	18.15	19.44	20.72	21.11	21.72	22.11	23.41
	6H	17.26	17.57	18.28	18.59	19.90	21.24	21.55	22.26	22.57	23.88
	8H	17.48	17.76	18.50	18.77	20.12	21.43	21.71	22.46	22.72	24.07