

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P333954

Luminaire Tested: S123DP-S1165D830-4F0-1E-UDD-D

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-2019
Report Number: P333954
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1802-639-15)
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123DP-S1165D830-4F0-1E-UDD-D
Description: DEFINE 3 DIRECT LED LUMINAIRE, DROP SATIN WHITE DIFFUSER
PENDANT/SURFACE/WALL MOUNT, 1165 LUMENS PER FOOT
Light Source: 3000K CCT, 80 CRI LEDS
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4309.8 lumens
Efficiency: N/A
Efficacy: 104.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.25 / 1.37
Luminous Opening: Rectangular w/ Sides (W: 0.25' x L: 4' x H: 0.08')
CIE Type: Direct

Input Watts (W): 41.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



TEST NUMBER: P333954
CATALOG NUMBER: S123DP-S1165D830-4F0-1E-UDD-D

Luminous Intensity Polar Plot

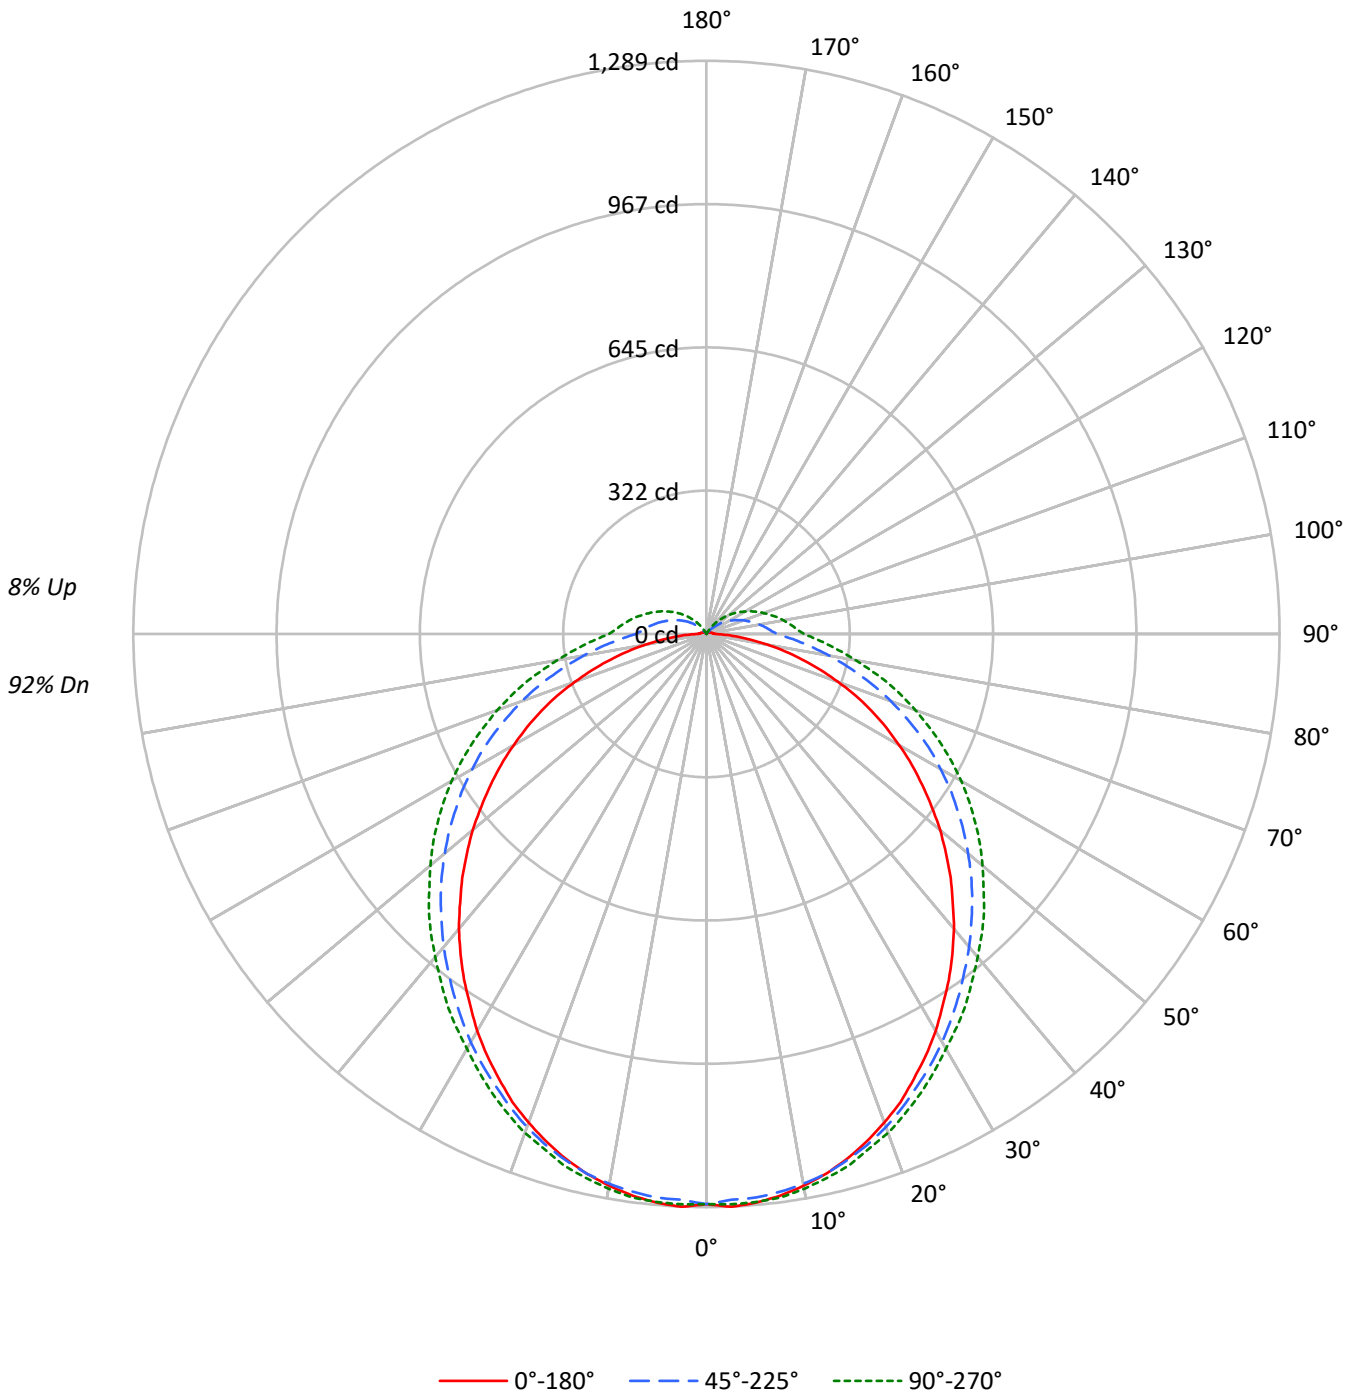



TEST NUMBER: P333954

CATALOG NUMBER: S123DP-S1165D830-4F0-1E-UDD-D

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	117	117	117	117	113	113	113	113	106	106	106	100	100	100	94	94	94	92
1	105	100	95	90	102	97	92	88	91	87	84	85	82	80	80	78	76	73
2	95	86	79	72	92	83	77	71	79	73	68	74	69	65	70	66	63	60
3	86	75	67	60	83	73	65	59	69	62	56	65	59	54	61	56	52	50
4	79	66	57	50	76	64	56	49	61	54	48	57	51	46	54	49	45	42
5	72	59	50	43	70	58	49	42	54	47	41	52	45	40	49	43	39	36
6	67	53	44	37	64	52	43	37	49	42	36	47	40	35	44	38	34	32
7	62	48	39	33	60	47	38	32	45	37	32	42	36	31	40	35	30	28
8	58	44	35	29	56	43	35	29	41	33	28	39	32	28	37	31	27	25
9	54	40	32	26	52	39	31	26	37	30	25	36	29	25	34	28	24	22
10	50	37	29	24	49	36	29	24	35	28	23	33	27	23	32	26	22	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13804	13804	13804
5°	13846	13456	13464
10°	13721	13146	13080
15°	13545	12794	12662
20°	13292	12392	12202
25°	12981	11929	11718
30°	12661	11514	11226
35°	12303	11073	10836
40°	11961	10674	10416
45°	11582	10289	10081
50°	11208	9909	9711
55°	10794	9521	9379
60°	10391	9126	9038
65°	9979	8704	8632
70°	9356	8231	8217
75°	8571	7689	7795
80°	7667	7158	7311
85°	6823	6790	7032

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11582 cd/sqm



TEST NUMBER: P333954

CATALOG NUMBER: S123DP-S1165D830-4F0-1E-UDD-D

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.7	2.8
10°-20°	346.8	8.0
20°-30°	518.6	12.0
30°-40°	619.2	14.4
40°-50°	647.8	15.0
50°-60°	608.0	14.1
60°-70°	507.8	11.8
70°-80°	363.1	8.4
80°-90°	216.1	5.0
90°-100°	135.8	3.2
100°-110°	99.8	2.3
110°-120°	66.6	1.5
120°-130°	38.0	0.9
130°-140°	17.1	0.4
140°-150°	3.6	0.1
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	987.0	22.9
0°-40°	1606.2	37.3
0°-60°	2862.0	66.4
0°-90°	3948.9	91.6
90°-120°	302.2	7.0
90°-150°	360.8	8.4
90°-180°	361.0	8.4
0°-180°	4309.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1282	1282	1282	1282	1282	
5°	1284	1281	1273	1284	1282	122
15°	1222	1226	1225	1239	1238	344
25°	1104	1118	1122	1140	1140	509
35°	950	972	990	1011	1017	594
45°	777	810	845	872	883	599
55°	592	638	689	726	738	530
65°	409	464	525	567	581	405
75°	222	288	358	404	420	237
85°	68	138	212	260	274	70
90°	18	87	158	205	219	13
95°	15	70	138	182	196	12
105°	11	45	105	144	156	11
115°	7	24	74	108	119	7
125°	4	4	45	74	84	4
135°	3	1	17	42	49	2
145°	1	0	0	11	17	1
155°	0	0	0	0	0	0
165°	0	0	0	0	0	0
175°	0	0	0	0	0	0
180°	0	0	0	0	0	0



TEST NUMBER: P333954

CATALOG NUMBER: S123DP-S1165D830-4F0-1E-UDD-D

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1282.4	1282.4	1282.4	1282.4	1282.4
2.5°	1289.4	1285.2	1274.0	1285.2	1283.8
5°	1283.8	1281.0	1272.6	1283.8	1282.4
7.5°	1274.0	1274.0	1265.6	1279.6	1278.2
10°	1260.0	1262.8	1255.8	1269.8	1267.0
12.5°	1243.3	1247.5	1243.3	1255.8	1253.0
15°	1222.3	1226.5	1225.1	1239.1	1237.7
17.5°	1197.2	1205.5	1204.1	1216.7	1213.9
20°	1169.2	1177.6	1180.4	1193.0	1194.4
22.5°	1139.9	1148.3	1152.5	1169.2	1167.8
25°	1103.6	1117.5	1121.7	1139.9	1139.9
27.5°	1068.6	1084.0	1092.4	1107.8	1109.2
30°	1030.9	1049.1	1060.3	1077.0	1077.0
32.5°	989.0	1010.0	1025.3	1043.5	1047.7
35°	949.9	972.3	990.4	1011.4	1017.0
37.5°	908.0	933.1	954.1	977.8	982.0
40°	866.1	891.2	919.2	942.9	948.5
42.5°	820.0	852.1	881.5	908.0	916.4
45°	776.7	810.2	845.1	871.7	882.9
47.5°	730.6	768.3	807.4	836.8	845.1
50°	685.9	725.0	768.3	800.4	810.2
52.5°	638.4	680.3	729.2	762.7	775.3
55°	592.3	638.4	688.7	726.4	737.6
57.5°	547.6	595.1	649.6	687.3	699.9
60°	500.1	550.4	607.7	646.8	662.1
62.5°	455.4	507.1	568.5	607.7	621.6
65°	409.3	463.8	525.2	567.2	581.1
67.5°	363.2	420.5	481.9	528.0	539.2
70°	314.3	374.4	441.4	486.1	500.1
72.5°	269.6	329.7	399.5	445.6	459.6
75°	222.1	287.8	357.6	403.7	420.5
77.5°	181.6	247.3	317.1	366.0	378.6
80°	138.3	206.7	279.4	326.9	340.8
82.5°	100.6	170.4	244.5	292.0	305.9
85°	68.4	138.3	212.3	259.8	273.8
87.5°	41.9	111.8	183.0	230.5	244.5
90°	18.2	86.6	157.9	205.3	219.3
92.5°	16.8	76.8	146.7	192.8	205.3
95°	15.4	69.8	138.3	181.6	195.6
97.5°	14.0	64.3	129.9	171.8	185.8
100°	12.6	57.3	121.5	162.0	176.0
102.5°	11.2	50.3	113.2	152.3	166.2
105°	11.2	44.7	104.8	143.9	156.5
107.5°	9.8	39.1	96.4	134.1	146.7
110°	8.4	33.5	89.4	125.7	136.9



TEST NUMBER: P333954

CATALOG NUMBER: S123DP-S1165D830-4F0-1E-UDD-D

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	8.4	27.9	81.0	115.9	128.5
115°	7.0	23.7	74.0	107.6	118.7
117.5°	7.0	18.2	65.7	99.2	110.4
120°	5.6	12.6	58.7	90.8	100.6
122.5°	5.6	8.4	51.7	82.4	92.2
125°	4.2	4.2	44.7	74.0	83.8
127.5°	4.2	2.8	37.7	65.7	75.4
130°	4.2	2.8	30.7	57.3	65.7
132.5°	2.8	2.8	23.7	48.9	58.7
135°	2.8	1.4	16.8	41.9	48.9
137.5°	2.8	1.4	11.2	33.5	40.5
140°	1.4	1.4	5.6	26.5	33.5
142.5°	1.4	0.0	0.0	18.2	25.1
145°	1.4	0.0	0.0	11.2	16.8
147.5°	0.0	0.0	0.0	4.2	9.8
150°	0.0	0.0	0.0	0.0	2.8
152.5°	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0
157.5°	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0
162.5°	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0
167.5°	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0
172.5°	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0
177.5°	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)