

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332532-927

Luminaire Tested: **S124DIP-S350D1205U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332532-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S350D1205U927-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1205 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5011.3 lumens
Efficiency: N/A
Efficacy: 118.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 42.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332532-927

CATALOG NUMBER: S124DIP-S350D1205U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

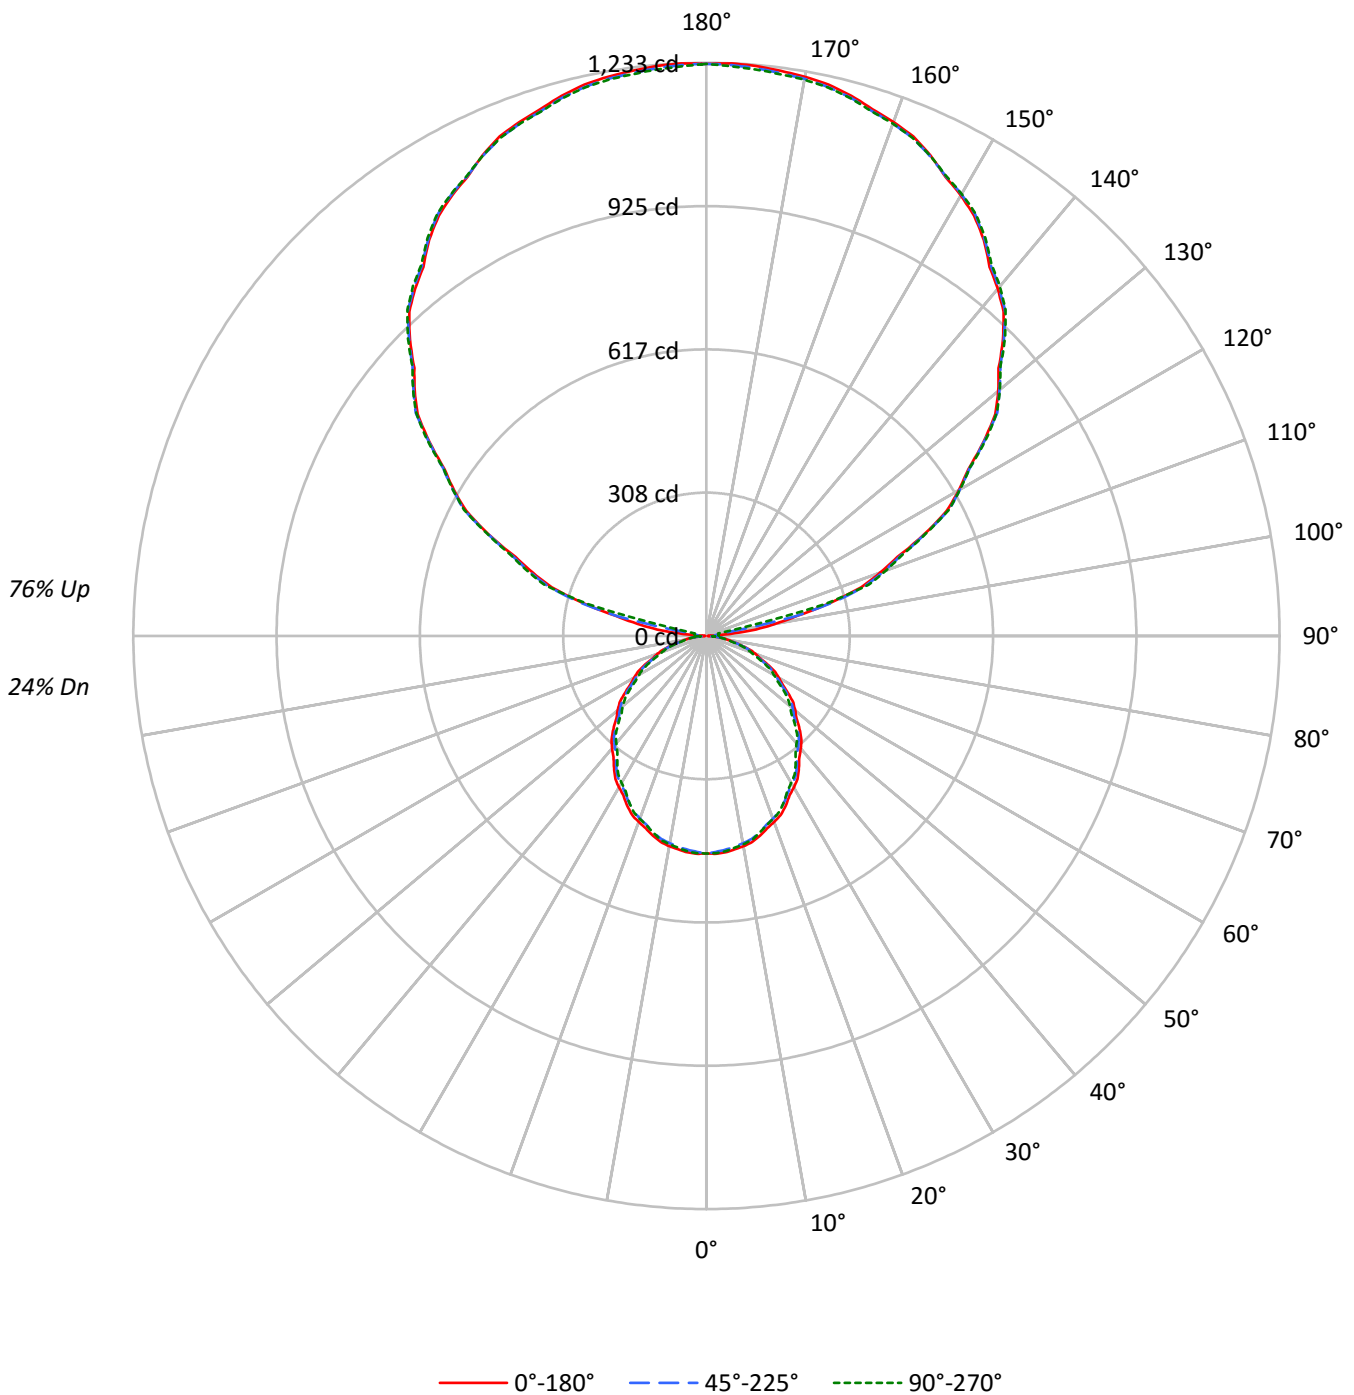



TEST NUMBER: P332532-927

CATALOG NUMBER: S124DIP-S350D1205U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	32	32	32	24
1	92	88	84	81	82	78	75	72	60	58	56	44	42	41	28	28	27	20
2	84	77	71	66	74	68	63	59	53	49	46	38	36	34	25	24	23	17
3	76	67	60	55	68	60	54	49	46	42	39	34	31	29	22	21	19	14
4	70	59	52	46	62	53	47	42	41	37	33	30	27	25	20	18	17	12
5	64	53	45	39	56	47	41	36	37	32	28	27	24	21	18	16	14	11
6	59	47	39	34	52	42	36	31	33	28	25	24	21	19	16	14	13	9
7	54	42	35	29	48	38	31	27	30	25	22	22	19	16	15	13	11	8
8	50	38	31	26	44	34	28	23	27	22	19	20	17	14	13	11	10	7
9	46	35	28	23	41	31	25	21	25	20	17	18	15	13	12	10	9	7
10	43	32	25	20	38	29	23	18	23	18	15	17	14	12	11	10	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3777	3777	3777
5°	3789	3743	3771
10°	3765	3713	3731
15°	3719	3661	3670
20°	3660	3594	3598
25°	3591	3520	3510
30°	3506	3432	3402
35°	3418	3341	3297
40°	3327	3236	3177
45°	3232	3134	3075
50°	3127	3042	2948
55°	3013	2923	2829
60°	2900	2792	2706
65°	2772	2665	2558
70°	2629	2497	2398
75°	2408	2293	2233
80°	2143	2060	2004
85°	1880	1806	1769



TEST NUMBER: P332532-927

CATALOG NUMBER: S124DIP-S350D1205U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	44.1	0.9
10°-20°	124.2	2.5
20°-30°	182.8	3.6
30°-40°	212.5	4.2
40°-50°	212.5	4.2
50°-60°	185.9	3.7
60°-70°	138.0	2.8
70°-80°	78.4	1.6
80°-90°	26.2	0.5
90°-100°	42.1	0.8
100°-110°	268.4	5.4
110°-120°	513.4	10.2
120°-130°	651.7	13.0
130°-140°	697.3	13.9
140°-150°	652.1	13.0
150°-160°	525.8	10.5
160°-170°	339.2	6.8
170°-180°	116.9	2.3
0°-30°	351.0	7.0
0°-40°	563.5	11.2
0°-60°	961.8	19.2
0°-90°	1204.4	24.0
90°-120°	823.9	16.4
90°-150°	2825.0	56.4
90°-180°	3807.0	76.0
0°-180°	5011.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	468	468	468	468	468	
5°	468	466	462	466	465	44
15°	445	443	438	440	439	125
25°	403	400	395	396	394	185
35°	347	344	339	336	334	217
45°	283	280	274	270	269	218
55°	214	213	208	203	201	192
65°	145	143	140	136	134	144
75°	77	75	74	72	72	82
85°	20	20	20	20	19	22
90°	3	13	20	26	28	3
95°	51	21	20	26	27	65
105°	277	282	287	293	262	290
115°	517	520	519	521	521	509
125°	727	731	729	732	733	649
135°	902	901	905	907	908	695
145°	1040	1043	1043	1044	1046	650
155°	1140	1141	1139	1142	1140	526
165°	1203	1199	1198	1205	1198	340
175°	1231	1226	1226	1233	1223	117
180°	1231	1231	1231	1231	1231	



TEST NUMBER: P332532-927

CATALOG NUMBER: S124DIP-S350D1205U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	467.9	467.9	467.9	467.9	467.9	467.9	467.9	467.9	467.9	467.9	467.9
2.5°	469.1	469.0	468.7	468.6	468.3	467.9	467.1	466.4	465.7	464.9	465.6
5°	467.5	467.2	466.9	466.6	466.3	465.6	464.7	463.8	462.9	461.9	462.9
7.5°	463.3	462.9	462.6	462.2	461.9	461.2	460.2	459.2	458.2	457.2	457.9
10°	459.3	459.0	458.7	458.4	458.0	457.3	456.2	455.1	454.1	453.0	453.6
12.5°	454.2	453.9	453.6	453.2	452.9	452.2	451.0	449.9	448.7	447.6	448.3
15°	445.0	444.7	444.4	444.1	443.8	443.0	441.7	440.5	439.2	438.0	438.5
17.5°	434.0	433.6	433.2	432.8	432.4	431.6	430.4	429.2	428.0	426.8	427.1
20°	426.0	425.6	425.2	424.7	424.3	423.5	422.2	421.0	419.7	418.4	418.7
22.5°	417.2	416.7	416.1	415.6	415.0	414.2	412.9	411.7	410.4	409.2	409.6
25°	403.1	402.5	402.0	401.3	400.8	399.9	398.7	397.5	396.4	395.2	395.3
27.5°	386.9	386.3	385.7	385.1	384.5	383.7	382.5	381.5	380.4	379.3	379.1
30°	376.1	375.4	374.8	374.1	373.4	372.6	371.5	370.3	369.3	368.2	367.9
32.5°	364.7	364.1	363.5	362.9	362.3	361.4	360.3	359.1	358.0	356.8	356.4
35°	346.8	346.3	345.7	345.1	344.5	343.6	342.5	341.3	340.2	339.0	338.4
37.5°	328.0	327.5	326.9	326.5	325.9	325.0	323.8	322.5	321.2	320.0	319.3
40°	315.7	315.1	314.4	313.7	313.1	312.1	310.9	309.6	308.3	307.1	306.3
42.5°	302.5	302.1	301.7	301.3	301.0	300.0	298.7	297.2	295.9	294.5	293.5
45°	283.1	282.5	281.9	281.4	280.7	279.8	278.5	277.1	275.8	274.5	273.5
47.5°	262.8	262.4	262.0	261.6	261.2	260.4	259.1	257.9	256.7	255.4	254.4
50°	249.0	248.7	248.3	248.0	247.6	246.9	245.7	244.5	243.4	242.2	241.1
52.5°	235.5	235.0	234.6	234.2	233.9	233.1	231.8	230.6	229.3	228.1	227.1
55°	214.1	213.9	213.6	213.3	213.1	212.4	211.2	210.1	208.9	207.7	206.8
57.5°	193.7	193.5	193.1	192.9	192.6	191.9	190.7	189.6	188.4	187.3	186.3
60°	179.6	179.2	178.8	178.3	177.9	177.2	176.1	175.0	174.0	172.9	172.1
62.5°	165.8	165.5	165.1	164.8	164.4	163.7	162.5	161.4	160.2	159.1	158.4
65°	145.1	144.7	144.3	143.9	143.5	142.8	142.0	141.2	140.3	139.5	138.6
67.5°	124.3	123.9	123.5	123.1	122.7	122.2	121.4	120.6	119.8	118.9	118.1
70°	111.4	110.7	110.2	109.6	109.0	108.4	107.7	107.1	106.4	105.8	105.0
72.5°	97.6	97.0	96.4	95.9	95.2	94.7	94.1	93.6	93.1	92.5	92.0
75°	77.2	76.8	76.4	76.0	75.6	75.2	74.8	74.3	73.9	73.5	73.2
77.5°	57.8	57.7	57.4	57.3	57.1	56.8	56.5	56.1	55.7	55.4	55.2
80°	46.1	45.9	45.6	45.4	45.2	44.9	44.8	44.6	44.4	44.3	44.0
82.5°	34.7	34.6	34.5	34.4	34.2	34.1	34.1	34.1	34.1	34.1	34.0
85°	20.3	20.3	20.3	20.3	20.3	20.2	20.0	19.8	19.6	19.5	19.5
87.5°	8.3	8.7	9.1	9.5	9.9	10.2	10.5	10.7	11.0	11.2	11.5
90°	2.8	5.0	7.3	9.5	11.7	13.7	15.4	17.0	18.6	20.3	21.5
92.5°	11.6	11.7	11.9	12.0	12.1	13.0	14.6	16.2	17.9	19.5	20.8
95°	50.6	43.6	36.7	29.8	22.8	19.4	19.6	19.8	20.0	20.3	21.5
97.5°	107.5	111.9	116.2	120.5	124.8	115.6	92.8	69.9	47.1	24.3	24.4
100°	151.0	154.6	158.4	162.0	165.7	153.4	125.2	97.0	68.8	40.5	37.0
102.5°	199.6	202.2	204.9	207.6	210.3	209.8	206.2	202.5	198.8	195.1	157.6
105°	277.0	278.3	279.5	280.7	281.9	283.1	284.2	285.1	286.1	287.2	289.1
107.5°	349.0	349.7	350.3	350.9	351.5	352.5	353.9	355.3	356.6	358.1	358.9
110°	397.7	398.2	398.9	399.5	400.1	401.0	402.3	403.5	404.7	405.9	406.3



TEST NUMBER: P332532-927

CATALOG NUMBER: S124DIP-S350D1205U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	444.8	445.9	446.9	448.1	449.2	450.0	450.6	451.1	451.8	452.3	452.3
115°	517.3	517.9	518.6	519.1	519.8	520.0	519.8	519.6	519.4	519.1	519.6
117.5°	582.7	583.4	584.3	585.1	585.9	586.5	587.0	587.5	588.0	588.4	588.3
120°	626.9	627.6	628.5	629.3	630.1	630.4	630.3	630.0	629.8	629.6	630.0
122.5°	668.0	668.6	669.1	669.6	670.0	670.4	670.7	671.0	671.3	671.6	671.8
125°	727.1	728.0	728.8	729.6	730.5	730.6	730.2	729.8	729.4	729.0	729.6
127.5°	783.2	783.3	783.5	783.8	783.9	784.5	785.4	786.4	787.3	788.3	788.1
130°	819.2	819.4	819.7	819.8	820.1	820.5	821.1	821.7	822.3	822.9	823.1
132.5°	852.4	852.7	853.1	853.5	853.8	854.4	855.2	856.0	856.7	857.5	857.7
135°	902.1	901.9	901.7	901.4	901.3	901.6	902.4	903.2	904.0	904.8	905.2
137.5°	946.1	946.2	946.3	946.3	946.4	946.9	947.8	948.7	949.6	950.5	950.9
140°	974.8	975.2	975.6	976.0	976.4	976.8	977.2	977.6	978.0	978.5	979.1
142.5°	1000.5	1001.3	1002.0	1002.7	1003.5	1004.0	1004.2	1004.5	1004.7	1005.0	1005.4
145°	1040.1	1040.8	1041.4	1042.0	1042.6	1042.9	1042.9	1042.9	1042.9	1042.9	1043.1
147.5°	1071.6	1072.8	1073.9	1075.1	1076.2	1076.7	1076.5	1076.3	1076.0	1075.9	1076.0
150°	1094.5	1095.3	1096.1	1096.9	1097.7	1098.0	1097.8	1097.6	1097.4	1097.2	1097.2
152.5°	1113.6	1114.3	1114.9	1115.6	1116.2	1116.3	1116.0	1115.6	1115.2	1114.9	1115.2
155°	1140.5	1140.7	1140.9	1141.1	1141.3	1141.1	1140.5	1139.9	1139.2	1138.6	1139.5
157.5°	1163.1	1163.0	1162.8	1162.8	1162.6	1162.2	1161.5	1160.9	1160.2	1159.4	1160.5
160°	1176.4	1175.8	1175.1	1174.6	1173.9	1173.5	1173.3	1173.1	1172.9	1172.7	1173.9
162.5°	1188.1	1187.4	1186.6	1185.8	1185.0	1184.6	1184.3	1184.2	1183.9	1183.8	1184.9
165°	1203.1	1202.1	1201.0	1200.0	1199.0	1198.5	1198.5	1198.5	1198.5	1198.5	1200.1
167.5°	1214.8	1213.8	1212.8	1211.6	1210.6	1210.0	1209.9	1209.7	1209.7	1209.5	1211.3
170°	1221.5	1220.3	1219.0	1217.8	1216.6	1216.1	1216.2	1216.5	1216.6	1216.9	1218.5
172.5°	1225.9	1224.6	1223.4	1222.2	1221.0	1220.4	1220.7	1220.9	1221.1	1221.3	1222.9
175°	1230.7	1229.5	1228.2	1227.0	1225.7	1225.3	1225.4	1225.7	1225.9	1226.1	1227.9
177.5°	1232.9	1231.8	1230.6	1229.5	1228.3	1227.9	1228.2	1228.5	1228.9	1229.2	1230.5
180°	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7



TEST NUMBER: P332532-927

CATALOG NUMBER: S124DIP-S350D1205U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	467.9	467.9	467.9	467.9	467.9	467.9	467.9	467.9
2.5°	466.3	467.0	467.6	467.9	467.9	467.8	467.7	467.6
5°	463.8	464.7	465.6	466.0	465.8	465.6	465.5	465.3
7.5°	458.6	459.4	460.1	460.4	460.3	460.2	460.1	460.0
10°	454.3	455.0	455.7	455.9	455.7	455.5	455.3	455.2
12.5°	449.0	449.7	450.5	450.8	450.5	450.3	450.0	449.8
15°	438.9	439.4	440.0	440.1	439.8	439.6	439.3	439.1
17.5°	427.5	427.8	428.1	428.2	428.0	427.9	427.7	427.5
20°	419.0	419.2	419.5	419.5	419.3	419.1	419.0	418.8
22.5°	410.0	410.5	411.0	411.1	410.7	410.4	410.1	409.9
25°	395.4	395.5	395.5	395.5	395.1	394.7	394.4	394.1
27.5°	378.9	378.7	378.5	378.2	377.8	377.4	376.9	376.5
30°	367.6	367.3	366.9	366.5	366.1	365.7	365.3	364.9
32.5°	356.0	355.6	355.2	354.8	354.4	353.9	353.6	353.2
35°	337.8	337.2	336.6	336.1	335.7	335.3	334.9	334.5
37.5°	318.7	318.1	317.4	316.9	316.3	315.8	315.2	314.7
40°	305.5	304.6	303.8	303.2	302.7	302.3	301.9	301.5
42.5°	292.6	291.6	290.7	290.0	289.7	289.5	289.1	288.9
45°	272.7	271.7	270.8	270.2	270.0	269.7	269.5	269.3
47.5°	253.3	252.3	251.3	250.5	249.9	249.2	248.6	248.0
50°	239.9	238.8	237.6	236.7	236.2	235.8	235.2	234.7
52.5°	226.1	225.1	224.0	223.2	222.5	221.9	221.3	220.6
55°	205.7	204.7	203.7	203.0	202.5	202.0	201.5	201.0
57.5°	185.4	184.4	183.5	182.8	182.3	181.8	181.3	180.8
60°	171.3	170.6	169.8	169.3	168.9	168.4	168.0	167.6
62.5°	157.7	157.0	156.3	155.7	155.3	155.0	154.6	154.1
65°	137.8	137.0	136.2	135.5	135.1	134.7	134.3	133.9
67.5°	117.3	116.5	115.7	115.3	115.2	115.0	114.9	114.8
70°	104.4	103.8	103.1	102.6	102.3	102.1	101.9	101.6
72.5°	91.5	90.9	90.4	90.0	89.8	89.5	89.3	89.0
75°	72.8	72.5	72.2	71.9	71.9	71.8	71.7	71.6
77.5°	55.1	55.1	55.0	54.8	54.6	54.3	54.1	53.9
80°	43.9	43.7	43.6	43.5	43.3	43.3	43.2	43.1
82.5°	33.8	33.7	33.7	33.6	33.5	33.4	33.3	33.2
85°	19.5	19.5	19.5	19.5	19.4	19.3	19.2	19.1
87.5°	11.7	12.0	12.2	12.4	12.4	12.6	12.7	12.8
90°	22.7	23.9	25.2	26.0	26.4	26.8	27.2	27.6
92.5°	21.9	23.2	24.4	25.1	25.2	25.3	25.3	25.4
95°	22.7	23.9	25.2	25.9	26.1	26.3	26.5	26.7
97.5°	24.6	24.6	24.8	25.0	25.2	25.3	25.6	25.7
100°	33.5	30.1	26.6	25.0	25.2	25.3	25.6	25.7
102.5°	120.1	82.6	45.1	26.4	26.4	26.5	26.5	26.5
105°	290.9	292.7	294.5	291.8	284.4	277.0	269.7	262.4
107.5°	359.9	360.8	361.6	362.5	363.3	364.1	364.8	365.6
110°	406.8	407.2	407.6	408.1	408.7	409.3	410.0	410.5



TEST NUMBER: P332532-927

CATALOG NUMBER: S124DIP-S350D1205U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	452.2	452.1	452.0	452.3	453.1	453.9	454.7	455.4
115°	520.0	520.4	520.8	521.0	521.0	521.0	521.0	521.0
117.5°	588.2	588.1	588.0	588.0	587.9	587.8	587.7	587.6
120°	630.4	630.8	631.2	631.2	630.8	630.4	630.0	629.6
122.5°	672.1	672.3	672.6	672.5	672.1	671.7	671.2	670.8
125°	730.2	730.9	731.5	731.9	732.1	732.3	732.5	732.7
127.5°	788.1	787.9	787.8	787.7	787.5	787.3	787.2	787.0
130°	823.3	823.6	823.7	823.8	823.8	823.8	823.8	823.8
132.5°	857.9	858.2	858.3	858.3	858.2	858.0	857.9	857.7
135°	905.6	906.0	906.5	906.9	907.3	907.7	908.1	908.5
137.5°	951.4	951.8	952.3	952.4	952.4	952.2	952.0	952.0
140°	979.7	980.3	981.0	981.4	981.5	981.8	981.9	982.1
142.5°	1005.9	1006.3	1006.8	1007.0	1007.1	1007.1	1007.2	1007.2
145°	1043.3	1043.5	1043.7	1044.0	1044.4	1044.8	1045.3	1045.7
147.5°	1076.2	1076.3	1076.5	1076.7	1076.9	1077.1	1077.3	1077.5
150°	1097.2	1097.2	1097.2	1097.3	1097.5	1097.7	1098.0	1098.1
152.5°	1115.6	1115.9	1116.2	1116.3	1116.2	1116.0	1115.9	1115.8
155°	1140.3	1141.1	1141.9	1142.0	1141.4	1140.7	1140.2	1139.6
157.5°	1161.6	1162.6	1163.7	1163.7	1162.6	1161.6	1160.5	1159.4
160°	1175.1	1176.4	1177.6	1177.6	1176.4	1175.1	1173.9	1172.7
162.5°	1186.2	1187.4	1188.7	1188.6	1187.2	1185.8	1184.4	1183.0
165°	1201.7	1203.4	1205.0	1204.9	1203.1	1201.2	1199.4	1197.5
167.5°	1213.1	1214.9	1216.7	1216.6	1214.6	1212.5	1210.5	1208.4
170°	1220.1	1221.8	1223.4	1223.2	1221.1	1219.1	1217.1	1215.0
172.5°	1224.6	1226.2	1227.8	1227.6	1225.3	1223.1	1220.9	1218.7
175°	1229.8	1231.6	1233.4	1233.1	1230.7	1228.2	1225.7	1223.3
177.5°	1231.8	1233.1	1234.5	1234.1	1232.2	1230.2	1228.2	1226.3
180°	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7	1230.7

(END OF REPORT)