

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332561-927

Luminaire Tested: **S124DIP-S575D810U927-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332561-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S575D810U927-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4269.0 lumens
Efficiency: N/A
Efficacy: 111.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 38.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332561-927

CATALOG NUMBER: S124DIP-S575D810U927-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

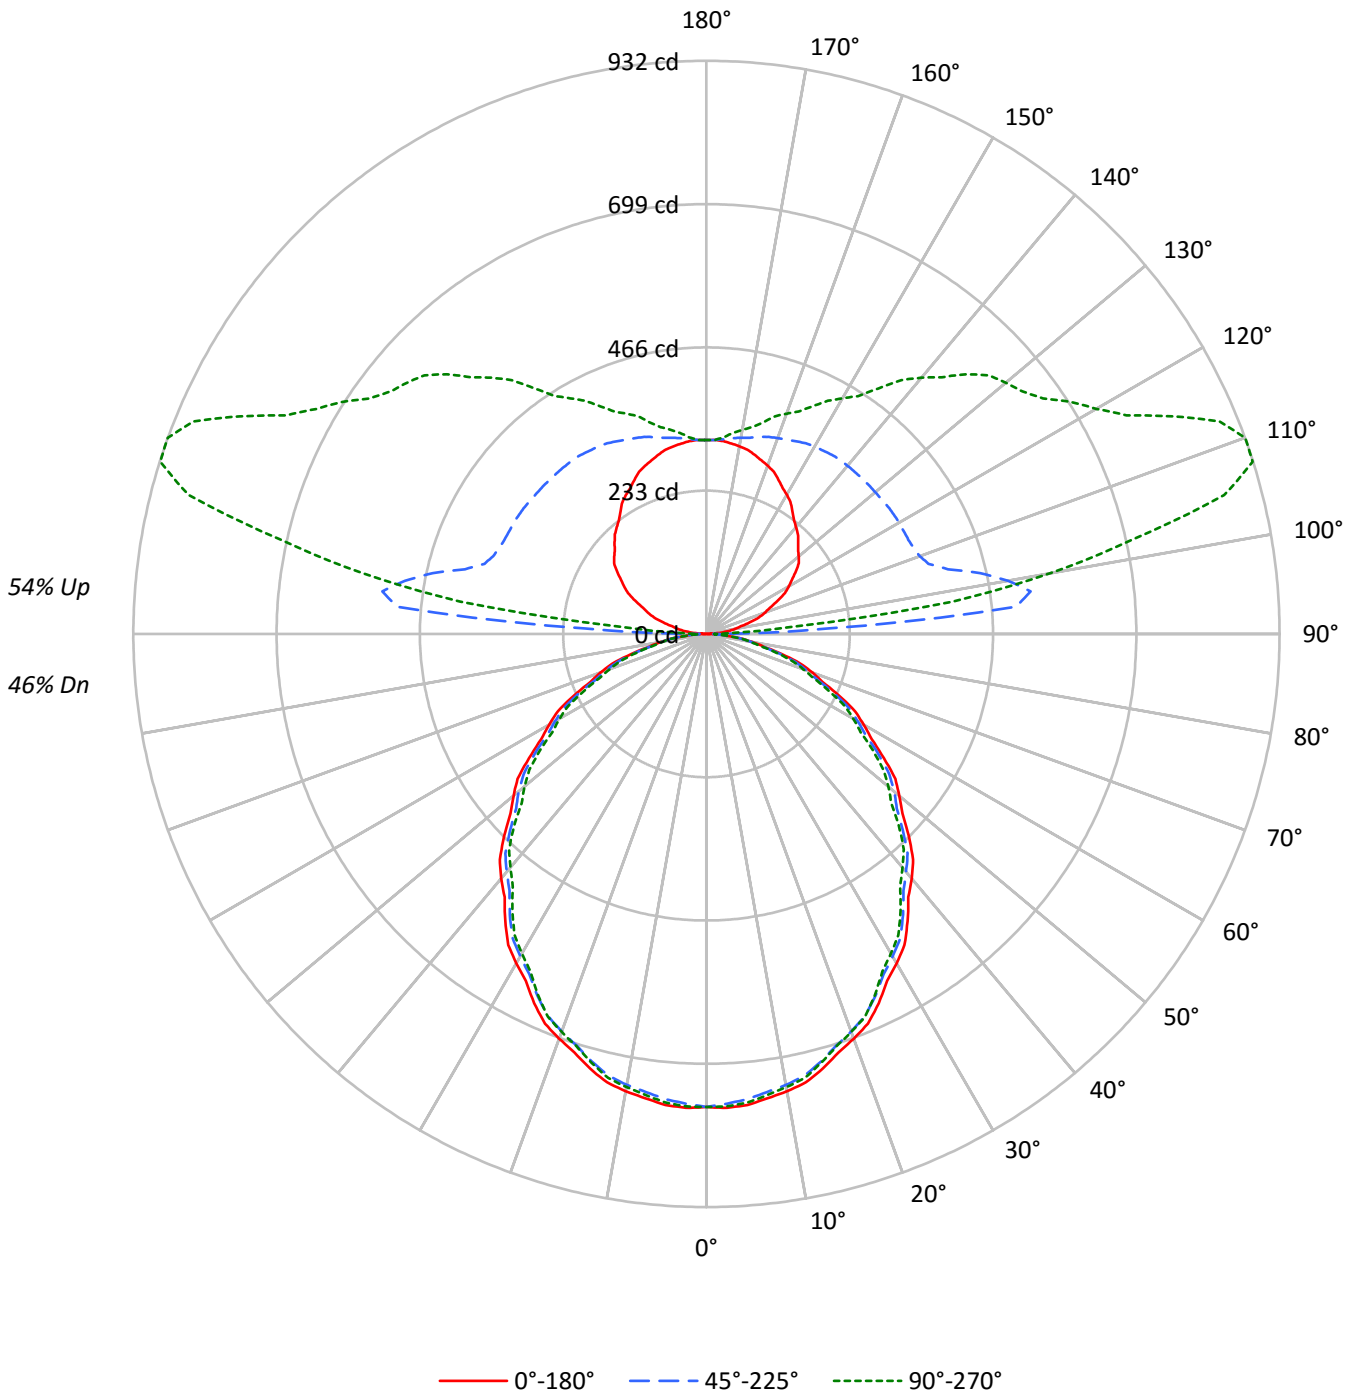



TEST NUMBER: P332561-927

CATALOG NUMBER: S124DIP-S575D810U927-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53	46																				
1	97	93	89	85	89	85	82	79	71	69	67	58	57	55	47	45	44	39																				
2	88	81	75	70	81	74	69	65	62	58	55	51	48	46	41	39	37	33																				
3	80	71	64	58	74	65	59	54	55	50	46	45	42	39	36	34	32	28																				
4	74	63	55	49	67	58	51	46	49	44	39	40	36	33	32	30	27	24																				
5	68	56	48	42	62	52	45	39	44	38	34	36	32	29	29	26	24	21																				
6	62	50	42	36	57	46	39	34	39	34	30	33	28	25	26	23	21	18																				
7	57	45	37	32	53	42	35	30	36	30	26	30	25	22	24	21	19	16																				
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	17	14																				
9	50	37	30	25	46	35	28	24	30	24	21	25	21	18	20	17	15	13																				
10	46	34	27	22	43	32	25	21	27	22	19	23	19	16	19	16	14	12																				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6211	6211	6211
5°	6229	6155	6199
10°	6190	6105	6135
15°	6115	6018	6033
20°	6016	5910	5916
25°	5903	5787	5770
30°	5764	5643	5591
35°	5619	5492	5419
40°	5469	5321	5223
45°	5313	5151	5053
50°	5141	5001	4847
55°	4954	4807	4650
60°	4766	4589	4448
65°	4556	4380	4204
70°	4322	4102	3944
75°	3961	3768	3671
80°	3524	3380	3296
85°	3084	2973	2908



TEST NUMBER: P332561-927

CATALOG NUMBER: S124DIP-S575D810U927-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.5	1.7
10°-20°	204.1	4.8
20°-30°	300.5	7.0
30°-40°	349.3	8.2
40°-50°	349.3	8.2
50°-60°	305.5	7.2
60°-70°	226.9	5.3
70°-80°	128.9	3.0
80°-90°	38.9	0.9
90°-100°	227.7	5.3
100°-110°	474.0	11.1
110°-120°	424.5	9.9
120°-130°	357.1	8.4
130°-140°	297.7	7.0
140°-150°	227.5	5.3
150°-160°	159.9	3.7
160°-170°	94.0	2.2
170°-180°	30.6	0.7
0°-30°	577.0	13.5
0°-40°	926.3	21.7
0°-60°	1581.2	37.0
0°-90°	1975.9	46.3
90°-120°	1126.2	26.4
90°-150°	2008.5	47.0
90°-180°	2293.0	53.7
0°-180°	4269.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	769	769	769	769	769	
5°	769	766	760	766	765	73
15°	732	729	720	723	722	206
25°	663	658	650	650	648	305
35°	570	566	557	553	550	356
45°	465	461	451	445	443	359
55°	352	350	342	334	330	315
65°	238	235	229	223	220	236
75°	127	124	121	118	118	135
85°	33	33	32	32	31	37
90°	1	5	11	12	13	3
95°	20	64	505	250	151	23
105°	72	105	406	875	872	77
115°	128	160	362	696	837	127
125°	178	211	360	592	668	158
135°	211	251	357	526	597	163
145°	243	279	356	444	488	153
155°	277	299	346	392	408	128
165°	302	311	331	351	356	85
175°	315	315	318	322	321	30
180°	315	315	315	315	315	



TEST NUMBER: P332561-927

CATALOG NUMBER: S124DIP-S575D810U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3
2.5°	771.3	771.0	770.6	770.3	770.0	769.2	768.0	766.8	765.6	764.4	765.5
5°	768.7	768.2	767.6	767.1	766.5	765.5	764.0	762.5	761.0	759.5	761.0
7.5°	761.5	761.0	760.5	759.9	759.4	758.3	756.6	754.9	753.2	751.5	752.8
10°	755.1	754.6	754.1	753.5	753.0	751.8	750.0	748.2	746.5	744.7	745.8
12.5°	746.8	746.2	745.7	745.1	744.6	743.4	741.5	739.6	737.7	735.8	737.0
15°	731.7	731.2	730.6	730.1	729.5	728.3	726.2	724.1	722.1	720.0	720.8
17.5°	713.6	712.9	712.3	711.5	710.8	709.6	707.6	705.7	703.7	701.8	702.3
20°	700.3	699.6	698.9	698.2	697.5	696.2	694.1	692.1	690.0	687.9	688.3
22.5°	686.0	685.1	684.2	683.3	682.4	680.9	678.8	676.8	674.7	672.6	673.4
25°	662.7	661.7	660.8	659.8	658.9	657.4	655.5	653.6	651.6	649.7	649.9
27.5°	636.0	635.1	634.1	633.1	632.1	630.7	628.9	627.2	625.3	623.6	623.3
30°	618.3	617.2	616.1	615.0	613.9	612.4	610.7	608.9	607.1	605.4	604.8
32.5°	599.5	598.6	597.5	596.6	595.6	594.1	592.3	590.4	588.5	586.6	586.0
35°	570.2	569.3	568.3	567.4	566.4	564.9	563.0	561.1	559.2	557.3	556.3
37.5°	539.2	538.4	537.5	536.6	535.8	534.3	532.3	530.2	528.1	526.1	525.1
40°	519.0	517.9	516.8	515.8	514.7	513.1	511.0	509.0	506.9	504.9	503.5
42.5°	497.3	496.7	496.1	495.4	494.7	493.2	491.0	488.7	486.4	484.2	482.6
45°	465.4	464.5	463.5	462.6	461.6	460.0	457.8	455.6	453.4	451.2	449.7
47.5°	432.0	431.3	430.7	430.0	429.4	428.0	426.0	424.0	421.9	419.9	418.2
50°	409.3	408.8	408.2	407.7	407.1	405.9	404.0	402.0	400.1	398.2	396.3
52.5°	387.1	386.5	385.8	385.2	384.5	383.2	381.1	379.1	377.1	375.0	373.4
55°	352.0	351.6	351.2	350.8	350.4	349.2	347.3	345.3	343.4	341.5	339.8
57.5°	318.5	318.0	317.5	317.0	316.6	315.4	313.5	311.6	309.7	307.8	306.3
60°	295.2	294.6	293.9	293.2	292.6	291.3	289.5	287.7	286.0	284.2	283.0
62.5°	272.6	272.0	271.4	270.8	270.3	269.0	267.2	265.3	263.4	261.5	260.4
65°	238.5	237.9	237.2	236.5	235.8	234.8	233.5	232.0	230.7	229.3	227.9
67.5°	204.3	203.7	203.0	202.4	201.8	200.8	199.5	198.2	196.9	195.5	194.2
70°	183.1	182.1	181.2	180.2	179.3	178.2	177.1	176.0	174.9	173.8	172.8
72.5°	160.4	159.5	158.5	157.5	156.5	155.7	154.8	153.9	153.0	152.1	151.2
75°	127.0	126.3	125.6	124.9	124.2	123.6	122.9	122.2	121.5	120.8	120.3
77.5°	95.1	94.7	94.4	94.2	93.9	93.4	92.8	92.2	91.6	91.0	90.8
80°	75.8	75.4	75.0	74.6	74.1	73.8	73.6	73.3	73.0	72.7	72.5
82.5°	57.1	56.9	56.7	56.5	56.3	56.2	56.2	56.1	56.0	56.0	55.8
85°	33.3	33.3	33.3	33.3	33.3	33.1	32.9	32.6	32.3	32.1	32.1
87.5°	12.9	13.1	13.3	13.4	13.4	13.2	13.9	13.8	13.9	14.1	13.9
90°	0.6	1.8	3.7	4.4	5.0	5.0	8.6	8.6	9.9	11.2	10.5
92.5°	7.1	10.3	16.1	23.7	32.7	45.6	77.1	125.1	172.0	196.5	163.7
95°	20.4	22.3	28.5	36.5	51.4	77.4	131.3	232.9	381.0	504.9	519.1
97.5°	36.7	36.7	42.0	49.4	62.2	84.0	125.5	209.4	356.6	531.7	652.1
100°	47.1	47.1	51.4	58.9	70.6	90.5	127.0	197.0	323.4	498.0	656.6
102.5°	57.0	58.0	61.8	68.8	80.0	98.9	131.9	193.5	301.0	455.9	619.4
105°	72.5	74.3	77.4	84.8	96.0	114.0	143.7	195.1	281.9	406.3	551.9
107.5°	89.6	90.8	93.9	101.8	112.5	130.2	157.5	204.3	278.4	378.6	497.4
110°	101.0	102.2	105.3	112.7	123.9	140.6	167.9	211.2	279.3	369.2	470.2



TEST NUMBER: P332561-927

CATALOG NUMBER: S124DIP-S575D810U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	111.9	113.1	116.7	123.7	134.8	151.5	177.8	218.6	282.3	364.7	454.8
115°	127.6	129.4	133.8	140.0	151.8	168.5	193.3	230.4	288.0	362.3	440.4
117.5°	143.9	145.7	149.6	156.4	167.4	184.7	208.3	242.4	294.1	361.7	434.0
120°	154.9	156.1	160.4	167.2	177.8	195.1	218.6	250.9	298.6	361.7	430.5
122.5°	164.8	166.0	170.3	176.7	188.1	205.0	228.5	258.8	303.0	361.2	426.5
125°	177.8	180.2	183.9	190.8	202.6	219.9	242.2	270.7	309.7	360.5	419.9
127.5°	189.3	191.3	195.7	203.5	215.8	233.3	254.8	281.0	315.1	359.2	411.1
130°	195.7	198.2	203.2	212.5	224.3	242.2	263.2	287.4	319.0	358.6	405.8
132.5°	202.2	204.1	210.6	219.4	232.2	249.1	270.2	293.8	322.5	358.1	400.8
135°	211.2	213.7	219.9	230.4	243.4	259.5	280.0	302.3	327.6	357.4	393.3
137.5°	220.3	222.6	229.4	239.5	252.9	268.3	287.4	308.2	330.7	357.3	386.9
140°	226.7	228.5	235.4	245.9	258.9	273.8	292.4	312.2	333.3	356.8	383.4
142.5°	233.6	235.5	241.9	251.8	264.4	278.8	296.8	315.1	335.3	356.8	380.5
145°	243.4	245.3	251.5	260.2	272.0	285.6	301.7	318.4	336.4	355.5	375.3
147.5°	254.4	255.1	260.5	269.4	279.2	291.5	306.7	321.2	337.0	353.3	370.8
150°	261.4	262.1	267.0	274.4	283.7	295.5	309.1	322.7	337.0	351.8	367.3
152.5°	267.8	268.0	272.9	279.9	288.2	299.0	311.1	323.7	336.0	349.4	363.4
155°	276.9	277.5	281.2	287.4	294.2	303.5	314.0	324.6	334.5	345.6	357.4
157.5°	285.7	285.7	289.1	294.0	299.9	307.2	316.2	324.6	332.9	341.8	351.3
160°	291.1	291.1	293.6	297.9	302.9	309.7	317.1	324.6	331.4	338.8	346.9
162.5°	296.1	295.6	297.5	301.4	305.9	311.2	318.1	324.6	329.9	335.9	342.9
165°	301.7	301.7	302.9	306.0	309.1	312.8	318.4	323.4	327.1	331.4	336.4
167.5°	307.2	306.7	307.2	309.6	311.3	314.2	318.3	321.9	324.1	326.9	330.4
170°	309.7	309.1	309.7	311.6	312.8	314.7	317.7	320.8	322.1	323.9	326.5
172.5°	312.2	311.6	311.7	313.1	313.8	315.1	317.3	319.9	320.1	321.0	323.0
175°	314.7	314.0	314.0	314.7	315.3	315.3	316.6	318.4	317.7	317.7	319.0
177.5°	315.8	315.3	314.8	315.3	315.3	315.3	315.8	316.8	315.8	315.8	316.2
180°	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3



TEST NUMBER: P332561-927

CATALOG NUMBER: S124DIP-S575D810U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	769.3	769.3	769.3	769.3	769.3	769.3	769.3	769.3
2.5°	766.6	767.7	768.8	769.3	769.1	769.1	769.0	768.8
5°	762.5	764.0	765.5	766.1	765.8	765.6	765.2	765.0
7.5°	754.0	755.2	756.4	756.9	756.8	756.6	756.5	756.2
10°	746.9	748.0	749.1	749.5	749.2	748.9	748.6	748.4
12.5°	738.2	739.4	740.6	741.0	740.6	740.2	739.9	739.5
15°	721.7	722.5	723.3	723.5	723.1	722.7	722.2	721.8
17.5°	702.8	703.3	703.9	703.9	703.7	703.4	703.1	702.9
20°	688.8	689.2	689.6	689.7	689.4	689.1	688.9	688.6
22.5°	674.1	674.9	675.7	675.7	675.3	674.8	674.3	673.8
25°	650.0	650.1	650.3	650.1	649.5	649.0	648.4	647.8
27.5°	623.0	622.6	622.3	621.8	621.1	620.4	619.7	619.0
30°	604.3	603.7	603.2	602.5	601.8	601.2	600.5	599.8
32.5°	585.3	584.6	584.0	583.3	582.7	581.9	581.2	580.6
35°	555.3	554.4	553.4	552.6	551.9	551.2	550.6	549.9
37.5°	524.0	522.9	521.9	520.9	520.1	519.1	518.2	517.3
40°	502.2	500.7	499.4	498.4	497.6	497.0	496.3	495.6
42.5°	481.0	479.3	477.8	476.7	476.3	475.9	475.4	474.9
45°	448.2	446.7	445.2	444.3	443.9	443.5	443.0	442.6
47.5°	416.5	414.8	413.1	411.8	410.7	409.6	408.6	407.6
50°	394.3	392.4	390.5	389.2	388.3	387.5	386.7	385.9
52.5°	371.6	369.9	368.3	366.9	365.8	364.8	363.8	362.7
55°	338.3	336.6	334.9	333.7	332.9	332.1	331.2	330.4
57.5°	304.8	303.2	301.6	300.4	299.6	298.8	298.0	297.2
60°	281.7	280.5	279.2	278.3	277.6	276.9	276.2	275.5
62.5°	259.3	258.1	257.0	256.1	255.4	254.8	254.1	253.3
65°	226.6	225.2	223.9	222.8	222.1	221.4	220.8	220.1
67.5°	192.9	191.6	190.3	189.5	189.3	189.2	188.9	188.8
70°	171.7	170.6	169.4	168.7	168.3	167.9	167.5	167.1
72.5°	150.4	149.5	148.6	148.0	147.6	147.2	146.8	146.3
75°	119.7	119.1	118.7	118.3	118.1	118.0	117.9	117.7
77.5°	90.6	90.5	90.3	90.1	89.7	89.4	89.0	88.6
80°	72.2	71.9	71.6	71.5	71.3	71.1	71.1	70.9
82.5°	55.6	55.5	55.3	55.1	55.1	54.9	54.7	54.6
85°	32.1	32.1	32.1	32.0	31.8	31.7	31.6	31.4
87.5°	14.1	14.2	14.3	14.3	14.4	14.6	14.4	14.4
90°	11.2	11.8	12.4	12.4	13.0	13.6	13.0	13.0
92.5°	121.7	91.6	72.9	60.4	53.2	49.8	47.7	47.7
95°	459.0	363.0	280.0	219.9	189.6	170.3	159.2	151.1
97.5°	678.1	642.5	581.9	517.2	472.8	435.5	416.8	404.0
100°	747.0	759.4	729.0	683.3	629.3	591.5	573.0	568.0
102.5°	743.5	805.0	813.8	794.7	761.7	734.3	714.7	710.7
105°	693.8	800.9	862.2	887.6	888.9	883.9	875.3	871.6
107.5°	623.1	737.1	823.5	878.7	909.3	923.4	929.6	931.2
110°	580.4	687.5	777.4	845.5	889.5	915.5	926.7	932.2



TEST NUMBER: P332561-927

CATALOG NUMBER: S124DIP-S575D810U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	549.2	644.0	728.8	796.9	846.8	878.4	894.0	903.0
115°	517.8	594.1	666.5	726.0	774.9	812.1	831.9	836.9
117.5°	502.5	565.5	622.5	673.0	714.7	745.9	766.0	769.8
120°	495.5	553.2	602.7	646.7	682.0	709.2	725.3	732.1
122.5°	489.6	545.2	590.3	628.8	658.7	682.0	695.6	702.4
125°	479.4	532.7	575.4	609.5	634.3	652.3	664.0	667.7
127.5°	467.1	517.9	560.5	592.9	617.8	633.8	643.7	647.5
130°	457.2	506.0	548.2	581.0	606.4	621.9	631.8	635.6
132.5°	446.7	492.7	533.9	566.6	591.5	609.0	618.5	622.2
135°	432.4	472.6	510.4	541.4	566.2	583.5	593.4	597.1
137.5°	419.4	453.4	485.3	513.3	536.4	553.5	561.7	566.2
140°	411.9	441.0	468.9	495.0	516.6	530.2	538.9	543.8
142.5°	405.0	430.6	454.6	477.1	496.3	508.9	516.6	520.1
145°	395.2	416.3	434.8	452.2	467.7	478.2	484.4	487.5
147.5°	387.1	403.9	418.7	432.4	443.8	452.8	457.5	458.6
150°	382.1	396.4	408.8	419.9	429.9	437.9	441.6	442.3
152.5°	376.8	389.0	400.4	409.6	418.0	424.5	426.7	427.4
155°	368.5	378.5	387.8	395.2	401.4	406.3	408.2	408.2
157.5°	359.7	368.0	375.9	381.8	386.5	390.2	391.3	391.3
160°	354.3	361.2	368.0	372.9	376.6	380.3	381.0	381.0
162.5°	348.9	354.7	360.0	364.5	367.2	370.9	371.5	371.1
165°	341.3	345.0	349.4	352.4	354.9	357.4	356.8	356.2
167.5°	334.0	336.8	340.3	342.1	343.4	345.0	344.9	344.4
170°	329.5	331.4	333.9	335.7	337.0	337.5	337.0	337.0
172.5°	325.6	326.9	328.4	329.8	330.5	331.1	330.5	329.5
175°	320.3	320.8	322.1	322.1	322.1	323.4	322.1	320.8
177.5°	316.8	317.3	317.3	317.7	317.3	317.7	316.8	315.8
180°	315.3	315.3	315.3	315.3	315.3	315.3	315.3	315.3

(END OF REPORT)