

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332588-927

Luminaire Tested: **S124DIP-S795D365U927-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332588-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124DIP-S795D365U927-4F0-1E-UDD-F4  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 365 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3735.8 lumens  
Efficiency: N/A  
Efficacy: 106.7 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 35  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332588-927

CATALOG NUMBER: S124DIP-S795D365U927-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

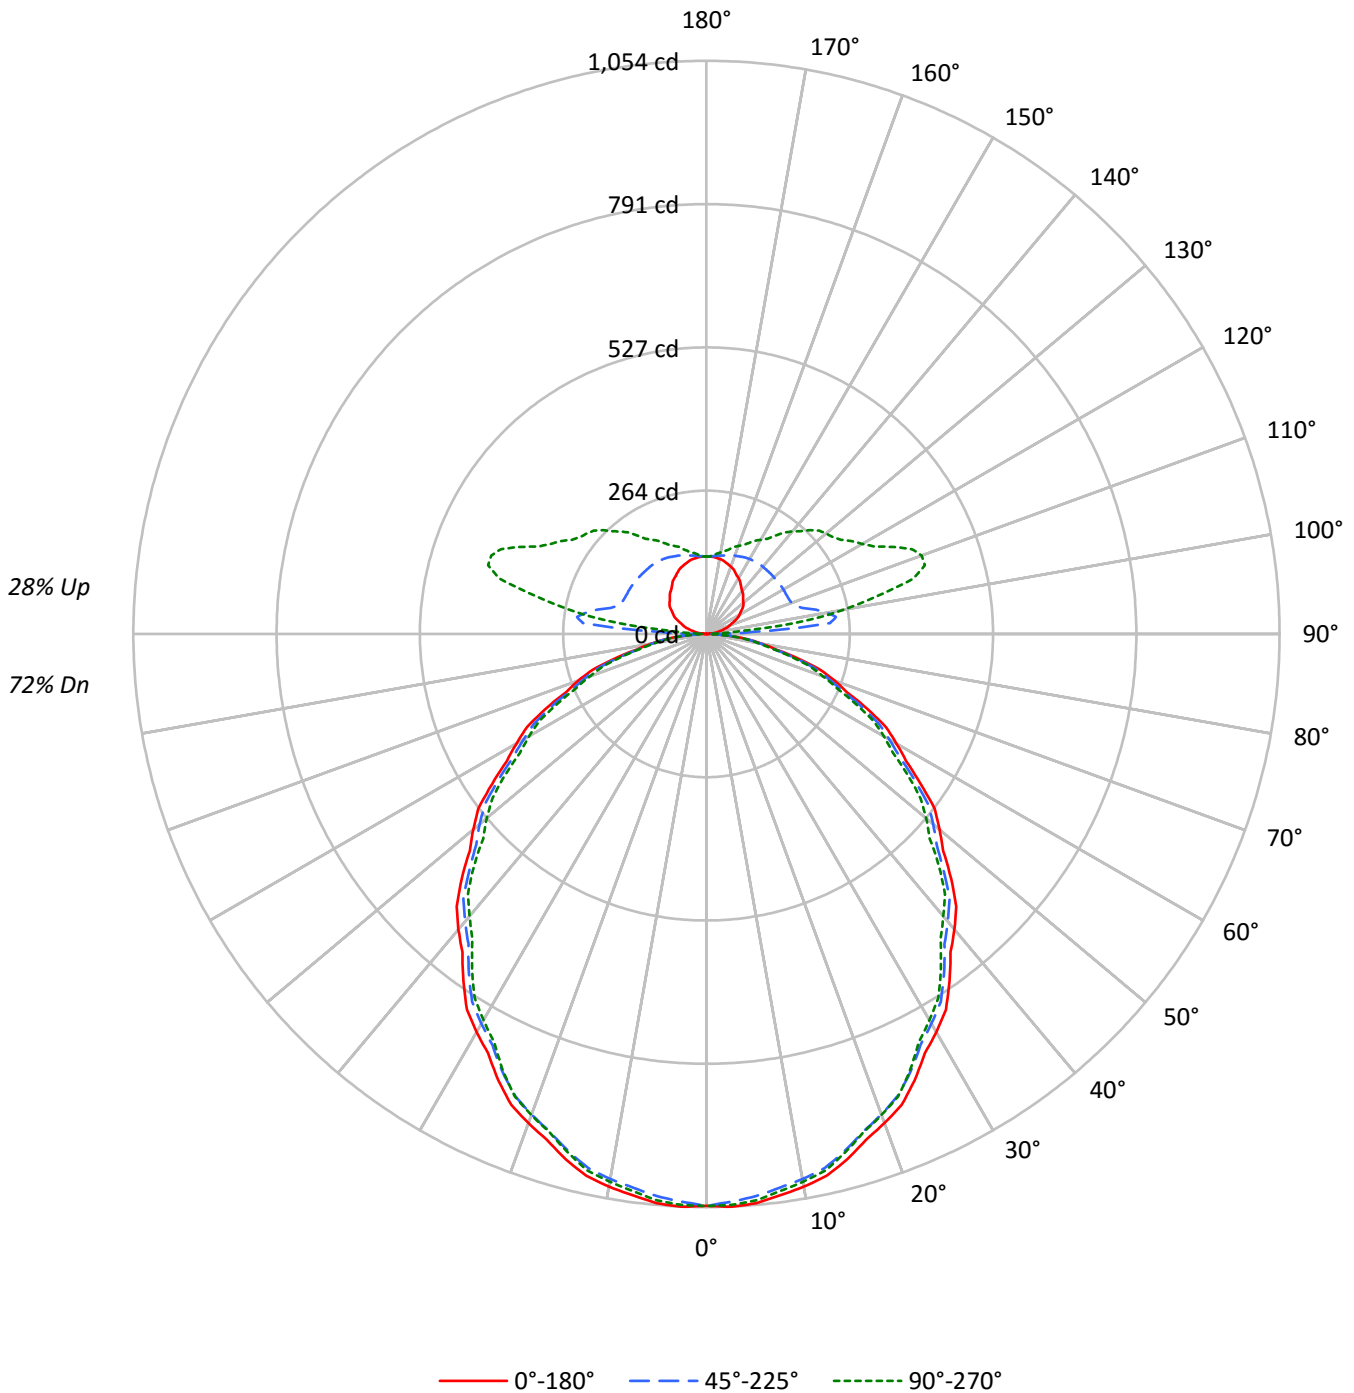



TEST NUMBER: P332588-927

CATALOG NUMBER: S124DIP-S795D365U927-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	77	77	77	72
1	103	98	94	91	97	93	90	86	84	81	79	75	73	71	68	66	65	61
2	94	86	79	74	88	82	76	71	74	69	65	66	63	60	60	57	54	51
3	85	75	68	62	81	72	65	59	65	59	55	59	54	51	53	49	46	43
4	78	67	59	52	74	64	56	50	58	52	47	52	47	43	47	43	40	37
5	72	60	51	45	68	57	49	44	52	45	41	47	42	38	43	38	35	32
6	66	54	45	39	63	51	44	38	47	40	36	43	37	33	39	34	31	28
7	61	49	40	35	58	47	39	34	43	36	31	39	33	29	35	31	27	25
8	57	44	36	31	54	42	35	30	39	33	28	36	30	26	32	28	25	22
9	53	41	33	28	51	39	32	27	36	30	25	33	28	24	30	25	22	20
10	50	37	30	25	47	36	29	24	33	27	23	30	25	22	28	23	20	18

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8490	8490	8490
5°	8515	8413	8474
10°	8461	8344	8385
15°	8359	8226	8247
20°	8223	8079	8086
25°	8068	7911	7888
30°	7879	7713	7643
35°	7681	7508	7407
40°	7477	7273	7140
45°	7263	7042	6907
50°	7027	6836	6625
55°	6773	6570	6356
60°	6516	6273	6082
65°	6229	5989	5746
70°	5908	5611	5391
75°	5415	5153	5022
80°	4816	4621	4505
85°	4215	4057	3974



TEST NUMBER: P332588-927

CATALOG NUMBER: S124DIP-S795D365U927-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	99.0	2.7
10°-20°	279.0	7.5
20°-30°	410.7	11.0
30°-40°	477.4	12.8
40°-50°	477.5	12.8
50°-60°	417.6	11.2
60°-70°	310.2	8.3
70°-80°	176.2	4.7
80°-90°	51.6	1.4
90°-100°	102.9	2.8
100°-110°	214.2	5.7
110°-120°	191.9	5.1
120°-130°	161.4	4.3
130°-140°	134.6	3.6
140°-150°	102.8	2.8
150°-160°	72.3	1.9
160°-170°	42.5	1.1
170°-180°	13.8	0.4
0°-30°	788.7	21.1
0°-40°	1266.2	33.9
0°-60°	2161.3	57.9
0°-90°	2699.3	72.3
90°-120°	509.0	13.6
90°-150°	907.8	24.3
90°-180°	1036.0	27.7
0°-180°	3735.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1052	1052	1052	1052	1052	
5°	1051	1047	1038	1047	1046	100
15°	1000	996	984	989	987	282
25°	906	900	888	889	886	417
35°	779	773	762	756	752	487
45°	636	630	617	608	605	490
55°	481	478	467	457	452	431
65°	326	322	314	305	301	323
75°	174	169	165	162	161	184
85°	46	45	44	44	43	50
90°	0	2	5	6	6	3
95°	9	29	228	113	68	10
105°	33	47	184	396	394	35
115°	58	72	164	315	378	57
125°	80	96	163	268	302	72
135°	96	114	162	238	270	74
145°	110	126	161	200	220	69
155°	125	135	156	177	184	58
165°	136	141	150	159	161	38
175°	142	142	144	146	145	13
180°	142	142	142	142	142	



TEST NUMBER: P332588-927

CATALOG NUMBER: S124DIP-S795D365U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6
2.5°	1054.3	1053.8	1053.4	1053.0	1052.5	1051.5	1049.8	1048.1	1046.5	1044.9	1046.3
5°	1050.8	1050.0	1049.2	1048.5	1047.7	1046.3	1044.3	1042.2	1040.1	1038.1	1040.1
7.5°	1041.0	1040.2	1039.5	1038.7	1038.0	1036.5	1034.2	1031.9	1029.6	1027.3	1029.0
10°	1032.2	1031.5	1030.7	1030.0	1029.2	1027.6	1025.2	1022.8	1020.3	1017.9	1019.4
12.5°	1020.7	1020.0	1019.2	1018.5	1017.8	1016.1	1013.5	1010.9	1008.4	1005.8	1007.4
15°	1000.2	999.4	998.7	997.9	997.2	995.5	992.6	989.8	987.0	984.2	985.3
17.5°	975.4	974.5	973.5	972.6	971.7	969.9	967.3	964.6	961.9	959.3	960.0
20°	957.2	956.2	955.4	954.4	953.5	951.6	948.8	945.9	943.2	940.4	941.0
22.5°	937.7	936.4	935.2	934.0	932.7	930.7	927.9	925.1	922.3	919.5	920.5
25°	905.8	904.5	903.2	901.9	900.6	898.6	896.0	893.3	890.7	888.1	888.3
27.5°	869.4	868.1	866.7	865.4	864.0	862.1	859.7	857.3	854.8	852.4	851.9
30°	845.2	843.7	842.2	840.7	839.2	837.2	834.7	832.3	829.9	827.4	826.7
32.5°	819.5	818.2	816.8	815.5	814.1	812.1	809.6	807.0	804.5	801.8	801.0
35°	779.4	778.1	776.8	775.5	774.2	772.2	769.6	767.0	764.4	761.8	760.4
37.5°	737.1	735.9	734.7	733.6	732.3	730.3	727.5	724.7	721.9	719.1	717.6
40°	709.5	708.0	706.5	705.0	703.5	701.3	698.5	695.7	692.9	690.1	688.2
42.5°	679.9	678.9	678.0	677.2	676.2	674.2	671.1	668.0	664.9	661.8	659.7
45°	636.2	634.9	633.6	632.2	631.0	628.8	625.8	622.8	619.8	616.8	614.7
47.5°	590.5	589.6	588.7	587.8	586.9	585.1	582.3	579.6	576.8	574.0	571.6
50°	559.5	558.7	558.0	557.2	556.5	554.8	552.2	549.6	546.9	544.3	541.7
52.5°	529.2	528.3	527.4	526.5	525.5	523.7	520.9	518.2	515.4	512.6	510.3
55°	481.2	480.5	480.0	479.4	478.9	477.3	474.7	472.1	469.4	466.8	464.5
57.5°	435.3	434.7	434.0	433.4	432.8	431.1	428.6	426.0	423.4	420.8	418.7
60°	403.6	402.7	401.7	400.8	399.9	398.2	395.8	393.3	390.9	388.5	386.7
62.5°	372.6	371.9	371.1	370.3	369.5	367.8	365.2	362.6	360.0	357.4	355.9
65°	326.1	325.2	324.2	323.3	322.3	320.9	319.1	317.2	315.3	313.5	311.6
67.5°	279.2	278.4	277.5	276.6	275.8	274.5	272.7	270.8	269.1	267.3	265.5
70°	250.3	249.0	247.6	246.3	245.0	243.6	242.1	240.6	239.1	237.7	236.1
72.5°	219.3	217.9	216.7	215.3	214.0	212.8	211.6	210.3	209.1	207.9	206.8
75°	173.6	172.6	171.7	170.8	169.8	168.9	167.9	167.0	166.1	165.2	164.4
77.5°	129.9	129.5	129.1	128.7	128.3	127.7	126.8	126.0	125.2	124.4	124.1
80°	103.6	103.1	102.5	102.0	101.4	100.9	100.5	100.2	99.8	99.4	99.0
82.5°	78.0	77.8	77.5	77.2	77.0	76.8	76.8	76.7	76.6	76.5	76.3
85°	45.5	45.5	45.5	45.5	45.5	45.3	44.9	44.6	44.2	43.8	43.8
87.5°	17.6	17.5	17.6	17.5	17.3	17.2	17.4	17.3	17.2	17.2	17.1
90°	0.3	0.9	1.7	2.0	2.2	2.2	3.9	3.9	4.5	5.1	4.8
92.5°	3.2	4.7	7.3	10.7	14.8	20.6	34.9	56.6	77.7	88.8	74.0
95°	9.3	10.1	12.9	16.6	23.2	35.0	59.3	105.3	172.2	228.1	234.6
97.5°	16.6	16.6	19.0	22.3	28.1	37.9	56.7	94.7	161.1	240.3	294.8
100°	21.3	21.3	23.2	26.6	31.9	40.9	57.4	89.0	146.2	225.1	296.8
102.5°	25.7	26.2	28.0	31.1	36.2	44.7	59.7	87.5	136.1	206.0	280.0
105°	32.8	33.6	35.0	38.3	43.4	51.5	65.0	88.2	127.4	183.6	249.5
107.5°	40.5	41.0	42.5	46.0	50.9	58.9	71.1	92.4	125.8	171.1	224.8
110°	45.6	46.2	47.6	50.9	56.0	63.5	75.9	95.5	126.3	166.8	212.5



TEST NUMBER: P332588-927

CATALOG NUMBER: S124DIP-S795D365U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	50.5	51.1	52.8	55.8	60.9	68.4	80.3	98.9	127.6	164.9	205.6
115°	57.7	58.5	60.4	63.3	68.6	76.1	87.4	104.2	130.2	163.8	199.1
117.5°	65.0	65.8	67.6	70.7	75.7	83.5	94.1	109.6	132.9	163.5	196.1
120°	70.0	70.6	72.5	75.6	80.3	88.2	98.9	113.4	135.0	163.5	194.6
122.5°	74.5	75.0	77.0	79.9	85.1	92.7	103.3	117.0	137.0	163.3	192.8
125°	80.3	81.4	83.2	86.3	91.6	99.4	109.5	122.3	140.0	163.0	189.8
127.5°	85.6	86.4	88.5	92.0	97.5	105.4	115.2	127.0	142.4	162.3	185.8
130°	88.5	89.6	91.8	96.0	101.3	109.5	119.0	129.9	144.2	162.1	183.4
132.5°	91.4	92.3	95.2	99.2	105.0	112.6	122.2	132.8	145.8	161.9	181.2
135°	95.5	96.6	99.4	104.2	110.0	117.3	126.5	136.7	148.1	161.5	177.8
137.5°	99.6	100.6	103.7	108.2	114.3	121.3	129.9	139.3	149.5	161.5	174.9
140°	102.5	103.3	106.4	111.1	117.0	123.7	132.1	141.1	150.6	161.3	173.3
142.5°	105.6	106.5	109.3	113.8	119.5	126.0	134.2	142.4	151.5	161.3	172.0
145°	110.0	110.9	113.7	117.6	122.9	129.0	136.3	143.9	152.0	160.7	169.7
147.5°	115.0	115.3	117.8	121.8	126.2	131.7	138.6	145.2	152.3	159.7	167.6
150°	118.1	118.4	120.6	124.1	128.3	133.6	139.7	145.8	152.3	159.0	166.0
152.5°	121.0	121.1	123.3	126.5	130.2	135.1	140.6	146.3	151.9	157.9	164.2
155°	125.2	125.4	127.1	129.9	133.0	137.2	142.0	146.7	151.2	156.2	161.5
157.5°	129.1	129.1	130.7	132.8	135.5	138.9	142.9	146.7	150.4	154.5	158.8
160°	131.6	131.6	132.7	134.7	136.9	140.0	143.4	146.7	149.8	153.1	156.8
162.5°	133.8	133.6	134.5	136.3	138.2	140.7	143.8	146.7	149.1	151.8	155.0
165°	136.3	136.3	136.9	138.3	139.7	141.4	143.9	146.2	147.8	149.8	152.0
167.5°	138.9	138.6	138.9	139.9	140.7	142.0	143.9	145.4	146.5	147.7	149.3
170°	140.0	139.7	140.0	140.9	141.4	142.2	143.6	145.0	145.6	146.4	147.6
172.5°	141.1	140.9	140.9	141.5	141.8	142.4	143.4	144.6	144.7	145.0	146.0
175°	142.2	142.0	142.0	142.2	142.5	142.5	143.1	143.9	143.6	143.6	144.2
177.5°	142.8	142.5	142.3	142.5	142.5	142.5	142.8	143.1	142.8	142.8	143.0
180°	142.5	142.5	142.5	142.5	142.5	142.5	142.5	142.5	142.5	142.5	142.5



TEST NUMBER: P332588-927

CATALOG NUMBER: S124DIP-S795D365U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6	1051.6
2.5°	1047.8	1049.3	1050.8	1051.5	1051.4	1051.2	1051.1	1050.9
5°	1042.2	1044.3	1046.3	1047.2	1046.8	1046.5	1046.1	1045.7
7.5°	1030.6	1032.3	1033.9	1034.6	1034.4	1034.2	1034.0	1033.7
10°	1020.9	1022.4	1023.9	1024.5	1024.1	1023.7	1023.3	1022.9
12.5°	1009.1	1010.7	1012.3	1012.9	1012.4	1011.9	1011.3	1010.8
15°	986.4	987.5	988.6	989.0	988.4	987.9	987.3	986.7
17.5°	960.7	961.4	962.1	962.3	961.9	961.5	961.2	960.8
20°	941.5	942.1	942.6	942.7	942.3	942.0	941.6	941.2
22.5°	921.5	922.5	923.5	923.7	923.0	922.3	921.6	921.0
25°	888.5	888.7	888.9	888.6	887.9	887.1	886.4	885.6
27.5°	851.5	851.0	850.6	849.9	849.0	848.0	847.1	846.1
30°	825.9	825.2	824.4	823.6	822.7	821.7	820.8	819.9
32.5°	800.0	799.2	798.3	797.3	796.4	795.4	794.5	793.6
35°	759.1	757.8	756.5	755.3	754.4	753.5	752.6	751.6
37.5°	716.2	714.8	713.4	712.1	710.8	709.6	708.4	707.1
40°	686.3	684.5	682.6	681.2	680.2	679.4	678.4	677.5
42.5°	657.4	655.3	653.1	651.7	651.1	650.5	649.8	649.2
45°	612.7	610.6	608.6	607.3	606.7	606.1	605.5	605.0
47.5°	569.3	567.0	564.7	562.8	561.4	560.0	558.6	557.1
50°	539.1	536.5	533.9	532.0	530.8	529.7	528.6	527.5
52.5°	508.0	505.6	503.4	501.5	500.1	498.7	497.3	495.8
55°	462.3	460.1	457.8	456.1	455.0	453.9	452.7	451.6
57.5°	416.5	414.4	412.3	410.7	409.6	408.4	407.4	406.3
60°	385.1	383.4	381.7	380.4	379.5	378.5	377.6	376.7
62.5°	354.3	352.8	351.3	350.1	349.1	348.2	347.3	346.3
65°	309.7	307.8	305.9	304.6	303.6	302.7	301.7	300.8
67.5°	263.7	261.9	260.1	259.0	258.8	258.6	258.3	258.0
70°	234.6	233.1	231.6	230.6	230.0	229.5	228.9	228.4
72.5°	205.6	204.4	203.2	202.3	201.7	201.1	200.6	200.0
75°	163.7	162.9	162.2	161.7	161.5	161.3	161.1	161.0
77.5°	123.9	123.7	123.5	123.1	122.6	122.2	121.7	121.2
80°	98.7	98.3	97.9	97.7	97.4	97.3	97.1	96.9
82.5°	76.0	75.8	75.6	75.4	75.3	75.0	74.9	74.6
85°	43.8	43.8	43.8	43.7	43.6	43.3	43.2	42.9
87.5°	17.2	17.3	17.3	17.3	17.3	17.4	17.3	17.3
90°	5.1	5.3	5.6	5.6	5.9	6.2	5.9	5.9
92.5°	55.0	41.4	33.0	27.3	24.0	22.5	21.5	21.5
95°	207.5	164.1	126.5	99.4	85.6	77.0	71.9	68.3
97.5°	306.5	290.4	263.0	233.8	213.7	196.9	188.5	182.6
100°	337.6	343.3	329.5	308.8	284.5	267.4	259.0	256.7
102.5°	336.1	363.8	367.8	359.2	344.3	331.9	323.1	321.2
105°	313.5	362.0	389.8	401.2	401.8	399.5	395.6	394.0
107.5°	281.6	333.2	372.2	397.2	411.0	417.4	420.2	420.9
110°	262.4	310.8	351.4	382.1	402.0	413.8	418.8	421.4





TEST NUMBER: P332588-927

CATALOG NUMBER: S124DIP-S795D365U927-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	248.2	291.0	329.4	360.2	382.8	397.0	404.1	408.1
115°	234.1	268.5	301.3	328.1	350.2	367.0	376.0	378.3
117.5°	227.1	255.6	281.4	304.2	323.1	337.2	346.2	347.9
120°	223.9	250.0	272.4	292.3	308.2	320.6	327.9	331.0
122.5°	221.3	246.4	266.8	284.2	297.7	308.2	314.4	317.5
125°	216.7	240.7	260.1	275.5	286.7	294.9	300.2	301.8
127.5°	211.1	234.1	253.4	268.0	279.2	286.5	291.0	292.6
130°	206.6	228.8	247.8	262.6	274.1	281.1	285.6	287.2
132.5°	201.9	222.7	241.3	256.1	267.4	275.3	279.6	281.2
135°	195.4	213.7	230.7	244.7	255.9	263.7	268.2	269.9
137.5°	189.6	204.9	219.4	232.0	242.5	250.2	253.9	255.9
140°	186.2	199.3	211.9	223.7	233.5	239.6	243.6	245.8
142.5°	183.1	194.6	205.4	215.6	224.3	230.0	233.5	235.0
145°	178.6	188.1	196.5	204.4	211.4	216.1	219.0	220.3
147.5°	175.0	182.5	189.3	195.4	200.6	204.7	206.8	207.3
150°	172.8	179.2	184.8	189.8	194.3	198.0	199.6	199.9
152.5°	170.3	175.9	181.0	185.1	188.9	191.9	192.9	193.2
155°	166.6	171.0	175.2	178.6	181.4	183.6	184.5	184.5
157.5°	162.6	166.4	169.9	172.6	174.7	176.4	176.9	176.9
160°	160.2	163.2	166.3	168.6	170.2	171.9	172.2	172.2
162.5°	157.7	160.3	162.7	164.8	166.0	167.6	167.9	167.7
165°	154.2	156.0	157.9	159.3	160.4	161.5	161.3	161.0
167.5°	151.0	152.3	153.8	154.6	155.2	156.0	155.9	155.7
170°	148.9	149.8	150.9	151.8	152.3	152.6	152.3	152.3
172.5°	147.2	147.7	148.5	149.1	149.4	149.6	149.4	148.9
175°	144.7	145.0	145.6	145.6	145.6	146.2	145.6	145.0
177.5°	143.1	143.4	143.4	143.6	143.4	143.6	143.1	142.8
180°	142.5	142.5	142.5	142.5	142.5	142.5	142.5	142.5

(END OF REPORT)