

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332923-927

Luminaire Tested: **S124RDIP-S575D1205U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332923-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124RDIP-S575D1205U927-4F0-1E-UDD-F1  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5165.2 lumens  
Efficiency: N/A  
Efficacy: 104.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 49.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332923-927

CATALOG NUMBER: S124RDIP-S575D1205U927-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

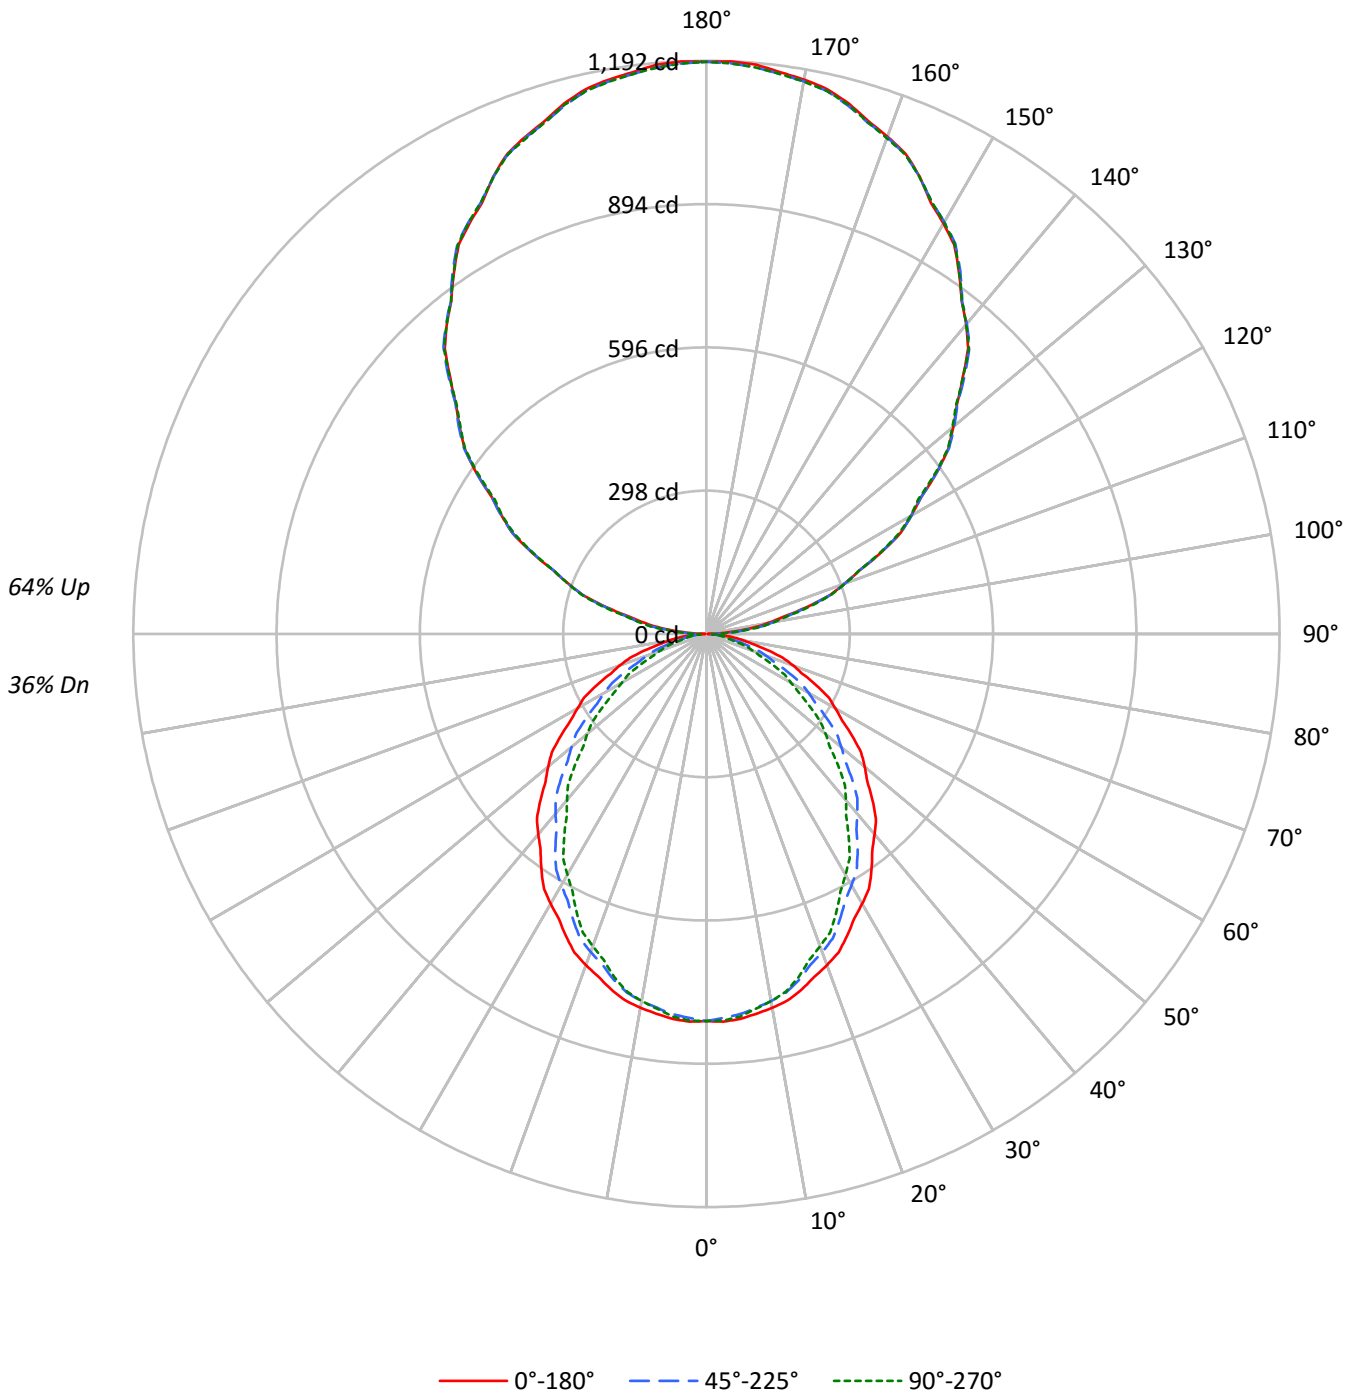



TEST NUMBER: P332923-927

CATALOG NUMBER: S124RDIP-S575D1205U927-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	104	104	104	104	94	94	94	94	76	76	76		59	59	59		43	43	43	36
1	95	91	87	84	86	82	79	76	66	64	62		52	51	49		39	38	37	31
2	86	79	73	69	78	72	67	63	58	55	52		46	43	41		34	33	31	26
3	79	70	63	57	71	64	58	53	52	47	44		41	38	35		30	29	27	22
4	72	62	54	48	65	56	50	45	46	41	37		36	33	30		27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32		33	29	26		25	22	20	17
6	61	49	42	36	55	45	38	33	37	32	28		29	26	23		22	20	18	15
7	56	45	37	31	51	41	34	29	34	28	25		27	23	20		20	18	16	13
8	52	40	33	28	47	37	30	26	31	26	22		24	21	18		19	16	14	12
9	49	37	30	25	44	34	27	23	28	23	20		23	19	16		17	15	13	11
10	45	34	27	22	41	31	25	21	26	21	18		21	17	15		16	14	12	10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6500	6500	6500
5°	6514	6434	6474
10°	6473	6357	6357
15°	6399	6224	6177
20°	6296	6048	5936
25°	6167	5842	5694
30°	6039	5626	5390
35°	5899	5401	5084
40°	5730	5145	4755
45°	5574	4891	4419
50°	5397	4598	4064
55°	5206	4294	3678
60°	4996	3961	3284
65°	4804	3543	2896
70°	4525	3085	2460
75°	4173	2558	1999
80°	3640	1948	1836
85°	3084	1769	1658



TEST NUMBER: P332923-927

CATALOG NUMBER: S124RDIP-S575D1205U927-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	75.6	1.5
10°-20°	210.9	4.1
20°-30°	304.5	5.9
30°-40°	345.2	6.7
40°-50°	333.3	6.5
50°-60°	277.2	5.4
60°-70°	191.4	3.7
70°-80°	97.0	1.9
80°-90°	28.4	0.6
90°-100°	78.5	1.5
100°-110°	232.5	4.5
110°-120°	394.6	7.6
120°-130°	520.4	10.1
130°-140°	584.4	11.3
140°-150°	574.3	11.1
150°-160°	483.0	9.4
160°-170°	321.4	6.2
170°-180°	112.5	2.2
0°-30°	591.0	11.4
0°-40°	936.2	18.1
0°-60°	1546.7	29.9
0°-90°	1863.6	36.1
90°-120°	705.6	13.7
90°-150°	2384.7	46.2
90°-180°	3302.0	63.9
0°-180°	5165.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	805	805	805	805	805	
5°	804	801	794	800	799	76
15°	766	760	745	743	739	216
25°	692	680	656	646	639	319
35°	599	578	548	528	516	374
45°	488	465	428	399	387	376
55°	370	344	305	274	261	331
65°	252	224	186	160	152	248
75°	134	111	82	68	64	141
85°	33	22	19	18	18	38
90°	3	13	20	26	28	5
95°	55	63	70	73	73	61
105°	214	216	219	222	225	228
115°	401	401	399	398	398	396
125°	584	584	584	582	580	521
135°	754	759	759	757	755	583
145°	916	919	920	919	917	573
155°	1049	1049	1048	1052	1048	483
165°	1142	1139	1138	1143	1139	322
175°	1188	1184	1183	1188	1183	113
180°	1190	1190	1190	1190	1190	



TEST NUMBER: P332923-927

CATALOG NUMBER: S124RDIP-S575D1205U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	805.1	805.1	805.1	805.1	805.1	805.1	805.1	805.1	805.1	805.1	805.1
2.5°	807.1	806.6	806.2	805.7	805.3	804.5	803.3	802.1	800.8	799.6	800.8
5°	803.8	803.3	802.7	802.2	801.7	800.6	798.9	797.3	795.6	794.0	795.4
7.5°	796.5	796.0	795.4	794.9	794.2	792.9	790.8	788.6	786.5	784.3	785.2
10°	789.6	789.0	788.3	787.6	787.0	785.4	782.9	780.4	777.9	775.5	776.0
12.5°	780.8	780.0	779.2	778.4	777.6	775.8	772.9	769.9	767.1	764.1	764.5
15°	765.6	764.4	763.2	761.9	760.7	758.4	754.9	751.5	748.1	744.7	744.4
17.5°	747.3	745.4	743.7	741.9	740.1	737.2	733.1	729.0	724.8	720.7	720.0
20°	732.9	731.2	729.4	727.6	725.8	722.6	718.0	713.3	708.6	704.0	702.9
22.5°	717.2	715.2	713.2	711.1	709.2	705.7	700.7	695.7	690.7	685.7	684.0
25°	692.3	689.8	687.3	684.8	682.4	678.3	672.7	667.1	661.5	655.9	653.6
27.5°	666.1	663.1	660.0	656.9	653.7	649.2	643.2	637.2	631.2	625.2	622.3
30°	647.8	644.4	641.0	637.6	634.2	629.2	622.8	616.4	609.9	603.5	600.1
32.5°	628.7	624.8	620.9	617.0	613.2	607.9	601.3	594.6	588.0	581.3	577.3
35°	598.6	594.2	589.8	585.4	581.1	575.4	568.5	561.7	554.8	548.0	543.4
37.5°	566.4	561.9	557.4	552.9	548.3	542.2	534.6	527.0	519.5	511.9	506.7
40°	543.7	539.2	534.6	530.1	525.6	519.4	511.7	503.8	496.1	488.2	482.4
42.5°	522.0	517.3	512.5	507.8	503.0	496.6	488.5	480.3	472.2	464.1	458.2
45°	488.2	483.2	478.1	473.0	467.9	461.3	453.0	444.9	436.7	428.4	421.7
47.5°	453.4	448.1	442.8	437.6	432.4	425.5	416.9	408.4	399.9	391.3	384.4
50°	429.7	424.3	419.0	413.6	408.3	401.2	392.4	383.7	374.9	366.1	359.3
52.5°	405.5	400.3	395.1	389.8	384.5	377.5	368.4	359.5	350.5	341.5	334.5
55°	369.9	364.4	358.9	353.4	347.9	340.7	331.8	323.0	314.0	305.1	298.0
57.5°	334.6	328.9	323.2	317.5	311.8	304.6	295.8	287.0	278.3	269.5	262.3
60°	309.4	304.0	298.5	293.0	287.6	280.4	271.6	262.8	254.1	245.3	238.2
62.5°	286.8	281.1	275.4	269.7	264.0	256.7	247.6	238.7	229.7	220.7	214.1
65°	251.5	245.7	239.7	233.9	227.9	220.6	211.8	203.1	194.3	185.5	179.7
67.5°	214.9	209.2	203.6	198.0	192.3	185.4	177.3	169.1	161.1	152.9	147.8
70°	191.7	185.9	180.2	174.4	168.7	161.9	154.1	146.3	138.5	130.7	126.2
72.5°	167.1	161.8	156.6	151.5	146.2	140.0	132.6	125.2	117.8	110.4	106.6
75°	133.8	128.7	123.7	118.6	113.5	107.7	101.3	94.8	88.4	82.0	78.8
77.5°	100.0	95.7	91.4	87.1	82.8	78.0	72.8	67.7	62.4	57.2	55.4
80°	78.3	74.3	70.3	66.4	62.4	58.4	54.3	50.1	46.0	41.9	41.5
82.5°	59.6	55.9	52.3	48.6	45.0	42.0	39.6	37.2	34.9	32.6	32.2
85°	33.3	30.6	27.8	25.0	22.3	20.8	20.4	20.0	19.5	19.1	18.9
87.5°	11.9	11.5	11.0	10.6	10.2	10.1	10.3	10.5	10.8	10.9	11.1
90°	2.8	5.0	7.3	9.5	11.7	13.7	15.4	17.0	18.6	20.3	21.5
92.5°	19.7	22.3	24.9	27.4	30.0	31.8	33.0	34.1	35.3	36.4	37.2
95°	55.2	57.0	58.9	60.8	62.6	64.2	65.7	67.1	68.5	69.9	70.6
97.5°	96.5	97.9	99.4	100.8	102.3	103.9	105.6	107.3	108.9	110.6	111.4
100°	128.9	129.7	130.5	131.3	132.1	133.5	135.3	137.1	138.9	140.9	141.2
102.5°	162.7	163.0	163.3	163.7	164.1	165.0	166.7	168.4	170.1	171.7	172.3
105°	214.4	214.7	214.8	215.1	215.2	215.8	216.6	217.4	218.2	219.0	219.7
107.5°	268.7	269.0	269.3	269.5	269.7	269.9	270.1	270.1	270.3	270.4	271.0
110°	305.5	305.9	306.3	306.8	307.2	307.3	307.1	306.9	306.7	306.5	306.1



TEST NUMBER: P332923-927

CATALOG NUMBER: S124RDIP-S575D1205U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	343.8	344.0	344.0	344.1	344.2	344.0	343.6	343.3	342.9	342.5	342.5
115°	401.2	401.2	401.2	401.2	401.2	401.1	400.7	400.3	399.8	399.4	399.3
117.5°	455.4	455.6	455.7	455.9	456.1	456.0	455.7	455.4	455.1	454.9	454.2
120°	491.5	492.3	493.1	493.9	494.7	494.9	494.2	493.6	493.0	492.4	491.4
122.5°	529.0	529.3	529.7	530.0	530.4	530.4	530.0	529.8	529.5	529.2	528.5
125°	584.4	584.4	584.4	584.4	584.4	584.3	584.2	583.9	583.7	583.5	583.1
127.5°	634.7	635.3	635.9	636.5	637.2	637.3	636.9	636.6	636.3	636.0	635.6
130°	670.0	670.7	671.2	671.8	672.5	672.8	672.8	672.8	672.8	672.8	672.4
132.5°	706.1	706.5	707.0	707.4	707.9	708.1	707.9	707.7	707.6	707.4	706.9
135°	753.8	755.0	756.2	757.5	758.7	759.3	759.3	759.3	759.3	759.3	758.9
137.5°	805.6	806.3	806.8	807.4	807.9	808.4	808.7	809.1	809.4	809.7	809.2
140°	840.3	840.7	841.1	841.5	841.9	842.1	842.1	842.1	842.1	842.1	841.9
142.5°	872.0	872.4	872.7	873.1	873.6	873.7	873.5	873.4	873.2	873.1	873.0
145°	915.8	916.6	917.4	918.2	919.0	919.6	919.7	920.0	920.1	920.4	920.1
147.5°	959.2	960.2	961.2	962.1	963.1	963.5	963.4	963.2	963.1	962.9	962.7
150°	985.7	986.5	987.4	988.2	989.0	989.4	989.4	989.4	989.4	989.4	989.4
152.5°	1010.7	1011.2	1011.7	1012.2	1012.7	1013.0	1013.2	1013.4	1013.5	1013.7	1014.2
155°	1049.2	1049.2	1049.2	1049.2	1049.2	1049.1	1048.9	1048.7	1048.5	1048.3	1049.1
157.5°	1081.6	1081.2	1080.9	1080.5	1080.1	1079.9	1079.9	1079.8	1079.8	1079.7	1080.4
160°	1100.7	1100.6	1100.3	1100.1	1099.9	1099.7	1099.5	1099.3	1099.1	1098.9	1099.5
162.5°	1118.4	1117.8	1117.4	1116.8	1116.3	1115.9	1115.7	1115.6	1115.3	1115.1	1116.2
165°	1142.2	1141.5	1140.9	1140.3	1139.7	1139.2	1138.8	1138.4	1138.0	1137.6	1138.8
167.5°	1160.4	1159.5	1158.6	1157.8	1157.0	1156.5	1156.6	1156.6	1156.7	1156.7	1157.9
170°	1170.7	1169.7	1168.6	1167.6	1166.6	1166.2	1166.4	1166.6	1166.8	1167.0	1168.2
172.5°	1178.1	1177.2	1176.3	1175.4	1174.6	1174.2	1174.3	1174.3	1174.3	1174.4	1175.8
175°	1188.2	1187.2	1186.1	1185.1	1184.1	1183.4	1183.3	1183.0	1182.9	1182.6	1184.1
177.5°	1191.5	1190.6	1189.9	1189.1	1188.2	1187.8	1187.8	1187.8	1187.8	1187.8	1189.0
180°	1190.0	1190.0	1190.0	1190.0	1190.0	1190.0	1190.0	1190.0	1190.0	1190.0	1190.0



TEST NUMBER: P332923-927

CATALOG NUMBER: S124RDIP-S575D1205U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	805.1	805.1	805.1	805.1	805.1	805.1	805.1	805.1
2.5°	802.1	803.3	804.5	805.0	804.9	804.8	804.7	804.6
5°	796.7	798.1	799.5	800.0	799.7	799.5	799.2	798.9
7.5°	786.1	787.0	787.9	788.1	787.7	787.2	786.8	786.3
10°	776.6	777.1	777.7	777.7	777.1	776.6	776.0	775.5
12.5°	764.8	765.1	765.5	765.2	764.5	763.7	763.0	762.2
15°	744.1	743.9	743.5	743.0	742.0	741.0	740.1	739.1
17.5°	719.2	718.4	717.6	716.5	715.1	713.7	712.2	710.7
20°	701.8	700.7	699.6	698.2	696.4	694.6	692.8	691.0
22.5°	682.5	680.8	679.1	677.6	676.1	674.7	673.3	671.8
25°	651.3	648.9	646.6	644.8	643.3	642.0	640.6	639.2
27.5°	619.4	616.6	613.7	611.2	609.3	607.3	605.4	603.4
30°	596.7	593.2	589.8	587.0	584.8	582.6	580.4	578.2
32.5°	573.4	569.4	565.4	562.4	560.3	558.3	556.1	554.1
35°	538.7	534.0	529.4	525.9	523.4	520.9	518.4	515.9
37.5°	501.5	496.3	491.1	487.3	484.7	482.3	479.8	477.4
40°	476.7	471.0	465.2	461.1	458.6	456.1	453.7	451.2
42.5°	452.3	446.5	440.6	436.4	433.8	431.3	428.6	426.1
45°	415.0	408.3	401.6	397.0	394.5	392.1	389.6	387.1
47.5°	377.4	370.4	363.5	358.6	355.9	353.2	350.5	347.8
50°	352.4	345.6	338.7	334.1	331.4	328.8	326.2	323.6
52.5°	327.6	320.6	313.7	308.9	306.1	303.4	300.7	298.0
55°	290.9	283.8	276.6	271.8	269.2	266.6	264.0	261.3
57.5°	255.0	247.8	240.6	236.0	234.0	232.0	230.0	228.1
60°	231.1	223.9	216.8	212.2	210.0	207.8	205.7	203.4
62.5°	207.6	201.0	194.4	190.2	188.5	186.7	185.0	183.2
65°	173.8	167.9	162.0	158.2	156.6	155.0	153.3	151.6
67.5°	142.8	137.7	132.6	129.2	127.4	125.6	123.7	121.9
70°	121.7	117.2	112.6	109.6	108.3	106.9	105.5	104.2
72.5°	102.7	98.9	95.0	92.4	91.2	89.9	88.6	87.4
75°	75.7	72.6	69.4	67.4	66.5	65.8	65.0	64.1
77.5°	53.6	51.7	49.8	48.8	48.6	48.3	48.1	47.8
80°	41.1	40.7	40.2	40.0	39.8	39.7	39.6	39.5
82.5°	31.9	31.6	31.4	31.1	31.0	30.8	30.7	30.6
85°	18.5	18.3	18.0	17.9	17.9	17.9	17.9	17.9
87.5°	11.2	11.3	11.5	11.6	11.9	12.0	12.2	12.4
90°	22.7	23.9	25.2	26.0	26.4	26.8	27.2	27.6
92.5°	37.9	38.7	39.4	39.8	40.2	40.4	40.6	40.9
95°	71.1	71.8	72.4	72.7	72.7	72.7	72.7	72.7
97.5°	112.1	112.8	113.6	113.9	113.9	113.9	113.9	113.9
100°	141.6	142.0	142.4	142.7	142.7	142.7	142.7	142.7
102.5°	172.9	173.5	174.0	174.4	174.6	174.8	174.9	175.1
105°	220.3	220.9	221.5	222.1	222.8	223.3	223.9	224.6
107.5°	271.6	272.1	272.7	273.0	272.9	272.9	272.8	272.8
110°	305.6	305.2	304.8	304.9	305.5	306.2	306.8	307.4





TEST NUMBER: P332923-927

CATALOG NUMBER: S124RDIP-S575D1205U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	342.4	342.3	342.2	342.2	342.4	342.5	342.6	342.8
115°	399.0	398.8	398.6	398.4	398.2	398.0	397.8	397.6
117.5°	453.4	452.7	452.0	451.5	451.1	450.7	450.3	449.9
120°	490.4	489.3	488.3	488.0	488.4	488.8	489.3	489.6
122.5°	527.8	527.1	526.4	525.7	525.0	524.3	523.5	522.8
125°	582.7	582.3	581.9	581.5	581.1	580.7	580.2	579.8
127.5°	635.2	634.8	634.3	634.0	633.7	633.3	633.0	632.6
130°	671.9	671.5	671.1	670.5	669.7	668.9	668.0	667.3
132.5°	706.5	706.2	705.8	705.4	705.0	704.7	704.4	704.1
135°	758.5	758.0	757.6	757.2	756.5	755.9	755.3	754.7
137.5°	808.7	808.1	807.6	807.4	807.6	807.6	807.8	807.9
140°	841.7	841.5	841.3	841.1	840.9	840.7	840.5	840.3
142.5°	873.0	872.9	872.9	872.8	872.8	872.7	872.7	872.7
145°	920.0	919.7	919.6	919.1	918.5	917.9	917.3	916.7
147.5°	962.6	962.4	962.2	962.0	961.9	961.6	961.4	961.2
150°	989.4	989.4	989.4	989.3	989.0	988.9	988.6	988.5
152.5°	1014.6	1015.2	1015.7	1015.7	1015.1	1014.5	1014.0	1013.5
155°	1050.0	1050.8	1051.5	1051.5	1050.8	1050.0	1049.1	1048.3
157.5°	1081.0	1081.6	1082.2	1082.2	1081.5	1080.8	1080.1	1079.4
160°	1100.1	1100.7	1101.4	1101.1	1100.1	1099.1	1098.1	1097.1
162.5°	1117.3	1118.4	1119.5	1119.6	1118.6	1117.5	1116.5	1115.5
165°	1140.0	1141.2	1142.5	1142.6	1141.9	1141.1	1140.2	1139.4
167.5°	1159.1	1160.4	1161.6	1161.6	1160.3	1159.0	1157.8	1156.5
170°	1169.5	1170.7	1172.0	1171.8	1170.4	1168.9	1167.5	1166.1
172.5°	1177.2	1178.5	1180.0	1180.0	1178.5	1177.0	1175.6	1174.2
175°	1185.5	1186.9	1188.4	1188.4	1186.9	1185.5	1184.1	1182.6
177.5°	1190.1	1191.3	1192.4	1192.3	1191.0	1189.7	1188.4	1187.1
180°	1190.0	1190.0	1190.0	1190.0	1190.0	1190.0	1190.0	1190.0

(END OF REPORT)