

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332651-830

Luminaire Tested: **S124DIP-S1020D810U830-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332651-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S1020D810U830-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6903.8 lumens
Efficiency: N/A
Efficacy: 126.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332651-830

CATALOG NUMBER: S124DIP-S1020D810U830-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

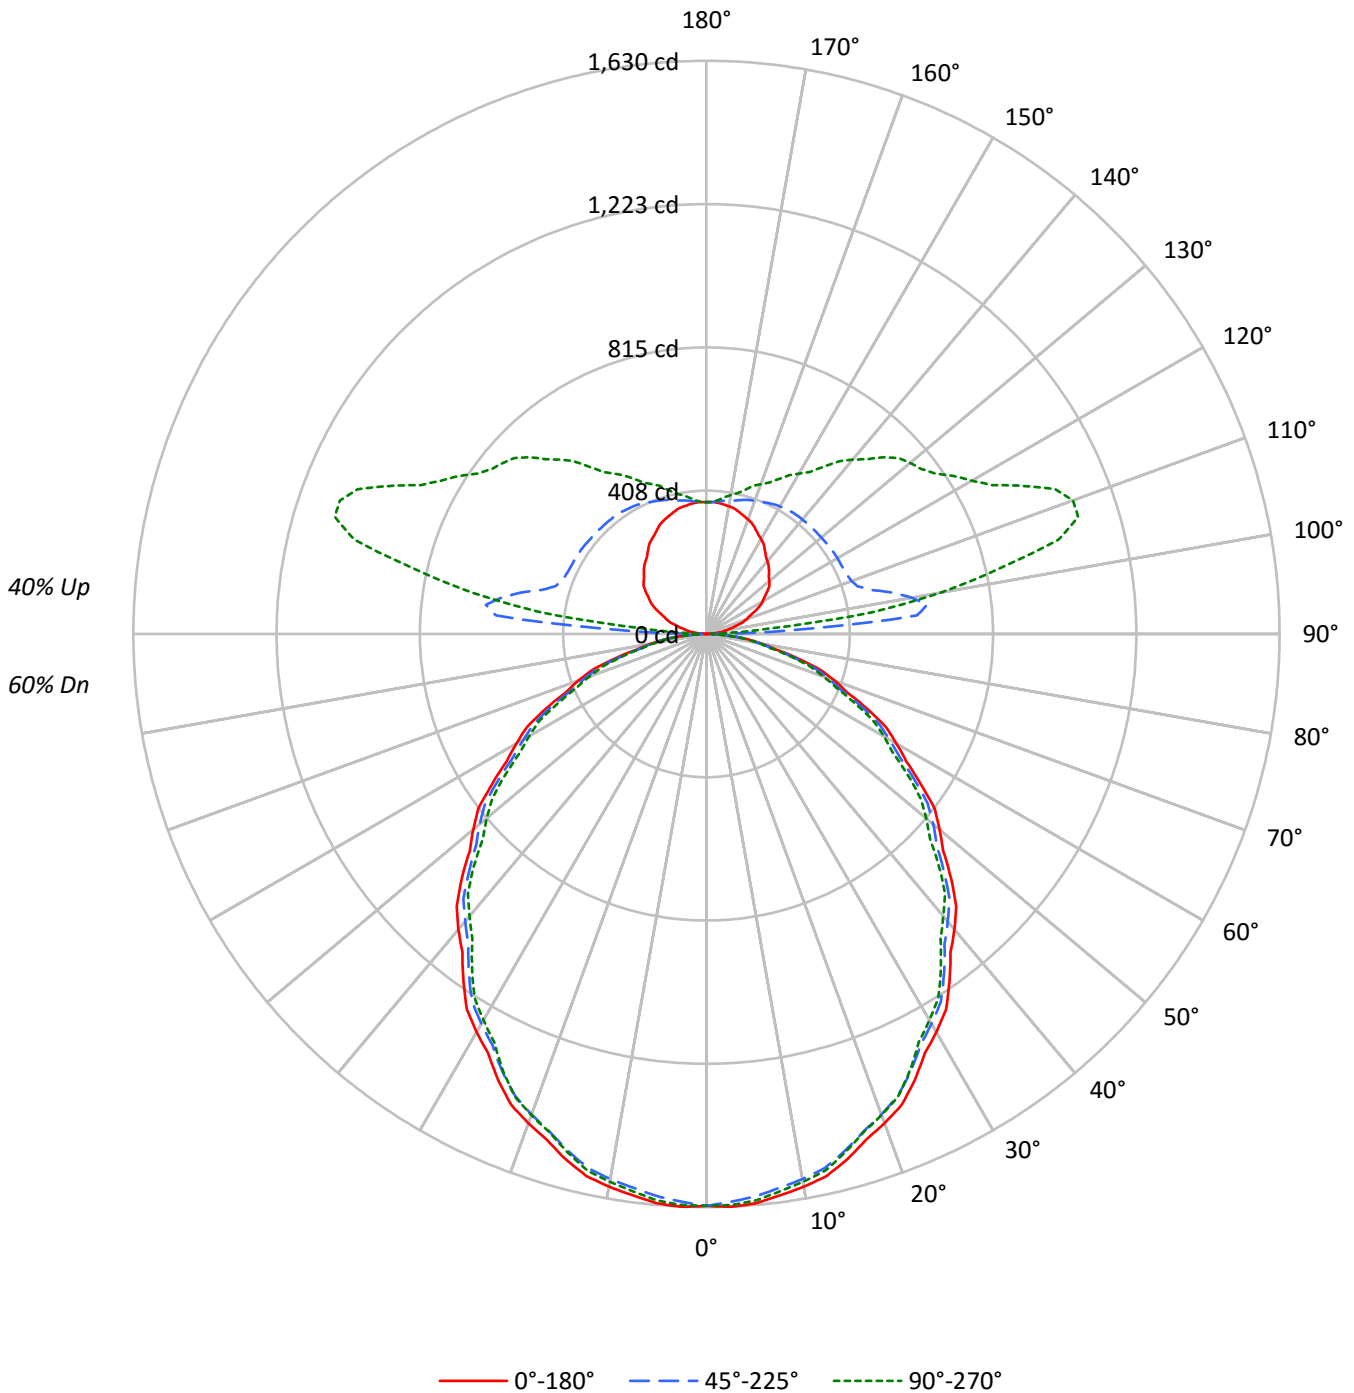



TEST NUMBER: P332651-830

CATALOG NUMBER: S124DIP-S1020D810U830-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	66	66	66	60
1	100	96	92	88	93	90	86	83	78	76	73	68	66	64	58	57	55	51
2	91	84	77	72	85	78	73	68	69	64	61	59	56	53	51	49	47	43
3	83	73	66	60	77	69	62	57	60	55	51	53	49	45	45	42	40	36
4	76	65	57	51	71	61	54	48	54	48	44	47	42	39	40	37	34	31
5	70	58	50	44	65	55	47	42	48	42	38	42	37	34	36	33	30	27
6	64	52	44	38	60	49	42	36	43	37	33	38	33	30	33	29	26	24
7	60	47	39	33	56	44	37	32	39	33	29	35	30	26	30	26	23	21
8	55	43	35	30	52	40	33	28	36	30	26	32	27	23	28	24	21	19
9	52	39	32	26	48	37	30	25	33	27	23	29	24	21	26	22	19	17
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	24	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13130	13130	13130
5°	13169	13011	13105
10°	13086	12904	12969
15°	12929	12721	12754
20°	12718	12494	12506
25°	12479	12235	12200
30°	12185	11929	11820
35°	11880	11610	11456
40°	11564	11248	11041
45°	11233	10891	10683
50°	10868	10574	10246
55°	10473	10162	9831
60°	10078	9700	9405
65°	9635	9259	8886
70°	9135	8674	8337
75°	8372	7966	7764
80°	7452	7146	6969
85°	6521	6280	6150



TEST NUMBER: P332651-830

CATALOG NUMBER: S124DIP-S1020D810U830-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.2	2.2
10°-20°	431.5	6.3
20°-30°	635.2	9.2
30°-40°	738.4	10.7
40°-50°	738.4	10.7
50°-60°	645.9	9.4
60°-70°	479.7	6.9
70°-80°	272.5	3.9
80°-90°	80.7	1.2
90°-100°	270.9	3.9
100°-110°	563.9	8.2
110°-120°	505.1	7.3
120°-130°	424.9	6.2
130°-140°	354.3	5.1
140°-150°	270.6	3.9
150°-160°	190.2	2.8
160°-170°	111.9	1.6
170°-180°	36.4	0.5
0°-30°	1219.8	17.7
0°-40°	1958.2	28.4
0°-60°	3342.6	48.4
0°-90°	4175.5	60.5
90°-120°	1340.0	19.4
90°-150°	2389.7	34.6
90°-180°	2728.0	39.5
0°-180°	6903.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1626	1626	1626	1626	1626	
5°	1625	1619	1606	1619	1617	154
15°	1547	1541	1522	1529	1526	436
25°	1401	1391	1374	1374	1370	644
35°	1205	1196	1178	1169	1162	753
45°	984	974	954	940	936	758
55°	744	739	722	707	698	666
65°	504	497	485	472	465	499
75°	268	262	255	250	249	285
85°	70	70	68	68	66	77
90°	1	6	13	15	16	5
95°	24	77	601	297	180	27
105°	86	125	483	1041	1037	92
115°	152	191	431	828	996	151
125°	212	251	429	705	794	188
135°	251	299	425	626	710	194
145°	290	332	423	528	580	182
155°	329	356	411	466	486	152
165°	359	370	394	418	424	101
175°	374	375	378	383	382	36
180°	375	375	375	375	375	



TEST NUMBER: P332651-830

CATALOG NUMBER: S124DIP-S1020D810U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4
2.5°	1630.5	1629.8	1629.1	1628.4	1627.8	1626.1	1623.5	1621.0	1618.4	1615.9	1618.3
5°	1625.0	1623.9	1622.8	1621.6	1620.4	1618.3	1615.0	1611.8	1608.7	1605.5	1608.7
7.5°	1610.0	1608.7	1607.6	1606.5	1605.3	1603.0	1599.4	1595.9	1592.3	1588.8	1591.4
10°	1596.4	1595.3	1594.0	1592.9	1591.8	1589.3	1585.5	1581.8	1578.0	1574.2	1576.5
12.5°	1578.7	1577.5	1576.3	1575.2	1574.0	1571.4	1567.4	1563.5	1559.4	1555.5	1558.0
15°	1546.9	1545.7	1544.5	1543.4	1542.2	1539.5	1535.1	1530.8	1526.4	1522.1	1523.8
17.5°	1508.5	1507.1	1505.6	1504.2	1502.8	1500.0	1495.8	1491.8	1487.6	1483.6	1484.6
20°	1480.4	1478.9	1477.5	1476.0	1474.6	1471.7	1467.4	1463.0	1458.7	1454.3	1455.2
22.5°	1450.2	1448.2	1446.3	1444.4	1442.6	1439.4	1435.0	1430.7	1426.3	1422.0	1423.6
25°	1400.9	1398.9	1396.8	1394.8	1392.8	1389.8	1385.7	1381.7	1377.6	1373.6	1373.9
27.5°	1344.6	1342.6	1340.4	1338.3	1336.2	1333.3	1329.6	1325.8	1322.0	1318.2	1317.6
30°	1307.1	1304.8	1302.4	1300.1	1297.8	1294.8	1291.0	1287.2	1283.5	1279.7	1278.6
32.5°	1267.4	1265.4	1263.3	1261.2	1259.1	1256.0	1252.1	1248.1	1244.1	1240.1	1238.7
35°	1205.4	1203.4	1201.4	1199.4	1197.3	1194.3	1190.2	1186.2	1182.1	1178.1	1176.0
37.5°	1140.0	1138.1	1136.3	1134.4	1132.6	1129.5	1125.1	1120.8	1116.4	1112.1	1109.9
40°	1097.3	1095.0	1092.6	1090.3	1088.0	1084.7	1080.3	1076.0	1071.7	1067.3	1064.4
42.5°	1051.4	1050.0	1048.6	1047.3	1045.8	1042.7	1037.9	1033.1	1028.3	1023.5	1020.1
45°	983.9	981.8	979.9	977.8	975.8	972.4	967.8	963.2	958.6	953.9	950.7
47.5°	913.2	911.9	910.5	909.1	907.7	904.8	900.6	896.3	892.0	887.7	884.1
50°	865.3	864.1	863.0	861.9	860.6	858.1	854.0	850.0	845.9	841.9	837.8
52.5°	818.4	817.0	815.6	814.3	812.8	810.0	805.7	801.4	797.1	792.9	789.3
55°	744.1	743.2	742.3	741.5	740.6	738.2	734.1	730.1	726.0	722.0	718.5
57.5°	673.3	672.2	671.3	670.2	669.3	666.8	662.8	658.8	654.8	650.8	647.5
60°	624.2	622.7	621.3	619.9	618.4	615.9	612.1	608.3	604.5	600.8	598.1
62.5°	576.3	575.0	573.8	572.6	571.4	568.8	564.8	560.8	556.8	552.8	550.4
65°	504.4	502.8	501.4	500.0	498.5	496.3	493.4	490.6	487.7	484.7	481.9
67.5°	431.9	430.6	429.2	427.9	426.5	424.5	421.7	419.0	416.1	413.4	410.6
70°	387.0	385.0	383.0	381.0	378.9	376.7	374.5	372.1	369.9	367.5	365.1
72.5°	339.1	337.1	335.1	333.0	331.0	329.0	327.2	325.4	323.5	321.6	319.8
75°	268.4	267.0	265.5	264.1	262.7	261.2	259.8	258.4	256.8	255.4	254.3
77.5°	201.0	200.3	199.6	199.1	198.4	197.5	196.1	194.9	193.6	192.4	192.0
80°	160.3	159.4	158.5	157.7	156.8	156.1	155.5	155.0	154.4	153.7	153.2
82.5°	120.6	120.3	119.9	119.4	119.0	118.8	118.7	118.6	118.5	118.3	118.0
85°	70.4	70.4	70.4	70.4	70.4	70.1	69.5	68.9	68.3	67.8	67.8
87.5°	27.2	27.3	27.5	27.4	27.3	27.1	27.8	27.5	27.6	27.7	27.5
90°	0.8	2.2	4.4	5.2	5.9	5.9	10.3	10.3	11.8	13.3	12.5
92.5°	8.4	12.3	19.1	28.2	38.9	54.2	91.7	148.8	204.6	233.8	194.7
95°	24.3	26.5	33.9	43.5	61.2	92.1	156.3	277.1	453.3	600.7	617.6
97.5°	43.6	43.6	50.0	58.8	74.0	99.9	149.3	249.1	424.2	632.6	775.9
100°	56.0	56.0	61.2	70.0	84.0	107.6	151.1	234.4	384.7	592.6	781.2
102.5°	67.8	69.0	73.5	81.8	95.2	117.6	156.9	230.3	358.2	542.4	737.0
105°	86.2	88.4	92.1	100.9	114.2	135.6	171.0	232.1	335.4	483.4	656.7
107.5°	106.6	108.0	111.7	121.1	133.8	155.0	187.4	243.1	331.2	450.4	591.8
110°	120.2	121.6	125.3	134.1	147.4	167.3	199.7	251.3	332.3	439.2	559.4



TEST NUMBER: P332651-830

CATALOG NUMBER: S124DIP-S1020D810U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	133.1	134.6	138.8	147.1	160.3	180.3	211.5	260.1	335.9	433.9	541.1
115°	151.8	154.0	159.2	166.5	180.6	200.5	230.0	274.2	342.7	431.1	524.0
117.5°	171.3	173.3	178.0	186.1	199.2	219.8	247.8	288.4	350.0	430.4	516.3
120°	184.3	185.7	190.9	199.0	211.5	232.1	260.1	298.5	355.2	430.4	512.2
122.5°	196.0	197.6	202.6	210.2	223.9	243.9	271.9	307.9	360.5	429.8	507.5
125°	211.5	214.4	218.9	227.0	241.0	261.6	288.1	322.1	368.5	429.0	499.6
127.5°	225.3	227.6	232.9	242.1	256.7	277.6	303.2	334.3	374.8	427.3	489.2
130°	232.9	235.8	241.8	252.8	266.8	288.1	313.2	342.0	379.6	426.7	482.8
132.5°	240.5	242.9	250.6	261.1	276.3	296.4	321.5	349.6	383.7	426.1	476.8
135°	251.3	254.3	261.6	274.2	289.6	308.8	333.1	359.7	389.8	425.3	468.0
137.5°	262.1	264.9	273.0	284.9	301.0	319.2	342.0	366.7	393.5	425.1	460.3
140°	269.8	271.9	280.0	292.6	308.0	325.7	347.9	371.5	396.5	424.5	456.2
142.5°	278.0	280.2	287.8	299.6	314.5	331.7	353.2	374.9	398.9	424.5	452.7
145°	289.6	291.8	299.3	309.5	323.6	339.8	358.9	378.8	400.2	423.0	446.6
147.5°	302.7	303.5	310.0	320.6	332.2	346.9	364.9	382.2	401.0	420.4	441.2
150°	311.0	311.8	317.6	326.5	337.5	351.6	367.8	384.0	401.0	418.6	437.1
152.5°	318.7	318.9	324.7	333.0	342.9	355.7	370.1	385.1	399.7	415.7	432.3
155°	329.4	330.2	334.6	342.0	350.1	361.1	373.6	386.2	397.9	411.2	425.3
157.5°	339.9	339.9	344.0	349.8	356.8	365.5	376.2	386.2	396.1	406.7	418.0
160°	346.4	346.4	349.3	354.5	360.4	368.5	377.3	386.2	394.3	403.1	412.7
162.5°	352.3	351.7	354.0	358.6	363.9	370.2	378.5	386.2	392.6	399.6	408.0
165°	358.9	358.9	360.4	364.1	367.8	372.2	378.8	384.7	389.2	394.3	400.2
167.5°	365.5	364.9	365.5	368.3	370.4	373.8	378.7	383.0	385.6	389.0	393.1
170°	368.5	367.8	368.5	370.7	372.2	374.4	378.1	381.7	383.2	385.4	388.4
172.5°	371.5	370.7	370.9	372.5	373.3	374.9	377.5	380.6	380.9	381.9	384.3
175°	374.4	373.6	373.6	374.4	375.1	375.1	376.6	378.8	378.1	378.1	379.6
177.5°	375.7	375.1	374.6	375.1	375.1	375.1	375.7	376.9	375.7	375.7	376.3
180°	375.1	375.1	375.1	375.1	375.1	375.1	375.1	375.1	375.1	375.1	375.1



TEST NUMBER: P332651-830

CATALOG NUMBER: S124DIP-S1020D810U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4	1626.4
2.5°	1620.5	1622.9	1625.2	1626.3	1626.0	1625.8	1625.5	1625.3
5°	1611.8	1615.0	1618.3	1619.6	1619.0	1618.3	1617.8	1617.2
7.5°	1593.9	1596.5	1599.0	1600.2	1599.8	1599.4	1599.0	1598.7
10°	1578.9	1581.2	1583.5	1584.3	1583.8	1583.2	1582.6	1582.1
12.5°	1560.6	1563.1	1565.7	1566.5	1565.8	1564.9	1564.1	1563.3
15°	1525.6	1527.3	1529.1	1529.5	1528.6	1527.8	1526.9	1526.0
17.5°	1485.7	1486.9	1487.9	1488.2	1487.6	1487.0	1486.5	1485.8
20°	1456.0	1457.0	1457.8	1457.9	1457.4	1456.8	1456.2	1455.7
22.5°	1425.1	1426.7	1428.2	1428.5	1427.5	1426.4	1425.4	1424.4
25°	1374.1	1374.4	1374.7	1374.2	1373.1	1372.0	1370.7	1369.6
27.5°	1316.9	1316.2	1315.5	1314.5	1313.0	1311.5	1310.0	1308.6
30°	1277.4	1276.2	1275.1	1273.8	1272.3	1270.8	1269.4	1268.0
32.5°	1237.3	1236.0	1234.5	1233.1	1231.6	1230.2	1228.8	1227.3
35°	1174.0	1172.0	1170.0	1168.2	1166.8	1165.4	1163.9	1162.4
37.5°	1107.7	1105.5	1103.3	1101.3	1099.4	1097.4	1095.5	1093.6
40°	1061.5	1058.6	1055.7	1053.6	1052.1	1050.7	1049.2	1047.7
42.5°	1016.8	1013.4	1010.0	1007.9	1006.9	1005.9	1004.9	1004.0
45°	947.5	944.3	941.1	939.1	938.3	937.5	936.5	935.7
47.5°	880.5	876.9	873.4	870.4	868.3	866.0	863.8	861.7
50°	833.8	829.7	825.7	822.7	821.0	819.3	817.6	815.8
52.5°	785.7	782.0	778.4	775.6	773.4	771.2	769.0	766.8
55°	715.0	711.5	708.0	705.5	703.7	702.0	700.2	698.5
57.5°	644.2	640.9	637.6	635.1	633.4	631.8	630.1	628.4
60°	595.6	593.0	590.3	588.3	586.8	585.4	584.0	582.5
62.5°	548.1	545.6	543.3	541.4	540.0	538.5	537.1	535.6
65°	479.0	476.1	473.2	471.0	469.6	468.2	466.7	465.2
67.5°	407.8	405.0	402.3	400.7	400.2	399.8	399.4	399.1
70°	362.9	360.5	358.3	356.7	355.8	354.9	354.0	353.2
72.5°	317.9	316.0	314.2	312.8	312.0	311.1	310.3	309.3
75°	253.1	251.9	250.8	250.1	249.8	249.5	249.2	248.9
77.5°	191.6	191.3	191.0	190.4	189.6	188.9	188.1	187.4
80°	152.6	152.0	151.5	151.0	150.7	150.4	150.1	149.9
82.5°	117.6	117.3	117.0	116.6	116.3	116.0	115.7	115.5
85°	67.8	67.8	67.8	67.6	67.3	67.0	66.7	66.4
87.5°	27.7	27.8	28.0	28.0	28.1	28.3	28.1	28.1
90°	13.3	14.0	14.7	14.7	15.5	16.2	15.5	15.5
92.5°	144.8	109.0	86.7	71.9	63.2	59.3	56.7	56.7
95°	546.1	431.9	333.1	261.6	225.6	202.6	189.5	179.8
97.5°	806.8	764.4	692.3	615.4	562.5	518.1	496.0	480.7
100°	888.8	903.5	867.4	812.9	748.8	703.8	681.7	675.8
102.5°	884.7	957.8	968.3	945.6	906.3	873.6	850.4	845.6
105°	825.5	952.9	1025.9	1056.1	1057.6	1051.7	1041.4	1037.0
107.5°	741.3	877.0	979.8	1045.5	1081.9	1098.7	1106.1	1108.0
110°	690.6	818.0	924.9	1006.0	1058.3	1089.3	1102.6	1109.2



TEST NUMBER: P332651-830

CATALOG NUMBER: S124DIP-S1020D810U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	653.5	766.2	867.1	948.2	1007.6	1045.1	1063.7	1074.4
115°	616.1	706.8	793.0	863.7	922.0	966.2	989.8	995.7
117.5°	597.9	672.9	740.6	800.7	850.4	887.5	911.3	916.0
120°	589.6	658.2	717.1	769.4	811.4	843.9	863.0	871.1
122.5°	582.5	648.7	702.4	748.2	783.7	811.4	827.6	835.8
125°	570.4	633.9	684.7	725.2	754.7	776.1	790.0	794.5
127.5°	555.7	616.2	666.9	705.5	735.1	754.1	765.9	770.3
130°	543.9	602.1	652.2	691.3	721.5	740.0	751.8	756.2
132.5°	531.5	586.2	635.2	674.2	703.8	724.6	735.8	740.3
135°	514.4	562.3	607.3	644.1	673.6	694.3	706.1	710.5
137.5°	499.0	539.5	577.4	610.7	638.2	658.6	668.3	673.6
140°	490.1	524.7	557.9	588.9	614.6	630.8	641.2	647.1
142.5°	481.8	512.4	540.8	567.6	590.5	605.5	614.6	618.8
145°	470.2	495.3	517.4	538.0	556.5	568.9	576.4	580.0
147.5°	460.6	480.5	498.2	514.4	528.0	538.8	544.3	545.6
150°	454.7	471.6	486.4	499.6	511.5	521.0	525.5	526.2
152.5°	448.3	462.8	476.4	487.3	497.3	505.1	507.7	508.5
155°	438.5	450.3	461.4	470.2	477.6	483.4	485.7	485.7
157.5°	428.0	437.9	447.2	454.3	459.9	464.3	465.6	465.6
160°	421.6	429.7	437.8	443.7	448.1	452.5	453.3	453.3
162.5°	415.1	422.0	428.4	433.7	436.9	441.3	442.1	441.5
165°	406.0	410.5	415.7	419.3	422.3	425.3	424.5	423.8
167.5°	397.4	400.8	404.9	407.1	408.6	410.5	410.4	409.7
170°	392.1	394.3	397.3	399.4	401.0	401.6	401.0	401.0
172.5°	387.4	389.0	390.8	392.4	393.2	394.0	393.2	392.1
175°	381.1	381.7	383.2	383.2	383.2	384.7	383.2	381.7
177.5°	376.9	377.5	377.5	378.1	377.5	378.1	376.9	375.7
180°	375.1	375.1	375.1	375.1	375.1	375.1	375.1	375.1

(END OF REPORT)