

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332712-930

Luminaire Tested: **S124DIP-S1195D1205U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020


Test Information

Test Method: LM-79-08
Report Number: P332712-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S1195D1205U930-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1205 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8091.0 lumens
Efficiency: N/A
Efficacy: 112.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

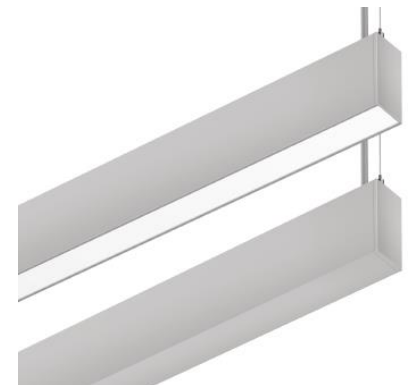

TEST NUMBER: P332712-930
CATALOG NUMBER: S124DIP-S1195D1205U930-4F0-1E-UDD-F

Luminous Intensity Polar Plot

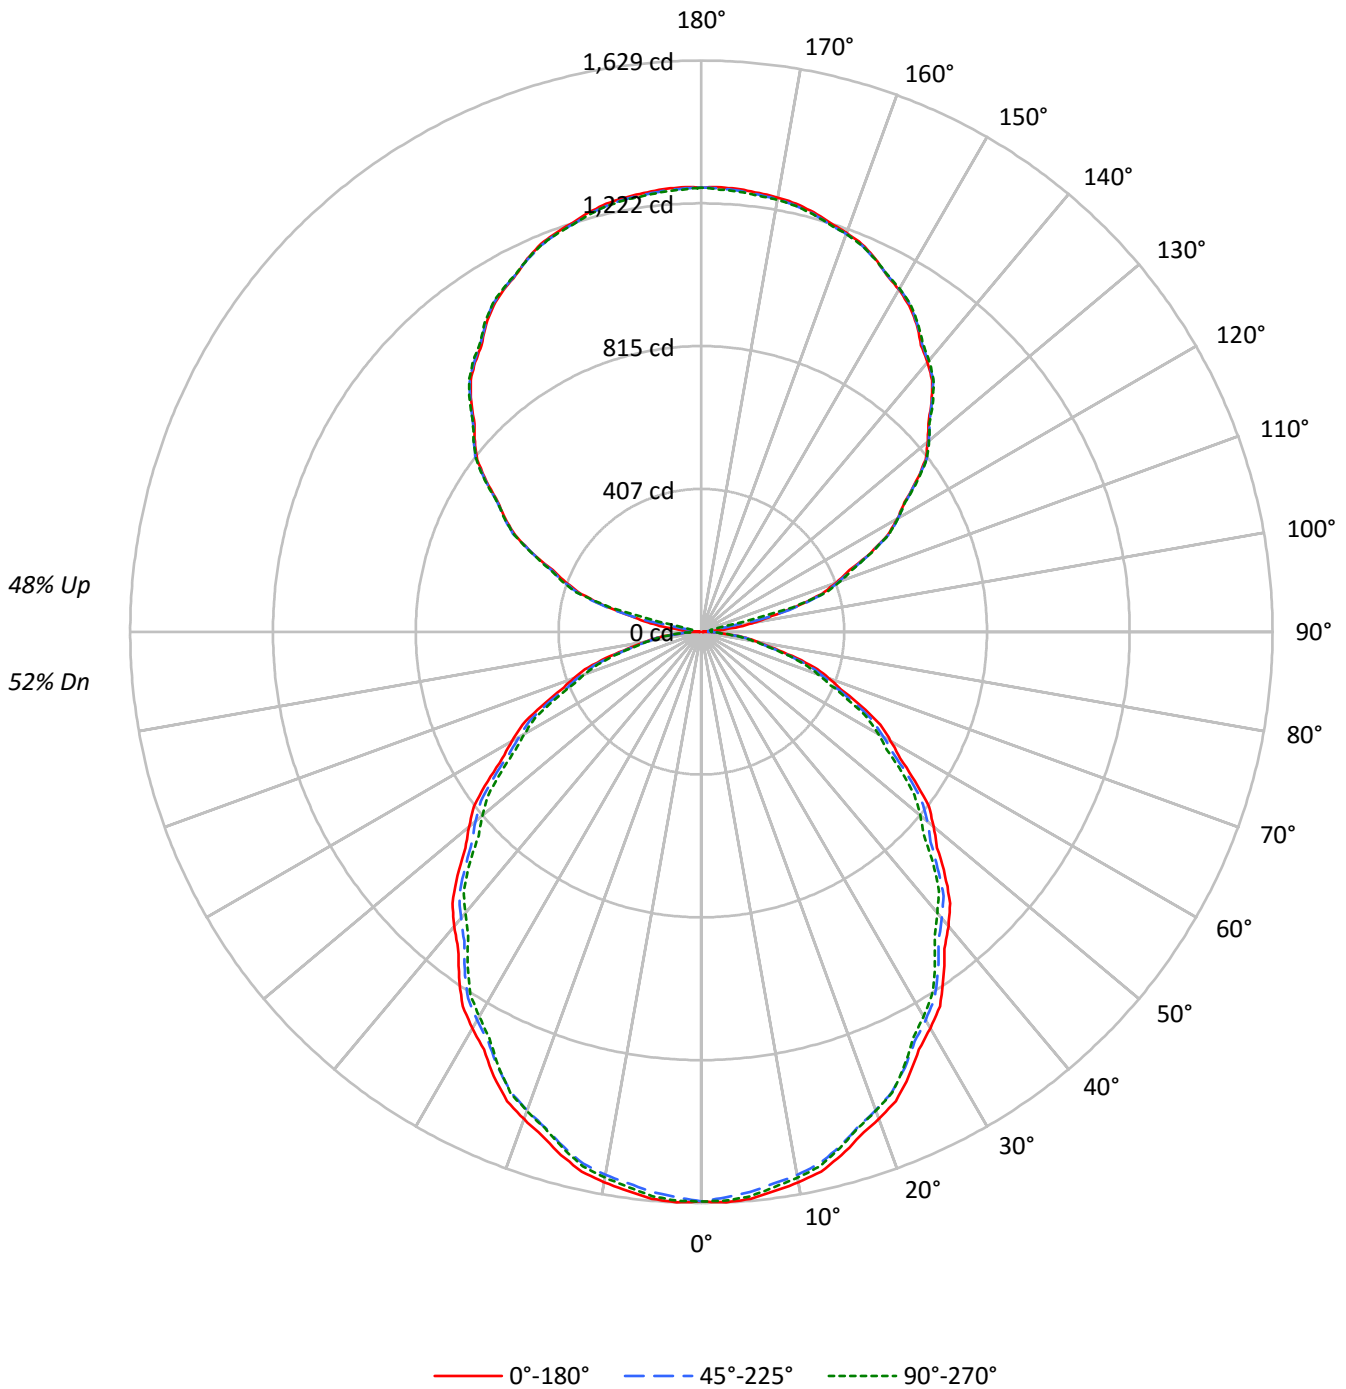



TEST NUMBER: P332712-930

CATALOG NUMBER: S124DIP-S1195D1205U930-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	99	99	99	99	84	84	84	70	70	70	58	58	58	52				
1	98	94	90	86	91	87	83	80	74	71	69	62	60	58	51	50	49	43				
2	89	82	76	70	82	76	70	66	65	61	57	54	51	49	45	43	41	36				
3	81	72	65	59	75	67	60	55	57	52	48	48	44	41	40	37	35	31				
4	75	64	56	50	69	59	52	47	51	45	41	43	39	35	35	32	30	26				
5	68	57	49	43	63	53	46	40	45	40	35	38	34	31	32	29	26	23				
6	63	51	43	37	58	47	40	35	41	35	31	35	30	27	29	26	23	20				
7	58	46	38	32	54	43	36	31	37	31	27	32	27	24	26	23	20	18				
8	54	42	34	29	50	39	32	27	34	28	24	29	24	21	24	21	18	16				
9	50	38	31	26	47	36	29	24	31	25	22	27	22	19	22	19	17	14				
10	47	35	28	23	44	33	26	22	29	23	19	25	20	17	21	17	15	13				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13116	13116	13116
5°	13156	12998	13092
10°	13073	12892	12956
15°	12915	12709	12741
20°	12706	12482	12493
25°	12466	12222	12188
30°	12172	11918	11808
35°	11869	11599	11445
40°	11552	11236	11031
45°	11222	10880	10671
50°	10857	10562	10236
55°	10463	10151	9821
60°	10069	9689	9397
65°	9626	9251	8879
70°	9128	8665	8327
75°	8366	7960	7757
80°	7443	7141	6960
85°	6512	6271	6150



TEST NUMBER: P332712-930

CATALOG NUMBER: S124DIP-S1195D1205U930-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.0	1.9
10°-20°	431.1	5.3
20°-30°	634.5	7.8
30°-40°	737.7	9.1
40°-50°	737.7	9.1
50°-60°	645.3	8.0
60°-70°	479.2	5.9
70°-80°	272.3	3.4
80°-90°	82.2	1.0
90°-100°	43.3	0.5
100°-110°	276.2	3.4
110°-120°	528.4	6.5
120°-130°	670.8	8.3
130°-140°	717.7	8.9
140°-150°	671.1	8.3
150°-160°	541.2	6.7
160°-170°	349.1	4.3
170°-180°	120.3	1.5
0°-30°	1218.6	15.1
0°-40°	1956.3	24.2
0°-60°	3339.3	41.3
0°-90°	4173.0	51.6
90°-120°	847.9	10.5
90°-150°	2907.4	35.9
90°-180°	3918.0	48.4
0°-180°	8091.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1625	1625	1625	1625	1625	
5°	1623	1618	1604	1617	1616	154
15°	1545	1539	1521	1528	1524	435
25°	1400	1390	1372	1373	1368	644
35°	1204	1195	1177	1168	1161	753
45°	983	973	953	939	935	757
55°	743	739	721	706	698	666
65°	504	497	484	472	465	499
75°	268	262	255	250	249	285
85°	70	70	68	68	66	77
90°	3	13	21	26	28	6
95°	52	22	21	26	28	67
105°	285	291	296	302	270	298
115°	532	535	534	536	536	524
125°	748	752	750	753	754	668
135°	928	928	931	933	935	715
145°	1070	1073	1073	1074	1076	669
155°	1174	1174	1172	1175	1173	541
165°	1238	1234	1234	1240	1232	350
175°	1267	1261	1262	1269	1259	121
180°	1267	1267	1267	1267	1267	



TEST NUMBER: P332712-930

CATALOG NUMBER: S124DIP-S1195D1205U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7
2.5°	1628.9	1628.2	1627.5	1626.8	1626.1	1624.5	1622.0	1619.4	1616.9	1614.4	1616.7
5°	1623.4	1622.3	1621.1	1620.0	1618.9	1616.7	1613.5	1610.3	1607.1	1603.9	1607.1
7.5°	1608.3	1607.2	1606.1	1604.8	1603.7	1601.4	1597.8	1594.3	1590.8	1587.2	1589.8
10°	1594.8	1593.7	1592.5	1591.3	1590.2	1587.7	1584.0	1580.2	1576.5	1572.7	1575.0
12.5°	1577.1	1576.0	1574.8	1573.6	1572.5	1569.9	1565.9	1562.0	1558.0	1554.0	1556.5
15°	1545.3	1544.2	1543.0	1541.9	1540.7	1538.0	1533.6	1529.3	1524.9	1520.6	1522.3
17.5°	1507.1	1505.6	1504.1	1502.8	1501.3	1498.5	1494.4	1490.3	1486.2	1482.1	1483.2
20°	1479.0	1477.5	1476.0	1474.6	1473.2	1470.2	1465.9	1461.6	1457.3	1452.9	1453.8
22.5°	1448.7	1446.8	1445.0	1443.0	1441.1	1437.9	1433.6	1429.3	1425.0	1420.6	1422.2
25°	1399.5	1397.5	1395.5	1393.4	1391.4	1388.4	1384.3	1380.3	1376.2	1372.1	1372.5
27.5°	1343.3	1341.2	1339.1	1337.0	1335.0	1332.0	1328.3	1324.5	1320.8	1317.0	1316.3
30°	1305.8	1303.5	1301.1	1298.9	1296.6	1293.5	1289.7	1286.0	1282.2	1278.5	1277.3
32.5°	1266.2	1264.1	1262.1	1260.0	1257.8	1254.8	1250.8	1246.8	1242.8	1238.8	1237.5
35°	1204.3	1202.2	1200.2	1198.2	1196.1	1193.1	1189.0	1185.0	1181.0	1176.9	1174.8
37.5°	1138.9	1137.0	1135.2	1133.3	1131.5	1128.4	1124.1	1119.7	1115.3	1111.0	1108.8
40°	1096.2	1093.9	1091.5	1089.2	1087.0	1083.6	1079.3	1074.9	1070.6	1066.2	1063.3
42.5°	1050.4	1049.0	1047.6	1046.2	1044.8	1041.7	1036.9	1032.1	1027.3	1022.5	1019.1
45°	982.9	980.9	978.8	976.8	974.9	971.5	966.9	962.2	957.6	953.0	949.8
47.5°	912.3	910.9	909.5	908.2	906.8	904.0	899.7	895.4	891.1	886.9	883.3
50°	864.5	863.3	862.1	861.0	859.8	857.2	853.1	849.1	845.1	841.0	837.0
52.5°	817.6	816.2	814.8	813.4	812.0	809.2	804.9	800.6	796.4	792.1	788.5
55°	743.4	742.5	741.7	740.8	739.9	737.4	733.4	729.4	725.3	721.2	717.8
57.5°	672.5	671.6	670.6	669.6	668.6	666.1	662.1	658.1	654.1	650.1	646.9
60°	623.6	622.2	620.7	619.3	617.8	615.2	611.5	607.7	603.9	600.1	597.5
62.5°	575.7	574.5	573.2	572.0	570.9	568.3	564.3	560.3	556.3	552.3	549.9
65°	503.9	502.4	500.9	499.5	498.1	495.9	493.0	490.1	487.2	484.3	481.4
67.5°	431.5	430.2	428.8	427.5	426.2	424.0	421.3	418.5	415.7	412.9	410.2
70°	386.7	384.7	382.6	380.6	378.5	376.4	374.1	371.8	369.4	367.1	364.8
72.5°	338.8	336.7	334.7	332.6	330.7	328.7	326.9	325.0	323.2	321.3	319.4
75°	268.2	266.8	265.3	263.8	262.4	261.0	259.5	258.0	256.7	255.2	254.0
77.5°	200.7	200.1	199.5	198.9	198.2	197.2	196.0	194.7	193.5	192.2	191.8
80°	160.1	159.2	158.4	157.5	156.7	156.0	155.4	154.7	154.2	153.6	153.0
82.5°	120.6	120.2	119.8	119.4	119.0	118.7	118.5	118.5	118.3	118.2	117.9
85°	70.3	70.3	70.3	70.3	70.3	70.0	69.5	68.9	68.2	67.7	67.7
87.5°	27.6	27.9	28.1	28.4	28.5	28.8	28.9	28.9	29.0	29.2	29.4
90°	2.9	5.1	7.5	9.8	12.1	14.1	15.8	17.4	19.2	20.9	22.1
92.5°	11.9	12.1	12.2	12.3	12.5	13.4	15.0	16.7	18.4	20.1	21.4
95°	52.1	44.9	37.7	30.7	23.5	20.0	20.2	20.4	20.6	20.9	22.1
97.5°	110.6	115.1	119.6	124.0	128.5	119.0	95.5	72.0	48.5	25.0	25.1
100°	155.4	159.1	163.0	166.7	170.6	157.9	128.8	99.8	70.8	41.7	38.1
102.5°	205.4	208.1	210.9	213.7	216.5	216.0	212.2	208.4	204.6	200.8	162.2
105°	285.1	286.4	287.6	288.9	290.2	291.4	292.4	293.4	294.5	295.5	297.5
107.5°	359.2	359.9	360.5	361.1	361.7	362.8	364.2	365.7	367.0	368.5	369.4
110°	409.3	409.9	410.5	411.2	411.8	412.7	414.0	415.2	416.5	417.8	418.2



TEST NUMBER: P332712-930

CATALOG NUMBER: S124DIP-S1195D1205U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	457.8	458.9	460.0	461.1	462.3	463.2	463.7	464.3	465.0	465.5	465.5
115°	532.4	533.0	533.7	534.3	534.9	535.2	534.9	534.8	534.5	534.3	534.8
117.5°	599.7	600.5	601.4	602.2	603.0	603.6	604.1	604.6	605.1	605.5	605.4
120°	645.1	646.0	646.9	647.7	648.5	648.8	648.7	648.4	648.2	648.0	648.4
122.5°	687.5	688.1	688.6	689.1	689.6	690.0	690.3	690.6	690.9	691.2	691.5
125°	748.4	749.3	750.1	750.9	751.8	752.0	751.5	751.1	750.7	750.3	750.9
127.5°	806.0	806.2	806.4	806.7	806.8	807.4	808.4	809.3	810.3	811.3	811.1
130°	843.1	843.3	843.6	843.8	844.0	844.4	845.1	845.6	846.3	846.9	847.1
132.5°	877.3	877.6	878.0	878.4	878.7	879.4	880.1	880.9	881.7	882.6	882.7
135°	928.4	928.2	928.0	927.7	927.6	927.9	928.7	929.5	930.4	931.2	931.6
137.5°	973.7	973.8	973.9	974.0	974.0	974.5	975.4	976.4	977.3	978.2	978.7
140°	1003.2	1003.6	1004.0	1004.5	1004.9	1005.3	1005.8	1006.2	1006.6	1007.1	1007.6
142.5°	1029.7	1030.5	1031.3	1032.0	1032.8	1033.3	1033.6	1033.8	1034.0	1034.3	1034.8
145°	1070.5	1071.1	1071.8	1072.4	1073.0	1073.3	1073.3	1073.3	1073.3	1073.3	1073.6
147.5°	1102.9	1104.1	1105.2	1106.4	1107.6	1108.1	1107.9	1107.7	1107.4	1107.3	1107.4
150°	1126.4	1127.2	1128.0	1128.9	1129.8	1130.1	1129.8	1129.7	1129.4	1129.2	1129.2
152.5°	1146.1	1146.8	1147.5	1148.1	1148.8	1148.9	1148.6	1148.2	1147.8	1147.5	1147.8
155°	1173.8	1173.9	1174.2	1174.4	1174.6	1174.4	1173.8	1173.1	1172.5	1171.8	1172.7
157.5°	1197.0	1196.9	1196.8	1196.7	1196.5	1196.1	1195.4	1194.7	1194.0	1193.3	1194.3
160°	1210.7	1210.1	1209.4	1208.8	1208.2	1207.8	1207.5	1207.3	1207.1	1206.9	1208.2
162.5°	1222.8	1222.1	1221.2	1220.4	1219.6	1219.1	1218.9	1218.7	1218.5	1218.3	1219.5
165°	1238.2	1237.1	1236.1	1235.0	1234.0	1233.5	1233.5	1233.5	1233.5	1233.5	1235.1
167.5°	1250.3	1249.2	1248.1	1247.0	1245.9	1245.3	1245.2	1245.0	1245.0	1244.8	1246.7
170°	1257.1	1255.9	1254.6	1253.4	1252.1	1251.6	1251.7	1252.0	1252.1	1252.4	1254.1
172.5°	1261.7	1260.4	1259.1	1257.8	1256.6	1256.1	1256.3	1256.5	1256.7	1256.9	1258.6
175°	1266.6	1265.3	1264.0	1262.8	1261.5	1261.0	1261.2	1261.4	1261.7	1261.8	1263.7
177.5°	1268.9	1267.7	1266.5	1265.3	1264.1	1263.7	1264.0	1264.4	1264.8	1265.1	1266.4
180°	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6



TEST NUMBER: P332712-930

CATALOG NUMBER: S124DIP-S1195D1205U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7
2.5°	1618.9	1621.3	1623.6	1624.6	1624.4	1624.2	1623.9	1623.7
5°	1610.3	1613.5	1616.7	1618.0	1617.4	1616.8	1616.2	1615.6
7.5°	1592.4	1594.9	1597.4	1598.6	1598.2	1597.8	1597.5	1597.2
10°	1577.3	1579.6	1581.9	1582.8	1582.3	1581.7	1581.0	1580.5
12.5°	1559.0	1561.5	1564.2	1565.0	1564.2	1563.3	1562.5	1561.7
15°	1524.0	1525.8	1527.5	1528.0	1527.1	1526.2	1525.3	1524.5
17.5°	1484.3	1485.4	1486.5	1486.7	1486.1	1485.6	1485.0	1484.4
20°	1454.7	1455.5	1456.4	1456.5	1456.0	1455.4	1454.8	1454.2
22.5°	1423.8	1425.3	1426.9	1427.1	1426.1	1425.1	1424.0	1422.9
25°	1372.8	1373.0	1373.4	1372.9	1371.7	1370.6	1369.5	1368.3
27.5°	1315.6	1314.9	1314.2	1313.1	1311.7	1310.3	1308.8	1307.3
30°	1276.1	1275.0	1273.8	1272.5	1271.1	1269.7	1268.2	1266.7
32.5°	1236.1	1234.7	1233.3	1231.9	1230.4	1229.0	1227.6	1226.1
35°	1172.9	1170.9	1168.8	1167.1	1165.6	1164.2	1162.7	1161.3
37.5°	1106.6	1104.4	1102.2	1100.2	1098.3	1096.3	1094.5	1092.5
40°	1060.5	1057.5	1054.7	1052.5	1051.1	1049.6	1048.1	1046.7
42.5°	1015.8	1012.4	1009.1	1006.9	1005.9	1004.9	1004.0	1003.0
45°	946.6	943.5	940.3	938.2	937.3	936.5	935.6	934.7
47.5°	879.7	876.1	872.5	869.6	867.4	865.2	863.0	860.8
50°	832.9	828.8	824.8	821.9	820.2	818.5	816.7	815.0
52.5°	784.9	781.3	777.7	774.9	772.7	770.5	768.3	766.1
55°	714.3	710.9	707.4	704.7	703.0	701.3	699.5	697.8
57.5°	643.6	640.3	637.0	634.5	632.8	631.1	629.4	627.8
60°	594.9	592.4	589.8	587.7	586.3	584.8	583.4	582.0
62.5°	547.5	545.1	542.7	540.9	539.4	537.9	536.5	535.1
65°	478.5	475.6	472.7	470.6	469.1	467.7	466.2	464.8
67.5°	407.4	404.6	401.9	400.2	399.8	399.4	399.0	398.6
70°	362.5	360.2	357.8	356.3	355.4	354.6	353.7	352.8
72.5°	317.6	315.8	313.9	312.5	311.7	310.8	309.9	309.1
75°	252.8	251.7	250.5	249.8	249.6	249.2	248.9	248.7
77.5°	191.4	191.1	190.8	190.2	189.5	188.7	187.9	187.2
80°	152.5	151.9	151.3	150.9	150.6	150.3	150.0	149.7
82.5°	117.5	117.2	116.8	116.5	116.2	115.9	115.6	115.4
85°	67.7	67.7	67.7	67.6	67.3	66.9	66.7	66.4
87.5°	29.7	29.9	30.2	30.3	30.4	30.5	30.6	30.7
90°	23.4	24.6	25.9	26.7	27.1	27.6	28.0	28.5
92.5°	22.6	23.9	25.1	25.8	25.9	26.0	26.1	26.2
95°	23.4	24.6	25.9	26.7	26.8	27.1	27.2	27.5
97.5°	25.3	25.4	25.5	25.7	25.9	26.1	26.3	26.5
100°	34.5	31.0	27.4	25.7	25.9	26.1	26.3	26.5
102.5°	123.6	85.0	46.4	27.1	27.1	27.2	27.2	27.3
105°	299.4	301.3	303.1	300.3	292.7	285.1	277.6	270.0
107.5°	370.4	371.3	372.2	373.1	373.9	374.7	375.4	376.3
110°	418.7	419.1	419.5	420.0	420.6	421.3	421.9	422.5



TEST NUMBER: P332712-930

CATALOG NUMBER: S124DIP-S1195D1205U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	465.4	465.3	465.2	465.5	466.4	467.2	468.0	468.7
115°	535.2	535.6	536.0	536.2	536.2	536.2	536.2	536.2
117.5°	605.4	605.3	605.2	605.1	605.0	605.0	604.9	604.8
120°	648.8	649.2	649.6	649.6	649.2	648.8	648.4	648.0
122.5°	691.7	691.9	692.2	692.1	691.7	691.3	690.8	690.4
125°	751.5	752.2	752.8	753.3	753.4	753.7	753.9	754.1
127.5°	811.1	810.9	810.8	810.7	810.5	810.3	810.2	810.0
130°	847.3	847.6	847.7	847.8	847.8	847.8	847.8	847.8
132.5°	883.0	883.2	883.4	883.4	883.2	883.1	882.9	882.7
135°	932.1	932.5	932.9	933.4	933.8	934.2	934.6	935.0
137.5°	979.2	979.6	980.1	980.2	980.2	980.0	979.8	979.7
140°	1008.3	1008.9	1009.6	1010.0	1010.2	1010.4	1010.6	1010.8
142.5°	1035.3	1035.7	1036.2	1036.4	1036.5	1036.5	1036.6	1036.6
145°	1073.7	1074.0	1074.2	1074.5	1074.9	1075.3	1075.8	1076.2
147.5°	1107.6	1107.7	1107.9	1108.1	1108.3	1108.6	1108.7	1109.0
150°	1129.2	1129.2	1129.2	1129.4	1129.5	1129.8	1130.0	1130.2
152.5°	1148.1	1148.4	1148.8	1148.8	1148.8	1148.6	1148.5	1148.3
155°	1173.5	1174.4	1175.3	1175.3	1174.7	1174.0	1173.5	1172.8
157.5°	1195.5	1196.5	1197.7	1197.7	1196.5	1195.5	1194.3	1193.3
160°	1209.4	1210.7	1211.9	1211.9	1210.7	1209.4	1208.2	1206.9
162.5°	1220.8	1222.1	1223.4	1223.3	1221.8	1220.4	1219.0	1217.5
165°	1236.8	1238.5	1240.2	1240.1	1238.2	1236.2	1234.4	1232.5
167.5°	1248.5	1250.3	1252.2	1252.1	1250.0	1247.9	1245.8	1243.7
170°	1255.7	1257.4	1259.1	1258.9	1256.8	1254.7	1252.6	1250.5
172.5°	1260.3	1262.0	1263.6	1263.4	1261.1	1258.8	1256.5	1254.3
175°	1265.7	1267.5	1269.4	1269.1	1266.6	1264.0	1261.5	1259.0
177.5°	1267.8	1269.1	1270.5	1270.2	1268.1	1266.1	1264.0	1262.1
180°	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6

(END OF REPORT)