

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332695-930

Luminaire Tested: **S124DIP-S1195D810U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332695-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S1195D810U930-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6458.4 lumens
Efficiency: N/A
Efficacy: 106.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332695-930

CATALOG NUMBER: S124DIP-S1195D810U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

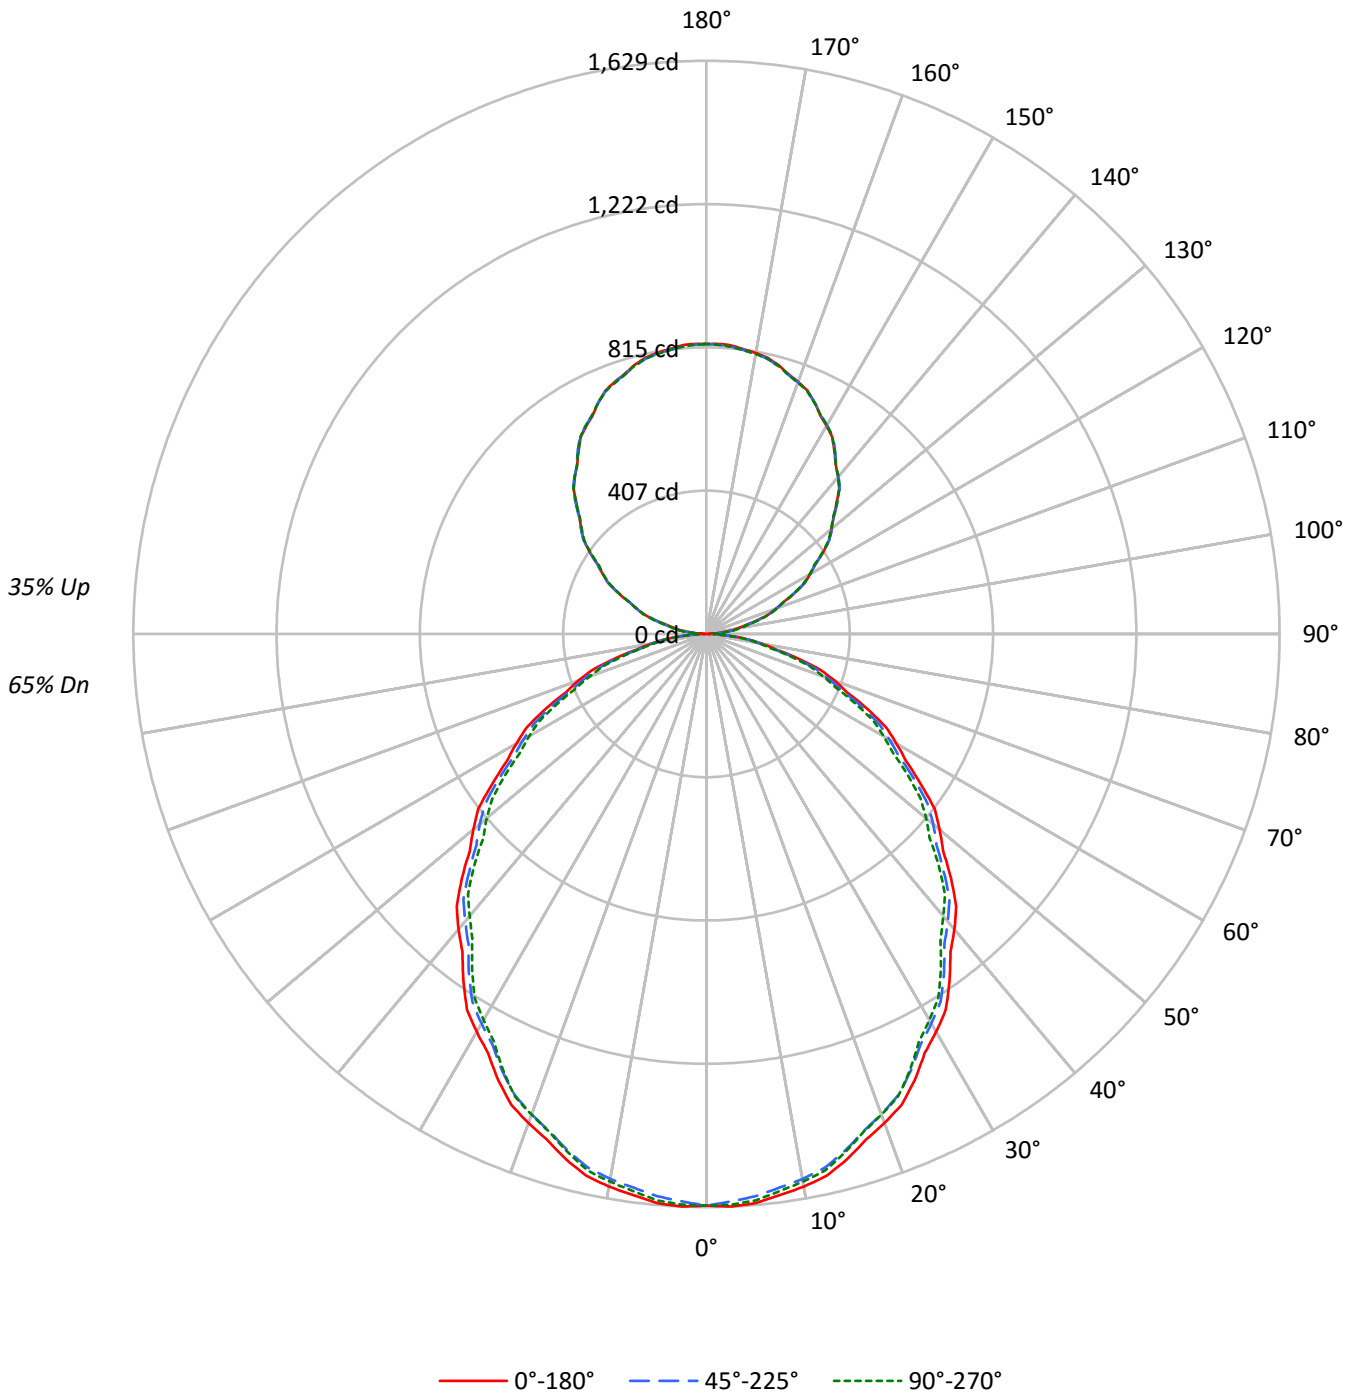



TEST NUMBER: P332695-930

CATALOG NUMBER: S124DIP-S1195D810U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	111	111	111	111	104	104	104	104	91	91	91		80	80	80		70	70	70	65
1	101	97	93	89	95	91	87	84	80	78	75		70	68	67		61	60	59	54
2	92	84	78	73	86	79	74	69	70	66	62		62	59	56		54	52	49	45
3	84	74	67	61	79	70	63	58	62	57	52		55	51	47		48	45	42	38
4	77	66	58	51	72	62	55	49	55	49	45		49	44	40		43	39	36	33
5	71	59	50	44	66	55	48	42	49	43	39		44	39	35		39	35	32	29
6	65	53	44	38	61	50	42	37	45	38	34		40	35	31		35	31	28	25
7	60	48	39	34	56	45	38	32	41	34	30		36	31	27		32	28	25	22
8	56	43	35	30	53	41	34	29	37	31	27		33	28	24		29	25	22	20
9	52	40	32	27	49	38	31	26	34	28	24		30	26	22		27	23	20	18
10	49	36	29	24	46	35	28	23	31	26	22		28	23	20		25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13116	13116	13116
5°	13156	12998	13092
10°	13073	12892	12956
15°	12915	12709	12741
20°	12706	12482	12493
25°	12466	12222	12188
30°	12172	11918	11808
35°	11869	11599	11445
40°	11552	11236	11031
45°	11222	10880	10671
50°	10857	10562	10236
55°	10463	10151	9821
60°	10069	9689	9397
65°	9626	9251	8879
70°	9128	8665	8327
75°	8366	7960	7757
80°	7443	7141	6960
85°	6512	6271	6150



TEST NUMBER: P332695-930

CATALOG NUMBER: S124DIP-S1195D810U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.0	2.4
10°-20°	431.1	6.7
20°-30°	634.5	9.8
30°-40°	737.7	11.4
40°-50°	737.7	11.4
50°-60°	645.3	10.0
60°-70°	479.2	7.4
70°-80°	272.3	4.2
80°-90°	81.0	1.3
90°-100°	54.4	0.8
100°-110°	161.0	2.5
110°-120°	273.3	4.2
120°-130°	360.4	5.6
130°-140°	404.7	6.3
140°-150°	397.7	6.2
150°-160°	334.5	5.2
160°-170°	222.6	3.4
170°-180°	77.9	1.2
0°-30°	1218.6	18.9
0°-40°	1956.3	30.3
0°-60°	3339.3	51.7
0°-90°	4171.8	64.6
90°-120°	488.7	7.6
90°-150°	1651.5	25.6
90°-180°	2287.0	35.4
0°-180°	6458.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1625	1625	1625	1625	1625	
5°	1623	1618	1604	1617	1616	154
15°	1545	1539	1521	1528	1524	435
25°	1400	1390	1372	1373	1368	644
35°	1204	1195	1177	1168	1161	753
45°	983	973	953	939	935	757
55°	743	739	721	706	698	666
65°	504	497	484	472	465	499
75°	268	262	255	250	249	285
85°	70	70	68	68	66	77
90°	2	9	14	18	19	6
95°	38	44	48	50	50	43
105°	148	149	152	154	156	158
115°	278	278	277	276	275	274
125°	405	405	404	403	402	361
135°	522	526	526	524	523	404
145°	634	637	637	637	635	397
155°	727	727	726	728	726	334
165°	791	789	788	791	789	223
175°	823	820	819	823	819	78
180°	824	824	824	824	824	



TEST NUMBER: P332695-930

CATALOG NUMBER: S124DIP-S1195D810U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7
2.5°	1628.9	1628.2	1627.5	1626.8	1626.1	1624.5	1622.0	1619.4	1616.9	1614.4	1616.7
5°	1623.4	1622.3	1621.1	1620.0	1618.9	1616.7	1613.5	1610.3	1607.1	1603.9	1607.1
7.5°	1608.3	1607.2	1606.1	1604.8	1603.7	1601.4	1597.8	1594.3	1590.8	1587.2	1589.8
10°	1594.8	1593.7	1592.5	1591.3	1590.2	1587.7	1584.0	1580.2	1576.5	1572.7	1575.0
12.5°	1577.1	1576.0	1574.8	1573.6	1572.5	1569.9	1565.9	1562.0	1558.0	1554.0	1556.5
15°	1545.3	1544.2	1543.0	1541.9	1540.7	1538.0	1533.6	1529.3	1524.9	1520.6	1522.3
17.5°	1507.1	1505.6	1504.1	1502.8	1501.3	1498.5	1494.4	1490.3	1486.2	1482.1	1483.2
20°	1479.0	1477.5	1476.0	1474.6	1473.2	1470.2	1465.9	1461.6	1457.3	1452.9	1453.8
22.5°	1448.7	1446.8	1445.0	1443.0	1441.1	1437.9	1433.6	1429.3	1425.0	1420.6	1422.2
25°	1399.5	1397.5	1395.5	1393.4	1391.4	1388.4	1384.3	1380.3	1376.2	1372.1	1372.5
27.5°	1343.3	1341.2	1339.1	1337.0	1335.0	1332.0	1328.3	1324.5	1320.8	1317.0	1316.3
30°	1305.8	1303.5	1301.1	1298.9	1296.6	1293.5	1289.7	1286.0	1282.2	1278.5	1277.3
32.5°	1266.2	1264.1	1262.1	1260.0	1257.8	1254.8	1250.8	1246.8	1242.8	1238.8	1237.5
35°	1204.3	1202.2	1200.2	1198.2	1196.1	1193.1	1189.0	1185.0	1181.0	1176.9	1174.8
37.5°	1138.9	1137.0	1135.2	1133.3	1131.5	1128.4	1124.1	1119.7	1115.3	1111.0	1108.8
40°	1096.2	1093.9	1091.5	1089.2	1087.0	1083.6	1079.3	1074.9	1070.6	1066.2	1063.3
42.5°	1050.4	1049.0	1047.6	1046.2	1044.8	1041.7	1036.9	1032.1	1027.3	1022.5	1019.1
45°	982.9	980.9	978.8	976.8	974.9	971.5	966.9	962.2	957.6	953.0	949.8
47.5°	912.3	910.9	909.5	908.2	906.8	904.0	899.7	895.4	891.1	886.9	883.3
50°	864.5	863.3	862.1	861.0	859.8	857.2	853.1	849.1	845.1	841.0	837.0
52.5°	817.6	816.2	814.8	813.4	812.0	809.2	804.9	800.6	796.4	792.1	788.5
55°	743.4	742.5	741.7	740.8	739.9	737.4	733.4	729.4	725.3	721.2	717.8
57.5°	672.5	671.6	670.6	669.6	668.6	666.1	662.1	658.1	654.1	650.1	646.9
60°	623.6	622.2	620.7	619.3	617.8	615.2	611.5	607.7	603.9	600.1	597.5
62.5°	575.7	574.5	573.2	572.0	570.9	568.3	564.3	560.3	556.3	552.3	549.9
65°	503.9	502.4	500.9	499.5	498.1	495.9	493.0	490.1	487.2	484.3	481.4
67.5°	431.5	430.2	428.8	427.5	426.2	424.0	421.3	418.5	415.7	412.9	410.2
70°	386.7	384.7	382.6	380.6	378.5	376.4	374.1	371.8	369.4	367.1	364.8
72.5°	338.8	336.7	334.7	332.6	330.7	328.7	326.9	325.0	323.2	321.3	319.4
75°	268.2	266.8	265.3	263.8	262.4	261.0	259.5	258.0	256.7	255.2	254.0
77.5°	200.7	200.1	199.5	198.9	198.2	197.2	196.0	194.7	193.5	192.2	191.8
80°	160.1	159.2	158.4	157.5	156.7	156.0	155.4	154.7	154.2	153.6	153.0
82.5°	120.6	120.2	119.8	119.4	119.0	118.7	118.5	118.5	118.3	118.2	117.9
85°	70.3	70.3	70.3	70.3	70.3	70.0	69.5	68.9	68.2	67.7	67.7
87.5°	27.5	27.6	27.6	27.7	27.8	27.8	27.8	27.8	27.8	27.8	28.0
90°	1.9	3.5	5.1	6.6	8.2	9.5	10.6	11.7	12.9	14.0	14.8
92.5°	13.6	15.4	17.2	19.0	20.8	22.1	22.8	23.6	24.5	25.3	25.8
95°	38.2	39.5	40.8	42.1	43.4	44.5	45.5	46.5	47.5	48.4	48.8
97.5°	66.8	67.8	68.8	69.9	70.8	72.0	73.1	74.3	75.4	76.6	77.1
100°	89.3	89.8	90.3	90.9	91.5	92.5	93.7	95.0	96.2	97.5	97.8
102.5°	112.7	112.9	113.2	113.4	113.6	114.3	115.4	116.6	117.8	119.0	119.4
105°	148.5	148.6	148.8	149.0	149.1	149.4	150.0	150.6	151.2	151.7	152.1
107.5°	186.1	186.3	186.5	186.6	186.8	186.9	187.0	187.1	187.2	187.3	187.7
110°	211.7	211.9	212.1	212.5	212.7	212.8	212.7	212.5	212.4	212.2	212.0



TEST NUMBER: P332695-930

CATALOG NUMBER: S124DIP-S1195D810U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	238.1	238.1	238.2	238.3	238.4	238.2	238.0	237.7	237.5	237.3	237.2
115°	277.9	277.9	277.9	277.9	277.9	277.8	277.4	277.2	276.9	276.6	276.5
117.5°	315.4	315.5	315.6	315.7	315.8	315.8	315.6	315.4	315.2	315.0	314.5
120°	340.4	341.0	341.5	342.1	342.7	342.7	342.3	341.9	341.4	341.0	340.3
122.5°	366.4	366.6	366.8	367.0	367.3	367.3	367.1	366.9	366.7	366.5	366.0
125°	404.7	404.7	404.7	404.7	404.7	404.6	404.6	404.4	404.2	404.1	403.8
127.5°	439.5	439.9	440.4	440.8	441.2	441.3	441.1	440.9	440.7	440.4	440.2
130°	464.0	464.5	464.9	465.3	465.7	465.9	465.9	465.9	465.9	465.9	465.6
132.5°	489.0	489.3	489.7	489.9	490.2	490.3	490.2	490.2	490.0	489.9	489.6
135°	522.0	522.9	523.7	524.6	525.5	525.9	525.9	525.9	525.9	525.9	525.5
137.5°	558.0	558.4	558.7	559.1	559.5	559.9	560.1	560.4	560.5	560.8	560.4
140°	582.0	582.2	582.5	582.8	583.1	583.2	583.2	583.2	583.2	583.2	583.1
142.5°	603.9	604.1	604.5	604.7	605.0	605.1	605.0	604.9	604.7	604.6	604.6
145°	634.2	634.8	635.4	635.9	636.5	636.8	637.0	637.1	637.2	637.4	637.2
147.5°	664.3	665.0	665.6	666.3	667.0	667.3	667.2	667.1	666.9	666.8	666.8
150°	682.7	683.2	683.8	684.4	684.9	685.2	685.2	685.2	685.2	685.2	685.2
152.5°	700.0	700.3	700.7	701.0	701.3	701.6	701.6	701.8	701.9	702.1	702.4
155°	726.6	726.6	726.6	726.6	726.6	726.5	726.4	726.3	726.1	726.0	726.5
157.5°	749.1	748.8	748.5	748.3	748.0	747.9	747.9	747.9	747.8	747.8	748.2
160°	762.3	762.1	762.1	761.9	761.7	761.6	761.5	761.3	761.2	761.1	761.5
162.5°	774.5	774.2	773.8	773.5	773.1	772.8	772.7	772.6	772.4	772.3	773.1
165°	791.0	790.6	790.2	789.7	789.3	789.0	788.6	788.4	788.1	787.8	788.6
167.5°	803.6	803.0	802.4	801.8	801.3	801.0	801.0	801.0	801.0	801.0	801.9
170°	810.7	810.1	809.3	808.6	808.0	807.6	807.8	808.0	808.0	808.2	809.0
172.5°	815.9	815.3	814.6	814.1	813.5	813.2	813.3	813.3	813.3	813.3	814.2
175°	822.9	822.1	821.4	820.8	820.0	819.6	819.5	819.3	819.2	819.0	820.0
177.5°	825.2	824.6	824.0	823.5	822.9	822.6	822.6	822.6	822.6	822.6	823.4
180°	824.1	824.1	824.1	824.1	824.1	824.1	824.1	824.1	824.1	824.1	824.1



TEST NUMBER: P332695-930

CATALOG NUMBER: S124DIP-S1195D810U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7
2.5°	1618.9	1621.3	1623.6	1624.6	1624.4	1624.2	1623.9	1623.7
5°	1610.3	1613.5	1616.7	1618.0	1617.4	1616.8	1616.2	1615.6
7.5°	1592.4	1594.9	1597.4	1598.6	1598.2	1597.8	1597.5	1597.2
10°	1577.3	1579.6	1581.9	1582.8	1582.3	1581.7	1581.0	1580.5
12.5°	1559.0	1561.5	1564.2	1565.0	1564.2	1563.3	1562.5	1561.7
15°	1524.0	1525.8	1527.5	1528.0	1527.1	1526.2	1525.3	1524.5
17.5°	1484.3	1485.4	1486.5	1486.7	1486.1	1485.6	1485.0	1484.4
20°	1454.7	1455.5	1456.4	1456.5	1456.0	1455.4	1454.8	1454.2
22.5°	1423.8	1425.3	1426.9	1427.1	1426.1	1425.1	1424.0	1422.9
25°	1372.8	1373.0	1373.4	1372.9	1371.7	1370.6	1369.5	1368.3
27.5°	1315.6	1314.9	1314.2	1313.1	1311.7	1310.3	1308.8	1307.3
30°	1276.1	1275.0	1273.8	1272.5	1271.1	1269.7	1268.2	1266.7
32.5°	1236.1	1234.7	1233.3	1231.9	1230.4	1229.0	1227.6	1226.1
35°	1172.9	1170.9	1168.8	1167.1	1165.6	1164.2	1162.7	1161.3
37.5°	1106.6	1104.4	1102.2	1100.2	1098.3	1096.3	1094.5	1092.5
40°	1060.5	1057.5	1054.7	1052.5	1051.1	1049.6	1048.1	1046.7
42.5°	1015.8	1012.4	1009.1	1006.9	1005.9	1004.9	1004.0	1003.0
45°	946.6	943.5	940.3	938.2	937.3	936.5	935.6	934.7
47.5°	879.7	876.1	872.5	869.6	867.4	865.2	863.0	860.8
50°	832.9	828.8	824.8	821.9	820.2	818.5	816.7	815.0
52.5°	784.9	781.3	777.7	774.9	772.7	770.5	768.3	766.1
55°	714.3	710.9	707.4	704.7	703.0	701.3	699.5	697.8
57.5°	643.6	640.3	637.0	634.5	632.8	631.1	629.4	627.8
60°	594.9	592.4	589.8	587.7	586.3	584.8	583.4	582.0
62.5°	547.5	545.1	542.7	540.9	539.4	537.9	536.5	535.1
65°	478.5	475.6	472.7	470.6	469.1	467.7	466.2	464.8
67.5°	407.4	404.6	401.9	400.2	399.8	399.4	399.0	398.6
70°	362.5	360.2	357.8	356.3	355.4	354.6	353.7	352.8
72.5°	317.6	315.8	313.9	312.5	311.7	310.8	309.9	309.1
75°	252.8	251.7	250.5	249.8	249.6	249.2	248.9	248.7
77.5°	191.4	191.1	190.8	190.2	189.5	188.7	187.9	187.2
80°	152.5	151.9	151.3	150.9	150.6	150.3	150.0	149.7
82.5°	117.5	117.2	116.8	116.5	116.2	115.9	115.6	115.4
85°	67.7	67.7	67.7	67.6	67.3	66.9	66.7	66.4
87.5°	28.1	28.3	28.5	28.6	28.6	28.7	28.8	28.8
90°	15.7	16.6	17.4	18.0	18.3	18.6	18.8	19.2
92.5°	26.3	26.7	27.3	27.6	27.8	28.0	28.1	28.3
95°	49.3	49.7	50.1	50.4	50.4	50.4	50.4	50.4
97.5°	77.6	78.1	78.7	78.9	78.9	78.9	78.9	78.9
100°	98.1	98.4	98.7	98.8	98.8	98.8	98.8	98.8
102.5°	119.8	120.1	120.5	120.7	120.9	121.0	121.2	121.2
105°	152.5	153.0	153.4	153.8	154.3	154.7	155.1	155.6
107.5°	188.1	188.4	188.8	189.1	189.0	189.0	189.0	188.9
110°	211.7	211.4	211.1	211.2	211.7	212.1	212.5	212.9



TEST NUMBER: P332695-930

CATALOG NUMBER: S124DIP-S1195D810U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	237.1	237.1	237.0	237.0	237.1	237.2	237.3	237.3
115°	276.3	276.2	276.1	275.9	275.8	275.7	275.5	275.3
117.5°	314.1	313.6	313.1	312.7	312.4	312.1	311.9	311.5
120°	339.6	338.8	338.2	337.9	338.3	338.5	338.8	339.1
122.5°	365.5	365.1	364.6	364.1	363.5	363.1	362.6	362.1
125°	403.6	403.2	403.0	402.7	402.4	402.1	401.9	401.5
127.5°	439.9	439.6	439.3	439.0	438.8	438.6	438.4	438.1
130°	465.4	465.0	464.8	464.4	463.8	463.3	462.7	462.1
132.5°	489.3	489.0	488.8	488.5	488.3	488.0	487.8	487.6
135°	525.3	525.0	524.7	524.3	523.9	523.5	523.1	522.7
137.5°	560.0	559.7	559.3	559.1	559.2	559.3	559.4	559.5
140°	582.9	582.8	582.6	582.5	582.4	582.2	582.0	582.0
142.5°	604.5	604.5	604.5	604.5	604.5	604.5	604.4	604.4
145°	637.1	637.0	636.8	636.5	636.1	635.7	635.3	634.9
147.5°	666.6	666.5	666.3	666.3	666.1	665.9	665.9	665.7
150°	685.2	685.2	685.2	685.1	685.0	684.9	684.7	684.5
152.5°	702.7	703.0	703.4	703.4	703.0	702.6	702.3	701.9
155°	727.1	727.7	728.2	728.2	727.7	727.1	726.5	726.0
157.5°	748.6	749.1	749.5	749.4	749.0	748.5	748.0	747.5
160°	761.9	762.3	762.7	762.6	761.9	761.2	760.5	759.8
162.5°	773.8	774.5	775.3	775.3	774.6	774.0	773.2	772.5
165°	789.5	790.4	791.2	791.3	790.8	790.2	789.6	789.1
167.5°	802.7	803.6	804.5	804.5	803.6	802.7	801.8	801.0
170°	809.9	810.7	811.6	811.5	810.6	809.6	808.5	807.6
172.5°	815.2	816.2	817.2	817.2	816.2	815.1	814.2	813.2
175°	821.0	822.0	823.0	823.0	822.0	821.0	820.0	819.0
177.5°	824.2	825.0	825.8	825.7	824.8	823.9	823.0	822.1
180°	824.1	824.1	824.1	824.1	824.1	824.1	824.1	824.1

(END OF REPORT)