

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332616-930

Luminaire Tested: **S124DIP-S795D1205U930-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332616-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124DIP-S795D1205U930-4F0-1E-UDD-A  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 1205 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6809.6 lumens  
Efficiency: N/A  
Efficacy: 119.7 lumens/watt  
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41  
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 56.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

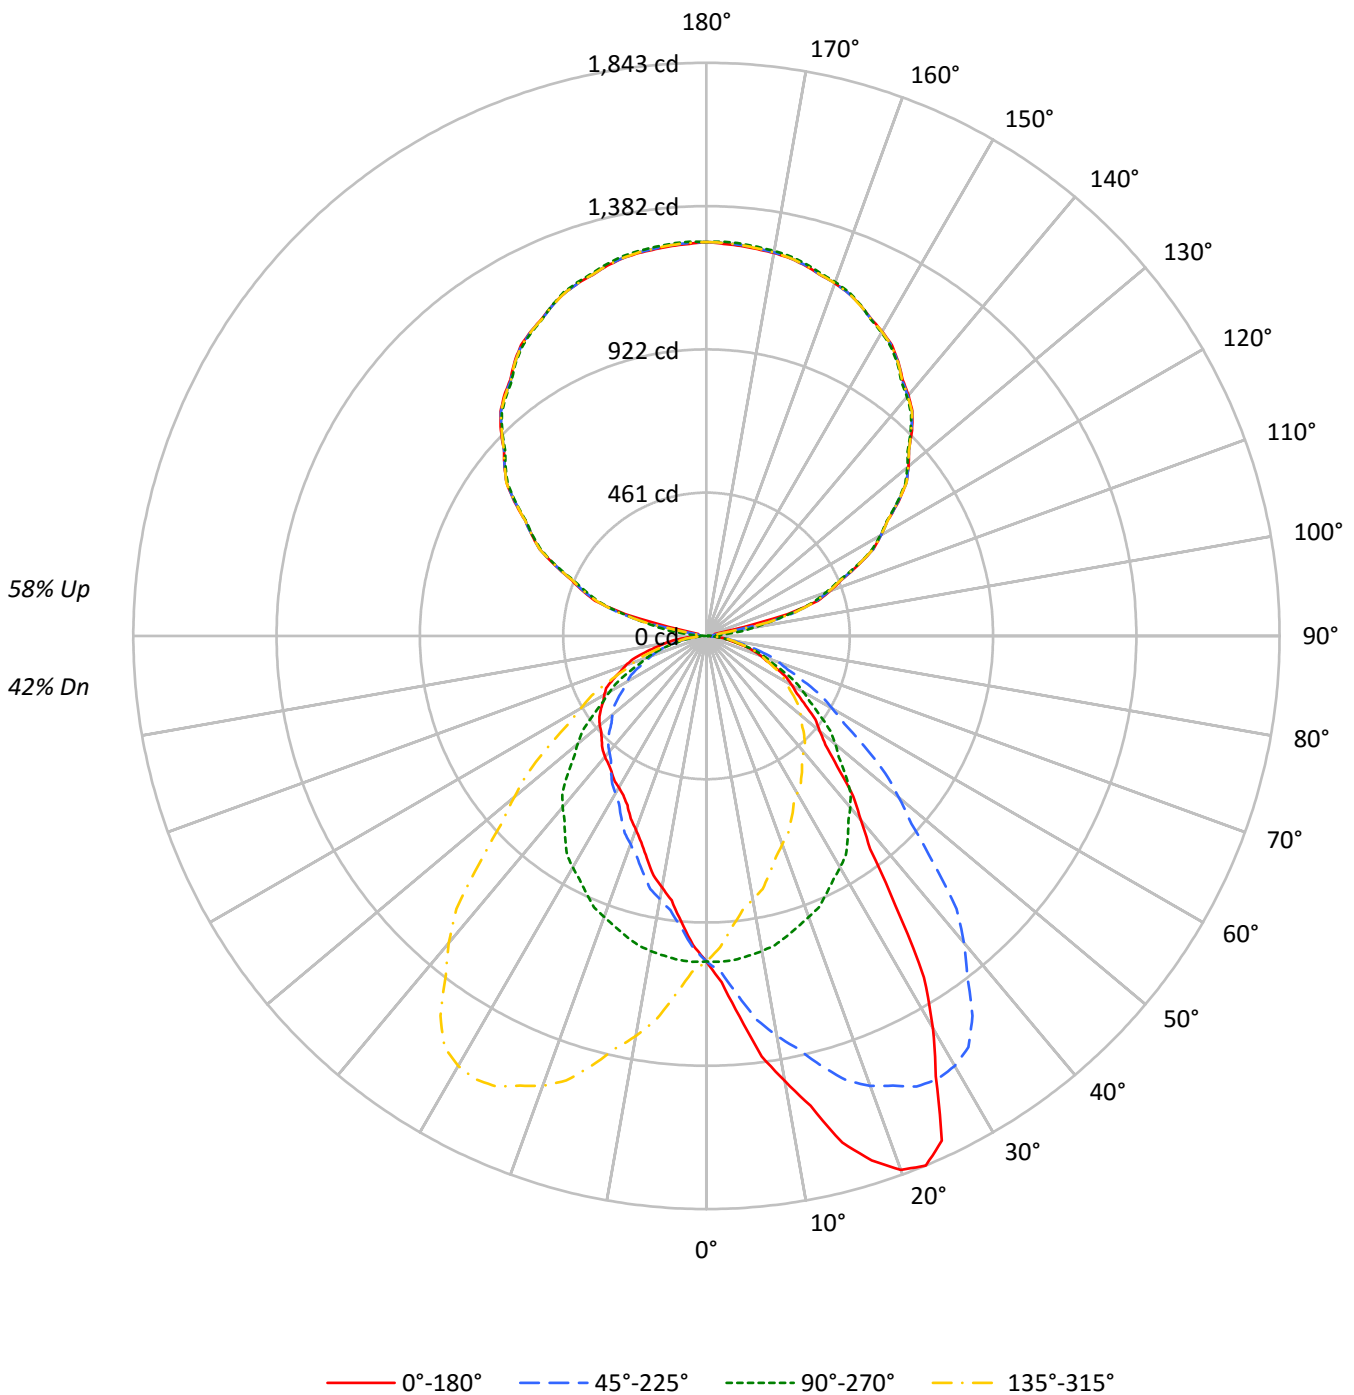



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	42				
1	96	92	88	85	88	84	81	78	70	67	65	56	55	53	44	43	42	36				
2	88	81	75	70	80	74	69	64	61	58	54	50	47	45	39	37	36	31				
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	34	32	30	26				
4	73	63	55	49	67	58	51	46	48	43	39	39	36	33	31	28	26	23				
5	67	56	48	42	61	52	45	39	43	38	34	35	31	28	28	25	23	20				
6	62	50	42	37	57	46	39	34	39	34	30	32	28	25	25	23	20	17				
7	57	45	38	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15				
8	53	41	34	28	49	38	31	27	32	27	23	27	23	20	21	18	16	14				
9	50	38	30	25	45	35	28	24	29	24	21	24	21	18	20	17	15	13				
10	46	34	27	23	42	32	26	21	27	22	19	23	19	16	18	15	13	11				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	8451	8451	8451	8451
5°	9951	8473	7478	8473
10°	11914	8435	6733	8435
15°	14098	8350	6182	8350
20°	15698	8262	5692	8262
25°	15952	8134	5353	8134
30°	13573	8011	5246	8011
35°	10435	7811	5248	7811
40°	8134	7576	5347	7576
45°	6782	7223	5436	7223
50°	5968	6791	5620	6791
55°	5468	6273	5847	6273
60°	5125	5811	6119	5811
65°	4770	5291	6346	5291
70°	4360	4780	6489	4780
75°	3896	4208	6410	4208
80°	3268	3445	6206	3445
85°	2408	2492	5947	2492



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	102.0	1.5
10°-20°	314.3	4.6
20°-30°	498.4	7.3
30°-40°	554.7	8.1
40°-50°	504.9	7.4
50°-60°	412.6	6.1
60°-70°	294.6	4.3
70°-80°	162.2	2.4
80°-90°	47.9	0.7
90°-100°	43.3	0.6
100°-110°	276.2	4.1
110°-120°	528.4	7.8
120°-130°	670.8	9.9
130°-140°	717.7	10.5
140°-150°	671.1	9.9
150°-160°	541.2	7.9
160°-170°	349.1	5.1
170°-180°	120.3	1.8
0°-30°	914.7	13.4
0°-40°	1469.4	21.6
0°-60°	2386.9	35.1
0°-90°	2891.6	42.5
90°-120°	847.9	12.5
90°-150°	2907.4	42.7
90°-180°	3918.0	57.5
0°-180°	6809.6	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1047	1047	1047	1047	1047	
5°	1228	1046	923	1046	1228	125
15°	1687	999	740	999	1687	477
25°	1791	913	601	913	1791	789
35°	1059	793	532	793	1059	672
45°	594	633	476	633	594	468
55°	388	446	415	446	388	351
65°	250	277	332	277	250	247
75°	125	135	206	135	125	133
85°	26	27	64	27	26	32
90°	28	3	28	3	28	13
95°	28	52	28	52	28	22
105°	270	285	270	285	270	236
115°	536	532	536	532	536	531
125°	754	748	754	748	754	672
135°	935	928	935	928	935	720
145°	1076	1070	1076	1070	1076	673
155°	1173	1174	1173	1174	1173	541
165°	1232	1238	1232	1238	1232	348
175°	1259	1267	1259	1267	1259	120
180°	1267	1267	1267	1267	1267	



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	1114.0	1113.7	1110.2	1109.5	1107.1	1104.0	1103.3	1097.7	1086.6	1081.4	1080.0
5°	1228.0	1236.6	1225.4	1223.2	1221.9	1207.6	1200.2	1191.6	1171.6	1159.9	1150.8
7.5°	1364.0	1365.0	1360.1	1356.1	1345.1	1332.5	1313.9	1293.9	1270.2	1245.4	1226.8
10°	1453.4	1456.9	1451.3	1450.4	1428.3	1414.5	1386.7	1363.3	1336.4	1306.4	1279.1
12.5°	1547.8	1543.0	1540.1	1521.5	1517.4	1492.2	1459.9	1435.7	1394.3	1359.9	1323.6
15°	1686.8	1677.2	1671.1	1645.5	1633.0	1597.8	1563.6	1537.2	1482.9	1431.3	1392.3
17.5°	1768.2	1777.8	1763.7	1753.2	1720.7	1696.1	1661.1	1605.6	1563.2	1499.1	1449.8
20°	1827.2	1828.1	1820.3	1809.5	1783.9	1752.6	1714.5	1653.8	1603.0	1539.3	1471.7
22.5°	1843.1	1843.4	1840.0	1829.9	1810.5	1785.3	1746.8	1696.1	1634.6	1565.3	1497.7
25°	1790.8	1789.1	1793.0	1804.3	1796.8	1789.1	1766.9	1729.2	1672.0	1598.7	1525.8
27.5°	1596.2	1608.2	1630.2	1657.9	1684.7	1705.0	1710.7	1703.0	1667.5	1607.3	1531.0
30°	1456.0	1470.8	1487.3	1515.0	1568.8	1599.6	1633.4	1659.0	1644.7	1596.5	1525.4
32.5°	1302.0	1305.7	1330.2	1361.7	1411.0	1470.2	1523.8	1575.7	1593.0	1567.7	1508.5
35°	1058.8	1064.9	1091.4	1122.6	1182.9	1255.3	1335.9	1407.9	1467.3	1491.2	1460.9
37.5°	864.1	881.5	900.2	933.8	986.8	1052.0	1135.8	1228.9	1317.4	1376.8	1386.8
40°	771.8	782.7	796.1	821.7	866.7	931.0	1002.9	1109.6	1203.7	1288.7	1316.5
42.5°	699.0	705.3	713.5	736.7	771.0	834.9	900.6	994.4	1088.9	1190.5	1237.0
45°	594.0	600.5	614.4	627.9	653.9	698.1	759.2	836.4	931.4	1029.4	1115.2
47.5°	518.3	522.4	530.7	545.0	567.1	596.3	646.0	710.5	798.5	893.6	985.1
50°	475.2	478.7	485.2	498.2	515.1	541.1	581.9	642.2	711.1	807.0	896.7
52.5°	441.2	442.6	447.4	456.2	469.7	491.5	525.0	574.9	639.0	724.4	813.8
55°	388.5	390.3	394.6	401.1	412.8	426.6	452.2	489.5	545.5	619.6	697.2
57.5°	345.1	346.3	350.0	352.5	362.2	373.4	393.1	419.7	462.1	525.0	594.3
60°	317.4	316.5	320.9	323.0	329.5	339.1	354.2	379.8	416.7	467.4	531.2
62.5°	290.3	289.1	292.8	295.6	299.4	307.5	319.9	340.0	369.9	415.7	470.8
65°	249.7	248.0	250.2	253.6	257.1	261.5	270.6	288.4	312.2	345.1	387.2
67.5°	209.0	210.8	211.2	212.9	214.9	220.8	227.1	239.6	256.4	282.8	318.5
70°	184.7	185.2	186.9	186.9	188.2	193.4	198.6	205.9	222.4	246.7	275.7
72.5°	160.5	162.2	161.6	163.0	163.9	167.4	171.2	178.2	192.2	210.3	234.8
75°	124.9	126.2	126.2	126.6	127.9	129.2	132.2	137.5	147.4	160.9	177.8
77.5°	91.1	91.2	91.8	93.4	93.4	95.5	97.8	101.9	106.8	116.0	126.4
80°	70.3	71.1	70.7	71.6	71.6	73.3	74.1	79.3	81.5	87.6	95.8
82.5°	51.5	52.3	52.3	53.5	54.2	54.5	55.8	57.8	60.0	65.4	68.7
85°	26.0	26.9	26.0	26.9	28.2	28.6	29.9	30.3	32.1	33.4	36.4
87.5°	13.3	14.3	14.2	14.4	15.1	15.2	15.3	14.8	15.9	16.0	17.0
90°	28.5	28.0	27.6	27.1	26.7	25.9	24.6	23.4	22.1	20.9	19.2
92.5°	26.2	26.1	26.0	25.9	25.8	25.1	23.9	22.6	21.4	20.1	18.4
95°	27.5	27.2	27.1	26.8	26.7	25.9	24.6	23.4	22.1	20.9	20.6
97.5°	26.5	26.3	26.1	25.9	25.7	25.5	25.4	25.3	25.1	25.0	48.5
100°	26.5	26.3	26.1	25.9	25.7	27.4	31.0	34.5	38.1	41.7	70.8
102.5°	27.3	27.2	27.2	27.1	27.1	46.4	85.0	123.6	162.2	200.8	204.6
105°	270.0	277.6	285.1	292.7	300.3	303.1	301.3	299.4	297.5	295.5	294.5
107.5°	376.3	375.4	374.7	373.9	373.1	372.2	371.3	370.4	369.4	368.5	367.0
110°	422.5	421.9	421.3	420.6	420.0	419.5	419.1	418.7	418.2	417.8	416.5



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	468.7	468.0	467.2	466.4	465.5	465.2	465.3	465.4	465.5	465.5	465.0
115°	536.2	536.2	536.2	536.2	536.2	536.0	535.6	535.2	534.8	534.3	534.5
117.5°	604.8	604.9	605.0	605.0	605.1	605.2	605.3	605.4	605.4	605.5	605.1
120°	648.0	648.4	648.8	649.2	649.6	649.6	649.2	648.8	648.4	648.0	648.2
122.5°	690.4	690.8	691.3	691.7	692.1	692.2	691.9	691.7	691.5	691.2	690.9
125°	754.1	753.9	753.7	753.4	753.3	752.8	752.2	751.5	750.9	750.3	750.7
127.5°	810.0	810.2	810.3	810.5	810.7	810.8	810.9	811.1	811.1	811.3	810.3
130°	847.8	847.8	847.8	847.8	847.8	847.7	847.6	847.3	847.1	846.9	846.3
132.5°	882.7	882.9	883.1	883.2	883.4	883.4	883.2	883.0	882.7	882.6	881.7
135°	935.0	934.6	934.2	933.8	933.4	932.9	932.5	932.1	931.6	931.2	930.4
137.5°	979.7	979.8	980.0	980.2	980.2	980.1	979.6	979.2	978.7	978.2	977.3
140°	1010.8	1010.6	1010.4	1010.2	1010.0	1009.6	1008.9	1008.3	1007.6	1007.1	1006.6
142.5°	1036.6	1036.6	1036.5	1036.5	1036.4	1036.2	1035.7	1035.3	1034.8	1034.3	1034.0
145°	1076.2	1075.8	1075.3	1074.9	1074.5	1074.2	1074.0	1073.7	1073.6	1073.3	1073.3
147.5°	1109.0	1108.7	1108.6	1108.3	1108.1	1107.9	1107.7	1107.6	1107.4	1107.3	1107.4
150°	1130.2	1130.0	1129.8	1129.5	1129.4	1129.2	1129.2	1129.2	1129.2	1129.2	1129.4
152.5°	1148.3	1148.5	1148.6	1148.8	1148.8	1148.8	1148.4	1148.1	1147.8	1147.5	1147.8
155°	1172.8	1173.5	1174.0	1174.7	1175.3	1175.3	1174.4	1173.5	1172.7	1171.8	1172.5
157.5°	1193.3	1194.3	1195.5	1196.5	1197.7	1197.7	1196.5	1195.5	1194.3	1193.3	1194.0
160°	1206.9	1208.2	1209.4	1210.7	1211.9	1211.9	1210.7	1209.4	1208.2	1206.9	1207.1
162.5°	1217.5	1219.0	1220.4	1221.8	1223.3	1223.4	1222.1	1220.8	1219.5	1218.3	1218.5
165°	1232.5	1234.4	1236.2	1238.2	1240.1	1240.2	1238.5	1236.8	1235.1	1233.5	1233.5
167.5°	1243.7	1245.8	1247.9	1250.0	1252.1	1252.2	1250.3	1248.5	1246.7	1244.8	1245.0
170°	1250.5	1252.6	1254.7	1256.8	1258.9	1259.1	1257.4	1255.7	1254.1	1252.4	1252.1
172.5°	1254.3	1256.5	1258.8	1261.1	1263.4	1263.6	1262.0	1260.3	1258.6	1256.9	1256.7
175°	1259.0	1261.5	1264.0	1266.6	1269.1	1269.4	1267.5	1265.7	1263.7	1261.8	1261.7
177.5°	1262.1	1264.0	1266.1	1268.1	1270.2	1270.5	1269.1	1267.8	1266.4	1265.1	1264.8
180°	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	1080.4	1075.5	1072.0	1069.3	1061.7	1057.1	1053.7	1048.8	1043.3	1037.4	1030.0
5°	1141.7	1126.9	1116.1	1099.6	1084.0	1071.0	1057.6	1045.5	1030.7	1014.6	1002.9
7.5°	1206.2	1184.2	1156.1	1131.7	1104.3	1080.4	1059.2	1037.3	1014.6	992.5	972.3
10°	1247.1	1218.9	1187.6	1150.8	1116.1	1085.3	1056.7	1029.0	1002.1	975.2	952.2
12.5°	1291.1	1256.0	1209.8	1166.8	1127.9	1086.7	1052.2	1018.2	985.8	957.5	930.7
15°	1350.2	1299.5	1246.2	1188.5	1137.3	1089.2	1042.0	999.1	962.6	925.3	899.3
17.5°	1386.6	1323.8	1262.8	1202.6	1140.7	1079.9	1029.0	979.4	933.8	896.7	864.0
20°	1410.5	1348.1	1272.2	1211.9	1138.2	1075.8	1016.8	961.7	914.0	874.6	840.7
22.5°	1431.3	1359.2	1283.3	1204.0	1130.6	1064.4	999.8	944.4	895.7	854.1	821.7
25°	1442.6	1359.8	1277.4	1198.5	1115.2	1036.7	978.2	913.2	861.1	817.3	782.7
27.5°	1443.8	1355.3	1262.1	1174.4	1088.4	1015.4	941.4	883.4	829.3	783.0	749.7
30°	1440.0	1347.7	1247.5	1152.5	1066.2	986.9	922.8	859.4	804.4	758.4	723.7
32.5°	1427.8	1331.7	1228.7	1128.2	1038.9	961.2	895.0	834.8	781.1	735.8	699.4
35°	1392.8	1297.8	1188.1	1083.6	992.1	913.6	853.8	792.6	738.9	695.9	660.8
37.5°	1337.8	1252.0	1140.4	1032.3	942.5	863.6	804.4	749.1	700.6	657.0	621.0
40°	1290.0	1214.6	1102.7	997.3	900.2	825.2	769.6	718.9	670.8	629.6	595.3
42.5°	1234.9	1169.1	1065.9	954.3	860.6	785.3	731.2	685.6	640.3	602.2	567.9
45°	1136.4	1093.2	996.0	892.8	795.2	724.1	672.5	632.7	594.5	557.2	528.6
47.5°	1023.4	1001.9	920.1	822.1	729.5	659.4	614.7	577.8	544.4	512.8	487.5
50°	947.5	937.0	866.3	771.8	683.4	617.4	572.3	540.7	512.1	484.4	460.5
52.5°	872.5	872.1	808.5	721.9	640.0	576.5	531.7	502.2	477.4	454.9	433.4
55°	758.0	770.1	720.2	643.0	569.7	512.5	472.2	445.7	428.4	409.8	393.7
57.5°	652.7	672.9	631.8	563.8	502.6	449.9	414.8	394.9	376.4	365.2	353.5
60°	584.1	603.2	571.0	513.8	456.2	411.1	377.6	359.9	343.8	336.1	327.8
62.5°	523.0	540.1	516.2	463.2	413.1	369.8	341.6	324.5	313.6	305.2	299.7
65°	435.8	450.0	429.7	391.1	348.2	313.5	290.5	277.0	266.7	263.2	257.1
67.5°	352.3	365.3	354.2	321.5	287.1	260.7	242.8	229.9	223.7	220.7	216.4
70°	302.6	315.7	303.9	275.3	248.9	226.8	209.9	202.5	196.0	194.7	188.6
72.5°	260.7	269.5	257.8	235.5	212.8	194.2	181.1	173.3	170.0	167.6	164.4
75°	195.6	203.3	195.6	178.2	162.2	149.2	137.9	134.9	130.9	129.6	127.5
77.5°	138.4	145.2	139.2	128.3	116.3	106.3	100.3	96.4	95.5	93.2	94.2
80°	105.8	110.1	104.5	97.1	87.6	80.6	76.3	74.1	71.6	70.7	72.4
82.5°	76.0	77.9	75.0	70.0	62.9	58.5	55.5	53.0	52.5	52.7	52.7
85°	39.5	39.1	38.6	34.2	32.1	29.0	27.3	26.9	26.4	27.3	28.2
87.5°	16.7	16.7	16.0	14.2	12.7	11.2	10.4	9.6	10.4	11.2	12.0
90°	17.4	15.8	14.1	12.1	9.8	7.5	5.1	2.9	5.1	7.5	9.8
92.5°	16.7	15.0	13.4	12.5	12.3	12.2	12.1	11.9	12.1	12.2	12.3
95°	20.4	20.2	20.0	23.5	30.7	37.7	44.9	52.1	44.9	37.7	30.7
97.5°	72.0	95.5	119.0	128.5	124.0	119.6	115.1	110.6	115.1	119.6	124.0
100°	99.8	128.8	157.9	170.6	166.7	163.0	159.1	155.4	159.1	163.0	166.7
102.5°	208.4	212.2	216.0	216.5	213.7	210.9	208.1	205.4	208.1	210.9	213.7
105°	293.4	292.4	291.4	290.2	288.9	287.6	286.4	285.1	286.4	287.6	288.9
107.5°	365.7	364.2	362.8	361.7	361.1	360.5	359.9	359.2	359.9	360.5	361.1
110°	415.2	414.0	412.7	411.8	411.2	410.5	409.9	409.3	409.9	410.5	411.2





TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	464.3	463.7	463.2	462.3	461.1	460.0	458.9	457.8	458.9	460.0	461.1
115°	534.8	534.9	535.2	534.9	534.3	533.7	533.0	532.4	533.0	533.7	534.3
117.5°	604.6	604.1	603.6	603.0	602.2	601.4	600.5	599.7	600.5	601.4	602.2
120°	648.4	648.7	648.8	648.5	647.7	646.9	646.0	645.1	646.0	646.9	647.7
122.5°	690.6	690.3	690.0	689.6	689.1	688.6	688.1	687.5	688.1	688.6	689.1
125°	751.1	751.5	752.0	751.8	750.9	750.1	749.3	748.4	749.3	750.1	750.9
127.5°	809.3	808.4	807.4	806.8	806.7	806.4	806.2	806.0	806.2	806.4	806.7
130°	845.6	845.1	844.4	844.0	843.8	843.6	843.3	843.1	843.3	843.6	843.8
132.5°	880.9	880.1	879.4	878.7	878.4	878.0	877.6	877.3	877.6	878.0	878.4
135°	929.5	928.7	927.9	927.6	927.7	928.0	928.2	928.4	928.2	928.0	927.7
137.5°	976.4	975.4	974.5	974.0	974.0	973.9	973.8	973.7	973.8	973.9	974.0
140°	1006.2	1005.8	1005.3	1004.9	1004.5	1004.0	1003.6	1003.2	1003.6	1004.0	1004.5
142.5°	1033.8	1033.6	1033.3	1032.8	1032.0	1031.3	1030.5	1029.7	1030.5	1031.3	1032.0
145°	1073.3	1073.3	1073.3	1073.0	1072.4	1071.8	1071.1	1070.5	1071.1	1071.8	1072.4
147.5°	1107.7	1107.9	1108.1	1107.6	1106.4	1105.2	1104.1	1102.9	1104.1	1105.2	1106.4
150°	1129.7	1129.8	1130.1	1129.8	1128.9	1128.0	1127.2	1126.4	1127.2	1128.0	1128.9
152.5°	1148.2	1148.6	1148.9	1148.8	1148.1	1147.5	1146.8	1146.1	1146.8	1147.5	1148.1
155°	1173.1	1173.8	1174.4	1174.6	1174.4	1174.2	1173.9	1173.8	1173.9	1174.2	1174.4
157.5°	1194.7	1195.4	1196.1	1196.5	1196.7	1196.8	1196.9	1197.0	1196.9	1196.8	1196.7
160°	1207.3	1207.5	1207.8	1208.2	1208.8	1209.4	1210.1	1210.7	1210.1	1209.4	1208.8
162.5°	1218.7	1218.9	1219.1	1219.6	1220.4	1221.2	1222.1	1222.8	1222.1	1221.2	1220.4
165°	1233.5	1233.5	1233.5	1234.0	1235.0	1236.1	1237.1	1238.2	1237.1	1236.1	1235.0
167.5°	1245.0	1245.2	1245.3	1245.9	1247.0	1248.1	1249.2	1250.3	1249.2	1248.1	1247.0
170°	1252.0	1251.7	1251.6	1252.1	1253.4	1254.6	1255.9	1257.1	1255.9	1254.6	1253.4
172.5°	1256.5	1256.3	1256.1	1256.6	1257.8	1259.1	1260.4	1261.7	1260.4	1259.1	1257.8
175°	1261.4	1261.2	1261.0	1261.5	1262.8	1264.0	1265.3	1266.6	1265.3	1264.0	1262.8
177.5°	1264.4	1264.0	1263.7	1264.1	1265.3	1266.5	1267.7	1268.9	1267.7	1266.5	1265.3
180°	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	1026.6	1023.5	1019.0	1012.8	1007.5	1002.0	1000.6	998.5	1002.7	999.2	998.2
5°	993.0	983.8	972.2	958.7	950.9	939.6	937.4	933.1	928.8	928.4	924.0
7.5°	957.3	944.0	928.6	914.9	902.2	889.9	881.9	880.1	873.8	870.0	865.7
10°	934.4	917.9	900.2	887.1	872.5	859.4	850.3	845.1	840.7	836.0	831.7
12.5°	907.3	889.8	875.2	861.1	843.6	833.7	818.7	809.8	808.9	808.9	797.7
15°	875.9	858.5	836.0	816.0	806.5	787.4	779.2	768.7	762.3	755.8	750.6
17.5°	839.9	818.3	800.7	777.8	759.6	744.4	733.6	727.3	717.5	708.3	701.6
20°	817.3	794.3	775.8	751.5	731.5	712.8	703.8	695.0	687.7	679.9	672.5
22.5°	794.4	770.5	747.6	724.1	705.5	685.8	677.0	665.2	658.2	653.9	646.5
25°	758.4	732.4	706.4	683.8	664.7	647.3	635.7	626.6	618.7	615.3	610.5
27.5°	719.2	693.3	668.2	642.6	620.9	608.4	599.0	592.2	587.6	583.0	580.9
30°	694.2	667.3	640.4	616.6	596.6	584.1	575.4	570.6	567.1	565.0	562.8
32.5°	668.9	642.4	614.1	592.3	574.5	563.3	556.7	551.9	550.2	549.3	548.6
35°	628.3	601.4	575.4	555.9	539.0	534.7	529.0	526.4	525.5	528.6	529.9
37.5°	589.0	564.0	540.1	521.2	510.1	503.8	501.8	502.0	505.1	507.8	510.9
40°	563.7	539.4	516.9	500.3	490.0	486.1	485.2	487.4	490.8	493.9	497.3
42.5°	539.1	515.1	494.6	479.2	472.0	468.4	468.9	471.1	475.9	479.6	484.9
45°	500.8	480.9	460.9	448.3	442.3	443.1	443.1	447.0	451.8	457.5	463.1
47.5°	464.8	444.7	428.3	417.8	414.6	413.8	416.3	421.3	428.2	435.2	443.0
50°	440.5	421.4	407.2	397.6	394.1	395.4	398.9	403.7	411.9	420.6	428.8
52.5°	415.9	398.6	385.3	376.4	374.1	376.3	379.8	387.3	394.6	404.0	413.9
55°	377.6	362.9	352.5	346.0	345.1	346.4	350.3	358.6	369.0	380.7	390.3
57.5°	339.6	327.3	317.7	313.2	313.6	314.9	321.3	331.1	342.2	354.7	367.0
60°	314.0	302.6	294.9	291.4	291.8	294.4	302.2	311.4	325.2	337.4	350.3
62.5°	289.7	279.7	272.3	269.2	268.6	274.3	281.8	291.2	305.1	318.6	332.6
65°	250.6	242.8	236.8	235.1	236.4	240.7	250.2	262.8	274.5	288.8	303.5
67.5°	212.5	206.0	201.9	202.7	204.2	210.7	218.7	229.4	242.7	257.6	272.1
70°	188.2	182.1	178.6	179.0	181.6	189.5	196.4	207.2	221.6	236.8	248.9
72.5°	163.2	159.2	156.1	157.9	160.5	165.9	174.6	185.4	198.0	212.1	224.9
75°	125.3	125.3	123.6	124.9	128.8	134.0	140.5	151.7	164.4	175.6	186.1
77.5°	92.9	92.0	93.1	94.7	96.9	103.1	110.6	118.6	128.1	139.3	148.0
80°	71.1	71.6	73.7	76.3	77.2	81.9	89.8	97.1	104.5	114.1	122.3
82.5°	53.4	53.9	55.0	58.3	59.1	64.2	69.3	76.6	83.3	89.8	96.6
85°	29.0	29.0	31.2	32.5	34.7	38.2	41.2	45.5	51.6	55.9	62.5
87.5°	13.5	13.9	15.7	16.7	18.0	20.1	21.0	25.1	26.7	28.8	32.0
90°	12.1	14.1	15.8	17.4	19.2	20.9	22.1	23.4	24.6	25.9	26.7
92.5°	12.5	13.4	15.0	16.7	18.4	20.1	21.4	22.6	23.9	25.1	25.8
95°	23.5	20.0	20.2	20.4	20.6	20.9	22.1	23.4	24.6	25.9	26.7
97.5°	128.5	119.0	95.5	72.0	48.5	25.0	25.1	25.3	25.4	25.5	25.7
100°	170.6	157.9	128.8	99.8	70.8	41.7	38.1	34.5	31.0	27.4	25.7
102.5°	216.5	216.0	212.2	208.4	204.6	200.8	162.2	123.6	85.0	46.4	27.1
105°	290.2	291.4	292.4	293.4	294.5	295.5	297.5	299.4	301.3	303.1	300.3
107.5°	361.7	362.8	364.2	365.7	367.0	368.5	369.4	370.4	371.3	372.2	373.1
110°	411.8	412.7	414.0	415.2	416.5	417.8	418.2	418.7	419.1	419.5	420.0



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	462.3	463.2	463.7	464.3	465.0	465.5	465.5	465.4	465.3	465.2	465.5
115°	534.9	535.2	534.9	534.8	534.5	534.3	534.8	535.2	535.6	536.0	536.2
117.5°	603.0	603.6	604.1	604.6	605.1	605.5	605.4	605.4	605.3	605.2	605.1
120°	648.5	648.8	648.7	648.4	648.2	648.0	648.4	648.8	649.2	649.6	649.6
122.5°	689.6	690.0	690.3	690.6	690.9	691.2	691.5	691.7	691.9	692.2	692.1
125°	751.8	752.0	751.5	751.1	750.7	750.3	750.9	751.5	752.2	752.8	753.3
127.5°	806.8	807.4	808.4	809.3	810.3	811.3	811.1	811.1	810.9	810.8	810.7
130°	844.0	844.4	845.1	845.6	846.3	846.9	847.1	847.3	847.6	847.7	847.8
132.5°	878.7	879.4	880.1	880.9	881.7	882.6	882.7	883.0	883.2	883.4	883.4
135°	927.6	927.9	928.7	929.5	930.4	931.2	931.6	932.1	932.5	932.9	933.4
137.5°	974.0	974.5	975.4	976.4	977.3	978.2	978.7	979.2	979.6	980.1	980.2
140°	1004.9	1005.3	1005.8	1006.2	1006.6	1007.1	1007.6	1008.3	1008.9	1009.6	1010.0
142.5°	1032.8	1033.3	1033.6	1033.8	1034.0	1034.3	1034.8	1035.3	1035.7	1036.2	1036.4
145°	1073.0	1073.3	1073.3	1073.3	1073.3	1073.3	1073.6	1073.7	1074.0	1074.2	1074.5
147.5°	1107.6	1108.1	1107.9	1107.7	1107.4	1107.3	1107.4	1107.6	1107.7	1107.9	1108.1
150°	1129.8	1130.1	1129.8	1129.7	1129.4	1129.2	1129.2	1129.2	1129.2	1129.2	1129.4
152.5°	1148.8	1148.9	1148.6	1148.2	1147.8	1147.5	1147.8	1148.1	1148.4	1148.8	1148.8
155°	1174.6	1174.4	1173.8	1173.1	1172.5	1171.8	1172.7	1173.5	1174.4	1175.3	1175.3
157.5°	1196.5	1196.1	1195.4	1194.7	1194.0	1193.3	1194.3	1195.5	1196.5	1197.7	1197.7
160°	1208.2	1207.8	1207.5	1207.3	1207.1	1206.9	1208.2	1209.4	1210.7	1211.9	1211.9
162.5°	1219.6	1219.1	1218.9	1218.7	1218.5	1218.3	1219.5	1220.8	1222.1	1223.4	1223.3
165°	1234.0	1233.5	1233.5	1233.5	1233.5	1233.5	1235.1	1236.8	1238.5	1240.2	1240.1
167.5°	1245.9	1245.3	1245.2	1245.0	1245.0	1244.8	1246.7	1248.5	1250.3	1252.2	1252.1
170°	1252.1	1251.6	1251.7	1252.0	1252.1	1252.4	1254.1	1255.7	1257.4	1259.1	1258.9
172.5°	1256.6	1256.1	1256.3	1256.5	1256.7	1256.9	1258.6	1260.3	1262.0	1263.6	1263.4
175°	1261.5	1261.0	1261.2	1261.4	1261.7	1261.8	1263.7	1265.7	1267.5	1269.4	1269.1
177.5°	1264.1	1263.7	1264.0	1264.4	1264.8	1265.1	1266.4	1267.8	1269.1	1270.5	1270.2
180°	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	997.4	996.8	994.3	994.0	994.3	996.8	997.4	998.2	999.2	1002.7	998.5
5°	921.5	919.2	917.9	922.8	917.9	919.2	921.5	924.0	928.4	928.8	933.1
7.5°	864.1	862.3	858.5	857.4	858.5	862.3	864.1	865.7	870.0	873.8	880.1
10°	827.3	825.6	822.1	821.3	822.1	825.6	827.3	831.7	836.0	840.7	845.1
12.5°	791.9	788.5	787.7	788.6	787.7	788.5	791.9	797.7	808.9	808.9	809.8
15°	744.9	743.2	738.4	739.7	738.4	743.2	744.9	750.6	755.8	762.3	768.7
17.5°	698.6	696.5	690.7	695.9	690.7	696.5	698.6	701.6	708.3	717.5	727.3
20°	669.5	666.0	663.0	662.5	663.0	666.0	669.5	672.5	679.9	687.7	695.0
22.5°	641.7	638.6	638.4	635.5	638.4	638.6	641.7	646.5	653.9	658.2	665.2
25°	607.1	604.1	603.2	601.0	603.2	604.1	607.1	610.5	615.3	618.7	626.6
27.5°	580.4	578.9	577.4	578.0	577.4	578.9	580.4	580.9	583.0	587.6	592.2
30°	564.1	563.7	562.8	562.8	562.8	563.7	564.1	562.8	565.0	567.1	570.6
32.5°	550.6	550.5	551.1	551.1	551.1	550.5	550.6	548.6	549.3	550.2	551.9
35°	531.6	532.9	533.8	532.5	533.8	532.9	531.6	529.9	528.6	525.5	526.4
37.5°	514.5	515.8	517.0	518.4	517.0	515.8	514.5	510.9	507.8	505.1	502.0
40°	501.2	504.3	505.2	507.4	505.2	504.3	501.2	497.3	493.9	490.8	487.4
42.5°	488.8	492.1	494.4	494.8	494.4	492.1	488.8	484.9	479.6	475.9	471.1
45°	469.6	473.0	476.1	476.1	476.1	473.0	469.6	463.1	457.5	451.8	447.0
47.5°	449.7	454.8	457.8	458.6	457.8	454.8	449.7	443.0	435.2	428.2	421.3
50°	436.2	442.3	445.3	447.5	445.3	442.3	436.2	428.8	420.6	411.9	403.7
52.5°	423.1	429.1	433.2	434.3	433.2	429.1	423.1	413.9	404.0	394.6	387.3
55°	400.2	408.9	413.7	415.4	413.7	408.9	400.2	390.3	380.7	369.0	358.6
57.5°	378.7	386.7	392.2	393.5	392.2	386.7	378.7	367.0	354.7	342.2	331.1
60°	362.1	370.7	377.6	379.0	377.6	370.7	362.1	350.3	337.4	325.2	311.4
62.5°	345.0	354.1	360.4	363.7	360.4	354.1	345.0	332.6	318.6	305.1	291.2
65°	315.7	324.7	330.8	332.2	330.8	324.7	315.7	303.5	288.8	274.5	262.8
67.5°	283.6	292.7	296.7	299.2	296.7	292.7	283.6	272.1	257.6	242.7	229.4
70°	261.1	268.4	272.7	274.9	272.7	268.4	261.1	248.9	236.8	221.6	207.2
72.5°	235.4	243.0	248.1	248.5	248.1	243.0	235.4	224.9	212.1	198.0	185.4
75°	196.0	202.9	205.5	205.5	205.5	202.9	196.0	186.1	175.6	164.4	151.7
77.5°	155.2	158.7	162.0	162.7	162.0	158.7	155.2	148.0	139.3	128.1	118.6
80°	128.8	130.9	133.5	133.5	133.5	130.9	128.8	122.3	114.1	104.5	97.1
82.5°	101.7	103.5	106.2	105.8	106.2	103.5	101.7	96.6	89.8	83.3	76.6
85°	61.6	65.5	65.1	64.2	65.1	65.5	61.6	62.5	55.9	51.6	45.5
87.5°	33.2	33.6	34.7	35.5	34.7	33.6	33.2	32.0	28.8	26.7	25.1
90°	27.1	27.6	28.0	28.5	28.0	27.6	27.1	26.7	25.9	24.6	23.4
92.5°	25.9	26.0	26.1	26.2	26.1	26.0	25.9	25.8	25.1	23.9	22.6
95°	26.8	27.1	27.2	27.5	27.2	27.1	26.8	26.7	25.9	24.6	23.4
97.5°	25.9	26.1	26.3	26.5	26.3	26.1	25.9	25.7	25.5	25.4	25.3
100°	25.9	26.1	26.3	26.5	26.3	26.1	25.9	25.7	27.4	31.0	34.5
102.5°	27.1	27.2	27.2	27.3	27.2	27.2	27.1	27.1	46.4	85.0	123.6
105°	292.7	285.1	277.6	270.0	277.6	285.1	292.7	300.3	303.1	301.3	299.4
107.5°	373.9	374.7	375.4	376.3	375.4	374.7	373.9	373.1	372.2	371.3	370.4
110°	420.6	421.3	421.9	422.5	421.9	421.3	420.6	420.0	419.5	419.1	418.7



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	466.4	467.2	468.0	468.7	468.0	467.2	466.4	465.5	465.2	465.3	465.4
115°	536.2	536.2	536.2	536.2	536.2	536.2	536.2	536.2	536.0	535.6	535.2
117.5°	605.0	605.0	604.9	604.8	604.9	605.0	605.0	605.1	605.2	605.3	605.4
120°	649.2	648.8	648.4	648.0	648.4	648.8	649.2	649.6	649.6	649.2	648.8
122.5°	691.7	691.3	690.8	690.4	690.8	691.3	691.7	692.1	692.2	691.9	691.7
125°	753.4	753.7	753.9	754.1	753.9	753.7	753.4	753.3	752.8	752.2	751.5
127.5°	810.5	810.3	810.2	810.0	810.2	810.3	810.5	810.7	810.8	810.9	811.1
130°	847.8	847.8	847.8	847.8	847.8	847.8	847.8	847.8	847.7	847.6	847.3
132.5°	883.2	883.1	882.9	882.7	882.9	883.1	883.2	883.4	883.4	883.2	883.0
135°	933.8	934.2	934.6	935.0	934.6	934.2	933.8	933.4	932.9	932.5	932.1
137.5°	980.2	980.0	979.8	979.7	979.8	980.0	980.2	980.2	980.1	979.6	979.2
140°	1010.2	1010.4	1010.6	1010.8	1010.6	1010.4	1010.2	1010.0	1009.6	1008.9	1008.3
142.5°	1036.5	1036.5	1036.6	1036.6	1036.6	1036.5	1036.5	1036.4	1036.2	1035.7	1035.3
145°	1074.9	1075.3	1075.8	1076.2	1075.8	1075.3	1074.9	1074.5	1074.2	1074.0	1073.7
147.5°	1108.3	1108.6	1108.7	1109.0	1108.7	1108.6	1108.3	1108.1	1107.9	1107.7	1107.6
150°	1129.5	1129.8	1130.0	1130.2	1130.0	1129.8	1129.5	1129.4	1129.2	1129.2	1129.2
152.5°	1148.8	1148.6	1148.5	1148.3	1148.5	1148.6	1148.8	1148.8	1148.8	1148.4	1148.1
155°	1174.7	1174.0	1173.5	1172.8	1173.5	1174.0	1174.7	1175.3	1175.3	1174.4	1173.5
157.5°	1196.5	1195.5	1194.3	1193.3	1194.3	1195.5	1196.5	1197.7	1197.7	1196.5	1195.5
160°	1210.7	1209.4	1208.2	1206.9	1208.2	1209.4	1210.7	1211.9	1211.9	1210.7	1209.4
162.5°	1221.8	1220.4	1219.0	1217.5	1219.0	1220.4	1221.8	1223.3	1223.4	1222.1	1220.8
165°	1238.2	1236.2	1234.4	1232.5	1234.4	1236.2	1238.2	1240.1	1240.2	1238.5	1236.8
167.5°	1250.0	1247.9	1245.8	1243.7	1245.8	1247.9	1250.0	1252.1	1252.2	1250.3	1248.5
170°	1256.8	1254.7	1252.6	1250.5	1252.6	1254.7	1256.8	1258.9	1259.1	1257.4	1255.7
172.5°	1261.1	1258.8	1256.5	1254.3	1256.5	1258.8	1261.1	1263.4	1263.6	1262.0	1260.3
175°	1266.6	1264.0	1261.5	1259.0	1261.5	1264.0	1266.6	1269.1	1269.4	1267.5	1265.7
177.5°	1268.1	1266.1	1264.0	1262.1	1264.0	1266.1	1268.1	1270.2	1270.5	1269.1	1267.8
180°	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	1000.6	1002.0	1007.5	1012.8	1019.0	1023.5	1026.6	1030.0	1037.4	1043.3	1048.8
5°	937.4	939.6	950.9	958.7	972.2	983.8	993.0	1002.9	1014.6	1030.7	1045.5
7.5°	881.9	889.9	902.2	914.9	928.6	944.0	957.3	972.3	992.5	1014.6	1037.3
10°	850.3	859.4	872.5	887.1	900.2	917.9	934.4	952.2	975.2	1002.1	1029.0
12.5°	818.7	833.7	843.6	861.1	875.2	889.8	907.3	930.7	957.5	985.8	1018.2
15°	779.2	787.4	806.5	816.0	836.0	858.5	875.9	899.3	925.3	962.6	999.1
17.5°	733.6	744.4	759.6	777.8	800.7	818.3	839.9	864.0	896.7	933.8	979.4
20°	703.8	712.8	731.5	751.5	775.8	794.3	817.3	840.7	874.6	914.0	961.7
22.5°	677.0	685.8	705.5	724.1	747.6	770.5	794.4	821.7	854.1	895.7	944.4
25°	635.7	647.3	664.7	683.8	706.4	732.4	758.4	782.7	817.3	861.1	913.2
27.5°	599.0	608.4	620.9	642.6	668.2	693.3	719.2	749.7	783.0	829.3	883.4
30°	575.4	584.1	596.6	616.6	640.4	667.3	694.2	723.7	758.4	804.4	859.4
32.5°	556.7	563.3	574.5	592.3	614.1	642.4	668.9	699.4	735.8	781.1	834.8
35°	529.0	534.7	539.0	555.9	575.4	601.4	628.3	660.8	695.9	738.9	792.6
37.5°	501.8	503.8	510.1	521.2	540.1	564.0	589.0	621.0	657.0	700.6	749.1
40°	485.2	486.1	490.0	500.3	516.9	539.4	563.7	595.3	629.6	670.8	718.9
42.5°	468.9	468.4	472.0	479.2	494.6	515.1	539.1	567.9	602.2	640.3	685.6
45°	443.1	443.1	442.3	448.3	460.9	480.9	500.8	528.6	557.2	594.5	632.7
47.5°	416.3	413.8	414.6	417.8	428.3	444.7	464.8	487.5	512.8	544.4	577.8
50°	398.9	395.4	394.1	397.6	407.2	421.4	440.5	460.5	484.4	512.1	540.7
52.5°	379.8	376.3	374.1	376.4	385.3	398.6	415.9	433.4	454.9	477.4	502.2
55°	350.3	346.4	345.1	346.0	352.5	362.9	377.6	393.7	409.8	428.4	445.7
57.5°	321.3	314.9	313.6	313.2	317.7	327.3	339.6	353.5	365.2	376.4	394.9
60°	302.2	294.4	291.8	291.4	294.9	302.6	314.0	327.8	336.1	343.8	359.9
62.5°	281.8	274.3	268.6	269.2	272.3	279.7	289.7	299.7	305.2	313.6	324.5
65°	250.2	240.7	236.4	235.1	236.8	242.8	250.6	257.1	263.2	266.7	277.0
67.5°	218.7	210.7	204.2	202.7	201.9	206.0	212.5	216.4	220.7	223.7	229.9
70°	196.4	189.5	181.6	179.0	178.6	182.1	188.2	188.6	194.7	196.0	202.5
72.5°	174.6	165.9	160.5	157.9	156.1	159.2	163.2	164.4	167.6	170.0	173.3
75°	140.5	134.0	128.8	124.9	123.6	125.3	125.3	127.5	129.6	130.9	134.9
77.5°	110.6	103.1	96.9	94.7	93.1	92.0	92.9	94.2	93.2	95.5	96.4
80°	89.8	81.9	77.2	76.3	73.7	71.6	71.1	72.4	70.7	71.6	74.1
82.5°	69.3	64.2	59.1	58.3	55.0	53.9	53.4	52.7	52.7	52.5	53.0
85°	41.2	38.2	34.7	32.5	31.2	29.0	29.0	28.2	27.3	26.4	26.9
87.5°	21.0	20.1	18.0	16.7	15.7	13.9	13.5	12.0	11.2	10.4	9.6
90°	22.1	20.9	19.2	17.4	15.8	14.1	12.1	9.8	7.5	5.1	2.9
92.5°	21.4	20.1	18.4	16.7	15.0	13.4	12.5	12.3	12.2	12.1	11.9
95°	22.1	20.9	20.6	20.4	20.2	20.0	23.5	30.7	37.7	44.9	52.1
97.5°	25.1	25.0	48.5	72.0	95.5	119.0	128.5	124.0	119.6	115.1	110.6
100°	38.1	41.7	70.8	99.8	128.8	157.9	170.6	166.7	163.0	159.1	155.4
102.5°	162.2	200.8	204.6	208.4	212.2	216.0	216.5	213.7	210.9	208.1	205.4
105°	297.5	295.5	294.5	293.4	292.4	291.4	290.2	288.9	287.6	286.4	285.1
107.5°	369.4	368.5	367.0	365.7	364.2	362.8	361.7	361.1	360.5	359.9	359.2
110°	418.2	417.8	416.5	415.2	414.0	412.7	411.8	411.2	410.5	409.9	409.3



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	465.5	465.5	465.0	464.3	463.7	463.2	462.3	461.1	460.0	458.9	457.8
115°	534.8	534.3	534.5	534.8	534.9	535.2	534.9	534.3	533.7	533.0	532.4
117.5°	605.4	605.5	605.1	604.6	604.1	603.6	603.0	602.2	601.4	600.5	599.7
120°	648.4	648.0	648.2	648.4	648.7	648.8	648.5	647.7	646.9	646.0	645.1
122.5°	691.5	691.2	690.9	690.6	690.3	690.0	689.6	689.1	688.6	688.1	687.5
125°	750.9	750.3	750.7	751.1	751.5	752.0	751.8	750.9	750.1	749.3	748.4
127.5°	811.1	811.3	810.3	809.3	808.4	807.4	806.8	806.7	806.4	806.2	806.0
130°	847.1	846.9	846.3	845.6	845.1	844.4	844.0	843.8	843.6	843.3	843.1
132.5°	882.7	882.6	881.7	880.9	880.1	879.4	878.7	878.4	878.0	877.6	877.3
135°	931.6	931.2	930.4	929.5	928.7	927.9	927.6	927.7	928.0	928.2	928.4
137.5°	978.7	978.2	977.3	976.4	975.4	974.5	974.0	974.0	973.9	973.8	973.7
140°	1007.6	1007.1	1006.6	1006.2	1005.8	1005.3	1004.9	1004.5	1004.0	1003.6	1003.2
142.5°	1034.8	1034.3	1034.0	1033.8	1033.6	1033.3	1032.8	1032.0	1031.3	1030.5	1029.7
145°	1073.6	1073.3	1073.3	1073.3	1073.3	1073.3	1073.0	1072.4	1071.8	1071.1	1070.5
147.5°	1107.4	1107.3	1107.4	1107.7	1107.9	1108.1	1107.6	1106.4	1105.2	1104.1	1102.9
150°	1129.2	1129.2	1129.4	1129.7	1129.8	1130.1	1129.8	1128.9	1128.0	1127.2	1126.4
152.5°	1147.8	1147.5	1147.8	1148.2	1148.6	1148.9	1148.8	1148.1	1147.5	1146.8	1146.1
155°	1172.7	1171.8	1172.5	1173.1	1173.8	1174.4	1174.6	1174.4	1174.2	1173.9	1173.8
157.5°	1194.3	1193.3	1194.0	1194.7	1195.4	1196.1	1196.5	1196.7	1196.8	1196.9	1197.0
160°	1208.2	1206.9	1207.1	1207.3	1207.5	1207.8	1208.2	1208.8	1209.4	1210.1	1210.7
162.5°	1219.5	1218.3	1218.5	1218.7	1218.9	1219.1	1219.6	1220.4	1221.2	1222.1	1222.8
165°	1235.1	1233.5	1233.5	1233.5	1233.5	1233.5	1234.0	1235.0	1236.1	1237.1	1238.2
167.5°	1246.7	1244.8	1245.0	1245.0	1245.2	1245.3	1245.9	1247.0	1248.1	1249.2	1250.3
170°	1254.1	1252.4	1252.1	1252.0	1251.7	1251.6	1252.1	1253.4	1254.6	1255.9	1257.1
172.5°	1258.6	1256.9	1256.7	1256.5	1256.3	1256.1	1256.6	1257.8	1259.1	1260.4	1261.7
175°	1263.7	1261.8	1261.7	1261.4	1261.2	1261.0	1261.5	1262.8	1264.0	1265.3	1266.6
177.5°	1266.4	1265.1	1264.8	1264.4	1264.0	1263.7	1264.1	1265.3	1266.5	1267.7	1268.9
180°	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	1053.7	1057.1	1061.7	1069.3	1072.0	1075.5	1080.4	1080.0	1081.4	1086.6	1097.7
5°	1057.6	1071.0	1084.0	1099.6	1116.1	1126.9	1141.7	1150.8	1159.9	1171.6	1191.6
7.5°	1059.2	1080.4	1104.3	1131.7	1156.1	1184.2	1206.2	1226.8	1245.4	1270.2	1293.9
10°	1056.7	1085.3	1116.1	1150.8	1187.6	1218.9	1247.1	1279.1	1306.4	1336.4	1363.3
12.5°	1052.2	1086.7	1127.9	1166.8	1209.8	1256.0	1291.1	1323.6	1359.9	1394.3	1435.7
15°	1042.0	1089.2	1137.3	1188.5	1246.2	1299.5	1350.2	1392.3	1431.3	1482.9	1537.2
17.5°	1029.0	1079.9	1140.7	1202.6	1262.8	1323.8	1386.6	1449.8	1499.1	1563.2	1605.6
20°	1016.8	1075.8	1138.2	1211.9	1272.2	1348.1	1410.5	1471.7	1539.3	1603.0	1653.8
22.5°	999.8	1064.4	1130.6	1204.0	1283.3	1359.2	1431.3	1497.7	1565.3	1634.6	1696.1
25°	978.2	1036.7	1115.2	1198.5	1277.4	1359.8	1442.6	1525.8	1598.7	1672.0	1729.2
27.5°	941.4	1015.4	1088.4	1174.4	1262.1	1355.3	1443.8	1531.0	1607.3	1667.5	1703.0
30°	922.8	986.9	1066.2	1152.5	1247.5	1347.7	1440.0	1525.4	1596.5	1644.7	1659.0
32.5°	895.0	961.2	1038.9	1128.2	1228.7	1331.7	1427.8	1508.5	1567.7	1593.0	1575.7
35°	853.8	913.6	992.1	1083.6	1188.1	1297.8	1392.8	1460.9	1491.2	1467.3	1407.9
37.5°	804.4	863.6	942.5	1032.3	1140.4	1252.0	1337.8	1386.8	1376.8	1317.4	1228.9
40°	769.6	825.2	900.2	997.3	1102.7	1214.6	1290.0	1316.5	1288.7	1203.7	1109.6
42.5°	731.2	785.3	860.6	954.3	1065.9	1169.1	1234.9	1237.0	1190.5	1088.9	994.4
45°	672.5	724.1	795.2	892.8	996.0	1093.2	1136.4	1115.2	1029.4	931.4	836.4
47.5°	614.7	659.4	729.5	822.1	920.1	1001.9	1023.4	985.1	893.6	798.5	710.5
50°	572.3	617.4	683.4	771.8	866.3	937.0	947.5	896.7	807.0	711.1	642.2
52.5°	531.7	576.5	640.0	721.9	808.5	872.1	872.5	813.8	724.4	639.0	574.9
55°	472.2	512.5	569.7	643.0	720.2	770.1	758.0	697.2	619.6	545.5	489.5
57.5°	414.8	449.9	502.6	563.8	631.8	672.9	652.7	594.3	525.0	462.1	419.7
60°	377.6	411.1	456.2	513.8	571.0	603.2	584.1	531.2	467.4	416.7	379.8
62.5°	341.6	369.8	413.1	463.2	516.2	540.1	523.0	470.8	415.7	369.9	340.0
65°	290.5	313.5	348.2	391.1	429.7	450.0	435.8	387.2	345.1	312.2	288.4
67.5°	242.8	260.7	287.1	321.5	354.2	365.3	352.3	318.5	282.8	256.4	239.6
70°	209.9	226.8	248.9	275.3	303.9	315.7	302.6	275.7	246.7	222.4	205.9
72.5°	181.1	194.2	212.8	235.5	257.8	269.5	260.7	234.8	210.3	192.2	178.2
75°	137.9	149.2	162.2	178.2	195.6	203.3	195.6	177.8	160.9	147.4	137.5
77.5°	100.3	106.3	116.3	128.3	139.2	145.2	138.4	126.4	116.0	106.8	101.9
80°	76.3	80.6	87.6	97.1	104.5	110.1	105.8	95.8	87.6	81.5	79.3
82.5°	55.5	58.5	62.9	70.0	75.0	77.9	76.0	68.7	65.4	60.0	57.8
85°	27.3	29.0	32.1	34.2	38.6	39.1	39.5	36.4	33.4	32.1	30.3
87.5°	10.4	11.2	12.7	14.2	16.0	16.7	16.7	17.0	16.0	15.9	14.8
90°	5.1	7.5	9.8	12.1	14.1	15.8	17.4	19.2	20.9	22.1	23.4
92.5°	12.1	12.2	12.3	12.5	13.4	15.0	16.7	18.4	20.1	21.4	22.6
95°	44.9	37.7	30.7	23.5	20.0	20.2	20.4	20.6	20.9	22.1	23.4
97.5°	115.1	119.6	124.0	128.5	119.0	95.5	72.0	48.5	25.0	25.1	25.3
100°	159.1	163.0	166.7	170.6	157.9	128.8	99.8	70.8	41.7	38.1	34.5
102.5°	208.1	210.9	213.7	216.5	216.0	212.2	208.4	204.6	200.8	162.2	123.6
105°	286.4	287.6	288.9	290.2	291.4	292.4	293.4	294.5	295.5	297.5	299.4
107.5°	359.9	360.5	361.1	361.7	362.8	364.2	365.7	367.0	368.5	369.4	370.4
110°	409.9	410.5	411.2	411.8	412.7	414.0	415.2	416.5	417.8	418.2	418.7





TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	458.9	460.0	461.1	462.3	463.2	463.7	464.3	465.0	465.5	465.5	465.4
115°	533.0	533.7	534.3	534.9	535.2	534.9	534.8	534.5	534.3	534.8	535.2
117.5°	600.5	601.4	602.2	603.0	603.6	604.1	604.6	605.1	605.5	605.4	605.4
120°	646.0	646.9	647.7	648.5	648.8	648.7	648.4	648.2	648.0	648.4	648.8
122.5°	688.1	688.6	689.1	689.6	690.0	690.3	690.6	690.9	691.2	691.5	691.7
125°	749.3	750.1	750.9	751.8	752.0	751.5	751.1	750.7	750.3	750.9	751.5
127.5°	806.2	806.4	806.7	806.8	807.4	808.4	809.3	810.3	811.3	811.1	811.1
130°	843.3	843.6	843.8	844.0	844.4	845.1	845.6	846.3	846.9	847.1	847.3
132.5°	877.6	878.0	878.4	878.7	879.4	880.1	880.9	881.7	882.6	882.7	883.0
135°	928.2	928.0	927.7	927.6	927.9	928.7	929.5	930.4	931.2	931.6	932.1
137.5°	973.8	973.9	974.0	974.0	974.5	975.4	976.4	977.3	978.2	978.7	979.2
140°	1003.6	1004.0	1004.5	1004.9	1005.3	1005.8	1006.2	1006.6	1007.1	1007.6	1008.3
142.5°	1030.5	1031.3	1032.0	1032.8	1033.3	1033.6	1033.8	1034.0	1034.3	1034.8	1035.3
145°	1071.1	1071.8	1072.4	1073.0	1073.3	1073.3	1073.3	1073.3	1073.3	1073.6	1073.7
147.5°	1104.1	1105.2	1106.4	1107.6	1108.1	1107.9	1107.7	1107.4	1107.3	1107.4	1107.6
150°	1127.2	1128.0	1128.9	1129.8	1130.1	1129.8	1129.7	1129.4	1129.2	1129.2	1129.2
152.5°	1146.8	1147.5	1148.1	1148.8	1148.9	1148.6	1148.2	1147.8	1147.5	1147.8	1148.1
155°	1173.9	1174.2	1174.4	1174.6	1174.4	1173.8	1173.1	1172.5	1171.8	1172.7	1173.5
157.5°	1196.9	1196.8	1196.7	1196.5	1196.1	1195.4	1194.7	1194.0	1193.3	1194.3	1195.5
160°	1210.1	1209.4	1208.8	1208.2	1207.8	1207.5	1207.3	1207.1	1206.9	1208.2	1209.4
162.5°	1222.1	1221.2	1220.4	1219.6	1219.1	1218.9	1218.7	1218.5	1218.3	1219.5	1220.8
165°	1237.1	1236.1	1235.0	1234.0	1233.5	1233.5	1233.5	1233.5	1233.5	1235.1	1236.8
167.5°	1249.2	1248.1	1247.0	1245.9	1245.3	1245.2	1245.0	1245.0	1244.8	1246.7	1248.5
170°	1255.9	1254.6	1253.4	1252.1	1251.6	1251.7	1252.0	1252.1	1252.4	1254.1	1255.7
172.5°	1260.4	1259.1	1257.8	1256.6	1256.1	1256.3	1256.5	1256.7	1256.9	1258.6	1260.3
175°	1265.3	1264.0	1262.8	1261.5	1261.0	1261.2	1261.4	1261.7	1261.8	1263.7	1265.7
177.5°	1267.7	1266.5	1265.3	1264.1	1263.7	1264.0	1264.4	1264.8	1265.1	1266.4	1267.8
180°	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	1103.3	1104.0	1107.1	1109.5	1110.2	1113.7	1114.0
5°	1200.2	1207.6	1221.9	1223.2	1225.4	1236.6	1228.0
7.5°	1313.9	1332.5	1345.1	1356.1	1360.1	1365.0	1364.0
10°	1386.7	1414.5	1428.3	1450.4	1451.3	1456.9	1453.4
12.5°	1459.9	1492.2	1517.4	1521.5	1540.1	1543.0	1547.8
15°	1563.6	1597.8	1633.0	1645.5	1671.1	1677.2	1686.8
17.5°	1661.1	1696.1	1720.7	1753.2	1763.7	1777.8	1768.2
20°	1714.5	1752.6	1783.9	1809.5	1820.3	1828.1	1827.2
22.5°	1746.8	1785.3	1810.5	1829.9	1840.0	1843.4	1843.1
25°	1766.9	1789.1	1796.8	1804.3	1793.0	1789.1	1790.8
27.5°	1710.7	1705.0	1684.7	1657.9	1630.2	1608.2	1596.2
30°	1633.4	1599.6	1568.8	1515.0	1487.3	1470.8	1456.0
32.5°	1523.8	1470.2	1411.0	1361.7	1330.2	1305.7	1302.0
35°	1335.9	1255.3	1182.9	1122.6	1091.4	1064.9	1058.8
37.5°	1135.8	1052.0	986.8	933.8	900.2	881.5	864.1
40°	1002.9	931.0	866.7	821.7	796.1	782.7	771.8
42.5°	900.6	834.9	771.0	736.7	713.5	705.3	699.0
45°	759.2	698.1	653.9	627.9	614.4	600.5	594.0
47.5°	646.0	596.3	567.1	545.0	530.7	522.4	518.3
50°	581.9	541.1	515.1	498.2	485.2	478.7	475.2
52.5°	525.0	491.5	469.7	456.2	447.4	442.6	441.2
55°	452.2	426.6	412.8	401.1	394.6	390.3	388.5
57.5°	393.1	373.4	362.2	352.5	350.0	346.3	345.1
60°	354.2	339.1	329.5	323.0	320.9	316.5	317.4
62.5°	319.9	307.5	299.4	295.6	292.8	289.1	290.3
65°	270.6	261.5	257.1	253.6	250.2	248.0	249.7
67.5°	227.1	220.8	214.9	212.9	211.2	210.8	209.0
70°	198.6	193.4	188.2	186.9	186.9	185.2	184.7
72.5°	171.2	167.4	163.9	163.0	161.6	162.2	160.5
75°	132.2	129.2	127.9	126.6	126.2	126.2	124.9
77.5°	97.8	95.5	93.4	93.4	91.8	91.2	91.1
80°	74.1	73.3	71.6	71.6	70.7	71.1	70.3
82.5°	55.8	54.5	54.2	53.5	52.3	52.3	51.5
85°	29.9	28.6	28.2	26.9	26.0	26.9	26.0
87.5°	15.3	15.2	15.1	14.4	14.2	14.3	13.3
90°	24.6	25.9	26.7	27.1	27.6	28.0	28.5
92.5°	23.9	25.1	25.8	25.9	26.0	26.1	26.2
95°	24.6	25.9	26.7	26.8	27.1	27.2	27.5
97.5°	25.4	25.5	25.7	25.9	26.1	26.3	26.5
100°	31.0	27.4	25.7	25.9	26.1	26.3	26.5
102.5°	85.0	46.4	27.1	27.1	27.2	27.2	27.3
105°	301.3	303.1	300.3	292.7	285.1	277.6	270.0
107.5°	371.3	372.2	373.1	373.9	374.7	375.4	376.3
110°	419.1	419.5	420.0	420.6	421.3	421.9	422.5



TEST NUMBER: P332616-930

CATALOG NUMBER: S124DIP-S795D1205U930-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	465.3	465.2	465.5	466.4	467.2	468.0	468.7
115°	535.6	536.0	536.2	536.2	536.2	536.2	536.2
117.5°	605.3	605.2	605.1	605.0	605.0	604.9	604.8
120°	649.2	649.6	649.6	649.2	648.8	648.4	648.0
122.5°	691.9	692.2	692.1	691.7	691.3	690.8	690.4
125°	752.2	752.8	753.3	753.4	753.7	753.9	754.1
127.5°	810.9	810.8	810.7	810.5	810.3	810.2	810.0
130°	847.6	847.7	847.8	847.8	847.8	847.8	847.8
132.5°	883.2	883.4	883.4	883.2	883.1	882.9	882.7
135°	932.5	932.9	933.4	933.8	934.2	934.6	935.0
137.5°	979.6	980.1	980.2	980.2	980.0	979.8	979.7
140°	1008.9	1009.6	1010.0	1010.2	1010.4	1010.6	1010.8
142.5°	1035.7	1036.2	1036.4	1036.5	1036.5	1036.6	1036.6
145°	1074.0	1074.2	1074.5	1074.9	1075.3	1075.8	1076.2
147.5°	1107.7	1107.9	1108.1	1108.3	1108.6	1108.7	1109.0
150°	1129.2	1129.2	1129.4	1129.5	1129.8	1130.0	1130.2
152.5°	1148.4	1148.8	1148.8	1148.8	1148.6	1148.5	1148.3
155°	1174.4	1175.3	1175.3	1174.7	1174.0	1173.5	1172.8
157.5°	1196.5	1197.7	1197.7	1196.5	1195.5	1194.3	1193.3
160°	1210.7	1211.9	1211.9	1210.7	1209.4	1208.2	1206.9
162.5°	1222.1	1223.4	1223.3	1221.8	1220.4	1219.0	1217.5
165°	1238.5	1240.2	1240.1	1238.2	1236.2	1234.4	1232.5
167.5°	1250.3	1252.2	1252.1	1250.0	1247.9	1245.8	1243.7
170°	1257.4	1259.1	1258.9	1256.8	1254.7	1252.6	1250.5
172.5°	1262.0	1263.6	1263.4	1261.1	1258.8	1256.5	1254.3
175°	1267.5	1269.4	1269.1	1266.6	1264.0	1261.5	1259.0
177.5°	1269.1	1270.5	1270.2	1268.1	1266.1	1264.0	1262.1
180°	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6	1266.6

(END OF REPORT)