

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332974-930

Luminaire Tested: **S124RDIP-S1020D1035U930-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332974-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1020 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 1035 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6458.5 lumens  
Efficiency: N/A  
Efficacy: 106.8 lumens/watt  
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39  
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 60.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

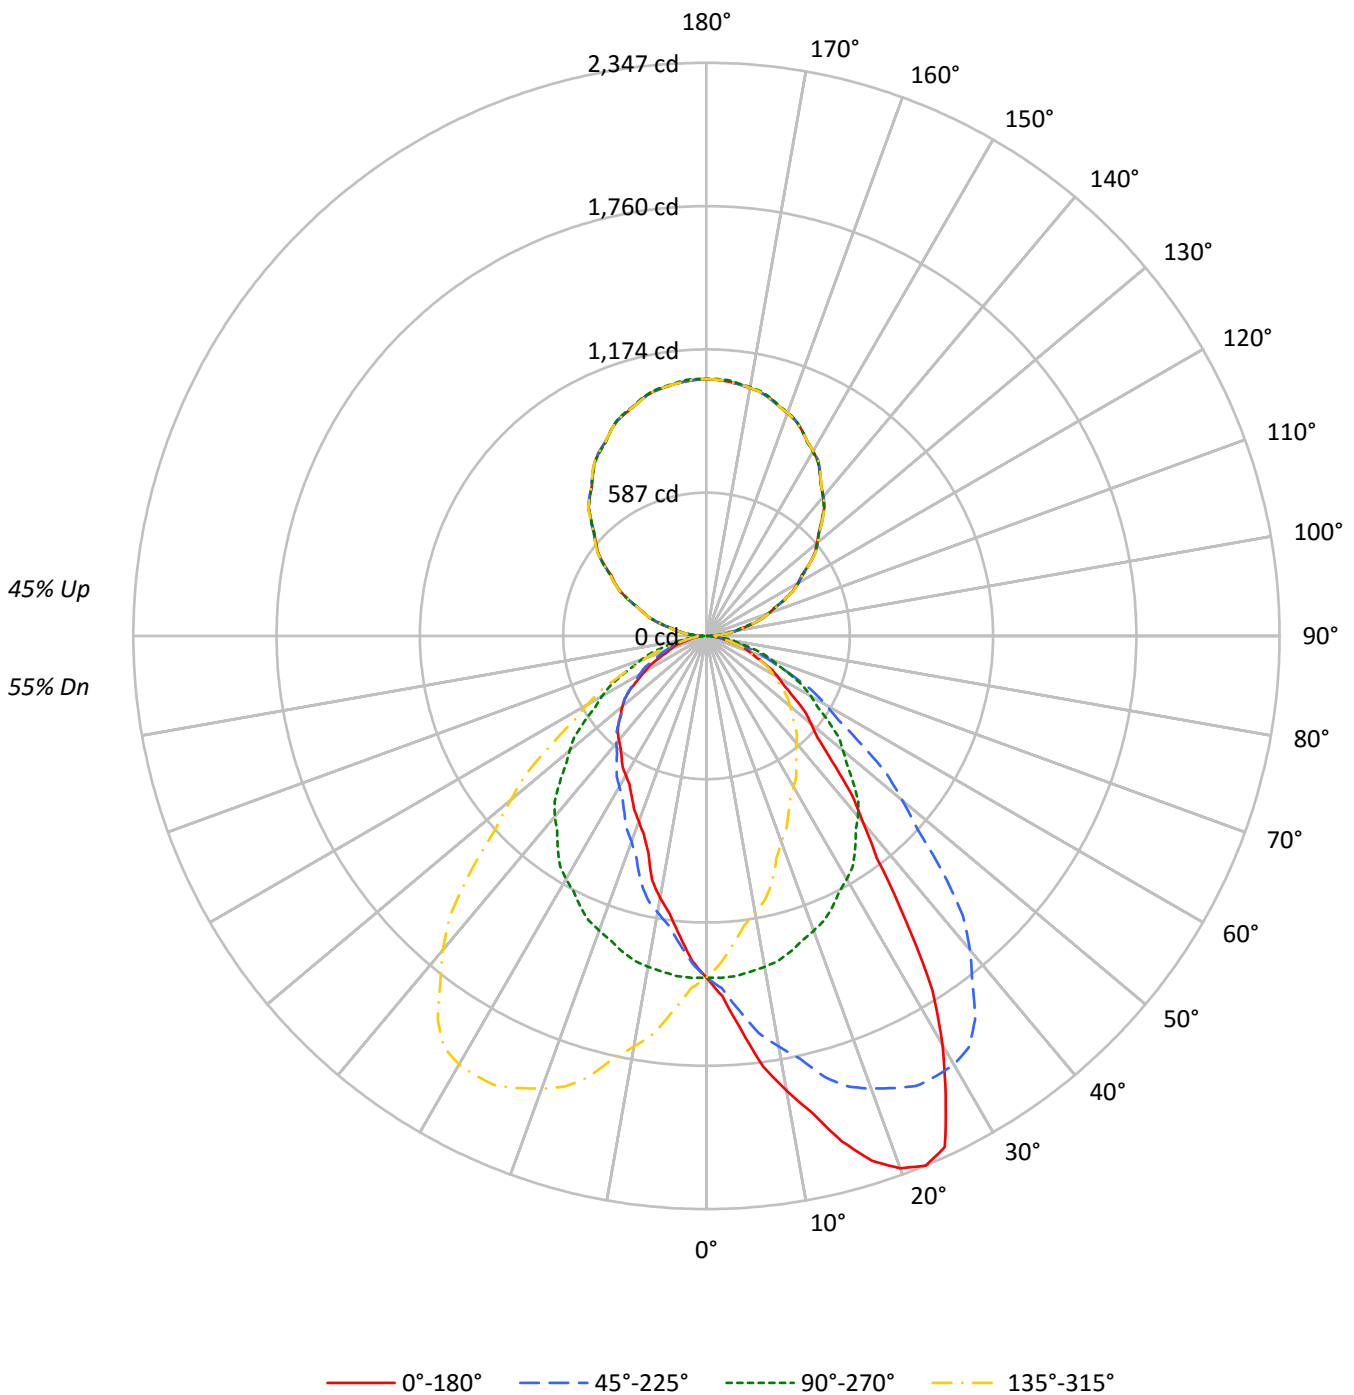



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	54	53	52	47
2	91	84	78	73	84	78	73	68	67	63	60	57	55	52	48	46	45	40
3	83	74	67	61	77	69	63	58	60	55	51	51	48	45	43	41	39	35
4	76	66	58	52	71	62	55	49	53	48	44	46	42	39	39	36	34	30
5	70	59	51	45	65	55	48	43	48	42	38	41	37	34	35	32	30	26
6	65	53	45	39	60	50	43	37	43	38	34	38	33	30	32	29	26	23
7	60	48	40	35	56	45	38	33	40	34	30	34	30	27	29	26	23	21
8	56	44	36	31	52	41	34	29	36	31	27	31	27	24	27	24	21	19
9	52	40	33	28	48	38	31	26	33	28	24	29	25	21	25	22	19	17
10	49	37	30	25	45	35	28	24	31	25	22	27	23	19	23	20	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	11293	11293	11293	11293
5°	13100	11327	10011	11327
10°	15497	11278	8936	11278
15°	17901	11173	7678	11173
20°	19930	11030	6943	11030
25°	20574	10889	6446	10889
30°	18011	10718	6147	10718
35°	14020	10464	5966	10464
40°	10513	10175	5868	10175
45°	8301	9710	5817	9710
50°	7008	9173	5649	9173
55°	6108	8583	5346	8583
60°	5496	7971	4732	7971
65°	4844	7310	4069	7310
70°	4362	6626	3673	6626
75°	3656	5873	3132	5873
80°	3092	5002	2934	5002
85°	2612	3909	2612	3909



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	135.5	2.1
10°-20°	408.9	6.3
20°-30°	639.5	9.9
30°-40°	710.9	11.0
40°-50°	630.7	9.8
50°-60°	491.5	7.6
60°-70°	321.8	5.0
70°-80°	158.2	2.4
80°-90°	42.2	0.7
90°-100°	69.4	1.1
100°-110°	205.6	3.2
110°-120°	348.9	5.4
120°-130°	460.1	7.1
130°-140°	516.7	8.0
140°-150°	507.8	7.9
150°-160°	427.1	6.6
160°-170°	284.1	4.4
170°-180°	99.5	1.5
0°-30°	1183.9	18.3
0°-40°	1894.8	29.3
0°-60°	3017.0	46.7
0°-90°	3539.2	54.8
90°-120°	623.9	9.7
90°-150°	2108.6	32.6
90°-180°	2919.0	45.2
0°-180°	6458.5	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1399	1399	1399	1399	1399	
5°	1616	1398	1235	1398	1616	164
15°	2142	1337	919	1337	2142	609
25°	2310	1222	724	1222	2310	1025
35°	1423	1062	605	1062	1423	892
45°	727	850	510	850	727	576
55°	434	610	380	610	434	395
65°	254	383	213	383	254	255
75°	117	188	100	188	117	129
85°	28	42	28	42	28	32
90°	24	2	24	2	24	14
95°	64	49	64	49	64	67
105°	198	190	198	190	198	209
115°	352	355	352	355	352	348
125°	513	517	513	517	513	457
135°	667	666	667	666	667	515
145°	810	810	810	810	810	507
155°	927	928	927	928	927	427
165°	1008	1010	1008	1010	1008	284
175°	1046	1051	1046	1051	1046	99
180°	1052	1052	1052	1052	1052	



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9
2.5°	1475.5	1479.6	1475.5	1475.1	1470.6	1469.3	1467.5	1461.6	1450.7	1444.5	1445.8
5°	1616.5	1630.5	1622.7	1621.5	1609.2	1596.8	1588.9	1570.8	1551.7	1538.7	1528.0
7.5°	1779.5	1787.5	1782.7	1774.7	1754.7	1743.3	1725.0	1701.2	1666.9	1640.5	1616.6
10°	1890.4	1897.1	1894.9	1880.2	1865.6	1835.7	1818.8	1785.6	1742.1	1707.8	1675.6
12.5°	1999.5	2006.7	1986.9	1987.5	1959.8	1936.3	1909.4	1867.6	1817.5	1773.1	1732.9
15°	2141.8	2132.7	2132.7	2121.5	2090.4	2057.8	2030.2	1986.2	1923.0	1870.1	1814.3
17.5°	2253.2	2256.3	2251.7	2225.0	2200.7	2166.9	2116.3	2065.0	2006.4	1935.3	1878.2
20°	2319.9	2319.9	2314.8	2296.8	2265.2	2229.1	2174.5	2118.6	2044.3	1972.7	1908.5
22.5°	2346.9	2348.7	2342.8	2327.8	2299.5	2264.2	2217.7	2161.0	2084.4	2003.8	1924.2
25°	2309.7	2320.4	2321.6	2317.6	2309.2	2287.7	2247.7	2189.6	2120.9	2033.5	1947.8
27.5°	2120.6	2134.1	2145.9	2165.4	2191.4	2204.9	2206.7	2177.2	2117.2	2033.1	1946.9
30°	1932.1	1943.3	1980.0	2027.9	2065.1	2098.9	2128.3	2136.1	2102.3	2026.8	1936.0
32.5°	1722.9	1738.2	1774.8	1826.4	1888.3	1945.6	2011.4	2045.0	2044.1	1998.8	1914.8
35°	1422.6	1433.9	1467.7	1521.8	1596.2	1681.3	1785.6	1866.7	1921.9	1918.0	1866.7
37.5°	1147.3	1160.0	1194.2	1239.1	1311.2	1416.6	1517.5	1629.3	1731.5	1788.8	1771.6
40°	997.6	998.2	1031.4	1077.7	1145.3	1237.1	1347.0	1471.0	1584.9	1677.9	1695.9
42.5°	879.5	879.5	901.6	951.4	1000.1	1086.5	1191.5	1314.6	1447.8	1555.3	1603.0
45°	727.1	732.1	750.2	780.1	818.4	891.6	975.6	1090.1	1239.4	1366.8	1446.3
47.5°	615.7	623.1	634.6	659.0	689.5	738.3	807.8	910.6	1032.1	1172.2	1285.3
50°	558.0	559.1	573.7	587.3	613.8	652.6	713.5	799.2	910.8	1045.5	1171.2
52.5°	508.4	508.2	517.0	534.1	555.6	586.0	635.1	713.1	812.0	932.8	1062.5
55°	434.0	436.8	443.6	457.1	473.4	494.9	533.8	592.4	670.2	773.3	891.1
57.5°	377.4	378.9	384.2	389.9	404.9	420.4	449.6	490.3	556.0	640.4	750.2
60°	340.4	341.0	342.7	351.1	363.0	377.6	397.4	431.7	487.0	564.2	651.0
62.5°	304.4	305.3	307.9	314.1	323.3	333.5	354.1	381.7	427.5	493.4	571.6
65°	253.6	254.2	258.1	260.4	267.7	276.7	292.0	310.5	342.1	397.4	456.6
67.5°	211.9	211.9	212.1	215.2	220.3	226.2	235.4	250.2	274.0	307.9	360.1
70°	184.8	184.8	186.0	187.7	190.5	195.6	200.6	211.9	229.4	257.0	297.0
72.5°	159.6	160.0	161.2	161.5	163.0	167.1	170.9	178.1	191.1	211.9	244.3
75°	117.2	119.0	121.7	124.0	126.8	126.3	130.2	134.7	138.7	151.1	169.7
77.5°	87.2	86.3	86.7	88.6	88.9	89.5	92.3	95.8	98.7	104.6	111.3
80°	66.5	66.5	68.2	68.7	68.2	68.7	71.6	73.3	74.4	76.6	82.8
82.5°	50.3	51.2	50.6	51.2	51.5	52.1	54.5	54.8	55.9	56.8	59.4
85°	28.2	28.8	29.3	28.2	28.2	28.2	29.3	29.8	31.0	30.4	31.6
87.5°	14.8	14.3	14.7	14.6	15.0	14.3	14.6	15.3	14.2	14.4	14.1
90°	24.4	24.1	23.7	23.3	23.0	22.3	21.2	20.1	19.0	17.9	16.5
92.5°	36.1	36.0	35.7	35.5	35.3	34.8	34.2	33.5	32.9	32.2	31.2
95°	64.3	64.3	64.3	64.3	64.3	64.0	63.5	62.9	62.4	61.9	60.6
97.5°	100.8	100.8	100.8	100.8	100.8	100.4	99.8	99.1	98.5	97.8	96.4
100°	126.1	126.1	126.1	126.1	126.1	126.0	125.6	125.2	124.9	124.5	122.9
102.5°	154.7	154.7	154.5	154.3	154.2	153.8	153.4	152.9	152.4	151.9	150.3
105°	198.5	198.0	197.5	196.9	196.4	195.8	195.3	194.8	194.2	193.7	193.0
107.5°	241.2	241.2	241.2	241.3	241.3	241.1	240.6	240.1	239.6	239.1	239.0
110°	271.8	271.3	270.7	270.2	269.6	269.5	269.9	270.3	270.6	271.0	271.2



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	303.0	303.0	302.8	302.7	302.6	302.6	302.6	302.7	302.8	302.9	303.2
115°	351.6	351.7	351.9	352.1	352.3	352.5	352.6	352.8	353.0	353.2	353.5
117.5°	397.8	398.1	398.5	398.8	399.3	399.7	400.3	401.0	401.5	402.2	402.4
120°	432.9	432.6	432.2	431.9	431.5	431.8	432.7	433.6	434.5	435.4	435.9
122.5°	462.2	462.8	463.5	464.1	464.8	465.5	466.1	466.7	467.3	467.9	468.1
125°	512.7	513.1	513.4	513.8	514.1	514.5	514.9	515.2	515.6	515.9	516.1
127.5°	559.4	559.7	559.9	560.3	560.5	560.8	561.3	561.6	562.0	562.3	562.6
130°	590.0	590.7	591.4	592.2	592.9	593.5	593.8	594.2	594.5	594.8	594.8
132.5°	622.6	622.8	623.1	623.4	623.7	624.0	624.4	624.8	625.1	625.5	625.6
135°	667.3	667.8	668.4	669.0	669.4	669.9	670.3	670.7	671.0	671.4	671.4
137.5°	714.4	714.2	714.1	714.0	713.9	714.1	714.5	715.0	715.5	716.0	715.7
140°	743.0	743.1	743.3	743.6	743.7	743.9	744.0	744.3	744.4	744.6	744.6
142.5°	771.6	771.7	771.7	771.8	771.8	771.8	771.8	771.8	771.9	771.9	772.1
145°	810.5	811.1	811.6	812.1	812.7	813.0	813.3	813.4	813.6	813.8	813.6
147.5°	849.9	850.1	850.3	850.4	850.6	850.8	850.9	851.1	851.3	851.4	851.5
150°	874.0	874.2	874.3	874.6	874.7	874.8	874.8	874.8	874.8	874.8	874.8
152.5°	896.1	896.6	897.1	897.6	898.1	898.1	897.6	897.2	896.7	896.3	896.2
155°	926.9	927.6	928.4	929.0	929.8	929.8	929.0	928.4	927.6	926.9	927.1
157.5°	954.4	955.0	955.6	956.3	956.8	956.9	956.3	955.8	955.3	954.7	954.8
160°	970.0	970.9	971.8	972.7	973.6	973.8	973.3	972.7	972.2	971.7	971.8
162.5°	986.3	987.2	988.1	989.0	989.9	989.9	988.9	987.9	986.9	985.9	986.2
165°	1007.5	1008.2	1008.9	1009.7	1010.3	1010.2	1009.1	1008.0	1006.9	1005.8	1006.2
167.5°	1022.6	1023.7	1024.8	1026.0	1027.1	1027.1	1026.1	1024.9	1023.9	1022.8	1022.7
170°	1031.0	1032.3	1033.6	1034.9	1036.1	1036.2	1035.1	1034.0	1033.0	1031.8	1031.7
172.5°	1038.2	1039.5	1040.7	1042.0	1043.3	1043.3	1042.0	1040.8	1039.6	1038.4	1038.4
175°	1045.7	1047.0	1048.2	1049.5	1050.8	1050.8	1049.5	1048.2	1047.0	1045.7	1045.9
177.5°	1049.6	1050.8	1051.9	1053.1	1054.3	1054.3	1053.3	1052.3	1051.2	1050.3	1050.3
180°	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9
2.5°	1441.3	1435.0	1431.8	1424.6	1416.0	1411.5	1407.5	1401.6	1393.9	1385.8	1380.0
5°	1514.4	1500.9	1484.0	1463.7	1445.7	1428.2	1413.0	1397.7	1380.3	1362.3	1344.3
7.5°	1589.5	1562.9	1534.1	1500.9	1468.6	1439.2	1412.1	1386.2	1356.8	1330.6	1306.7
10°	1641.8	1605.7	1565.7	1523.5	1481.2	1444.5	1408.5	1375.8	1339.7	1307.6	1280.5
12.5°	1684.2	1641.8	1593.7	1541.1	1490.2	1445.9	1404.4	1361.8	1320.8	1286.0	1249.9
15°	1754.5	1696.5	1631.7	1568.6	1502.6	1442.3	1386.5	1336.9	1290.1	1241.1	1206.7
17.5°	1802.9	1734.1	1655.2	1579.4	1501.5	1430.4	1366.0	1306.9	1253.0	1202.9	1162.0
20°	1831.7	1755.7	1668.3	1582.1	1494.7	1418.6	1349.3	1283.9	1228.2	1174.0	1131.7
22.5°	1848.0	1763.8	1668.3	1578.0	1487.5	1405.1	1329.0	1260.9	1200.2	1146.1	1099.3
25°	1853.2	1763.0	1665.5	1561.8	1462.6	1375.2	1296.3	1222.5	1154.9	1100.7	1051.2
27.5°	1846.0	1739.8	1639.9	1533.5	1431.2	1339.0	1256.2	1178.7	1110.9	1052.9	1002.0
30°	1835.2	1721.3	1614.2	1503.7	1400.0	1311.6	1224.2	1149.8	1079.3	1019.0	967.8
32.5°	1811.7	1698.8	1583.6	1470.4	1365.3	1274.1	1191.2	1116.4	1047.3	985.7	931.2
35°	1765.3	1650.8	1525.8	1409.7	1306.4	1211.8	1134.0	1061.8	995.9	930.0	872.5
37.5°	1704.1	1587.1	1462.7	1335.5	1232.3	1142.9	1071.5	1003.8	939.5	879.2	815.5
40°	1646.3	1539.8	1411.3	1285.1	1179.1	1092.8	1027.0	965.5	900.7	840.9	777.2
42.5°	1576.5	1485.7	1355.8	1229.1	1124.5	1041.5	980.0	919.9	861.0	803.1	736.6
45°	1459.8	1391.0	1269.3	1147.5	1042.1	959.9	903.5	850.5	798.7	743.4	680.9
47.5°	1326.1	1279.5	1174.4	1049.8	952.3	878.2	823.8	780.5	736.6	681.4	626.6
50°	1233.2	1203.3	1101.9	988.1	895.0	826.8	771.0	730.4	693.8	640.8	591.8
52.5°	1134.0	1118.1	1032.4	923.6	833.7	766.9	719.2	682.7	645.6	601.6	555.7
55°	982.9	991.4	918.7	824.6	740.0	683.7	640.3	609.8	578.3	541.1	505.6
57.5°	828.5	859.4	810.6	728.0	648.7	596.6	563.9	538.3	511.8	481.0	450.7
60°	736.1	762.0	734.4	661.7	592.4	543.9	513.5	493.7	467.2	439.0	416.0
62.5°	645.9	673.6	657.3	598.6	534.2	492.5	465.7	447.3	427.5	403.0	379.0
65°	532.6	550.7	542.7	502.2	456.6	421.0	396.2	382.7	364.7	346.7	325.2
67.5°	408.0	442.8	438.1	416.6	377.2	349.4	333.2	321.2	304.8	291.4	276.9
70°	335.3	367.5	366.9	349.4	328.0	302.1	290.8	280.7	266.0	253.1	241.2
72.5°	274.5	303.9	308.3	294.9	280.2	260.7	249.8	242.8	228.6	219.7	210.1
75°	192.2	213.6	219.2	219.2	212.5	202.4	192.7	188.3	178.1	170.2	164.6
77.5°	126.0	139.6	148.4	150.3	151.4	148.0	140.1	137.0	129.1	126.4	121.0
80°	89.0	98.1	108.2	111.6	114.4	113.3	109.9	107.6	100.4	97.5	95.2
82.5°	61.6	66.5	74.8	82.3	81.5	84.5	81.5	79.7	74.2	73.1	70.9
85°	32.1	32.7	33.8	38.9	41.7	42.8	43.4	42.2	40.6	40.6	36.6
87.5°	13.9	13.0	13.7	13.4	13.4	14.8	15.7	15.8	14.8	13.9	13.0
90°	15.0	13.5	12.1	10.4	8.4	6.4	4.4	2.4	4.4	6.4	8.4
92.5°	30.2	29.2	28.2	26.5	24.2	21.9	19.7	17.4	19.7	21.9	24.2
95°	59.4	58.0	56.7	55.4	53.7	52.1	50.5	48.8	50.5	52.1	53.7
97.5°	94.8	93.4	91.9	90.5	89.2	87.9	86.6	85.3	86.6	87.9	89.2
100°	121.2	119.6	118.0	116.8	116.1	115.4	114.6	113.9	114.6	115.4	116.1
102.5°	148.9	147.4	145.9	145.0	144.7	144.5	144.1	143.9	144.1	144.5	144.7
105°	192.2	191.5	190.8	190.4	190.1	190.0	189.8	189.6	189.8	190.0	190.1
107.5°	238.9	238.8	238.6	238.5	238.3	238.1	237.8	237.7	237.8	238.1	238.3
110°	271.3	271.5	271.7	271.7	271.3	270.9	270.5	270.2	270.5	270.9	271.3





TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	303.5	303.9	304.2	304.4	304.3	304.2	304.1	304.0	304.1	304.2	304.3
115°	353.9	354.2	354.7	354.8	354.8	354.8	354.8	354.8	354.8	354.8	354.8
117.5°	402.7	402.9	403.2	403.2	403.1	402.9	402.8	402.7	402.8	402.9	403.1
120°	436.4	437.0	437.6	437.5	436.8	436.0	435.3	434.6	435.3	436.0	436.8
122.5°	468.4	468.7	469.0	468.9	468.6	468.3	468.1	467.7	468.1	468.3	468.6
125°	516.3	516.5	516.7	516.7	516.7	516.7	516.7	516.7	516.7	516.7	516.7
127.5°	562.9	563.2	563.5	563.4	562.8	562.2	561.7	561.2	561.7	562.2	562.8
130°	594.8	594.8	594.8	594.6	594.0	593.5	593.0	592.4	593.0	593.5	594.0
132.5°	625.7	625.9	626.1	625.9	625.5	625.1	624.8	624.4	624.8	625.1	625.5
135°	671.4	671.4	671.4	670.8	669.8	668.6	667.6	666.5	667.6	668.6	669.8
137.5°	715.4	715.1	714.8	714.4	713.9	713.4	712.9	712.4	712.9	713.4	713.9
140°	744.6	744.6	744.6	744.4	744.0	743.7	743.3	743.0	743.3	743.7	744.0
142.5°	772.3	772.4	772.5	772.4	772.1	771.7	771.4	770.9	771.4	771.7	772.1
145°	813.4	813.3	813.0	812.6	811.9	811.1	810.4	809.7	810.4	811.1	811.9
147.5°	851.7	851.8	852.0	851.6	850.8	849.9	849.0	848.2	849.0	849.9	850.8
150°	874.8	874.8	874.8	874.5	873.8	873.0	872.3	871.6	872.3	873.0	873.8
152.5°	896.0	895.9	895.7	895.4	895.0	894.5	894.1	893.7	894.1	894.5	895.0
155°	927.2	927.4	927.6	927.7	927.7	927.7	927.7	927.7	927.7	927.7	927.7
157.5°	954.8	954.8	954.9	955.0	955.4	955.7	956.0	956.3	956.0	955.7	955.4
160°	972.0	972.2	972.4	972.6	972.7	972.9	973.1	973.3	973.1	972.9	972.7
162.5°	986.3	986.5	986.7	987.0	987.5	988.0	988.5	988.9	988.5	988.0	987.5
165°	1006.6	1006.9	1007.3	1007.7	1008.3	1008.9	1009.3	1009.9	1009.3	1008.9	1008.3
167.5°	1022.7	1022.6	1022.6	1023.0	1023.8	1024.5	1025.2	1026.1	1025.2	1024.5	1023.8
170°	1031.5	1031.4	1031.1	1031.5	1032.4	1033.3	1034.2	1035.1	1034.2	1033.3	1032.4
172.5°	1038.3	1038.3	1038.2	1038.6	1039.3	1040.2	1040.9	1041.6	1040.9	1040.2	1039.3
175°	1046.0	1046.3	1046.4	1047.0	1047.9	1048.8	1049.7	1050.6	1049.7	1048.8	1047.9
177.5°	1050.3	1050.3	1050.3	1050.6	1051.3	1052.1	1052.8	1053.5	1052.8	1052.1	1051.3
180°	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9
2.5°	1373.6	1369.1	1363.3	1356.5	1348.4	1341.2	1338.1	1340.8	1342.1	1338.5	1338.1
5°	1331.9	1317.8	1306.4	1289.6	1276.0	1264.8	1256.9	1253.5	1254.6	1245.6	1243.3
7.5°	1284.8	1268.1	1249.7	1229.6	1210.9	1194.3	1185.6	1180.9	1171.3	1167.3	1160.4
10°	1254.6	1232.1	1214.1	1190.3	1169.0	1149.2	1139.6	1131.7	1122.2	1117.7	1108.1
12.5°	1223.5	1197.3	1177.5	1152.9	1131.1	1107.3	1098.1	1083.5	1068.5	1059.1	1046.8
15°	1179.7	1148.1	1123.9	1094.5	1068.6	1041.5	1017.3	990.3	980.2	958.7	946.3
17.5°	1128.4	1096.3	1066.3	1027.0	987.0	953.4	927.6	901.6	886.1	872.5	866.2
20°	1094.5	1065.3	1023.5	977.9	933.4	896.2	875.3	858.4	841.5	831.9	825.2
22.5°	1062.5	1025.1	976.6	927.4	882.9	853.8	836.1	818.7	804.9	795.8	786.8
25°	1008.9	959.9	908.6	852.2	821.7	796.4	777.2	763.1	754.7	742.8	738.3
27.5°	953.7	894.4	837.8	799.9	768.2	745.0	728.3	717.7	707.0	699.4	693.6
30°	911.3	851.1	800.4	764.3	732.1	713.0	699.4	687.1	678.6	672.4	667.9
32.5°	869.4	809.1	766.5	727.7	702.4	683.7	669.3	660.0	653.4	645.3	642.6
35°	808.8	755.2	718.0	683.1	657.2	640.3	629.0	619.4	613.8	611.6	609.8
37.5°	750.5	706.7	666.7	638.1	614.9	601.6	588.3	583.6	579.8	575.7	577.5
40°	713.5	672.4	636.9	606.4	587.8	573.2	565.3	559.7	556.3	556.3	556.3
42.5°	681.5	641.3	606.7	579.4	560.8	548.4	539.6	534.8	533.8	533.3	536.0
45°	631.9	594.6	559.7	537.1	521.4	508.9	503.9	499.9	499.9	502.2	502.7
47.5°	582.5	547.7	519.7	494.4	480.0	472.2	467.8	465.8	466.0	468.2	470.8
50°	552.4	518.0	490.3	467.8	454.3	446.9	443.0	441.9	443.0	443.0	446.9
52.5°	519.4	488.7	461.5	442.5	427.2	420.4	418.2	416.6	417.3	419.1	420.8
55°	471.2	443.6	417.7	399.6	388.3	383.8	378.8	379.3	378.2	379.3	379.3
57.5°	422.8	398.0	373.9	359.6	349.7	343.2	337.6	339.2	337.5	337.3	336.4
60°	391.8	364.7	345.5	332.6	321.2	315.6	310.5	311.7	310.0	308.8	306.6
62.5°	357.9	335.3	317.1	304.6	295.5	289.0	284.0	282.8	278.9	275.1	270.1
65°	308.8	290.2	273.9	262.1	253.6	248.6	244.6	241.2	232.8	223.7	219.2
67.5°	261.2	247.8	232.5	222.5	215.6	209.0	201.5	195.7	187.8	182.9	180.0
70°	230.5	217.5	204.6	195.0	187.7	181.5	173.0	169.1	163.5	161.2	158.4
72.5°	201.2	189.1	177.1	168.4	160.6	155.8	149.1	145.2	142.7	141.8	139.0
75°	156.7	147.1	138.1	130.2	124.0	120.6	117.8	115.0	113.8	108.8	106.0
77.5°	114.3	108.0	102.3	96.7	92.3	90.1	84.6	81.4	79.5	77.1	76.6
80°	89.0	84.5	78.9	75.5	69.3	67.1	64.8	64.2	63.7	63.1	62.5
82.5°	66.9	62.5	56.8	54.8	53.1	51.8	50.4	49.8	49.2	49.6	49.5
85°	33.8	31.6	31.6	31.0	30.4	29.8	29.3	29.3	28.8	29.3	28.8
87.5°	13.4	13.2	13.5	12.9	13.7	13.9	13.7	13.9	14.6	13.9	14.0
90°	10.4	12.1	13.5	15.0	16.5	17.9	19.0	20.1	21.2	22.3	23.0
92.5°	26.5	28.2	29.2	30.2	31.2	32.2	32.9	33.5	34.2	34.8	35.3
95°	55.4	56.7	58.0	59.4	60.6	61.9	62.4	62.9	63.5	64.0	64.3
97.5°	90.5	91.9	93.4	94.8	96.4	97.8	98.5	99.1	99.8	100.4	100.8
100°	116.8	118.0	119.6	121.2	122.9	124.5	124.9	125.2	125.6	126.0	126.1
102.5°	145.0	145.9	147.4	148.9	150.3	151.9	152.4	152.9	153.4	153.8	154.2
105°	190.4	190.8	191.5	192.2	193.0	193.7	194.2	194.8	195.3	195.8	196.4
107.5°	238.5	238.6	238.8	238.9	239.0	239.1	239.6	240.1	240.6	241.1	241.3
110°	271.7	271.7	271.5	271.3	271.2	271.0	270.6	270.3	269.9	269.5	269.6



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	304.4	304.2	303.9	303.5	303.2	302.9	302.8	302.7	302.6	302.6	302.6
115°	354.8	354.7	354.2	353.9	353.5	353.2	353.0	352.8	352.6	352.5	352.3
117.5°	403.2	403.2	402.9	402.7	402.4	402.2	401.5	401.0	400.3	399.7	399.3
120°	437.5	437.6	437.0	436.4	435.9	435.4	434.5	433.6	432.7	431.8	431.5
122.5°	468.9	469.0	468.7	468.4	468.1	467.9	467.3	466.7	466.1	465.5	464.8
125°	516.7	516.7	516.5	516.3	516.1	515.9	515.6	515.2	514.9	514.5	514.1
127.5°	563.4	563.5	563.2	562.9	562.6	562.3	562.0	561.6	561.3	560.8	560.5
130°	594.6	594.8	594.8	594.8	594.8	594.8	594.5	594.2	593.8	593.5	592.9
132.5°	625.9	626.1	625.9	625.7	625.6	625.5	625.1	624.8	624.4	624.0	623.7
135°	670.8	671.4	671.4	671.4	671.4	671.4	671.0	670.7	670.3	669.9	669.4
137.5°	714.4	714.8	715.1	715.4	715.7	716.0	715.5	715.0	714.5	714.1	713.9
140°	744.4	744.6	744.6	744.6	744.6	744.6	744.4	744.3	744.0	743.9	743.7
142.5°	772.4	772.5	772.4	772.3	772.1	771.9	771.9	771.8	771.8	771.8	771.8
145°	812.6	813.0	813.3	813.4	813.6	813.8	813.6	813.4	813.3	813.0	812.7
147.5°	851.6	852.0	851.8	851.7	851.5	851.4	851.3	851.1	850.9	850.8	850.6
150°	874.5	874.8	874.8	874.8	874.8	874.8	874.8	874.8	874.8	874.8	874.7
152.5°	895.4	895.7	895.9	896.0	896.2	896.3	896.7	897.2	897.6	898.1	898.1
155°	927.7	927.6	927.4	927.2	927.1	926.9	927.6	928.4	929.0	929.8	929.8
157.5°	955.0	954.9	954.8	954.8	954.8	954.7	955.3	955.8	956.3	956.9	956.8
160°	972.6	972.4	972.2	972.0	971.8	971.7	972.2	972.7	973.3	973.8	973.6
162.5°	987.0	986.7	986.5	986.3	986.2	985.9	986.9	987.9	988.9	989.9	989.9
165°	1007.7	1007.3	1006.9	1006.6	1006.2	1005.8	1006.9	1008.0	1009.1	1010.2	1010.3
167.5°	1023.0	1022.6	1022.6	1022.7	1022.7	1022.8	1023.9	1024.9	1026.1	1027.1	1027.1
170°	1031.5	1031.1	1031.4	1031.5	1031.7	1031.8	1033.0	1034.0	1035.1	1036.2	1036.1
172.5°	1038.6	1038.2	1038.3	1038.3	1038.4	1038.4	1039.6	1040.8	1042.0	1043.3	1043.3
175°	1047.0	1046.4	1046.3	1046.0	1045.9	1045.7	1047.0	1048.2	1049.5	1050.8	1050.8
177.5°	1050.6	1050.3	1050.3	1050.3	1050.3	1050.3	1051.2	1052.3	1053.3	1054.3	1054.3
180°	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9
2.5°	1335.3	1336.2	1333.1	1332.2	1333.1	1336.2	1335.3	1338.1	1338.5	1342.1	1340.8
5°	1238.8	1237.7	1234.9	1235.4	1234.9	1237.7	1238.8	1243.3	1245.6	1254.6	1253.5
7.5°	1156.3	1151.9	1153.2	1148.7	1153.2	1151.9	1156.3	1160.4	1167.3	1171.3	1180.9
10°	1105.8	1099.6	1094.5	1090.1	1094.5	1099.6	1105.8	1108.1	1117.7	1122.2	1131.7
12.5°	1036.8	1031.5	1024.7	1026.1	1024.7	1031.5	1036.8	1046.8	1059.1	1068.5	1083.5
15°	939.0	930.5	917.0	918.7	917.0	930.5	939.0	946.3	958.7	980.2	990.3
17.5°	856.1	856.2	850.0	851.5	850.0	856.2	856.1	866.2	872.5	886.1	901.6
20°	813.3	809.3	809.9	808.2	809.9	809.3	813.3	825.2	831.9	841.5	858.4
22.5°	783.6	778.7	774.8	771.3	774.8	778.7	783.6	786.8	795.8	804.9	818.7
25°	733.3	729.9	724.8	723.7	724.8	729.9	733.3	738.3	742.8	754.7	763.1
27.5°	689.1	688.4	686.4	683.8	686.4	688.4	689.1	693.6	699.4	707.0	717.7
30°	663.4	662.3	661.1	659.4	661.1	662.3	663.4	667.9	672.4	678.6	687.1
32.5°	640.4	639.7	638.5	638.7	638.5	639.7	640.4	642.6	645.3	653.4	660.0
35°	607.6	607.0	605.9	605.4	605.9	607.0	607.6	609.8	611.6	613.8	619.4
37.5°	576.9	578.4	577.7	577.6	577.7	578.4	576.9	577.5	575.7	579.8	583.6
40°	555.7	556.3	557.4	556.8	557.4	556.3	555.7	556.3	556.3	556.3	559.7
42.5°	538.2	538.3	539.8	537.9	539.8	538.3	538.2	536.0	533.3	533.8	534.8
45°	506.7	510.1	509.5	509.5	509.5	510.1	506.7	502.7	502.2	499.9	499.9
47.5°	472.3	475.2	476.1	475.9	476.1	475.2	472.3	470.8	468.2	466.0	465.8
50°	449.8	448.7	450.4	449.8	450.4	448.7	449.8	446.9	443.0	443.0	441.9
52.5°	422.2	422.5	422.4	421.8	422.4	422.5	422.2	420.8	419.1	417.3	416.6
55°	379.8	380.4	379.3	379.8	379.3	380.4	379.8	379.3	379.3	378.2	379.3
57.5°	333.9	331.2	332.3	330.9	332.3	331.2	333.9	336.4	337.3	337.5	339.2
60°	301.0	296.4	295.3	293.1	295.3	296.4	301.0	306.6	308.8	310.0	311.7
62.5°	264.0	260.8	257.0	258.8	257.0	260.8	264.0	270.1	275.1	278.9	282.8
65°	214.7	212.5	210.8	213.0	210.8	212.5	214.7	219.2	223.7	232.8	241.2
67.5°	177.7	176.5	176.5	175.4	176.5	176.5	177.7	180.0	182.9	187.8	195.7
70°	158.4	156.7	156.7	155.6	156.7	156.7	158.4	158.4	161.2	163.5	169.1
72.5°	138.5	136.8	137.3	136.6	137.3	136.8	138.5	139.0	141.8	142.7	145.2
75°	102.6	99.8	99.8	100.4	99.8	99.8	102.6	106.0	108.8	113.8	115.0
77.5°	76.6	76.0	76.8	75.7	76.8	76.0	76.6	76.6	77.1	79.5	81.4
80°	62.5	62.0	61.5	63.1	61.5	62.0	62.5	62.5	63.1	63.7	64.2
82.5°	48.6	48.5	48.3	50.5	48.3	48.5	48.6	49.5	49.6	49.2	49.8
85°	29.3	28.2	29.3	28.2	29.3	28.2	29.3	28.8	29.3	28.8	29.3
87.5°	15.0	14.7	14.3	14.8	14.3	14.7	15.0	14.0	13.9	14.6	13.9
90°	23.3	23.7	24.1	24.4	24.1	23.7	23.3	23.0	22.3	21.2	20.1
92.5°	35.5	35.7	36.0	36.1	36.0	35.7	35.5	35.3	34.8	34.2	33.5
95°	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.3	64.0	63.5	62.9
97.5°	100.8	100.8	100.8	100.8	100.8	100.8	100.8	100.8	100.4	99.8	99.1
100°	126.1	126.1	126.1	126.1	126.1	126.1	126.1	126.1	126.0	125.6	125.2
102.5°	154.3	154.5	154.7	154.7	154.7	154.5	154.3	154.2	153.8	153.4	152.9
105°	196.9	197.5	198.0	198.5	198.0	197.5	196.9	196.4	195.8	195.3	194.8
107.5°	241.3	241.2	241.2	241.2	241.2	241.2	241.3	241.3	241.1	240.6	240.1
110°	270.2	270.7	271.3	271.8	271.3	270.7	270.2	269.6	269.5	269.9	270.3



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	302.7	302.8	303.0	303.0	303.0	302.8	302.7	302.6	302.6	302.6	302.7
115°	352.1	351.9	351.7	351.6	351.7	351.9	352.1	352.3	352.5	352.6	352.8
117.5°	398.8	398.5	398.1	397.8	398.1	398.5	398.8	399.3	399.7	400.3	401.0
120°	431.9	432.2	432.6	432.9	432.6	432.2	431.9	431.5	431.8	432.7	433.6
122.5°	464.1	463.5	462.8	462.2	462.8	463.5	464.1	464.8	465.5	466.1	466.7
125°	513.8	513.4	513.1	512.7	513.1	513.4	513.8	514.1	514.5	514.9	515.2
127.5°	560.3	559.9	559.7	559.4	559.7	559.9	560.3	560.5	560.8	561.3	561.6
130°	592.2	591.4	590.7	590.0	590.7	591.4	592.2	592.9	593.5	593.8	594.2
132.5°	623.4	623.1	622.8	622.6	622.8	623.1	623.4	623.7	624.0	624.4	624.8
135°	669.0	668.4	667.8	667.3	667.8	668.4	669.0	669.4	669.9	670.3	670.7
137.5°	714.0	714.1	714.2	714.4	714.2	714.1	714.0	713.9	714.1	714.5	715.0
140°	743.6	743.3	743.1	743.0	743.1	743.3	743.6	743.7	743.9	744.0	744.3
142.5°	771.8	771.7	771.7	771.6	771.7	771.7	771.8	771.8	771.8	771.8	771.8
145°	812.1	811.6	811.1	810.5	811.1	811.6	812.1	812.7	813.0	813.3	813.4
147.5°	850.4	850.3	850.1	849.9	850.1	850.3	850.4	850.6	850.8	850.9	851.1
150°	874.6	874.3	874.2	874.0	874.2	874.3	874.6	874.7	874.8	874.8	874.8
152.5°	897.6	897.1	896.6	896.1	896.6	897.1	897.6	898.1	898.1	897.6	897.2
155°	929.0	928.4	927.6	926.9	927.6	928.4	929.0	929.8	929.8	929.0	928.4
157.5°	956.3	955.6	955.0	954.4	955.0	955.6	956.3	956.8	956.9	956.3	955.8
160°	972.7	971.8	970.9	970.0	970.9	971.8	972.7	973.6	973.8	973.3	972.7
162.5°	989.0	988.1	987.2	986.3	987.2	988.1	989.0	989.9	989.9	988.9	987.9
165°	1009.7	1008.9	1008.2	1007.5	1008.2	1008.9	1009.7	1010.3	1010.2	1009.1	1008.0
167.5°	1026.0	1024.8	1023.7	1022.6	1023.7	1024.8	1026.0	1027.1	1027.1	1026.1	1024.9
170°	1034.9	1033.6	1032.3	1031.0	1032.3	1033.6	1034.9	1036.1	1036.2	1035.1	1034.0
172.5°	1042.0	1040.7	1039.5	1038.2	1039.5	1040.7	1042.0	1043.3	1043.3	1042.0	1040.8
175°	1049.5	1048.2	1047.0	1045.7	1047.0	1048.2	1049.5	1050.8	1050.8	1049.5	1048.2
177.5°	1053.1	1051.9	1050.8	1049.6	1050.8	1051.9	1053.1	1054.3	1054.3	1053.3	1052.3
180°	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9
2.5°	1338.1	1341.2	1348.4	1356.5	1363.3	1369.1	1373.6	1380.0	1385.8	1393.9	1401.6
5°	1256.9	1264.8	1276.0	1289.6	1306.4	1317.8	1331.9	1344.3	1362.3	1380.3	1397.7
7.5°	1185.6	1194.3	1210.9	1229.6	1249.7	1268.1	1284.8	1306.7	1330.6	1356.8	1386.2
10°	1139.6	1149.2	1169.0	1190.3	1214.1	1232.1	1254.6	1280.5	1307.6	1339.7	1375.8
12.5°	1098.1	1107.3	1131.1	1152.9	1177.5	1197.3	1223.5	1249.9	1286.0	1320.8	1361.8
15°	1017.3	1041.5	1068.6	1094.5	1123.9	1148.1	1179.7	1206.7	1241.1	1290.1	1336.9
17.5°	927.6	953.4	987.0	1027.0	1066.3	1096.3	1128.4	1162.0	1202.9	1253.0	1306.9
20°	875.3	896.2	933.4	977.9	1023.5	1065.3	1094.5	1131.7	1174.0	1228.2	1283.9
22.5°	836.1	853.8	882.9	927.4	976.6	1025.1	1062.5	1099.3	1146.1	1200.2	1260.9
25°	777.2	796.4	821.7	852.2	908.6	959.9	1008.9	1051.2	1100.7	1154.9	1222.5
27.5°	728.3	745.0	768.2	799.9	837.8	894.4	953.7	1002.0	1052.9	1110.9	1178.7
30°	699.4	713.0	732.1	764.3	800.4	851.1	911.3	967.8	1019.0	1079.3	1149.8
32.5°	669.3	683.7	702.4	727.7	766.5	809.1	869.4	931.2	985.7	1047.3	1116.4
35°	629.0	640.3	657.2	683.1	718.0	755.2	808.8	872.5	930.0	995.9	1061.8
37.5°	588.3	601.6	614.9	638.1	666.7	706.7	750.5	815.5	879.2	939.5	1003.8
40°	565.3	573.2	587.8	606.4	636.9	672.4	713.5	777.2	840.9	900.7	965.5
42.5°	539.6	548.4	560.8	579.4	606.7	641.3	681.5	736.6	803.1	861.0	919.9
45°	503.9	508.9	521.4	537.1	559.7	594.6	631.9	680.9	743.4	798.7	850.5
47.5°	467.8	472.2	480.0	494.4	519.7	547.7	582.5	626.6	681.4	736.6	780.5
50°	443.0	446.9	454.3	467.8	490.3	518.0	552.4	591.8	640.8	693.8	730.4
52.5°	418.2	420.4	427.2	442.5	461.5	488.7	519.4	555.7	601.6	645.6	682.7
55°	378.8	383.8	388.3	399.6	417.7	443.6	471.2	505.6	541.1	578.3	609.8
57.5°	337.6	343.2	349.7	359.6	373.9	398.0	422.8	450.7	481.0	511.8	538.3
60°	310.5	315.6	321.2	332.6	345.5	364.7	391.8	416.0	439.0	467.2	493.7
62.5°	284.0	289.0	295.5	304.6	317.1	335.3	357.9	379.0	403.0	427.5	447.3
65°	244.6	248.6	253.6	262.1	273.9	290.2	308.8	325.2	346.7	364.7	382.7
67.5°	201.5	209.0	215.6	222.5	232.5	247.8	261.2	276.9	291.4	304.8	321.2
70°	173.0	181.5	187.7	195.0	204.6	217.5	230.5	241.2	253.1	266.0	280.7
72.5°	149.1	155.8	160.6	168.4	177.1	189.1	201.2	210.1	219.7	228.6	242.8
75°	117.8	120.6	124.0	130.2	138.1	147.1	156.7	164.6	170.2	178.1	188.3
77.5°	84.6	90.1	92.3	96.7	102.3	108.0	114.3	121.0	126.4	129.1	137.0
80°	64.8	67.1	69.3	75.5	78.9	84.5	89.0	95.2	97.5	100.4	107.6
82.5°	50.4	51.8	53.1	54.8	56.8	62.5	66.9	70.9	73.1	74.2	79.7
85°	29.3	29.8	30.4	31.0	31.6	31.6	33.8	36.6	40.6	40.6	42.2
87.5°	13.7	13.9	13.7	12.9	13.5	13.2	13.4	13.0	13.9	14.8	15.8
90°	19.0	17.9	16.5	15.0	13.5	12.1	10.4	8.4	6.4	4.4	2.4
92.5°	32.9	32.2	31.2	30.2	29.2	28.2	26.5	24.2	21.9	19.7	17.4
95°	62.4	61.9	60.6	59.4	58.0	56.7	55.4	53.7	52.1	50.5	48.8
97.5°	98.5	97.8	96.4	94.8	93.4	91.9	90.5	89.2	87.9	86.6	85.3
100°	124.9	124.5	122.9	121.2	119.6	118.0	116.8	116.1	115.4	114.6	113.9
102.5°	152.4	151.9	150.3	148.9	147.4	145.9	145.0	144.7	144.5	144.1	143.9
105°	194.2	193.7	193.0	192.2	191.5	190.8	190.4	190.1	190.0	189.8	189.6
107.5°	239.6	239.1	239.0	238.9	238.8	238.6	238.5	238.3	238.1	237.8	237.7
110°	270.6	271.0	271.2	271.3	271.5	271.7	271.7	271.3	270.9	270.5	270.2



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	302.8	302.9	303.2	303.5	303.9	304.2	304.4	304.3	304.2	304.1	304.0
115°	353.0	353.2	353.5	353.9	354.2	354.7	354.8	354.8	354.8	354.8	354.8
117.5°	401.5	402.2	402.4	402.7	402.9	403.2	403.2	403.1	402.9	402.8	402.7
120°	434.5	435.4	435.9	436.4	437.0	437.6	437.5	436.8	436.0	435.3	434.6
122.5°	467.3	467.9	468.1	468.4	468.7	469.0	468.9	468.6	468.3	468.1	467.7
125°	515.6	515.9	516.1	516.3	516.5	516.7	516.7	516.7	516.7	516.7	516.7
127.5°	562.0	562.3	562.6	562.9	563.2	563.5	563.4	562.8	562.2	561.7	561.2
130°	594.5	594.8	594.8	594.8	594.8	594.8	594.6	594.0	593.5	593.0	592.4
132.5°	625.1	625.5	625.6	625.7	625.9	626.1	625.9	625.5	625.1	624.8	624.4
135°	671.0	671.4	671.4	671.4	671.4	671.4	670.8	669.8	668.6	667.6	666.5
137.5°	715.5	716.0	715.7	715.4	715.1	714.8	714.4	713.9	713.4	712.9	712.4
140°	744.4	744.6	744.6	744.6	744.6	744.6	744.4	744.0	743.7	743.3	743.0
142.5°	771.9	771.9	772.1	772.3	772.4	772.5	772.4	772.1	771.7	771.4	770.9
145°	813.6	813.8	813.6	813.4	813.3	813.0	812.6	811.9	811.1	810.4	809.7
147.5°	851.3	851.4	851.5	851.7	851.8	852.0	851.6	850.8	849.9	849.0	848.2
150°	874.8	874.8	874.8	874.8	874.8	874.8	874.5	873.8	873.0	872.3	871.6
152.5°	896.7	896.3	896.2	896.0	895.9	895.7	895.4	895.0	894.5	894.1	893.7
155°	927.6	926.9	927.1	927.2	927.4	927.6	927.7	927.7	927.7	927.7	927.7
157.5°	955.3	954.7	954.8	954.8	954.8	954.9	955.0	955.4	955.7	956.0	956.3
160°	972.2	971.7	971.8	972.0	972.2	972.4	972.6	972.7	972.9	973.1	973.3
162.5°	986.9	985.9	986.2	986.3	986.5	986.7	987.0	987.5	988.0	988.5	988.9
165°	1006.9	1005.8	1006.2	1006.6	1006.9	1007.3	1007.7	1008.3	1008.9	1009.3	1009.9
167.5°	1023.9	1022.8	1022.7	1022.7	1022.6	1022.6	1023.0	1023.8	1024.5	1025.2	1026.1
170°	1033.0	1031.8	1031.7	1031.5	1031.4	1031.1	1031.5	1032.4	1033.3	1034.2	1035.1
172.5°	1039.6	1038.4	1038.4	1038.3	1038.3	1038.2	1038.6	1039.3	1040.2	1040.9	1041.6
175°	1047.0	1045.7	1045.9	1046.0	1046.3	1046.4	1047.0	1047.9	1048.8	1049.7	1050.6
177.5°	1051.2	1050.3	1050.3	1050.3	1050.3	1050.3	1050.6	1051.3	1052.1	1052.8	1053.5
180°	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9
2.5°	1407.5	1411.5	1416.0	1424.6	1431.8	1435.0	1441.3	1445.8	1444.5	1450.7	1461.6
5°	1413.0	1428.2	1445.7	1463.7	1484.0	1500.9	1514.4	1528.0	1538.7	1551.7	1570.8
7.5°	1412.1	1439.2	1468.6	1500.9	1534.1	1562.9	1589.5	1616.6	1640.5	1666.9	1701.2
10°	1408.5	1444.5	1481.2	1523.5	1565.7	1605.7	1641.8	1675.6	1707.8	1742.1	1785.6
12.5°	1404.4	1445.9	1490.2	1541.1	1593.7	1641.8	1684.2	1732.9	1773.1	1817.5	1867.6
15°	1386.5	1442.3	1502.6	1568.6	1631.7	1696.5	1754.5	1814.3	1870.1	1923.0	1986.2
17.5°	1366.0	1430.4	1501.5	1579.4	1655.2	1734.1	1802.9	1878.2	1935.3	2006.4	2065.0
20°	1349.3	1418.6	1494.7	1582.1	1668.3	1755.7	1831.7	1908.5	1972.7	2044.3	2118.6
22.5°	1329.0	1405.1	1487.5	1578.0	1668.3	1763.8	1848.0	1924.2	2003.8	2084.4	2161.0
25°	1296.3	1375.2	1462.6	1561.8	1665.5	1763.0	1853.2	1947.8	2033.5	2120.9	2189.6
27.5°	1256.2	1339.0	1431.2	1533.5	1639.9	1739.8	1846.0	1946.9	2033.1	2117.2	2177.2
30°	1224.2	1311.6	1400.0	1503.7	1614.2	1721.3	1835.2	1936.0	2026.8	2102.3	2136.1
32.5°	1191.2	1274.1	1365.3	1470.4	1583.6	1698.8	1811.7	1914.8	1998.8	2044.1	2045.0
35°	1134.0	1211.8	1306.4	1409.7	1525.8	1650.8	1765.3	1866.7	1918.0	1921.9	1866.7
37.5°	1071.5	1142.9	1232.3	1335.5	1462.7	1587.1	1704.1	1771.6	1788.8	1731.5	1629.3
40°	1027.0	1092.8	1179.1	1285.1	1411.3	1539.8	1646.3	1695.9	1677.9	1584.9	1471.0
42.5°	980.0	1041.5	1124.5	1229.1	1355.8	1485.7	1576.5	1603.0	1555.3	1447.8	1314.6
45°	903.5	959.9	1042.1	1147.5	1269.3	1391.0	1459.8	1446.3	1366.8	1239.4	1090.1
47.5°	823.8	878.2	952.3	1049.8	1174.4	1279.5	1326.1	1285.3	1172.2	1032.1	910.6
50°	771.0	826.8	895.0	988.1	1101.9	1203.3	1233.2	1171.2	1045.5	910.8	799.2
52.5°	719.2	766.9	833.7	923.6	1032.4	1118.1	1134.0	1062.5	932.8	812.0	713.1
55°	640.3	683.7	740.0	824.6	918.7	991.4	982.9	891.1	773.3	670.2	592.4
57.5°	563.9	596.6	648.7	728.0	810.6	859.4	828.5	750.2	640.4	556.0	490.3
60°	513.5	543.9	592.4	661.7	734.4	762.0	736.1	651.0	564.2	487.0	431.7
62.5°	465.7	492.5	534.2	598.6	657.3	673.6	645.9	571.6	493.4	427.5	381.7
65°	396.2	421.0	456.6	502.2	542.7	550.7	532.6	456.6	397.4	342.1	310.5
67.5°	333.2	349.4	377.2	416.6	438.1	442.8	408.0	360.1	307.9	274.0	250.2
70°	290.8	302.1	328.0	349.4	366.9	367.5	335.3	297.0	257.0	229.4	211.9
72.5°	249.8	260.7	280.2	294.9	308.3	303.9	274.5	244.3	211.9	191.1	178.1
75°	192.7	202.4	212.5	219.2	219.2	213.6	192.2	169.7	151.1	138.7	134.7
77.5°	140.1	148.0	151.4	150.3	148.4	139.6	126.0	111.3	104.6	98.7	95.8
80°	109.9	113.3	114.4	111.6	108.2	98.1	89.0	82.8	76.6	74.4	73.3
82.5°	81.5	84.5	81.5	82.3	74.8	66.5	61.6	59.4	56.8	55.9	54.8
85°	43.4	42.8	41.7	38.9	33.8	32.7	32.1	31.6	30.4	31.0	29.8
87.5°	15.7	14.8	13.4	13.4	13.7	13.0	13.9	14.1	14.4	14.2	15.3
90°	4.4	6.4	8.4	10.4	12.1	13.5	15.0	16.5	17.9	19.0	20.1
92.5°	19.7	21.9	24.2	26.5	28.2	29.2	30.2	31.2	32.2	32.9	33.5
95°	50.5	52.1	53.7	55.4	56.7	58.0	59.4	60.6	61.9	62.4	62.9
97.5°	86.6	87.9	89.2	90.5	91.9	93.4	94.8	96.4	97.8	98.5	99.1
100°	114.6	115.4	116.1	116.8	118.0	119.6	121.2	122.9	124.5	124.9	125.2
102.5°	144.1	144.5	144.7	145.0	145.9	147.4	148.9	150.3	151.9	152.4	152.9
105°	189.8	190.0	190.1	190.4	190.8	191.5	192.2	193.0	193.7	194.2	194.8
107.5°	237.8	238.1	238.3	238.5	238.6	238.8	238.9	239.0	239.1	239.6	240.1
110°	270.5	270.9	271.3	271.7	271.7	271.5	271.3	271.2	271.0	270.6	270.3





TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	304.1	304.2	304.3	304.4	304.2	303.9	303.5	303.2	302.9	302.8	302.7
115°	354.8	354.8	354.8	354.8	354.7	354.2	353.9	353.5	353.2	353.0	352.8
117.5°	402.8	402.9	403.1	403.2	403.2	402.9	402.7	402.4	402.2	401.5	401.0
120°	435.3	436.0	436.8	437.5	437.6	437.0	436.4	435.9	435.4	434.5	433.6
122.5°	468.1	468.3	468.6	468.9	469.0	468.7	468.4	468.1	467.9	467.3	466.7
125°	516.7	516.7	516.7	516.7	516.7	516.5	516.3	516.1	515.9	515.6	515.2
127.5°	561.7	562.2	562.8	563.4	563.5	563.2	562.9	562.6	562.3	562.0	561.6
130°	593.0	593.5	594.0	594.6	594.8	594.8	594.8	594.8	594.8	594.5	594.2
132.5°	624.8	625.1	625.5	625.9	626.1	625.9	625.7	625.6	625.5	625.1	624.8
135°	667.6	668.6	669.8	670.8	671.4	671.4	671.4	671.4	671.4	671.0	670.7
137.5°	712.9	713.4	713.9	714.4	714.8	715.1	715.4	715.7	716.0	715.5	715.0
140°	743.3	743.7	744.0	744.4	744.6	744.6	744.6	744.6	744.6	744.4	744.3
142.5°	771.4	771.7	772.1	772.4	772.5	772.4	772.3	772.1	771.9	771.9	771.8
145°	810.4	811.1	811.9	812.6	813.0	813.3	813.4	813.6	813.8	813.6	813.4
147.5°	849.0	849.9	850.8	851.6	852.0	851.8	851.7	851.5	851.4	851.3	851.1
150°	872.3	873.0	873.8	874.5	874.8	874.8	874.8	874.8	874.8	874.8	874.8
152.5°	894.1	894.5	895.0	895.4	895.7	895.9	896.0	896.2	896.3	896.7	897.2
155°	927.7	927.7	927.7	927.7	927.6	927.4	927.2	927.1	926.9	927.6	928.4
157.5°	956.0	955.7	955.4	955.0	954.9	954.8	954.8	954.8	954.7	955.3	955.8
160°	973.1	972.9	972.7	972.6	972.4	972.2	972.0	971.8	971.7	972.2	972.7
162.5°	988.5	988.0	987.5	987.0	986.7	986.5	986.3	986.2	985.9	986.9	987.9
165°	1009.3	1008.9	1008.3	1007.7	1007.3	1006.9	1006.6	1006.2	1005.8	1006.9	1008.0
167.5°	1025.2	1024.5	1023.8	1023.0	1022.6	1022.6	1022.7	1022.7	1022.8	1023.9	1024.9
170°	1034.2	1033.3	1032.4	1031.5	1031.1	1031.4	1031.5	1031.7	1031.8	1033.0	1034.0
172.5°	1040.9	1040.2	1039.3	1038.6	1038.2	1038.3	1038.3	1038.4	1038.4	1039.6	1040.8
175°	1049.7	1048.8	1047.9	1047.0	1046.4	1046.3	1046.0	1045.9	1045.7	1047.0	1048.2
177.5°	1052.8	1052.1	1051.3	1050.6	1050.3	1050.3	1050.3	1050.3	1050.3	1051.2	1052.3
180°	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9	1398.9
2.5°	1467.5	1469.3	1470.6	1475.1	1475.5	1479.6	1475.5
5°	1588.9	1596.8	1609.2	1621.5	1622.7	1630.5	1616.5
7.5°	1725.0	1743.3	1754.7	1774.7	1782.7	1787.5	1779.5
10°	1818.8	1835.7	1865.6	1880.2	1894.9	1897.1	1890.4
12.5°	1909.4	1936.3	1959.8	1987.5	1986.9	2006.7	1999.5
15°	2030.2	2057.8	2090.4	2121.5	2132.7	2132.7	2141.8
17.5°	2116.3	2166.9	2200.7	2225.0	2251.7	2256.3	2253.2
20°	2174.5	2229.1	2265.2	2296.8	2314.8	2319.9	2319.9
22.5°	2217.7	2264.2	2299.5	2327.8	2342.8	2348.7	2346.9
25°	2247.7	2287.7	2309.2	2317.6	2321.6	2320.4	2309.7
27.5°	2206.7	2204.9	2191.4	2165.4	2145.9	2134.1	2120.6
30°	2128.3	2098.9	2065.1	2027.9	1980.0	1943.3	1932.1
32.5°	2011.4	1945.6	1888.3	1826.4	1774.8	1738.2	1722.9
35°	1785.6	1681.3	1596.2	1521.8	1467.7	1433.9	1422.6
37.5°	1517.5	1416.6	1311.2	1239.1	1194.2	1160.0	1147.3
40°	1347.0	1237.1	1145.3	1077.7	1031.4	998.2	997.6
42.5°	1191.5	1086.5	1000.1	951.4	901.6	879.5	879.5
45°	975.6	891.6	818.4	780.1	750.2	732.1	727.1
47.5°	807.8	738.3	689.5	659.0	634.6	623.1	615.7
50°	713.5	652.6	613.8	587.3	573.7	559.1	558.0
52.5°	635.1	586.0	555.6	534.1	517.0	508.2	508.4
55°	533.8	494.9	473.4	457.1	443.6	436.8	434.0
57.5°	449.6	420.4	404.9	389.9	384.2	378.9	377.4
60°	397.4	377.6	363.0	351.1	342.7	341.0	340.4
62.5°	354.1	333.5	323.3	314.1	307.9	305.3	304.4
65°	292.0	276.7	267.7	260.4	258.1	254.2	253.6
67.5°	235.4	226.2	220.3	215.2	212.1	211.9	211.9
70°	200.6	195.6	190.5	187.7	186.0	184.8	184.8
72.5°	170.9	167.1	163.0	161.5	161.2	160.0	159.6
75°	130.2	126.3	126.8	124.0	121.7	119.0	117.2
77.5°	92.3	89.5	88.9	88.6	86.7	86.3	87.2
80°	71.6	68.7	68.2	68.7	68.2	66.5	66.5
82.5°	54.5	52.1	51.5	51.2	50.6	51.2	50.3
85°	29.3	28.2	28.2	28.2	29.3	28.8	28.2
87.5°	14.6	14.3	15.0	14.6	14.7	14.3	14.8
90°	21.2	22.3	23.0	23.3	23.7	24.1	24.4
92.5°	34.2	34.8	35.3	35.5	35.7	36.0	36.1
95°	63.5	64.0	64.3	64.3	64.3	64.3	64.3
97.5°	99.8	100.4	100.8	100.8	100.8	100.8	100.8
100°	125.6	126.0	126.1	126.1	126.1	126.1	126.1
102.5°	153.4	153.8	154.2	154.3	154.5	154.7	154.7
105°	195.3	195.8	196.4	196.9	197.5	198.0	198.5
107.5°	240.6	241.1	241.3	241.3	241.2	241.2	241.2
110°	269.9	269.5	269.6	270.2	270.7	271.3	271.8



TEST NUMBER: P332974-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	302.6	302.6	302.6	302.7	302.8	303.0	303.0
115°	352.6	352.5	352.3	352.1	351.9	351.7	351.6
117.5°	400.3	399.7	399.3	398.8	398.5	398.1	397.8
120°	432.7	431.8	431.5	431.9	432.2	432.6	432.9
122.5°	466.1	465.5	464.8	464.1	463.5	462.8	462.2
125°	514.9	514.5	514.1	513.8	513.4	513.1	512.7
127.5°	561.3	560.8	560.5	560.3	559.9	559.7	559.4
130°	593.8	593.5	592.9	592.2	591.4	590.7	590.0
132.5°	624.4	624.0	623.7	623.4	623.1	622.8	622.6
135°	670.3	669.9	669.4	669.0	668.4	667.8	667.3
137.5°	714.5	714.1	713.9	714.0	714.1	714.2	714.4
140°	744.0	743.9	743.7	743.6	743.3	743.1	743.0
142.5°	771.8	771.8	771.8	771.8	771.7	771.7	771.6
145°	813.3	813.0	812.7	812.1	811.6	811.1	810.5
147.5°	850.9	850.8	850.6	850.4	850.3	850.1	849.9
150°	874.8	874.8	874.7	874.6	874.3	874.2	874.0
152.5°	897.6	898.1	898.1	897.6	897.1	896.6	896.1
155°	929.0	929.8	929.8	929.0	928.4	927.6	926.9
157.5°	956.3	956.9	956.8	956.3	955.6	955.0	954.4
160°	973.3	973.8	973.6	972.7	971.8	970.9	970.0
162.5°	988.9	989.9	989.9	989.0	988.1	987.2	986.3
165°	1009.1	1010.2	1010.3	1009.7	1008.9	1008.2	1007.5
167.5°	1026.1	1027.1	1027.1	1026.0	1024.8	1023.7	1022.6
170°	1035.1	1036.2	1036.1	1034.9	1033.6	1032.3	1031.0
172.5°	1042.0	1043.3	1043.3	1042.0	1040.7	1039.5	1038.2
175°	1049.5	1050.8	1050.8	1049.5	1048.2	1047.0	1045.7
177.5°	1053.3	1054.3	1054.3	1053.1	1051.9	1050.8	1049.6
180°	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2	1052.2

(END OF REPORT)