

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332978-930

Luminaire Tested: **S124RDIP-S1020D1035U930-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332978-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124RDIP-S1020D1035U930-4F0-1E-UDD-F4  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1035 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6416.6 lumens  
Efficiency: N/A  
Efficacy: 106.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 60.5  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332978-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

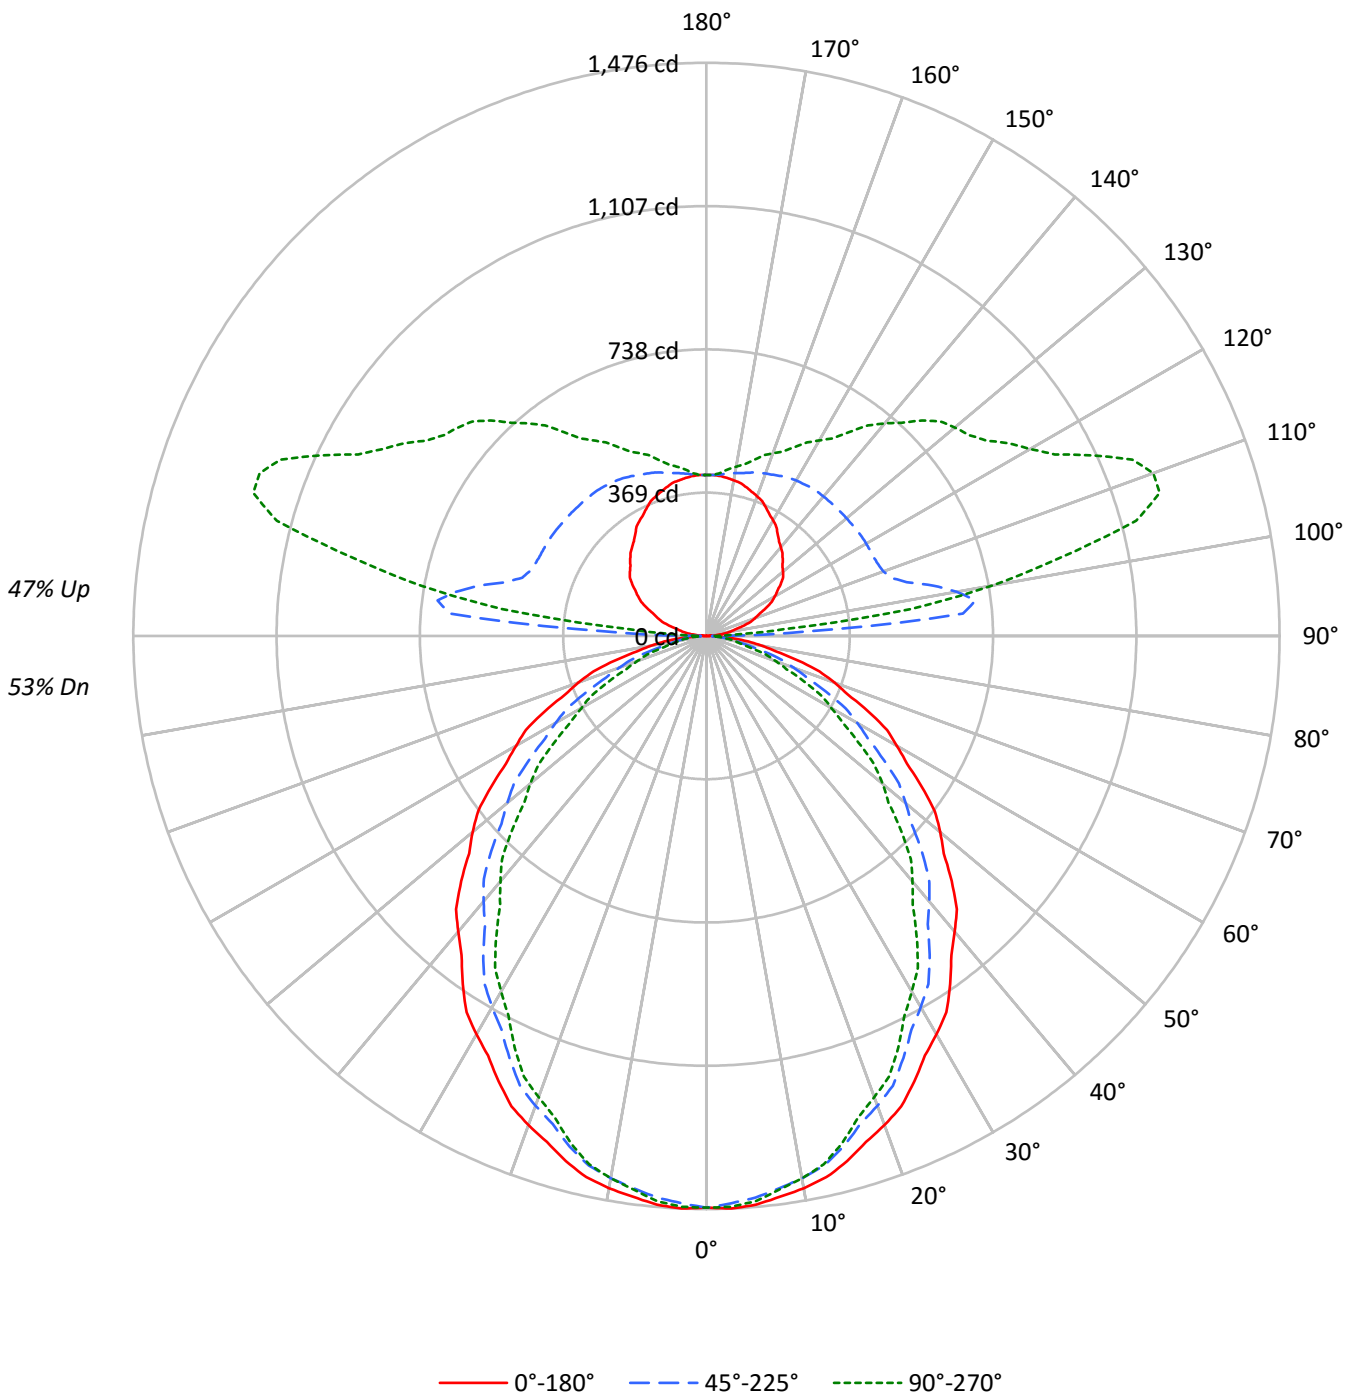



TEST NUMBER: P332978-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59
1	99	95	91	87	91	88	84	82	75	73	70	63	62	60	53	51	50
2	90	83	77	72	83	77	72	67	66	62	59	56	53	51	47	45	43
3	82	73	66	60	76	68	62	57	58	54	50	50	46	43	41	39	37
4	76	65	57	51	70	60	54	48	52	47	43	44	40	37	37	34	32
5	69	58	50	44	64	54	47	42	47	41	37	40	36	32	34	30	28
6	64	52	44	38	59	49	41	36	42	37	32	36	32	28	31	27	25
7	59	47	39	34	55	44	37	32	38	33	29	33	29	25	28	25	22
8	55	43	35	30	51	40	33	28	35	29	25	30	26	23	26	22	20
9	51	39	32	27	48	37	30	25	32	27	23	28	24	20	24	20	18
10	48	36	29	24	45	34	27	23	30	24	21	26	22	19	22	19	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	11885	11885	11885
5°	11912	11766	11839
10°	11837	11625	11625
15°	11701	11381	11295
20°	11515	11059	10856
25°	11276	10684	10413
30°	11044	10288	9857
35°	10787	9876	9298
40°	10478	9409	8696
45°	10193	8944	8082
50°	9868	8410	7433
55°	9520	7854	6726
60°	9137	7245	6006
65°	8785	6481	5297
70°	8275	5641	4497
75°	7629	4676	3656
80°	6657	3561	3357
85°	5641	3242	3029



TEST NUMBER: P332978-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	138.3	2.2
10°-20°	385.6	6.0
20°-30°	556.9	8.7
30°-40°	631.2	9.8
40°-50°	609.5	9.5
50°-60°	506.9	7.9
60°-70°	350.0	5.5
70°-80°	177.4	2.8
80°-90°	47.8	0.7
90°-100°	299.2	4.7
100°-110°	622.8	9.7
110°-120°	557.8	8.7
120°-130°	469.2	7.3
130°-140°	391.2	6.1
140°-150°	298.9	4.7
150°-160°	210.1	3.3
160°-170°	123.6	1.9
170°-180°	40.2	0.6
0°-30°	1080.8	16.8
0°-40°	1712.0	26.7
0°-60°	2828.4	44.1
0°-90°	3403.6	53.0
90°-120°	1479.8	23.1
90°-150°	2639.2	41.1
90°-180°	3013.0	47.0
0°-180°	6416.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1472	1472	1472	1472	1472	
5°	1470	1465	1452	1462	1461	139
15°	1400	1389	1362	1359	1352	394
25°	1266	1244	1199	1181	1169	583
35°	1094	1057	1002	965	944	684
45°	893	850	783	730	708	688
55°	676	630	558	501	478	605
65°	460	410	339	293	277	454
75°	245	202	150	125	117	258
85°	61	39	35	33	33	68
90°	1	6	15	16	17	4
95°	27	85	663	328	199	30
105°	95	138	534	1150	1145	102
115°	168	210	476	915	1100	166
125°	234	278	474	778	877	208
135°	278	330	470	691	785	214
145°	320	366	467	583	641	201
155°	364	393	454	514	536	168
165°	396	409	436	461	468	112
175°	413	414	418	423	422	39
180°	414	414	414	414	414	



TEST NUMBER: P332978-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2
2.5°	1475.8	1475.0	1474.1	1473.4	1472.6	1471.0	1468.8	1466.6	1464.4	1462.2	1464.4
5°	1469.9	1468.9	1467.9	1466.9	1465.9	1463.9	1460.9	1457.9	1454.9	1451.9	1454.4
7.5°	1456.6	1455.6	1454.5	1453.4	1452.4	1449.9	1446.0	1442.1	1438.2	1434.3	1435.9
10°	1444.0	1442.8	1441.4	1440.2	1439.0	1436.1	1431.6	1427.1	1422.5	1418.1	1419.0
12.5°	1427.8	1426.3	1424.8	1423.4	1422.0	1418.5	1413.2	1407.9	1402.6	1397.3	1397.9
15°	1400.0	1397.7	1395.5	1393.3	1391.0	1386.7	1380.5	1374.2	1368.0	1361.7	1361.2
17.5°	1366.4	1363.2	1359.9	1356.7	1353.4	1348.0	1340.5	1333.0	1325.5	1317.9	1316.5
20°	1340.3	1337.0	1333.7	1330.5	1327.2	1321.4	1312.9	1304.3	1295.8	1287.3	1285.3
22.5°	1311.4	1307.7	1304.1	1300.5	1296.8	1290.4	1281.3	1272.2	1263.1	1253.9	1250.9
25°	1265.9	1261.3	1256.9	1252.4	1247.8	1240.5	1230.2	1219.9	1209.7	1199.4	1195.1
27.5°	1218.1	1212.4	1206.8	1201.1	1195.5	1187.2	1176.2	1165.2	1154.2	1143.2	1138.0
30°	1184.7	1178.4	1172.2	1166.0	1159.7	1150.6	1138.9	1127.1	1115.3	1103.6	1097.3
32.5°	1149.6	1142.5	1135.4	1128.4	1121.3	1111.7	1099.5	1087.4	1075.1	1063.0	1055.7
35°	1094.5	1086.5	1078.5	1070.5	1062.5	1052.2	1039.7	1027.2	1014.6	1002.1	993.6
37.5°	1035.7	1027.4	1019.2	1010.9	1002.7	991.6	977.7	963.8	949.9	936.0	926.5
40°	994.3	985.9	977.7	969.4	961.2	949.9	935.6	921.3	907.0	892.8	882.2
42.5°	954.6	945.9	937.2	928.5	919.9	908.1	893.2	878.3	863.5	848.6	837.9
45°	892.8	883.5	874.2	865.0	855.7	843.5	828.5	813.5	798.4	783.4	771.2
47.5°	829.0	819.4	809.8	800.3	790.7	778.1	762.5	746.8	731.2	715.6	702.9
50°	785.7	775.9	766.1	756.4	746.6	733.7	717.7	701.6	685.6	669.6	657.0
52.5°	741.5	731.9	722.4	712.8	703.2	690.2	673.8	657.4	640.9	624.5	611.8
55°	676.4	666.3	656.3	646.3	636.3	623.1	606.8	590.5	574.3	558.0	544.9
57.5°	611.9	601.4	591.0	580.6	570.2	556.9	541.0	524.9	508.8	492.8	479.6
60°	565.9	555.9	545.8	535.8	525.8	512.7	496.8	480.7	464.6	448.7	435.6
62.5°	524.4	514.0	503.5	493.1	482.7	469.3	452.8	436.4	420.0	403.6	391.5
65°	459.9	449.1	438.4	427.6	416.9	403.4	387.4	371.4	355.3	339.3	328.6
67.5°	393.0	382.6	372.3	362.0	351.6	339.1	324.2	309.3	294.4	279.6	270.3
70°	350.6	340.1	329.5	319.0	308.5	296.1	281.8	267.5	253.2	239.0	230.7
72.5°	305.5	296.0	286.4	277.0	267.4	255.9	242.5	228.9	215.5	202.0	194.9
75°	244.6	235.4	226.1	216.8	207.6	197.0	185.2	173.5	161.7	149.9	144.1
77.5°	182.9	175.0	167.1	159.2	151.4	142.7	133.1	123.7	114.1	104.6	101.3
80°	143.2	135.9	128.7	121.4	114.1	106.7	99.2	91.7	84.1	76.6	75.9
82.5°	108.9	102.2	95.6	88.9	82.3	76.7	72.5	68.2	63.8	59.5	58.9
85°	60.9	55.8	50.9	45.8	40.8	37.9	37.2	36.4	35.7	35.0	34.4
87.5°	20.9	19.6	18.5	17.0	15.7	14.8	15.5	15.3	15.4	15.6	15.2
90°	0.8	2.4	4.9	5.7	6.5	6.5	11.4	11.4	13.0	14.7	13.9
92.5°	9.3	13.5	21.2	31.1	43.0	59.9	101.3	164.4	225.9	258.2	215.1
95°	26.8	29.3	37.4	48.0	67.6	101.7	172.5	306.1	500.6	663.3	682.1
97.5°	48.2	48.2	55.2	65.0	81.7	110.4	164.9	275.1	468.5	698.6	856.9
100°	61.9	61.9	67.6	77.3	92.8	118.9	166.9	258.9	424.9	654.4	862.7
102.5°	74.8	76.1	81.2	90.3	105.2	129.9	173.3	254.3	395.6	599.1	813.9
105°	95.2	97.7	101.7	111.5	126.1	149.8	188.8	256.4	370.3	533.9	725.2
107.5°	117.7	119.4	123.4	133.8	147.8	171.0	206.9	268.4	365.7	497.5	653.5
110°	132.6	134.3	138.4	148.1	162.8	184.7	220.5	277.5	367.0	485.1	617.8



TEST NUMBER: P332978-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	147.0	148.6	153.4	162.5	177.1	199.1	233.6	287.3	371.0	479.2	597.6
115°	167.7	170.1	175.8	183.9	199.4	221.4	254.0	302.8	378.5	476.1	578.7
117.5°	189.1	191.4	196.5	205.5	219.9	242.7	273.6	318.5	386.5	475.3	570.2
120°	203.5	205.1	210.8	219.7	233.6	256.4	287.3	329.6	392.3	475.3	565.7
122.5°	216.5	218.1	223.8	232.1	247.3	269.4	300.4	340.1	398.2	474.7	560.4
125°	233.6	236.8	241.7	250.7	266.1	288.9	318.2	355.7	407.0	473.7	551.9
127.5°	248.7	251.4	257.2	267.4	283.6	306.6	334.8	369.2	413.9	471.9	540.3
130°	257.2	260.5	266.9	279.2	294.6	318.2	345.9	377.6	419.1	471.2	533.1
132.5°	265.6	268.2	276.7	288.3	305.1	327.3	355.1	386.1	423.7	470.6	526.6
135°	277.5	280.8	288.9	302.8	319.8	341.0	367.9	397.2	430.6	469.6	516.8
137.5°	289.4	292.5	301.5	314.6	332.4	352.6	377.6	405.0	434.6	469.4	508.3
140°	297.9	300.4	309.3	323.1	340.2	359.8	384.2	410.2	437.9	468.8	503.9
142.5°	307.0	309.5	317.7	330.9	347.4	366.2	390.0	414.1	440.5	468.8	499.9
145°	319.8	322.3	330.4	341.9	357.3	375.2	396.4	418.3	442.0	467.2	493.3
147.5°	334.4	335.2	342.3	354.1	366.9	383.0	402.9	422.1	442.8	464.2	487.2
150°	343.5	344.3	350.8	360.6	372.8	388.2	406.2	424.0	442.8	462.3	482.7
152.5°	352.0	352.1	358.7	367.7	378.6	392.8	408.8	425.3	441.5	459.0	477.4
155°	363.8	364.6	369.5	377.6	386.6	398.8	412.6	426.5	439.5	454.2	469.6
157.5°	375.4	375.4	379.9	386.3	394.1	403.7	415.4	426.5	437.4	449.1	461.6
160°	382.5	382.5	385.8	391.5	398.0	407.0	416.7	426.5	435.5	445.2	455.8
162.5°	389.1	388.4	391.0	396.1	401.9	409.0	418.0	426.5	433.5	441.3	450.6
165°	396.4	396.4	398.0	402.1	406.2	411.0	418.3	424.9	429.7	435.5	442.0
167.5°	403.7	402.9	403.7	406.8	409.1	412.8	418.2	422.9	425.8	429.6	434.1
170°	407.0	406.2	407.0	409.4	411.0	413.4	417.5	421.6	423.2	425.7	428.9
172.5°	410.2	409.4	409.5	411.3	412.3	414.1	416.9	420.3	420.6	421.8	424.4
175°	413.4	412.6	412.6	413.4	414.3	414.3	415.9	418.3	417.5	417.5	419.1
177.5°	414.9	414.3	413.6	414.3	414.3	414.3	414.9	416.2	414.9	414.9	415.6
180°	414.3	414.3	414.3	414.3	414.3	414.3	414.3	414.3	414.3	414.3	414.3



TEST NUMBER: P332978-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2
2.5°	1466.6	1468.8	1471.0	1472.1	1471.9	1471.7	1471.5	1471.3
5°	1456.9	1459.4	1461.9	1462.9	1462.4	1461.9	1461.4	1460.9
7.5°	1437.5	1439.1	1440.7	1441.1	1440.3	1439.5	1438.7	1437.9
10°	1420.1	1421.1	1422.0	1422.0	1421.1	1420.1	1419.0	1418.1
12.5°	1398.5	1399.1	1399.7	1399.3	1397.9	1396.5	1395.1	1393.8
15°	1360.7	1360.2	1359.7	1358.5	1356.8	1355.0	1353.3	1351.5
17.5°	1315.2	1313.8	1312.4	1310.3	1307.7	1305.0	1302.4	1299.7
20°	1283.3	1281.3	1279.3	1276.7	1273.4	1270.2	1266.9	1263.6
22.5°	1247.9	1244.9	1241.9	1239.1	1236.4	1233.8	1231.1	1228.5
25°	1190.8	1186.6	1182.3	1178.9	1176.5	1173.9	1171.4	1169.0
27.5°	1132.7	1127.5	1122.2	1117.8	1114.2	1110.5	1106.9	1103.3
30°	1091.0	1084.8	1078.5	1073.3	1069.3	1065.4	1061.4	1057.4
32.5°	1048.5	1041.2	1034.0	1028.4	1024.6	1020.8	1017.0	1013.2
35°	985.0	976.6	968.0	961.6	957.0	952.5	948.0	943.5
37.5°	917.0	907.5	898.0	891.0	886.5	881.9	877.4	872.9
40°	871.7	861.2	850.7	843.2	838.7	834.1	829.6	825.2
42.5°	827.1	816.4	805.7	798.0	793.3	788.6	783.8	779.2
45°	758.9	746.6	734.3	725.9	721.5	716.9	712.4	707.9
47.5°	690.2	677.4	664.6	655.8	650.9	645.9	640.9	636.0
50°	644.5	632.0	619.5	610.8	606.1	601.3	596.6	591.8
52.5°	599.0	586.3	573.6	564.8	559.8	554.8	549.8	544.9
55°	531.9	518.9	505.9	497.0	492.2	487.5	482.7	477.9
57.5°	466.4	453.1	439.9	431.5	427.9	424.3	420.7	417.1
60°	422.6	409.5	396.6	388.0	384.0	380.0	376.0	372.0
62.5°	379.5	367.5	355.5	347.8	344.6	341.4	338.2	335.0
65°	317.7	307.0	296.2	289.3	286.3	283.3	280.3	277.3
67.5°	261.0	251.8	242.5	236.2	232.8	229.6	226.2	223.0
70°	222.4	214.2	205.9	200.5	198.0	195.5	193.0	190.5
72.5°	187.8	180.8	173.7	169.1	166.7	164.4	162.2	159.9
75°	138.4	132.6	126.9	123.3	121.7	120.3	118.7	117.2
77.5°	97.9	94.6	91.2	89.3	88.8	88.4	87.9	87.5
80°	75.2	74.4	73.6	73.1	72.9	72.6	72.4	72.2
82.5°	58.4	57.9	57.3	56.9	56.7	56.4	56.2	55.9
85°	33.9	33.4	32.9	32.7	32.7	32.7	32.7	32.7
87.5°	15.2	15.1	15.1	15.1	15.4	15.8	15.8	16.1
90°	14.7	15.5	16.3	16.3	17.1	17.9	17.1	17.1
92.5°	159.9	120.3	95.7	79.4	69.9	65.5	62.7	62.7
95°	603.1	477.0	367.9	288.9	249.1	223.8	209.2	198.6
97.5°	891.1	844.2	764.6	679.6	621.2	572.2	547.8	530.8
100°	981.6	997.8	958.0	897.7	827.0	777.3	752.8	746.4
102.5°	977.1	1057.8	1069.3	1044.2	1000.8	964.8	939.1	933.9
105°	911.6	1052.4	1132.9	1166.4	1168.0	1161.5	1150.1	1145.2
107.5°	818.6	968.6	1082.1	1154.6	1194.8	1213.4	1221.6	1223.7
110°	762.6	903.4	1021.5	1111.0	1168.8	1203.0	1217.6	1225.0





TEST NUMBER: P332978-930

CATALOG NUMBER: S124RDIP-S1020D1035U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	721.6	846.1	957.7	1047.2	1112.8	1154.1	1174.7	1186.5
115°	680.4	780.6	875.8	953.9	1018.2	1067.1	1093.1	1099.6
117.5°	660.2	743.1	818.0	884.3	939.1	980.2	1006.5	1011.5
120°	651.1	726.8	792.0	849.7	896.1	932.0	953.1	962.1
122.5°	643.4	716.4	775.7	826.3	865.5	896.1	914.0	923.0
125°	630.0	699.9	756.1	800.9	833.5	857.0	872.5	877.4
127.5°	613.7	680.6	736.6	779.1	811.8	832.8	845.8	850.7
130°	600.7	665.0	720.3	763.4	796.8	817.2	830.2	835.1
132.5°	587.0	647.4	701.4	744.6	777.3	800.2	812.6	817.5
135°	568.1	621.0	670.7	711.3	744.0	766.7	779.8	784.6
137.5°	551.1	595.8	637.6	674.4	704.8	727.3	738.1	744.0
140°	541.3	579.5	616.1	650.3	678.8	696.8	708.1	714.6
142.5°	532.1	565.8	597.3	626.9	652.1	668.7	678.8	683.4
145°	519.3	547.0	571.4	594.2	614.5	628.4	636.5	640.6
147.5°	508.7	530.7	550.2	568.1	583.1	595.0	601.2	602.6
150°	502.2	520.9	537.2	551.9	564.8	575.4	580.3	581.1
152.5°	495.0	511.1	526.1	538.2	549.3	557.8	560.8	561.6
155°	484.3	497.3	509.5	519.3	527.4	533.9	536.4	536.4
157.5°	472.7	483.6	493.9	501.7	507.8	512.7	514.2	514.2
160°	465.5	474.5	483.5	490.0	494.9	499.8	500.6	500.6
162.5°	458.4	466.0	473.0	478.9	482.5	487.4	488.2	487.5
165°	448.5	453.4	459.0	463.1	466.4	469.6	468.8	468.0
167.5°	438.9	442.6	447.2	449.6	451.3	453.4	453.2	452.6
170°	433.0	435.5	438.7	441.2	442.8	443.6	442.8	442.8
172.5°	427.8	429.6	431.5	433.3	434.3	435.1	434.3	433.0
175°	420.8	421.6	423.2	423.2	423.2	424.9	423.2	421.6
177.5°	416.2	416.9	416.9	417.5	416.9	417.5	416.2	414.9
180°	414.3	414.3	414.3	414.3	414.3	414.3	414.3	414.3

(END OF REPORT)