

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332942-930

Luminaire Tested: **S124RDIP-S795D810U930-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332942-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIP-S795D810U930-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 810 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4978.5 lumens
Efficiency: N/A
Efficacy: 108.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332942-930

CATALOG NUMBER: S124RDIP-S795D810U930-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

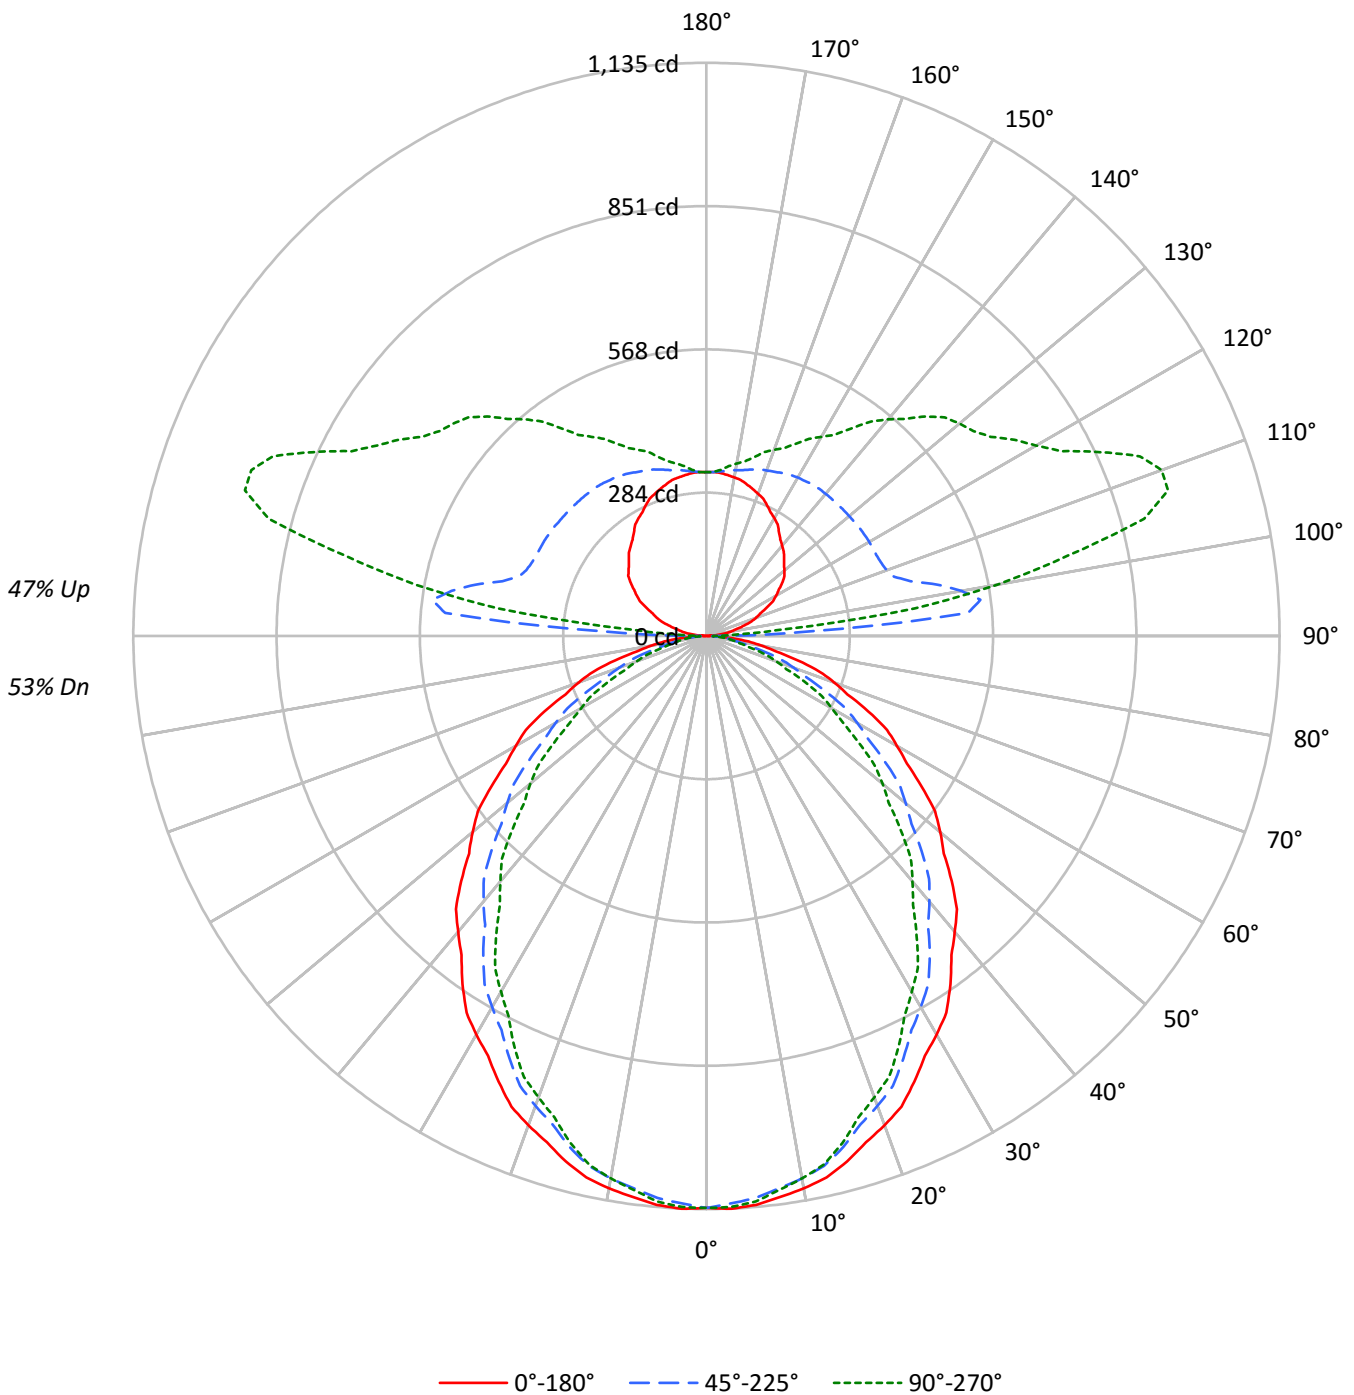



TEST NUMBER: P332942-930

CATALOG NUMBER: S124RDIP-S795D810U930-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53
1	99	94	91	87	91	88	84	81	75	72	70	63	61	60	52	51	50	45
2	90	83	77	72	83	77	72	67	66	62	59	56	53	50	46	44	43	38
3	82	73	66	60	76	68	62	56	58	54	50	49	46	43	41	39	36	33
4	75	65	57	51	70	60	53	48	52	47	42	44	40	37	37	34	32	28
5	69	58	50	44	64	54	47	41	47	41	37	40	36	32	33	30	28	25
6	64	52	44	38	59	49	41	36	42	36	32	36	32	28	30	27	25	22
7	59	47	39	34	55	44	37	32	38	33	28	33	28	25	28	24	22	19
8	55	43	35	30	51	40	33	28	35	29	25	30	26	23	26	22	20	17
9	51	39	32	27	47	37	30	25	32	27	23	28	23	20	24	20	18	16
10	48	36	29	24	44	34	27	23	30	24	21	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9143	9143	9143
5°	9164	9052	9108
10°	9107	8943	8943
15°	9002	8756	8690
20°	8858	8508	8352
25°	8675	8219	8011
30°	8496	7914	7582
35°	8298	7597	7154
40°	8061	7238	6690
45°	7841	6882	6218
50°	7592	6469	5718
55°	7323	6042	5175
60°	7030	5572	4621
65°	6758	4988	4076
70°	6366	4338	3460
75°	5870	3599	2813
80°	5119	2738	2580
85°	4335	2492	2325



TEST NUMBER: P332942-930

CATALOG NUMBER: S124RDIP-S795D810U930-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	106.4	2.1
10°-20°	296.7	6.0
20°-30°	428.4	8.6
30°-40°	485.6	9.8
40°-50°	468.9	9.4
50°-60°	389.9	7.8
60°-70°	269.3	5.4
70°-80°	136.5	2.7
80°-90°	36.8	0.7
90°-100°	234.4	4.7
100°-110°	487.8	9.8
110°-120°	436.9	8.8
120°-130°	367.5	7.4
130°-140°	306.4	6.2
140°-150°	234.1	4.7
150°-160°	164.6	3.3
160°-170°	96.8	1.9
170°-180°	31.5	0.6
0°-30°	831.5	16.7
0°-40°	1317.1	26.5
0°-60°	2176.0	43.7
0°-90°	2618.5	52.6
90°-120°	1159.1	23.3
90°-150°	2067.1	41.5
90°-180°	2360.0	47.4
0°-180°	4978.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1133	1133	1133	1133	1133	
5°	1131	1127	1117	1125	1124	107
15°	1077	1069	1048	1046	1040	303
25°	974	957	923	908	899	449
35°	842	813	771	742	726	526
45°	687	654	603	562	545	529
55°	520	484	429	386	368	465
65°	354	316	261	225	213	349
75°	188	156	115	96	90	199
85°	47	30	27	25	25	53
90°	1	5	12	13	13	3
95°	21	66	520	257	156	24
105°	75	108	418	900	897	80
115°	131	165	373	716	861	130
125°	183	217	371	610	687	163
135°	217	259	368	541	615	168
145°	250	287	366	456	502	157
155°	285	308	356	403	420	131
165°	310	320	341	361	367	88
175°	324	324	327	332	330	31
180°	324	324	324	324	324	



TEST NUMBER: P332942-930

CATALOG NUMBER: S124RDIP-S795D810U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6
2.5°	1135.4	1134.7	1134.1	1133.5	1132.9	1131.7	1130.0	1128.4	1126.7	1124.9	1126.7
5°	1130.8	1130.1	1129.3	1128.5	1127.7	1126.3	1123.9	1121.6	1119.2	1117.0	1118.9
7.5°	1120.6	1119.8	1119.0	1118.2	1117.4	1115.5	1112.5	1109.5	1106.4	1103.4	1104.6
10°	1110.9	1109.9	1109.0	1108.0	1107.0	1104.8	1101.4	1097.9	1094.5	1091.0	1091.7
12.5°	1098.4	1097.3	1096.2	1095.0	1094.0	1091.4	1087.3	1083.1	1079.0	1075.0	1075.5
15°	1077.1	1075.4	1073.6	1071.9	1070.2	1066.9	1062.0	1057.2	1052.4	1047.6	1047.2
17.5°	1051.2	1048.7	1046.2	1043.7	1041.2	1037.1	1031.3	1025.5	1019.7	1013.9	1012.8
20°	1031.1	1028.6	1026.1	1023.6	1021.1	1016.6	1010.0	1003.5	996.9	990.3	988.8
22.5°	1008.9	1006.1	1003.3	1000.5	997.7	992.7	985.7	978.7	971.7	964.7	962.4
25°	973.9	970.4	966.9	963.4	960.0	954.3	946.4	938.5	930.6	922.7	919.4
27.5°	937.1	932.8	928.4	924.1	919.7	913.3	904.8	896.4	887.9	879.5	875.5
30°	911.4	906.6	901.8	897.0	892.2	885.3	876.2	867.2	858.0	849.0	844.2
32.5°	884.4	879.0	873.5	868.0	862.7	855.2	845.9	836.5	827.1	817.7	812.2
35°	842.0	835.9	829.7	823.5	817.4	809.5	799.9	790.2	780.6	770.9	764.4
37.5°	796.8	790.4	784.1	777.7	771.4	762.9	752.2	741.5	730.8	720.2	712.8
40°	764.9	758.6	752.2	745.8	739.5	730.8	719.7	708.8	697.8	686.8	678.7
42.5°	734.3	727.7	721.1	714.4	707.7	698.6	687.2	675.7	664.3	652.8	644.6
45°	686.8	679.7	672.5	665.4	658.3	649.0	637.4	625.8	614.2	602.8	593.3
47.5°	637.7	630.4	623.1	615.6	608.3	598.6	586.6	574.5	562.6	550.5	540.7
50°	604.5	597.0	589.4	581.9	574.4	564.4	552.1	539.8	527.4	515.1	505.5
52.5°	570.5	563.1	555.7	548.4	541.0	531.0	518.4	505.7	493.1	480.5	470.7
55°	520.3	512.6	504.9	497.2	489.5	479.4	466.8	454.3	441.8	429.3	419.2
57.5°	470.8	462.7	454.7	446.7	438.6	428.4	416.1	403.8	391.5	379.1	369.0
60°	435.4	427.6	420.0	412.2	404.5	394.5	382.1	369.8	357.5	345.1	335.1
62.5°	403.4	395.4	387.4	379.4	371.4	361.0	348.4	335.7	323.1	310.5	301.2
65°	353.8	345.5	337.2	329.0	320.7	310.4	298.0	285.7	273.4	261.1	252.7
67.5°	302.3	294.4	286.4	278.5	270.5	260.9	249.4	238.0	226.5	215.1	207.9
70°	269.7	261.6	253.5	245.4	237.3	227.8	216.8	205.8	194.9	183.8	177.5
72.5°	235.1	227.7	220.4	213.0	205.7	196.9	186.5	176.1	165.8	155.4	149.9
75°	188.2	181.1	173.9	166.8	159.6	151.6	142.5	133.5	124.4	115.4	110.9
77.5°	140.6	134.6	128.6	122.5	116.4	109.7	102.5	95.1	87.8	80.5	77.9
80°	110.1	104.5	99.0	93.4	87.8	82.1	76.3	70.5	64.7	58.9	58.4
82.5°	83.8	78.7	73.5	68.4	63.3	59.0	55.8	52.4	49.1	45.8	45.3
85°	46.8	43.0	39.1	35.3	31.4	29.2	28.6	28.0	27.5	26.9	26.5
87.5°	16.1	15.1	14.3	13.1	12.1	11.3	12.0	11.8	11.9	12.0	11.7
90°	0.7	1.9	3.8	4.5	5.1	5.1	8.9	8.9	10.2	11.5	10.8
92.5°	7.3	10.6	16.6	24.4	33.7	46.9	79.3	128.7	177.0	202.2	168.4
95°	21.0	22.9	29.4	37.6	52.9	79.7	135.2	239.7	392.1	519.6	534.3
97.5°	37.7	37.7	43.2	50.9	64.0	86.4	129.1	215.5	367.0	547.2	671.2
100°	48.4	48.4	52.9	60.6	72.6	93.1	130.7	202.8	332.8	512.6	675.7
102.5°	58.6	59.7	63.6	70.8	82.3	101.7	135.7	199.2	309.8	469.2	637.5
105°	74.6	76.5	79.7	87.3	98.8	117.3	147.9	200.8	290.1	418.2	568.0
107.5°	92.2	93.4	96.6	104.8	115.8	134.0	162.1	210.3	286.5	389.6	511.9
110°	104.0	105.2	108.4	116.0	127.5	144.7	172.8	217.4	287.5	379.9	483.9



TEST NUMBER: P332942-930

CATALOG NUMBER: S124RDIP-S795D810U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	115.1	116.4	120.1	127.3	138.7	156.0	183.0	225.0	290.6	375.4	468.1
115°	131.3	133.2	137.7	144.1	156.2	173.4	198.9	237.2	296.4	372.9	453.2
117.5°	148.1	149.9	153.9	160.9	172.3	190.1	214.3	249.5	302.7	372.3	446.6
120°	159.4	160.6	165.1	172.1	183.0	200.8	225.0	258.2	307.3	372.3	443.0
122.5°	169.6	170.9	175.3	181.8	193.6	211.0	235.2	266.4	311.9	371.8	439.0
125°	183.0	185.5	189.3	196.3	208.5	226.3	249.2	278.6	318.8	371.0	432.2
127.5°	194.9	196.9	201.5	209.5	222.1	240.1	262.3	289.2	324.2	369.7	423.1
130°	201.5	204.0	209.1	218.7	230.8	249.2	270.9	295.8	328.3	369.1	417.6
132.5°	208.1	210.1	216.8	225.8	239.0	256.4	278.1	302.4	331.9	368.6	412.5
135°	217.4	220.0	226.3	237.2	250.5	267.1	288.1	311.1	337.2	367.9	404.8
137.5°	226.7	229.1	236.1	246.5	260.3	276.1	295.8	317.2	340.4	367.7	398.2
140°	233.3	235.2	242.2	253.1	266.4	281.8	300.9	321.3	343.0	367.2	394.6
142.5°	240.4	242.4	248.9	259.2	272.1	286.9	305.5	324.3	345.0	367.2	391.6
145°	250.5	252.4	258.9	267.7	279.9	293.9	310.5	327.7	346.2	365.9	386.3
147.5°	261.9	262.5	268.2	277.3	287.4	300.0	315.6	330.6	346.8	363.6	381.6
150°	269.0	269.7	274.8	282.4	292.0	304.1	318.1	332.2	346.8	362.1	378.1
152.5°	275.7	275.8	280.9	288.0	296.6	307.7	320.2	333.1	345.8	359.5	374.0
155°	284.9	285.6	289.4	295.8	302.8	312.3	323.2	334.0	344.2	355.7	367.9
157.5°	294.0	294.0	297.6	302.6	308.7	316.2	325.4	334.0	342.6	351.8	361.6
160°	299.6	299.6	302.1	306.6	311.8	318.8	326.4	334.0	341.0	348.7	357.0
162.5°	304.8	304.2	306.2	310.2	314.8	320.2	327.4	334.0	339.6	345.7	352.9
165°	310.5	310.5	311.8	315.0	318.1	322.0	327.7	332.8	336.6	341.0	346.2
167.5°	316.2	315.6	316.2	318.6	320.4	323.3	327.6	331.3	333.5	336.5	340.1
170°	318.8	318.1	318.8	320.7	322.0	323.8	327.0	330.2	331.5	333.4	336.0
172.5°	321.3	320.7	320.8	322.2	322.9	324.3	326.5	329.2	329.5	330.4	332.4
175°	323.8	323.2	323.2	323.8	324.5	324.5	325.8	327.7	327.0	327.0	328.3
177.5°	325.0	324.5	324.0	324.5	324.5	324.5	325.0	326.0	325.0	325.0	325.5
180°	324.5	324.5	324.5	324.5	324.5	324.5	324.5	324.5	324.5	324.5	324.5



TEST NUMBER: P332942-930

CATALOG NUMBER: S124RDIP-S795D810U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6	1132.6
2.5°	1128.4	1130.0	1131.7	1132.5	1132.4	1132.2	1132.0	1131.9
5°	1120.8	1122.7	1124.7	1125.4	1125.0	1124.7	1124.3	1123.9
7.5°	1105.9	1107.2	1108.4	1108.6	1108.1	1107.4	1106.9	1106.2
10°	1092.5	1093.2	1094.1	1094.1	1093.2	1092.5	1091.7	1091.0
12.5°	1076.0	1076.4	1076.8	1076.5	1075.5	1074.4	1073.3	1072.2
15°	1046.8	1046.4	1046.0	1045.2	1043.8	1042.4	1041.1	1039.8
17.5°	1011.8	1010.7	1009.6	1008.0	1006.0	1004.0	1001.9	999.9
20°	987.2	985.7	984.1	982.2	979.7	977.1	974.6	972.2
22.5°	960.1	957.7	955.4	953.2	951.2	949.2	947.1	945.1
25°	916.2	912.9	909.6	907.0	905.1	903.2	901.2	899.3
27.5°	871.4	867.4	863.3	859.9	857.1	854.4	851.6	848.8
30°	839.4	834.5	829.7	825.7	822.7	819.6	816.5	813.4
32.5°	806.6	801.0	795.4	791.2	788.2	785.3	782.4	779.4
35°	757.8	751.3	744.8	739.7	736.3	732.8	729.3	725.9
37.5°	705.5	698.1	690.8	685.4	682.0	678.5	675.1	671.6
40°	670.7	662.5	654.4	648.7	645.2	641.7	638.3	634.8
42.5°	636.3	628.1	619.9	613.9	610.3	606.7	603.1	599.4
45°	583.8	574.4	564.9	558.5	555.0	551.5	548.0	544.6
47.5°	530.9	521.1	511.4	504.5	500.8	496.9	493.1	489.3
50°	495.9	486.2	476.5	469.9	466.3	462.6	458.9	455.3
52.5°	460.9	451.1	441.2	434.5	430.6	426.8	423.1	419.2
55°	409.2	399.2	389.2	382.4	378.7	375.0	371.4	367.7
57.5°	358.8	348.6	338.4	332.0	329.2	326.4	323.7	320.9
60°	325.1	315.1	305.1	298.5	295.5	292.4	289.3	286.2
62.5°	292.0	282.7	273.5	267.6	265.1	262.7	260.2	257.7
65°	244.4	236.2	227.9	222.6	220.3	217.9	215.6	213.4
67.5°	200.8	193.7	186.5	181.7	179.2	176.6	174.1	171.5
70°	171.1	164.8	158.4	154.3	152.4	150.4	148.5	146.6
72.5°	144.6	139.1	133.6	130.0	128.3	126.5	124.7	122.9
75°	106.5	102.1	97.6	94.8	93.7	92.5	91.3	90.2
77.5°	75.3	72.7	70.1	68.6	68.3	68.0	67.7	67.3
80°	57.8	57.2	56.7	56.3	56.1	55.8	55.7	55.5
82.5°	44.9	44.5	44.1	43.8	43.6	43.4	43.2	43.0
85°	26.1	25.8	25.4	25.1	25.1	25.1	25.1	25.1
87.5°	11.7	11.7	11.7	11.7	11.9	12.2	12.2	12.4
90°	11.5	12.1	12.7	12.7	13.4	14.0	13.4	13.4
92.5°	125.2	94.2	75.0	62.2	54.7	51.3	49.1	49.1
95°	472.4	373.6	288.1	226.3	195.1	175.3	163.9	155.6
97.5°	697.9	661.2	598.8	532.3	486.6	448.2	429.0	415.8
100°	768.8	781.5	750.3	703.2	647.7	608.8	589.7	584.6
102.5°	765.2	828.5	837.6	817.9	783.9	755.7	735.6	731.5
105°	714.0	824.3	887.4	913.5	914.8	909.7	900.8	897.0
107.5°	641.2	758.6	847.5	904.3	935.9	950.4	956.8	958.4
110°	597.4	707.6	800.1	870.2	915.4	942.2	953.7	959.4



TEST NUMBER: P332942-930

CATALOG NUMBER: S124RDIP-S795D810U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	565.2	662.8	750.1	820.2	871.6	904.0	920.1	929.4
115°	533.0	611.4	685.9	747.1	797.5	835.8	856.1	861.3
117.5°	517.1	582.0	640.7	692.6	735.6	767.7	788.3	792.3
120°	510.0	569.3	620.3	665.5	701.9	729.9	746.5	753.5
122.5°	503.9	561.1	607.6	647.2	677.9	701.9	715.9	722.9
125°	493.4	548.3	592.2	627.3	652.8	671.3	683.4	687.2
127.5°	480.7	533.0	576.9	610.3	635.9	652.3	662.5	666.3
130°	470.5	520.8	564.2	597.9	624.1	640.1	650.3	654.1
132.5°	459.7	507.0	549.4	583.2	608.8	626.8	636.5	640.3
135°	445.0	486.4	525.3	557.2	582.7	600.5	610.7	614.6
137.5°	431.6	466.7	499.5	528.2	552.0	569.6	578.0	582.7
140°	424.0	453.9	482.6	509.4	531.7	545.7	554.6	559.7
142.5°	416.8	443.2	467.8	491.0	510.8	523.7	531.7	535.2
145°	406.8	428.4	447.5	465.4	481.4	492.1	498.6	501.7
147.5°	398.4	415.6	431.0	445.0	456.7	466.0	470.8	472.0
150°	393.3	408.0	420.8	432.2	442.5	450.7	454.5	455.2
152.5°	387.8	400.3	412.1	421.5	430.2	436.9	439.2	439.9
155°	379.3	389.6	399.1	406.8	413.1	418.2	420.1	420.1
157.5°	370.2	378.8	386.9	393.0	397.8	401.6	402.8	402.8
160°	364.7	371.7	378.7	383.8	387.6	391.4	392.1	392.1
162.5°	359.1	365.0	370.6	375.1	377.9	381.7	382.4	381.9
165°	351.2	355.1	359.5	362.7	365.3	367.9	367.2	366.6
167.5°	343.7	346.7	350.3	352.1	353.4	355.1	355.0	354.4
170°	339.2	341.0	343.6	345.5	346.8	347.4	346.8	346.8
172.5°	335.1	336.5	338.0	339.4	340.1	340.8	340.1	339.2
175°	329.6	330.2	331.5	331.5	331.5	332.8	331.5	330.2
177.5°	326.0	326.5	326.5	327.0	326.5	327.0	326.0	325.0
180°	324.5	324.5	324.5	324.5	324.5	324.5	324.5	324.5

(END OF REPORT)