

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332579

Luminaire Tested: **S124DIP-S575D1205U835-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332579
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S575D1205U835-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6797.0 lumens
Efficiency: N/A
Efficacy: 137.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332579

CATALOG NUMBER: S124DIP-S575D1205U835-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

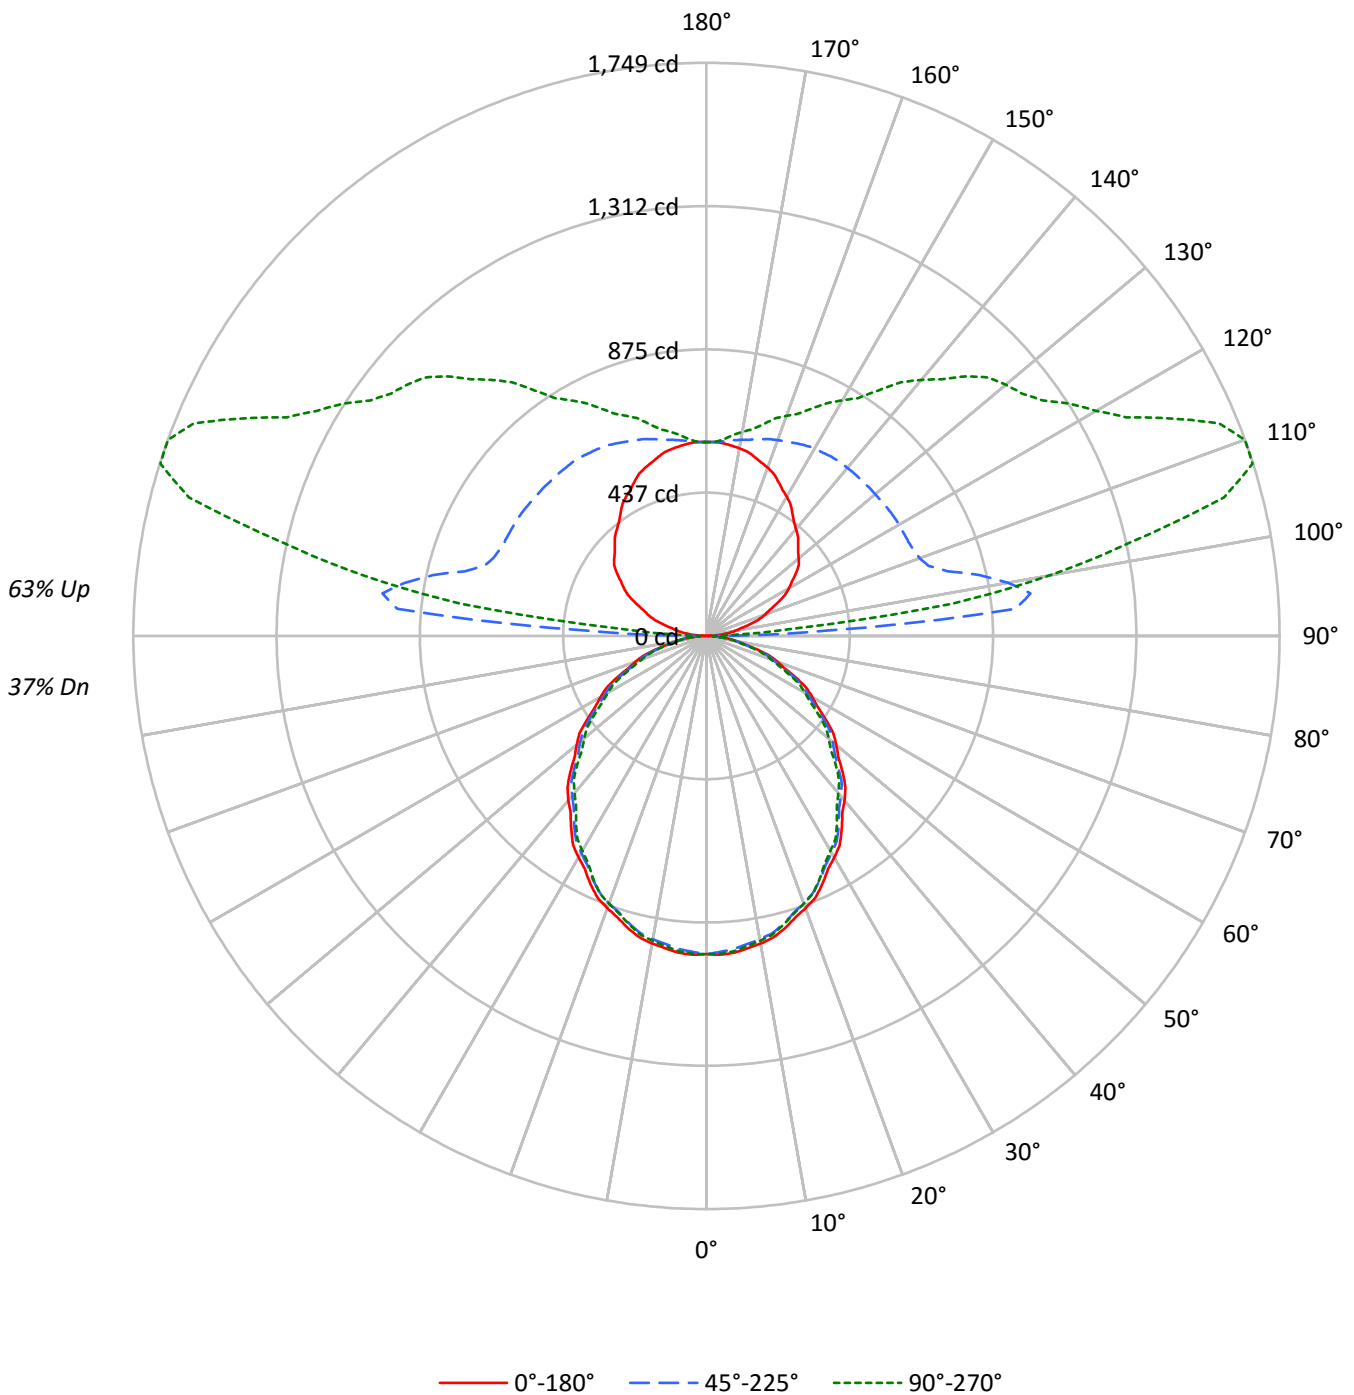



TEST NUMBER: P332579

CATALOG NUMBER: S124DIP-S575D1205U835-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	37
1	95	91	87	83	86	82	79	76	66	64	62	52	51	49	39	38	37	31
2	86	79	73	68	78	72	67	62	58	55	51	46	43	41	34	33	31	26
3	79	69	62	57	71	63	57	52	51	47	43	40	37	35	30	28	26	22
4	72	61	54	48	65	56	49	44	46	41	37	36	32	30	27	25	23	19
5	66	55	47	41	59	50	43	38	41	36	32	32	29	26	24	22	20	16
6	61	49	41	35	55	45	38	33	37	31	27	29	25	22	22	19	17	14
7	56	44	36	31	51	40	33	29	33	28	24	26	23	20	20	17	15	13
8	52	40	32	27	47	37	30	25	30	25	21	24	20	18	18	16	14	11
9	48	36	29	24	44	33	27	22	28	23	19	22	18	16	17	14	12	10
10	45	33	26	21	41	31	24	20	25	20	17	20	17	14	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7840	7840	7840
5°	7864	7769	7826
10°	7814	7706	7744
15°	7720	7596	7616
20°	7594	7460	7467
25°	7451	7306	7285
30°	7276	7124	7058
35°	7094	6933	6841
40°	6905	6716	6593
45°	6707	6503	6379
50°	6489	6314	6118
55°	6253	6068	5871
60°	6018	5792	5616
65°	5752	5530	5307
70°	5455	5179	4978
75°	5000	4757	4635
80°	4449	4268	4161
85°	3890	3751	3677



TEST NUMBER: P332579

CATALOG NUMBER: S124DIP-S575D1205U835-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.5	1.3
10°-20°	257.7	3.8
20°-30°	379.3	5.6
30°-40°	440.9	6.5
40°-50°	440.9	6.5
50°-60°	385.7	5.7
60°-70°	286.4	4.2
70°-80°	162.7	2.4
80°-90°	50.2	0.7
90°-100°	427.2	6.3
100°-110°	889.1	13.1
110°-120°	796.4	11.7
120°-130°	669.9	9.9
130°-140°	558.5	8.2
140°-150°	426.7	6.3
150°-160°	299.9	4.4
160°-170°	176.4	2.6
170°-180°	57.4	0.8
0°-30°	728.4	10.7
0°-40°	1169.3	17.2
0°-60°	1996.0	29.4
0°-90°	2495.4	36.7
90°-120°	2112.7	31.1
90°-150°	3767.8	55.4
90°-180°	4302.0	63.3
0°-180°	6797.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	971	971	971	971	971	
5°	970	967	959	967	966	92
15°	924	920	909	913	911	260
25°	836	831	820	821	818	385
35°	720	714	704	698	694	450
45°	588	582	570	561	559	453
55°	444	442	431	422	417	398
65°	301	297	290	282	278	298
75°	160	156	152	150	149	170
85°	42	42	40	40	40	46
90°	1	9	21	23	24	4
95°	38	121	947	469	284	43
105°	136	197	762	1641	1635	145
115°	239	300	680	1306	1570	237
125°	334	396	676	1111	1253	297
135°	396	472	670	987	1120	306
145°	457	523	667	832	914	287
155°	519	561	648	734	766	239
165°	566	583	622	658	668	160
175°	590	592	596	604	602	56
180°	592	592	592	592	592	



TEST NUMBER: P332579

CATALOG NUMBER: S124DIP-S575D1205U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	971.1	971.1	971.1	971.1	971.1	971.1	971.1	971.1	971.1	971.1	971.1
2.5°	973.6	973.2	972.8	972.4	972.0	971.0	969.5	968.0	966.4	964.9	966.3
5°	970.4	969.7	969.0	968.3	967.6	966.3	964.4	962.5	960.6	958.7	960.6
7.5°	961.3	960.6	960.0	959.3	958.6	957.2	955.1	953.0	950.8	948.7	950.3
10°	953.2	952.6	951.9	951.2	950.5	949.0	946.8	944.5	942.3	940.0	941.4
12.5°	942.7	942.0	941.3	940.6	939.9	938.4	936.0	933.6	931.2	928.8	930.3
15°	923.7	923.0	922.3	921.6	920.9	919.3	916.7	914.1	911.5	908.9	909.9
17.5°	900.8	899.9	899.1	898.2	897.3	895.7	893.2	890.8	888.3	885.9	886.5
20°	884.0	883.1	882.3	881.4	880.5	878.8	876.2	873.6	871.0	868.4	868.9
22.5°	865.9	864.8	863.7	862.5	861.4	859.5	856.9	854.3	851.7	849.1	850.1
25°	836.5	835.3	834.1	832.9	831.7	829.9	827.4	825.0	822.6	820.2	820.4
27.5°	802.9	801.7	800.4	799.2	797.9	796.2	793.9	791.7	789.4	787.2	786.8
30°	780.5	779.1	777.7	776.3	775.0	773.1	770.9	768.6	766.4	764.2	763.5
32.5°	756.8	755.6	754.3	753.1	751.9	750.0	747.7	745.3	742.9	740.5	739.7
35°	719.8	718.6	717.4	716.2	715.0	713.1	710.7	708.3	705.9	703.5	702.2
37.5°	680.7	679.6	678.5	677.4	676.3	674.5	671.9	669.3	666.7	664.1	662.8
40°	655.2	653.8	652.4	651.1	649.7	647.7	645.1	642.5	639.9	637.3	635.6
42.5°	627.8	627.0	626.2	625.3	624.5	622.6	619.8	616.9	614.0	611.2	609.2
45°	587.5	586.3	585.1	583.9	582.7	580.7	577.9	575.1	572.4	569.6	567.7
47.5°	545.3	544.5	543.7	542.8	542.0	540.3	537.8	535.2	532.6	530.1	527.9
50°	516.7	516.0	515.3	514.6	513.9	512.4	510.0	507.5	505.1	502.7	500.3
52.5°	488.7	487.9	487.0	486.2	485.4	483.7	481.1	478.6	476.0	473.4	471.3
55°	444.3	443.8	443.3	442.8	442.3	440.8	438.4	435.9	433.5	431.1	429.0
57.5°	402.0	401.4	400.8	400.2	399.6	398.2	395.8	393.4	391.0	388.6	386.6
60°	372.7	371.9	371.0	370.1	369.3	367.7	365.5	363.2	361.0	358.7	357.2
62.5°	344.1	343.4	342.6	341.9	341.2	339.6	337.3	334.9	332.5	330.1	328.7
65°	301.1	300.3	299.4	298.6	297.7	296.4	294.7	292.9	291.2	289.5	287.7
67.5°	257.9	257.1	256.3	255.5	254.7	253.5	251.8	250.2	248.5	246.8	245.2
70°	231.1	229.9	228.7	227.5	226.3	225.0	223.6	222.2	220.8	219.4	218.1
72.5°	202.5	201.3	200.1	198.8	197.6	196.5	195.4	194.3	193.2	192.0	190.9
75°	160.3	159.4	158.6	157.7	156.8	156.0	155.1	154.2	153.4	152.5	151.8
77.5°	120.0	119.6	119.2	118.9	118.5	117.9	117.1	116.4	115.6	114.9	114.6
80°	95.7	95.2	94.7	94.2	93.6	93.2	92.9	92.5	92.2	91.8	91.5
82.5°	72.1	71.8	71.6	71.3	71.1	70.9	70.9	70.8	70.7	70.7	70.4
85°	42.0	42.0	42.0	42.0	42.0	41.8	41.5	41.2	40.8	40.5	40.5
87.5°	16.4	16.7	17.3	17.4	17.5	17.4	18.6	18.5	18.8	19.1	18.9
90°	1.2	3.5	7.0	8.1	9.3	9.3	16.3	16.3	18.6	20.9	19.8
92.5°	13.2	19.3	30.2	44.4	61.4	85.5	144.6	234.7	322.6	368.6	307.0
95°	38.3	41.8	53.5	68.6	96.4	145.3	246.3	436.9	714.6	947.0	973.8
97.5°	68.8	68.8	78.8	92.7	116.7	157.6	235.4	392.8	668.8	997.5	1223.4
100°	88.3	88.3	96.4	110.4	132.5	169.7	238.2	369.5	606.6	934.2	1231.7
102.5°	106.9	108.8	116.0	129.0	150.1	185.5	247.5	363.0	564.7	855.2	1162.0
105°	136.0	139.4	145.3	159.2	180.1	213.8	269.6	366.0	528.7	762.3	1035.3
107.5°	168.0	170.3	176.2	191.0	211.0	244.3	295.4	383.2	522.2	710.2	933.1
110°	189.4	191.7	197.5	211.5	232.4	263.8	314.9	396.2	524.1	692.6	882.0



TEST NUMBER: P332579

CATALOG NUMBER: S124DIP-S575D1205U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	209.9	212.2	218.9	231.9	252.9	284.2	333.5	410.2	529.6	684.2	853.1
115°	239.4	242.9	251.0	262.6	284.7	316.1	362.5	432.3	540.3	679.8	826.2
117.5°	270.0	273.3	280.5	293.3	314.0	346.5	390.7	454.8	551.7	678.6	814.1
120°	290.5	292.8	301.0	313.7	333.5	366.0	410.2	470.6	560.1	678.6	807.6
122.5°	309.1	311.4	319.6	331.4	353.0	384.6	428.8	485.5	568.5	677.7	800.2
125°	333.5	338.1	345.1	357.9	380.0	412.5	454.3	507.8	581.0	676.3	787.8
127.5°	355.1	358.8	367.2	381.8	404.8	437.6	478.0	527.1	591.0	673.7	771.3
130°	367.2	371.8	381.1	398.6	420.6	454.3	493.9	539.2	598.4	672.8	761.1
132.5°	379.3	383.0	395.1	411.6	435.5	467.4	506.9	551.3	604.9	671.9	751.8
135°	396.2	400.9	412.5	432.3	456.7	486.9	525.2	567.1	614.7	670.5	737.9
137.5°	413.2	417.6	430.4	449.2	474.6	503.4	539.2	578.2	620.5	670.2	725.8
140°	425.3	428.8	441.6	461.3	485.7	513.6	548.5	585.6	625.2	669.3	719.3
142.5°	438.3	441.8	453.6	472.5	495.9	522.9	556.8	591.2	628.9	669.3	713.7
145°	456.7	460.2	471.8	488.0	510.1	535.7	565.9	597.3	631.0	667.0	704.2
147.5°	477.3	478.5	488.7	505.5	523.8	546.8	575.2	602.6	632.1	662.8	695.6
150°	490.4	491.5	500.8	514.8	532.2	554.3	579.8	605.4	632.1	660.0	689.1
152.5°	502.4	502.7	512.0	525.0	540.6	560.8	583.6	607.3	630.3	655.4	681.6
155°	519.4	520.6	527.5	539.2	552.0	569.4	589.1	608.9	627.5	648.4	670.5
157.5°	535.9	535.9	542.4	551.5	562.6	576.4	593.1	608.9	624.5	641.2	659.1
160°	546.1	546.1	550.8	558.9	568.2	581.0	594.9	608.9	621.7	635.6	650.7
162.5°	555.4	554.5	558.2	565.4	573.8	583.8	596.8	608.9	618.9	630.0	643.3
165°	565.9	565.9	568.2	574.0	579.8	586.8	597.3	606.6	613.5	621.7	631.0
167.5°	576.4	575.2	576.4	580.8	584.0	589.4	597.0	603.8	608.0	613.3	619.8
170°	581.0	579.8	581.0	584.5	586.8	590.3	596.1	601.9	604.2	607.7	612.4
172.5°	585.6	584.5	584.7	587.3	588.7	591.2	595.2	600.1	600.5	602.1	605.9
175°	590.3	589.1	589.1	590.3	591.5	591.5	593.8	597.3	596.1	596.1	598.4
177.5°	592.4	591.5	590.5	591.5	591.5	591.5	592.4	594.2	592.4	592.4	593.3
180°	591.5	591.5	591.5	591.5	591.5	591.5	591.5	591.5	591.5	591.5	591.5



TEST NUMBER: P332579

CATALOG NUMBER: S124DIP-S575D1205U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	971.1	971.1	971.1	971.1	971.1	971.1	971.1	971.1
2.5°	967.7	969.1	970.5	971.1	970.9	970.8	970.7	970.5
5°	962.5	964.4	966.3	967.1	966.7	966.4	966.0	965.7
7.5°	951.8	953.3	954.8	955.5	955.3	955.1	954.9	954.6
10°	942.8	944.2	945.6	946.1	945.7	945.4	945.0	944.7
12.5°	931.9	933.4	934.9	935.4	934.9	934.4	934.0	933.5
15°	911.0	912.0	913.0	913.3	912.8	912.3	911.7	911.2
17.5°	887.2	887.8	888.5	888.6	888.3	887.9	887.6	887.3
20°	869.5	870.0	870.5	870.6	870.2	869.9	869.6	869.2
22.5°	851.0	851.9	852.9	853.0	852.4	851.8	851.2	850.5
25°	820.5	820.7	820.9	820.6	819.9	819.2	818.5	817.8
27.5°	786.4	785.9	785.5	784.9	784.0	783.2	782.3	781.4
30°	762.8	762.1	761.4	760.6	759.7	758.9	758.0	757.1
32.5°	738.8	738.0	737.2	736.3	735.5	734.6	733.7	732.9
35°	701.0	699.8	698.6	697.6	696.7	695.8	695.0	694.1
37.5°	661.5	660.1	658.8	657.6	656.5	655.3	654.2	653.0
40°	633.9	632.1	630.4	629.1	628.2	627.4	626.5	625.6
42.5°	607.2	605.1	603.1	601.8	601.3	600.7	600.1	599.5
45°	565.8	563.9	562.0	560.8	560.3	559.8	559.2	558.7
47.5°	525.8	523.6	521.5	519.8	518.5	517.1	515.8	514.5
50°	497.8	495.4	493.0	491.3	490.2	489.2	488.2	487.1
52.5°	469.1	467.0	464.9	463.1	461.8	460.5	459.2	457.9
55°	427.0	424.9	422.8	421.2	420.2	419.2	418.1	417.1
57.5°	384.7	382.7	380.7	379.2	378.2	377.2	376.2	375.2
60°	355.6	354.1	352.5	351.3	350.4	349.6	348.7	347.8
62.5°	327.3	325.8	324.4	323.3	322.4	321.6	320.7	319.8
65°	286.0	284.3	282.6	281.3	280.4	279.5	278.7	277.8
67.5°	243.5	241.9	240.2	239.2	239.0	238.8	238.5	238.3
70°	216.7	215.3	213.9	213.0	212.4	211.9	211.4	210.9
72.5°	189.8	188.7	187.6	186.8	186.3	185.8	185.3	184.7
75°	151.1	150.4	149.8	149.3	149.1	149.0	148.8	148.6
77.5°	114.4	114.2	114.0	113.7	113.2	112.8	112.3	111.9
80°	91.1	90.8	90.4	90.2	90.0	89.8	89.7	89.5
82.5°	70.2	70.0	69.8	69.6	69.5	69.3	69.1	68.9
85°	40.5	40.5	40.5	40.4	40.2	40.0	39.9	39.7
87.5°	19.1	19.4	19.6	19.6	19.8	20.1	19.8	19.8
90°	20.9	22.1	23.2	23.2	24.4	25.6	24.4	24.4
92.5°	228.2	171.7	136.7	113.4	99.7	93.4	89.5	89.5
95°	861.0	680.9	525.2	412.5	355.6	319.6	298.6	283.5
97.5°	1272.2	1205.2	1091.6	970.3	886.8	816.9	782.0	757.9
100°	1401.4	1424.6	1367.7	1281.7	1180.6	1109.7	1074.9	1065.6
102.5°	1394.9	1510.1	1526.6	1490.8	1428.8	1377.4	1340.7	1333.3
105°	1301.4	1502.5	1617.5	1665.1	1667.5	1658.2	1641.9	1634.9
107.5°	1168.7	1382.8	1544.8	1648.4	1705.8	1732.3	1743.9	1747.0
110°	1088.8	1289.8	1458.3	1586.1	1668.6	1717.4	1738.4	1748.8



TEST NUMBER: P332579

CATALOG NUMBER: S124DIP-S575D1205U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1030.2	1208.0	1367.2	1495.0	1588.7	1647.7	1677.0	1694.0
115°	971.4	1114.4	1250.3	1361.9	1453.7	1523.4	1560.6	1569.9
117.5°	942.6	1060.9	1167.8	1262.4	1340.7	1399.3	1436.9	1444.1
120°	929.6	1037.7	1130.6	1213.1	1279.4	1330.5	1360.7	1373.5
122.5°	918.4	1022.8	1107.4	1179.7	1235.7	1279.4	1304.9	1317.7
125°	899.4	999.3	1079.5	1143.4	1189.9	1223.6	1245.7	1252.6
127.5°	876.1	971.7	1051.6	1112.3	1159.0	1189.0	1207.6	1214.5
130°	857.6	949.4	1028.4	1090.0	1137.6	1166.6	1185.2	1192.2
132.5°	838.0	924.3	1001.4	1063.0	1109.7	1142.5	1160.1	1167.1
135°	811.1	886.6	957.5	1015.6	1062.1	1094.6	1113.2	1120.2
137.5°	786.7	850.6	910.3	962.8	1006.3	1038.4	1053.7	1062.1
140°	772.7	827.3	879.6	928.4	969.1	994.7	1010.9	1020.2
142.5°	759.7	807.8	852.7	895.0	931.0	954.7	969.1	975.6
145°	741.4	780.9	815.7	848.3	877.3	897.1	908.7	914.5
147.5°	726.3	757.6	785.5	811.1	832.5	849.4	858.3	860.3
150°	717.0	743.7	766.9	787.8	806.4	821.5	828.5	829.7
152.5°	706.7	729.7	751.1	768.3	784.1	796.4	800.6	801.8
155°	691.4	710.0	727.4	741.4	753.0	762.3	765.8	765.8
157.5°	674.9	690.5	705.1	716.3	725.1	732.1	734.2	734.2
160°	664.7	677.4	690.2	699.5	706.5	713.5	714.6	714.6
162.5°	654.4	665.4	675.4	683.7	688.8	695.8	697.0	696.0
165°	640.3	647.2	655.4	661.2	665.8	670.5	669.3	668.2
167.5°	626.6	631.9	638.4	641.9	644.2	647.2	647.0	646.1
170°	618.2	621.7	626.3	629.8	632.1	633.3	632.1	632.1
172.5°	610.7	613.3	616.1	618.6	620.0	621.2	620.0	618.2
175°	600.8	601.9	604.2	604.2	604.2	606.6	604.2	601.9
177.5°	594.2	595.2	595.2	596.1	595.2	596.1	594.2	592.4
180°	591.5	591.5	591.5	591.5	591.5	591.5	591.5	591.5

(END OF REPORT)