

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332588

Luminaire Tested: **S124DIP-S795D365U835-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332588
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S795D365U835-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4715.8 lumens
Efficiency: N/A
Efficacy: 134.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 35
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332588

CATALOG NUMBER: S124DIP-S795D365U835-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

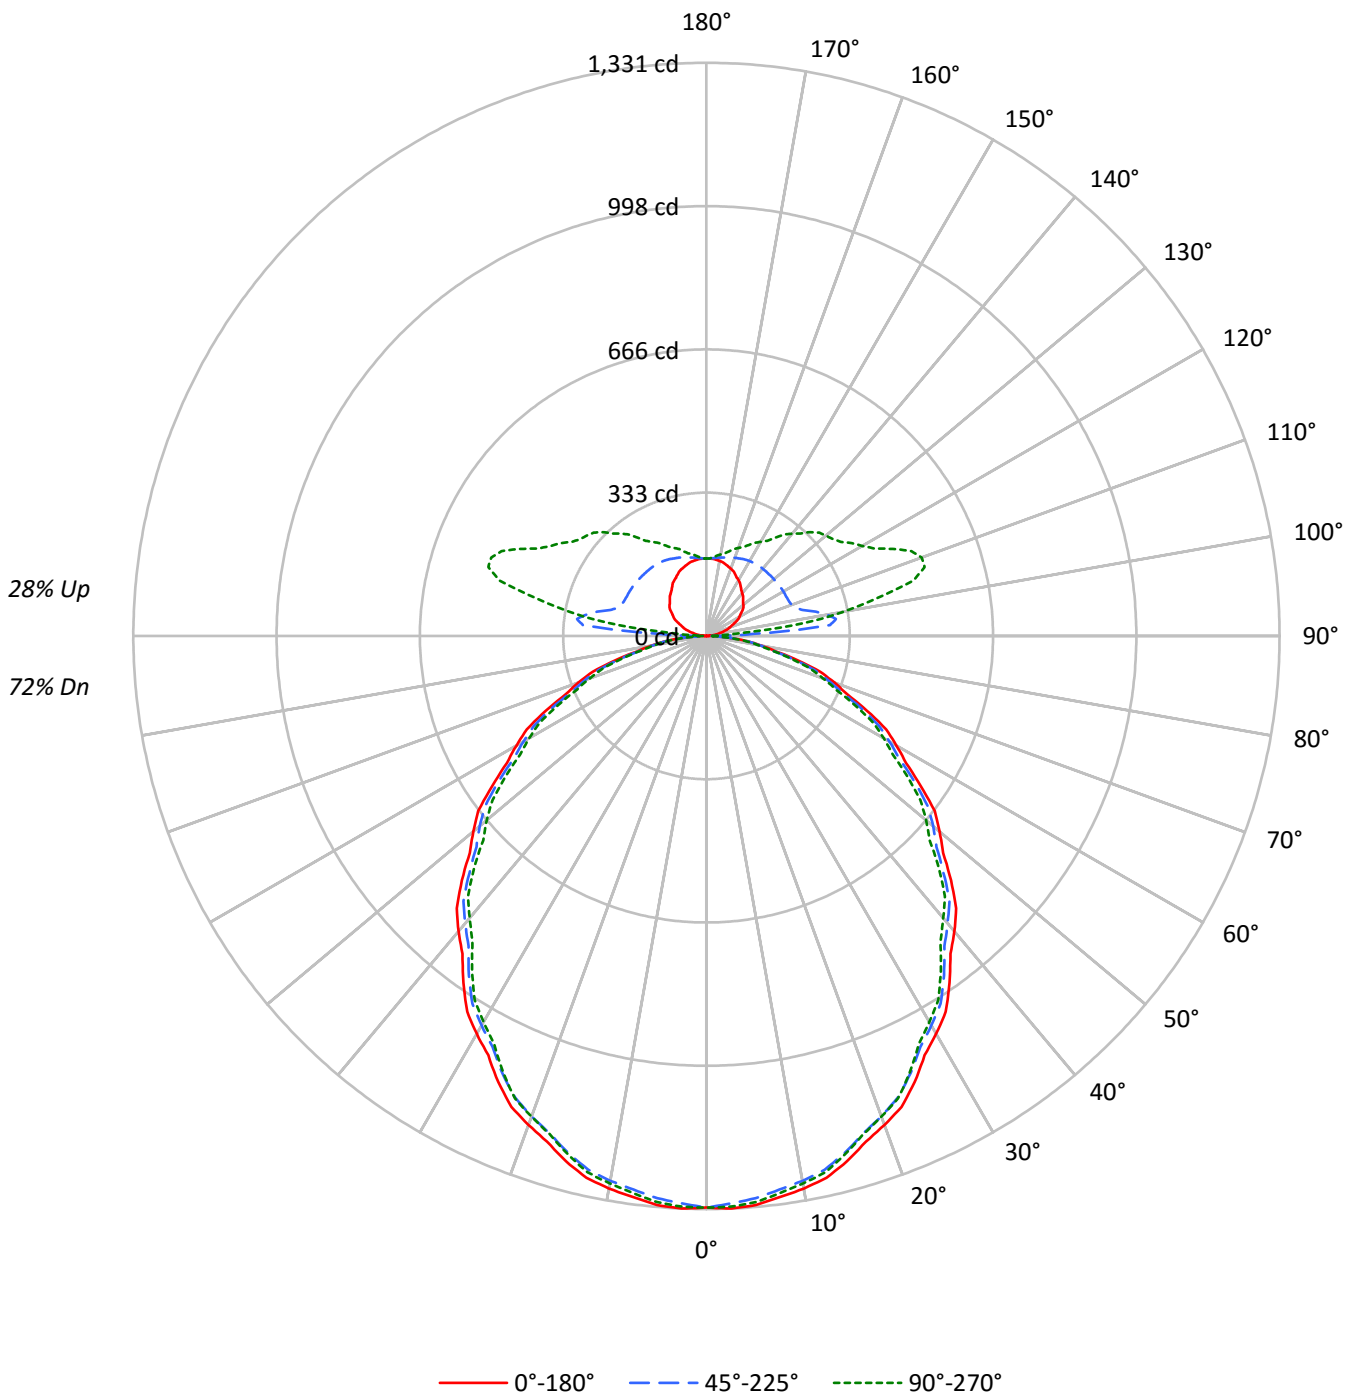



TEST NUMBER: P332588

CATALOG NUMBER: S124DIP-S795D365U835-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	77	77	77	72
1	103	98	94	91	97	93	90	86	84	81	79	75	73	71	68	66	65	61
2	94	86	79	74	88	82	76	71	74	69	65	66	63	60	60	57	54	51
3	85	75	68	62	81	72	65	59	65	59	55	59	54	51	53	49	46	43
4	78	67	59	52	74	64	56	50	58	52	47	52	47	43	47	43	40	37
5	72	60	51	45	68	57	49	44	52	45	41	47	42	38	43	38	35	32
6	66	54	45	39	63	51	44	38	47	40	36	43	37	33	39	34	31	28
7	61	49	40	35	58	47	39	34	43	36	31	39	33	29	35	31	27	25
8	57	44	36	31	54	42	35	30	39	33	28	36	30	26	32	28	25	22
9	53	41	33	28	51	39	32	27	36	30	25	33	28	24	30	25	22	20
10	50	37	30	25	47	36	29	24	33	27	23	30	25	22	28	23	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10717	10717	10717
5°	10749	10619	10697
10°	10681	10533	10585
15°	10552	10384	10410
20°	10381	10198	10207
25°	10185	9986	9958
30°	9945	9737	9648
35°	9697	9477	9351
40°	9438	9180	9013
45°	9169	8889	8719
50°	8871	8629	8363
55°	8549	8294	8024
60°	8226	7918	7677
65°	7862	7559	7253
70°	7456	7081	6805
75°	6834	6503	6338
80°	6081	5835	5686
85°	5317	5122	5020



TEST NUMBER: P332588

CATALOG NUMBER: S124DIP-S795D365U835-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.0	2.7
10°-20°	352.2	7.5
20°-30°	518.4	11.0
30°-40°	602.7	12.8
40°-50°	602.7	12.8
50°-60°	527.2	11.2
60°-70°	391.5	8.3
70°-80°	222.4	4.7
80°-90°	65.2	1.4
90°-100°	129.9	2.8
100°-110°	270.4	5.7
110°-120°	242.2	5.1
120°-130°	203.7	4.3
130°-140°	169.9	3.6
140°-150°	129.8	2.8
150°-160°	91.2	1.9
160°-170°	53.7	1.1
170°-180°	17.5	0.4
0°-30°	995.7	21.1
0°-40°	1598.4	33.9
0°-60°	2728.3	57.9
0°-90°	3407.5	72.3
90°-120°	642.6	13.6
90°-150°	1146.0	24.3
90°-180°	1308.0	27.7
0°-180°	4715.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1328	1328	1328	1328	1328	
5°	1326	1322	1310	1321	1320	126
15°	1263	1258	1242	1248	1246	356
25°	1143	1136	1121	1122	1118	526
35°	984	976	962	954	949	615
45°	803	795	779	767	764	619
55°	607	604	589	577	570	544
65°	412	406	396	385	380	407
75°	219	214	208	204	203	233
85°	57	57	55	55	54	63
90°	0	3	6	7	7	4
95°	12	37	288	143	86	13
105°	41	60	232	499	497	44
115°	73	91	207	397	478	72
125°	101	121	206	338	381	90
135°	120	144	204	300	341	93
145°	139	159	203	253	278	87
155°	158	171	197	223	233	73
165°	172	177	189	200	203	49
175°	180	180	181	184	183	17
180°	180	180	180	180	180	



TEST NUMBER: P332588

CATALOG NUMBER: S124DIP-S795D365U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5
2.5°	1330.9	1330.3	1329.7	1329.2	1328.6	1327.3	1325.2	1323.1	1321.0	1319.0	1320.8
5°	1326.4	1325.5	1324.5	1323.6	1322.6	1320.8	1318.2	1315.6	1313.0	1310.4	1313.0
7.5°	1314.1	1313.1	1312.2	1311.2	1310.3	1308.4	1305.5	1302.6	1299.7	1296.8	1298.9
10°	1303.0	1302.1	1301.1	1300.2	1299.2	1297.2	1294.1	1291.1	1288.0	1284.9	1286.8
12.5°	1288.5	1287.6	1286.6	1285.7	1284.8	1282.6	1279.4	1276.1	1272.9	1269.6	1271.7
15°	1262.6	1261.6	1260.7	1259.7	1258.8	1256.6	1253.0	1249.5	1245.9	1242.4	1243.8
17.5°	1231.3	1230.1	1228.9	1227.8	1226.6	1224.3	1221.0	1217.6	1214.2	1210.9	1211.8
20°	1208.3	1207.1	1206.0	1204.8	1203.6	1201.2	1197.7	1194.1	1190.6	1187.1	1187.8
22.5°	1183.7	1182.1	1180.5	1179.0	1177.4	1174.9	1171.3	1167.8	1164.2	1160.7	1162.0
25°	1143.4	1141.8	1140.1	1138.5	1136.8	1134.3	1131.0	1127.7	1124.4	1121.1	1121.3
27.5°	1097.5	1095.8	1094.1	1092.4	1090.7	1088.3	1085.2	1082.2	1079.1	1076.0	1075.4
30°	1066.9	1065.0	1063.1	1061.2	1059.3	1056.8	1053.7	1050.7	1047.6	1044.5	1043.6
32.5°	1034.5	1032.8	1031.1	1029.4	1027.7	1025.2	1022.0	1018.7	1015.5	1012.2	1011.1
35°	983.9	982.2	980.6	978.9	977.3	974.8	971.5	968.2	964.9	961.6	959.9
37.5°	930.5	929.0	927.5	926.0	924.4	921.9	918.4	914.8	911.3	907.7	905.9
40°	895.6	893.7	891.8	889.9	888.0	885.3	881.8	878.2	874.7	871.1	868.8
42.5°	858.2	857.0	855.9	854.8	853.6	851.1	847.2	843.3	839.3	835.4	832.7
45°	803.1	801.4	799.8	798.1	796.5	793.7	790.0	786.2	782.4	778.6	776.0
47.5°	745.4	744.3	743.2	742.0	740.9	738.6	735.1	731.6	728.1	724.6	721.6
50°	706.3	705.3	704.4	703.4	702.5	700.4	697.1	693.8	690.4	687.1	683.8
52.5°	668.0	666.9	665.7	664.6	663.4	661.1	657.6	654.1	650.6	647.1	644.2
55°	607.4	606.6	605.9	605.2	604.5	602.5	599.2	595.9	592.6	589.3	586.4
57.5°	549.5	548.7	547.9	547.1	546.3	544.2	541.0	537.7	534.5	531.2	528.5
60°	509.5	508.3	507.1	506.0	504.8	502.6	499.6	496.5	493.4	490.4	488.2
62.5°	470.4	469.4	468.4	467.4	466.4	464.3	461.0	457.7	454.5	451.2	449.3
65°	411.6	410.5	409.3	408.1	406.9	405.1	402.8	400.4	398.0	395.7	393.3
67.5°	352.5	351.4	350.3	349.2	348.2	346.5	344.2	341.9	339.7	337.4	335.1
70°	315.9	314.3	312.6	310.9	309.3	307.5	305.6	303.7	301.8	300.0	298.1
72.5°	276.8	275.1	273.5	271.8	270.1	268.6	267.1	265.5	264.0	262.5	261.0
75°	219.1	217.9	216.8	215.6	214.4	213.2	212.0	210.8	209.7	208.5	207.5
77.5°	164.0	163.5	163.0	162.5	161.9	161.2	160.1	159.1	158.0	157.0	156.7
80°	130.8	130.1	129.4	128.7	128.0	127.4	126.9	126.5	126.0	125.5	125.0
82.5°	98.5	98.2	97.8	97.5	97.2	97.0	96.9	96.8	96.7	96.6	96.3
85°	57.4	57.4	57.4	57.4	57.4	57.2	56.7	56.3	55.8	55.3	55.3
87.5°	22.2	22.1	22.2	22.1	21.9	21.7	22.0	21.8	21.7	21.7	21.6
90°	0.4	1.1	2.1	2.5	2.8	2.8	4.9	4.9	5.7	6.4	6.0
92.5°	4.0	5.9	9.2	13.5	18.7	26.0	44.0	71.4	98.1	112.1	93.4
95°	11.7	12.7	16.3	20.9	29.3	44.2	74.9	132.9	217.4	288.0	296.2
97.5°	20.9	20.9	24.0	28.2	35.5	47.9	71.6	119.5	203.4	303.4	372.1
100°	26.9	26.9	29.3	33.6	40.3	51.6	72.5	112.4	184.5	284.2	374.6
102.5°	32.5	33.1	35.3	39.2	45.7	56.4	75.3	110.4	171.8	260.1	353.4
105°	41.4	42.4	44.2	48.4	54.8	65.0	82.0	111.3	160.8	231.8	314.9
107.5°	51.1	51.8	53.6	58.1	64.2	74.3	89.8	116.6	158.8	216.0	283.8
110°	57.6	58.3	60.1	64.3	70.7	80.2	95.8	120.5	159.4	210.6	268.3



TEST NUMBER: P332588

CATALOG NUMBER: S124DIP-S795D365U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	63.8	64.5	66.6	70.5	76.9	86.4	101.4	124.8	161.1	208.1	259.5
115°	72.8	73.9	76.3	79.9	86.6	96.1	110.3	131.5	164.3	206.8	251.3
117.5°	82.1	83.1	85.3	89.2	95.5	105.4	118.8	138.3	167.8	206.4	247.6
120°	88.4	89.1	91.5	95.4	101.4	111.3	124.8	143.1	170.4	206.4	245.6
122.5°	94.0	94.7	97.2	100.8	107.4	117.0	130.4	147.7	172.9	206.1	243.4
125°	101.4	102.8	105.0	108.9	115.6	125.5	138.2	154.4	176.7	205.7	239.6
127.5°	108.0	109.1	111.7	116.1	123.1	133.1	145.4	160.3	179.8	204.9	234.6
130°	111.7	113.1	115.9	121.2	127.9	138.2	150.2	164.0	182.0	204.6	231.5
132.5°	115.4	116.5	120.2	125.2	132.5	142.1	154.2	167.7	184.0	204.4	228.7
135°	120.5	121.9	125.5	131.5	138.9	148.1	159.7	172.5	187.0	203.9	224.4
137.5°	125.7	127.0	130.9	136.6	144.3	153.1	164.0	175.9	188.7	203.9	220.8
140°	129.4	130.4	134.3	140.3	147.7	156.2	166.8	178.1	190.1	203.6	218.8
142.5°	133.3	134.4	138.0	143.7	150.8	159.0	169.4	179.8	191.3	203.6	217.1
145°	138.9	140.0	143.5	148.4	155.2	162.9	172.1	181.7	191.9	202.9	214.2
147.5°	145.2	145.5	148.7	153.7	159.3	166.3	174.9	183.3	192.3	201.6	211.6
150°	149.1	149.5	152.3	156.6	161.9	168.6	176.4	184.1	192.3	200.7	209.6
152.5°	152.8	152.9	155.7	159.7	164.4	170.6	177.5	184.7	191.7	199.3	207.3
155°	158.0	158.3	160.5	164.0	167.9	173.2	179.2	185.2	190.9	197.2	203.9
157.5°	163.0	163.0	165.0	167.7	171.1	175.3	180.4	185.2	189.9	195.0	200.5
160°	166.1	166.1	167.5	170.0	172.8	176.7	181.0	185.2	189.1	193.3	197.9
162.5°	168.9	168.7	169.8	172.0	174.5	177.6	181.5	185.2	188.2	191.6	195.7
165°	172.1	172.1	172.8	174.6	176.4	178.5	181.7	184.5	186.6	189.1	191.9
167.5°	175.3	174.9	175.3	176.6	177.6	179.3	181.6	183.6	184.9	186.5	188.5
170°	176.7	176.4	176.7	177.8	178.5	179.5	181.3	183.1	183.8	184.8	186.3
172.5°	178.1	177.8	177.8	178.6	179.0	179.8	181.0	182.5	182.7	183.1	184.3
175°	179.5	179.2	179.2	179.5	179.9	179.9	180.6	181.7	181.3	181.3	182.0
177.5°	180.2	179.9	179.6	179.9	179.9	179.9	180.2	180.7	180.2	180.2	180.5
180°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9



TEST NUMBER: P332588

CATALOG NUMBER: S124DIP-S795D365U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5
2.5°	1322.7	1324.6	1326.5	1327.4	1327.2	1327.0	1326.8	1326.6
5°	1315.6	1318.2	1320.8	1321.9	1321.4	1321.0	1320.5	1320.0
7.5°	1301.0	1303.1	1305.1	1306.0	1305.8	1305.5	1305.2	1304.9
10°	1288.7	1290.6	1292.5	1293.2	1292.7	1292.2	1291.8	1291.3
12.5°	1273.8	1275.8	1277.9	1278.6	1278.0	1277.3	1276.6	1276.0
15°	1245.2	1246.6	1248.0	1248.4	1247.7	1247.0	1246.3	1245.6
17.5°	1212.7	1213.6	1214.5	1214.7	1214.2	1213.7	1213.3	1212.8
20°	1188.5	1189.2	1189.9	1190.0	1189.5	1189.1	1188.6	1188.1
22.5°	1163.2	1164.5	1165.8	1166.0	1165.1	1164.3	1163.4	1162.6
25°	1121.6	1121.8	1122.1	1121.7	1120.8	1119.8	1118.9	1117.9
27.5°	1074.9	1074.3	1073.7	1072.9	1071.7	1070.5	1069.3	1068.1
30°	1042.6	1041.7	1040.7	1039.7	1038.5	1037.3	1036.1	1035.0
32.5°	1009.9	1008.8	1007.7	1006.5	1005.3	1004.1	1002.9	1001.8
35°	958.3	956.6	954.9	953.5	952.3	951.2	950.0	948.8
37.5°	904.1	902.3	900.6	898.9	897.3	895.8	894.2	892.6
40°	866.4	864.1	861.7	859.9	858.7	857.6	856.4	855.2
42.5°	829.9	827.2	824.4	822.7	821.9	821.1	820.3	819.5
45°	773.4	770.8	768.2	766.6	765.8	765.1	764.4	763.7
47.5°	718.7	715.8	712.8	710.5	708.7	706.9	705.1	703.3
50°	680.5	677.2	673.9	671.5	670.1	668.7	667.3	665.9
52.5°	641.3	638.3	635.4	633.1	631.3	629.5	627.7	625.9
55°	583.6	580.8	577.9	575.8	574.4	573.0	571.5	570.1
57.5°	525.8	523.1	520.4	518.4	517.0	515.6	514.3	512.9
60°	486.1	484.0	481.8	480.2	479.0	477.8	476.6	475.5
62.5°	447.3	445.4	443.5	441.9	440.7	439.5	438.4	437.2
65°	391.0	388.6	386.2	384.5	383.3	382.1	380.9	379.7
67.5°	332.9	330.6	328.3	327.0	326.7	326.4	326.0	325.7
70°	296.2	294.3	292.4	291.1	290.4	289.7	289.0	288.3
72.5°	259.5	258.0	256.5	255.4	254.6	253.9	253.2	252.5
75°	206.6	205.6	204.7	204.1	203.9	203.6	203.4	203.2
77.5°	156.4	156.1	155.9	155.4	154.8	154.2	153.6	153.0
80°	124.6	124.1	123.6	123.3	123.0	122.8	122.6	122.3
82.5°	96.0	95.7	95.4	95.2	95.0	94.7	94.5	94.2
85°	55.3	55.3	55.3	55.2	55.0	54.7	54.5	54.2
87.5°	21.7	21.8	21.8	21.8	21.9	22.0	21.9	21.9
90°	6.4	6.7	7.1	7.1	7.4	7.8	7.4	7.4
92.5°	69.4	52.2	41.6	34.5	30.3	28.4	27.2	27.2
95°	261.9	207.1	159.7	125.5	108.1	97.2	90.8	86.2
97.5°	386.9	366.6	332.0	295.1	269.7	248.5	237.9	230.5
100°	426.2	433.3	416.0	389.8	359.1	337.5	326.9	324.1
102.5°	424.3	459.3	464.3	453.4	434.6	419.0	407.8	405.5
105°	395.8	457.0	492.0	506.5	507.2	504.3	499.4	497.3
107.5°	355.5	420.6	469.8	501.4	518.8	526.9	530.4	531.3
110°	331.2	392.3	443.6	482.4	507.5	522.4	528.7	531.9



TEST NUMBER: P332588

CATALOG NUMBER: S124DIP-S795D365U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	313.3	367.4	415.8	454.7	483.2	501.2	510.1	515.2
115°	295.5	338.9	380.3	414.2	442.1	463.3	474.7	477.5
117.5°	286.7	322.7	355.2	384.0	407.8	425.6	437.0	439.2
120°	282.7	315.6	343.9	369.0	389.1	404.7	413.9	417.8
122.5°	279.3	311.1	336.8	358.8	375.8	389.1	396.9	400.8
125°	273.6	303.9	328.3	347.8	361.9	372.2	378.9	381.0
127.5°	266.5	295.5	319.9	338.3	352.5	361.6	367.3	369.4
130°	260.8	288.8	312.8	331.5	346.0	354.8	360.5	362.6
132.5°	254.9	281.1	304.6	323.3	337.5	347.5	352.9	355.0
135°	246.7	269.7	291.2	308.9	323.0	332.9	338.6	340.7
137.5°	239.3	258.7	276.9	292.8	306.1	315.8	320.5	323.0
140°	235.0	251.6	267.5	282.4	294.8	302.5	307.5	310.3
142.5°	231.1	245.7	259.3	272.2	283.2	290.4	294.8	296.7
145°	225.5	237.5	248.1	258.0	266.8	272.8	276.4	278.1
147.5°	220.9	230.4	238.9	246.7	253.2	258.4	261.0	261.7
150°	218.1	226.2	233.3	239.6	245.3	249.9	252.0	252.3
152.5°	215.0	222.0	228.5	233.7	238.5	242.2	243.5	243.9
155°	210.3	215.9	221.2	225.5	229.0	231.8	232.9	232.9
157.5°	205.3	210.0	214.5	217.9	220.5	222.7	223.3	223.3
160°	202.2	206.0	209.9	212.8	214.9	217.0	217.4	217.4
162.5°	199.1	202.4	205.4	208.0	209.5	211.6	212.0	211.7
165°	194.7	196.9	199.3	201.1	202.5	203.9	203.6	203.2
167.5°	190.6	192.2	194.2	195.2	195.9	196.9	196.8	196.5
170°	188.0	189.1	190.5	191.6	192.3	192.6	192.3	192.3
172.5°	185.8	186.5	187.4	188.2	188.6	188.9	188.6	188.0
175°	182.7	183.1	183.8	183.8	183.8	184.5	183.8	183.1
177.5°	180.7	181.0	181.0	181.3	181.0	181.3	180.7	180.2
180°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9

(END OF REPORT)