

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332976

Luminaire Tested: **S124RDIP-S1020D1035U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332976
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIP-S1020D1035U835-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1035 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8304.3 lumens
Efficiency: N/A
Efficacy: 137.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332976

CATALOG NUMBER: S124RDIP-S1020D1035U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

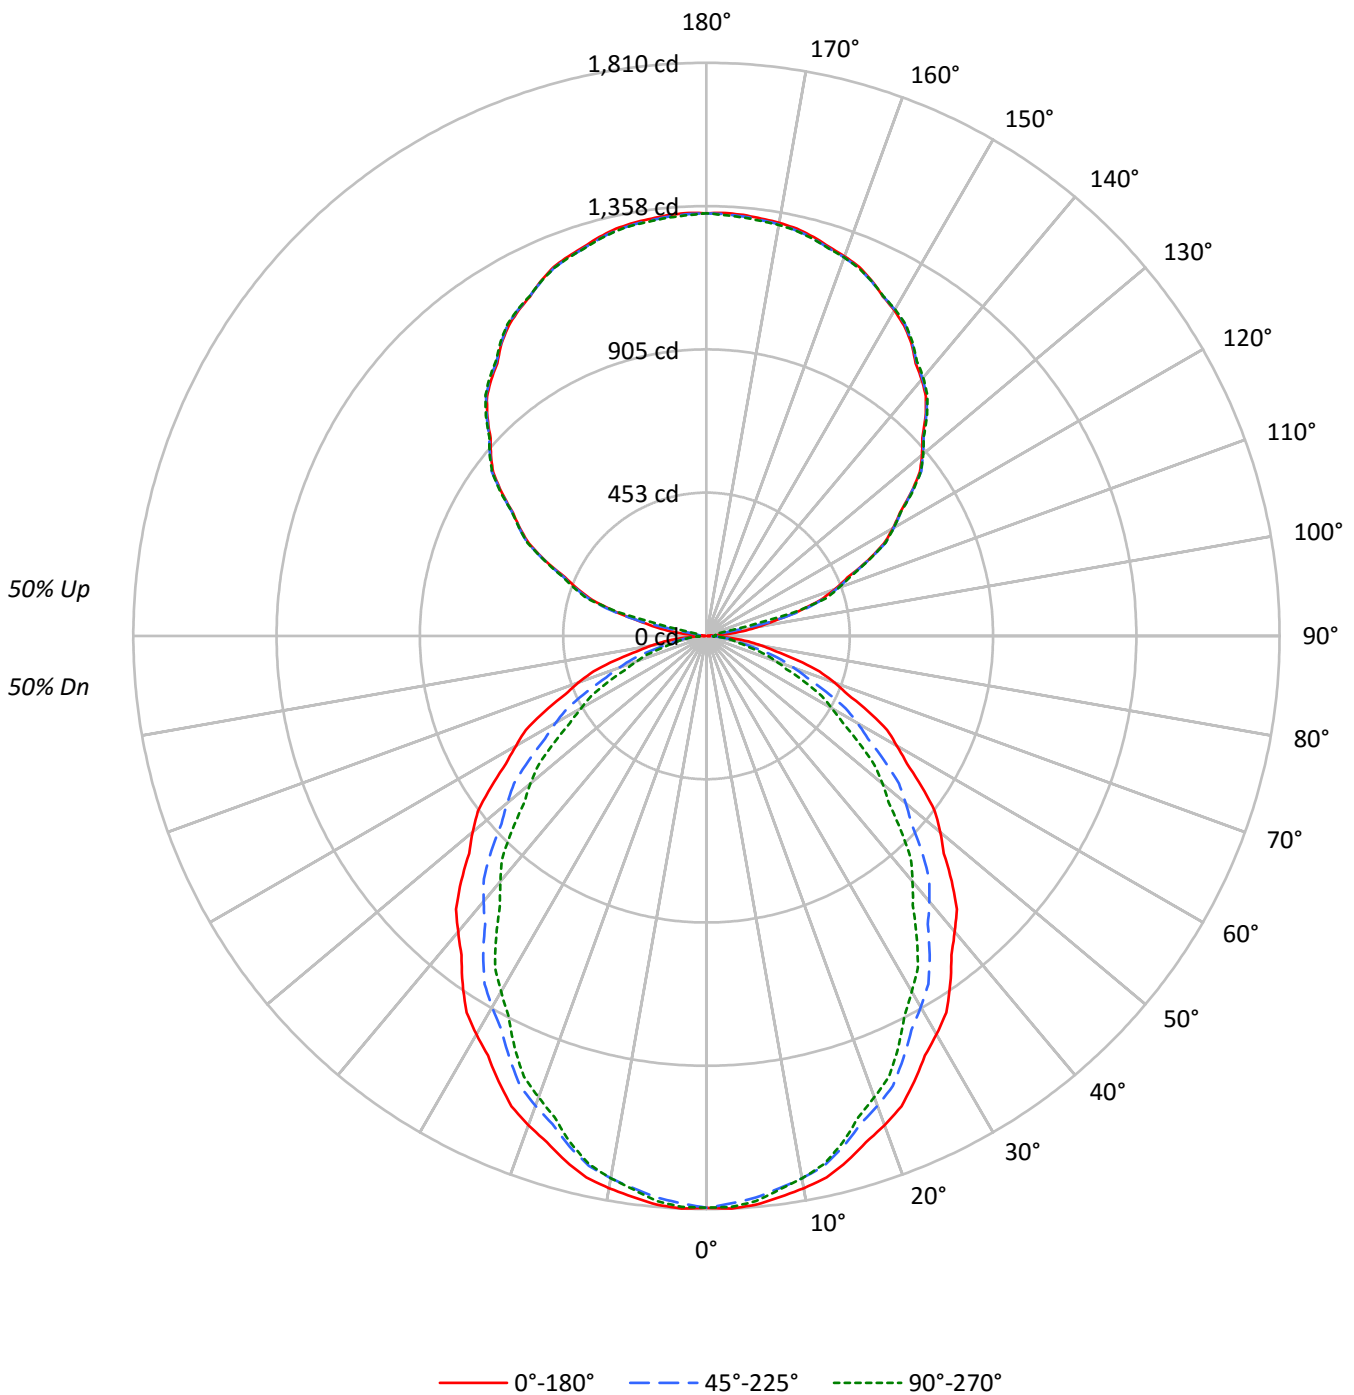



TEST NUMBER: P332976

CATALOG NUMBER: S124RDIP-S1020D1035U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50																				
1	98	94	90	87	90	87	84	81	74	71	69	61	60	58	50	49	48	43																				
2	90	82	76	71	82	76	71	67	65	61	58	54	52	49	45	43	41	36																				
3	82	73	65	60	75	67	61	56	57	53	49	48	45	42	40	37	35	31																				
4	75	64	57	51	69	60	53	48	51	46	42	43	39	36	36	33	30	27																				
5	69	57	49	44	63	53	46	41	46	40	36	39	35	31	32	29	27	23																				
6	64	52	44	38	59	48	41	36	41	36	32	35	31	28	29	26	24	21																				
7	59	47	39	33	54	44	36	31	38	32	28	32	28	24	27	24	21	18																				
8	55	42	35	29	50	40	33	28	34	29	25	29	25	22	25	21	19	17																				
9	51	39	31	26	47	36	30	25	32	26	22	27	23	20	23	20	17	15																				
10	48	36	28	24	44	33	27	23	29	24	20	25	21	18	21	18	16	14																				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14577	14577	14577
5°	14610	14431	14521
10°	14519	14258	14258
15°	14352	13959	13855
20°	14123	13564	13315
25°	13831	13104	12772
30°	13546	12618	12089
35°	13231	12113	11404
40°	12852	11540	10666
45°	12501	10970	9913
50°	12103	10315	9117
55°	11676	9633	8251
60°	11207	8885	7367
65°	10776	7950	6497
70°	10150	6918	5516
75°	9357	5736	4485
80°	8164	4370	4114
85°	6919	3974	3714



TEST NUMBER: P332976

CATALOG NUMBER: S124RDIP-S1020D1035U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	169.6	2.0
10°-20°	473.0	5.7
20°-30°	683.0	8.2
30°-40°	774.2	9.3
40°-50°	747.6	9.0
50°-60°	621.7	7.5
60°-70°	429.3	5.2
70°-80°	217.6	2.6
80°-90°	59.7	0.7
90°-100°	45.7	0.5
100°-110°	291.1	3.5
110°-120°	556.8	6.7
120°-130°	706.8	8.5
130°-140°	756.2	9.1
140°-150°	707.2	8.5
150°-160°	570.3	6.9
160°-170°	367.8	4.4
170°-180°	126.8	1.5
0°-30°	1325.6	16.0
0°-40°	2099.9	25.3
0°-60°	3469.2	41.8
0°-90°	4175.7	50.3
90°-120°	893.5	10.8
90°-150°	3063.7	36.9
90°-180°	4129.0	49.7
0°-180°	8304.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1806	1806	1806	1806	1806	
5°	1803	1797	1781	1794	1792	171
15°	1717	1704	1670	1667	1658	484
25°	1553	1526	1471	1448	1434	715
35°	1342	1297	1229	1183	1157	839
45°	1095	1042	961	896	868	844
55°	830	772	684	615	586	742
65°	564	503	416	359	340	557
75°	300	248	184	153	144	317
85°	75	48	43	40	40	84
90°	3	14	22	28	30	6
95°	55	23	22	28	29	71
105°	300	306	312	318	284	314
115°	561	564	563	565	565	552
125°	789	792	791	794	795	704
135°	978	978	981	983	985	753
145°	1128	1131	1131	1132	1134	705
155°	1237	1238	1235	1238	1236	570
165°	1305	1300	1300	1307	1299	369
175°	1335	1329	1330	1338	1327	127
180°	1335	1335	1335	1335	1335	



TEST NUMBER: P332976

CATALOG NUMBER: S124RDIP-S1020D1035U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1805.7	1805.7	1805.7	1805.7	1805.7	1805.7	1805.7	1805.7	1805.7	1805.7	1805.7
2.5°	1810.1	1809.1	1808.1	1807.2	1806.2	1804.3	1801.6	1798.9	1796.2	1793.5	1796.2
5°	1802.9	1801.7	1800.5	1799.2	1798.0	1795.5	1791.9	1788.2	1784.5	1780.8	1783.9
7.5°	1786.6	1785.3	1784.0	1782.7	1781.4	1778.4	1773.6	1768.8	1764.0	1759.2	1761.2
10°	1771.1	1769.6	1768.0	1766.5	1765.0	1761.4	1755.9	1750.4	1744.8	1739.3	1740.5
12.5°	1751.2	1749.4	1747.6	1745.9	1744.1	1739.9	1733.4	1726.9	1720.4	1713.9	1714.6
15°	1717.2	1714.4	1711.7	1708.9	1706.1	1700.9	1693.2	1685.5	1677.9	1670.2	1669.6
17.5°	1676.0	1672.0	1668.0	1664.0	1660.0	1653.4	1644.2	1635.0	1625.8	1616.5	1614.8
20°	1643.9	1639.9	1635.9	1631.9	1627.9	1620.7	1610.3	1599.8	1589.4	1578.9	1576.5
22.5°	1608.5	1604.0	1599.5	1595.1	1590.6	1582.7	1571.6	1560.4	1549.2	1538.0	1534.3
25°	1552.7	1547.1	1541.6	1536.1	1530.5	1521.5	1508.9	1496.3	1483.7	1471.1	1465.9
27.5°	1494.0	1487.1	1480.2	1473.2	1466.3	1456.1	1442.6	1429.2	1415.7	1402.2	1395.8
30°	1453.1	1445.4	1437.8	1430.1	1422.4	1411.3	1396.9	1382.4	1368.0	1353.6	1345.9
32.5°	1410.0	1401.3	1392.6	1384.0	1375.3	1363.5	1348.6	1333.7	1318.7	1303.8	1294.9
35°	1342.5	1332.7	1322.8	1313.0	1303.2	1290.6	1275.2	1259.9	1244.5	1229.1	1218.7
37.5°	1270.3	1260.2	1250.1	1239.9	1229.8	1216.2	1199.2	1182.2	1165.1	1148.1	1136.4
40°	1219.5	1209.3	1199.2	1189.0	1178.9	1165.1	1147.6	1130.0	1112.5	1095.0	1082.1
42.5°	1170.8	1160.2	1149.5	1138.9	1128.3	1113.8	1095.6	1077.3	1059.1	1040.8	1027.7
45°	1095.0	1083.7	1072.3	1060.9	1049.5	1034.6	1016.2	997.8	979.3	960.9	945.9
47.5°	1016.8	1005.0	993.3	981.6	969.8	954.4	935.2	916.0	896.8	877.7	862.1
50°	963.7	951.7	939.7	927.7	915.7	899.9	880.3	860.6	840.9	821.3	805.9
52.5°	909.5	897.7	886.0	874.3	862.5	846.6	826.4	806.3	786.1	766.0	750.4
55°	829.6	817.3	805.0	792.7	780.4	764.3	744.3	724.3	704.4	684.4	668.4
57.5°	750.5	737.7	724.9	712.1	699.4	683.1	663.5	643.8	624.1	604.5	588.3
60°	694.1	681.8	669.5	657.2	644.9	628.9	609.3	589.6	569.9	550.3	534.3
62.5°	643.2	630.4	617.6	604.8	592.1	575.6	555.4	535.3	515.1	495.0	480.2
65°	564.1	550.9	537.7	524.5	511.3	494.8	475.2	455.5	435.8	416.2	403.0
67.5°	482.0	469.3	456.7	444.0	431.3	415.9	397.6	379.4	361.1	342.9	331.5
70°	430.0	417.1	404.2	391.3	378.4	363.2	345.7	328.1	310.6	293.1	283.0
72.5°	374.7	363.0	351.3	339.7	328.0	313.9	297.4	280.8	264.3	247.8	239.1
75°	300.0	288.7	277.3	265.9	254.6	241.6	227.2	212.8	198.3	183.9	176.8
77.5°	224.3	214.6	205.0	195.3	185.7	175.0	163.3	151.7	140.0	128.3	124.2
80°	175.6	166.7	157.8	148.9	140.0	130.9	121.7	112.5	103.2	94.0	93.1
82.5°	133.6	125.4	117.2	109.0	100.9	94.1	88.9	83.6	78.3	73.0	72.3
85°	74.7	68.5	62.4	56.2	50.1	46.5	45.6	44.7	43.8	42.9	42.2
87.5°	26.0	24.6	23.1	21.6	20.1	19.4	19.6	19.7	19.8	19.9	19.9
90°	3.0	5.4	7.9	10.3	12.8	14.9	16.6	18.4	20.2	22.0	23.3
92.5°	12.6	12.7	12.8	13.0	13.1	14.1	15.8	17.6	19.4	21.2	22.5
95°	54.9	47.4	39.8	32.3	24.7	21.1	21.3	21.5	21.7	22.0	23.3
97.5°	116.6	121.3	126.0	130.7	135.4	125.4	100.6	75.9	51.1	26.4	26.5
100°	163.7	167.7	171.7	175.7	179.7	166.4	135.8	105.2	74.5	43.9	40.2
102.5°	216.4	219.4	222.3	225.2	228.1	227.6	223.6	219.6	215.6	211.6	170.9
105°	300.5	301.8	303.1	304.5	305.8	307.0	308.1	309.2	310.4	311.5	313.5
107.5°	378.5	379.2	379.9	380.5	381.2	382.3	383.8	385.3	386.8	388.3	389.3
110°	431.3	431.9	432.6	433.2	433.9	434.9	436.2	437.6	438.9	440.2	440.7



TEST NUMBER: P332976

CATALOG NUMBER: S124RDIP-S1020D1035U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	482.4	483.6	484.8	486.0	487.2	488.1	488.7	489.3	489.9	490.5	490.5
115°	561.0	561.7	562.4	563.0	563.7	563.9	563.7	563.5	563.2	563.0	563.5
117.5°	631.9	632.8	633.7	634.6	635.5	636.1	636.6	637.1	637.6	638.1	638.0
120°	679.8	680.7	681.6	682.5	683.4	683.7	683.5	683.3	683.0	682.8	683.3
122.5°	724.5	725.1	725.6	726.1	726.7	727.1	727.4	727.7	728.0	728.3	728.6
125°	788.6	789.5	790.4	791.3	792.2	792.4	792.0	791.5	791.1	790.6	791.3
127.5°	849.3	849.5	849.8	850.0	850.2	850.8	851.9	852.9	853.9	854.9	854.8
130°	888.5	888.7	888.9	889.1	889.3	889.8	890.5	891.1	891.8	892.5	892.7
132.5°	924.4	924.8	925.2	925.6	926.0	926.6	927.5	928.3	929.1	930.0	930.2
135°	978.3	978.1	977.9	977.6	977.4	977.7	978.6	979.5	980.4	981.3	981.7
137.5°	1026.0	1026.1	1026.2	1026.3	1026.4	1026.9	1027.9	1028.9	1029.8	1030.8	1031.3
140°	1057.2	1057.6	1058.1	1058.5	1058.9	1059.4	1059.8	1060.3	1060.7	1061.2	1061.8
142.5°	1085.1	1085.9	1086.7	1087.5	1088.3	1088.8	1089.1	1089.4	1089.6	1089.9	1090.4
145°	1128.0	1128.7	1129.4	1130.0	1130.7	1131.0	1131.0	1131.0	1131.0	1131.0	1131.3
147.5°	1162.2	1163.4	1164.7	1165.9	1167.2	1167.7	1167.4	1167.2	1167.0	1166.8	1167.0
150°	1186.9	1187.8	1188.7	1189.6	1190.5	1190.8	1190.6	1190.4	1190.2	1189.9	1189.9
152.5°	1207.7	1208.4	1209.1	1209.8	1210.5	1210.7	1210.3	1209.9	1209.5	1209.1	1209.5
155°	1236.9	1237.1	1237.3	1237.5	1237.7	1237.5	1236.9	1236.2	1235.5	1234.9	1235.7
157.5°	1261.4	1261.3	1261.1	1261.0	1260.9	1260.4	1259.7	1258.9	1258.2	1257.4	1258.6
160°	1275.8	1275.1	1274.5	1273.8	1273.1	1272.7	1272.5	1272.2	1272.0	1271.8	1273.1
162.5°	1288.6	1287.7	1286.9	1286.0	1285.2	1284.7	1284.4	1284.2	1284.0	1283.8	1285.1
165°	1304.7	1303.6	1302.5	1301.4	1300.3	1299.7	1299.7	1299.7	1299.7	1299.7	1301.5
167.5°	1317.5	1316.4	1315.2	1314.1	1312.9	1312.3	1312.1	1312.0	1311.9	1311.7	1313.7
170°	1324.7	1323.4	1322.0	1320.7	1319.4	1318.8	1319.0	1319.3	1319.5	1319.7	1321.5
172.5°	1329.5	1328.2	1326.8	1325.5	1324.2	1323.6	1323.8	1324.1	1324.3	1324.5	1326.3
175°	1334.7	1333.4	1332.0	1330.7	1329.4	1328.8	1329.0	1329.3	1329.5	1329.7	1331.7
177.5°	1337.1	1335.8	1334.6	1333.4	1332.1	1331.7	1332.0	1332.4	1332.7	1333.1	1334.5
180°	1334.7	1334.7	1334.7	1334.7	1334.7	1334.7	1334.7	1334.7	1334.7	1334.7	1334.7



TEST NUMBER: P332976

CATALOG NUMBER: S124RDIP-S1020D1035U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1805.7	1805.7	1805.7	1805.7	1805.7	1805.7	1805.7	1805.7
2.5°	1798.9	1801.6	1804.3	1805.6	1805.3	1805.1	1804.8	1804.6
5°	1786.9	1790.0	1793.1	1794.3	1793.7	1793.1	1792.5	1791.9
7.5°	1763.2	1765.1	1767.1	1767.6	1766.6	1765.6	1764.6	1763.6
10°	1741.8	1743.0	1744.2	1744.2	1743.0	1741.8	1740.5	1739.3
12.5°	1715.3	1716.1	1716.8	1716.3	1714.6	1712.9	1711.2	1709.5
15°	1669.0	1668.3	1667.7	1666.3	1664.2	1662.0	1659.9	1657.7
17.5°	1613.1	1611.4	1609.7	1607.2	1603.9	1600.7	1597.4	1594.1
20°	1574.0	1571.6	1569.1	1565.9	1561.9	1557.9	1553.9	1549.9
22.5°	1530.6	1526.9	1523.3	1519.8	1516.5	1513.3	1510.0	1506.8
25°	1460.6	1455.4	1450.2	1446.0	1443.0	1439.9	1436.8	1433.8
27.5°	1389.3	1382.9	1376.4	1371.0	1366.6	1362.1	1357.7	1353.3
30°	1338.2	1330.5	1322.8	1316.5	1311.6	1306.7	1301.8	1296.9
32.5°	1286.0	1277.1	1268.2	1261.4	1256.7	1252.0	1247.4	1242.7
35°	1208.2	1197.8	1187.3	1179.4	1173.8	1168.3	1162.8	1157.2
37.5°	1124.8	1113.1	1101.4	1092.8	1087.3	1081.7	1076.2	1070.7
40°	1069.2	1056.3	1043.4	1034.2	1028.7	1023.1	1017.6	1012.1
42.5°	1014.5	1001.4	988.2	978.8	973.0	967.2	961.4	955.7
45°	930.8	915.7	900.7	890.4	884.9	879.3	873.8	868.3
47.5°	846.5	830.9	815.2	804.4	798.3	792.2	786.1	780.1
50°	790.5	775.2	759.8	749.2	743.4	737.5	731.7	725.9
52.5°	734.7	719.1	703.5	692.7	686.6	680.5	674.4	668.4
55°	652.4	636.5	620.5	609.6	603.7	597.9	592.1	586.2
57.5°	572.0	555.8	539.6	529.3	524.8	520.4	516.0	511.6
60°	518.3	502.3	486.4	475.9	471.0	466.1	461.2	456.3
62.5°	465.5	450.7	436.0	426.6	422.7	418.8	414.8	410.9
65°	389.7	376.5	363.3	354.9	351.2	347.5	343.8	340.1
67.5°	320.1	308.8	297.4	289.7	285.6	281.6	277.5	273.5
70°	272.8	262.7	252.6	245.9	242.9	239.8	236.7	233.7
72.5°	230.4	221.8	213.1	207.4	204.5	201.7	198.9	196.1
75°	169.8	162.7	155.6	151.2	149.3	147.5	145.6	143.8
77.5°	120.1	116.0	111.8	109.5	108.9	108.4	107.8	107.3
80°	92.2	91.3	90.3	89.7	89.4	89.1	88.8	88.5
82.5°	71.6	71.0	70.3	69.8	69.5	69.2	68.9	68.6
85°	41.6	41.0	40.4	40.1	40.1	40.1	40.1	40.1
87.5°	19.9	19.9	20.0	20.1	20.5	20.8	21.1	21.5
90°	24.6	26.0	27.3	28.2	28.6	29.1	29.5	29.9
92.5°	23.8	25.2	26.5	27.2	27.3	27.4	27.5	27.6
95°	24.6	26.0	27.3	28.1	28.3	28.5	28.7	28.9
97.5°	26.6	26.8	26.9	27.1	27.3	27.5	27.7	28.0
100°	36.4	32.6	28.8	27.1	27.3	27.5	27.7	28.0
102.5°	130.3	89.6	48.9	28.6	28.6	28.7	28.7	28.8
105°	315.5	317.4	319.4	316.5	308.5	300.5	292.5	284.5
107.5°	390.3	391.3	392.2	393.1	394.0	394.8	395.7	396.5
110°	441.1	441.6	442.0	442.6	443.2	443.9	444.6	445.2



TEST NUMBER: P332976

CATALOG NUMBER: S124RDIP-S1020D1035U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	490.4	490.3	490.2	490.6	491.4	492.3	493.1	493.9
115°	563.9	564.4	564.8	565.0	565.0	565.0	565.0	565.0
117.5°	637.9	637.8	637.7	637.7	637.6	637.5	637.4	637.3
120°	683.7	684.1	684.6	684.6	684.1	683.7	683.3	682.8
122.5°	728.9	729.1	729.4	729.3	728.9	728.4	728.0	727.5
125°	792.0	792.6	793.3	793.7	794.0	794.2	794.4	794.6
127.5°	854.7	854.5	854.4	854.2	854.1	853.9	853.7	853.5
130°	892.9	893.1	893.3	893.5	893.5	893.5	893.5	893.5
132.5°	930.4	930.7	930.9	930.9	930.7	930.5	930.4	930.2
135°	982.2	982.6	983.1	983.5	984.0	984.4	984.8	985.3
137.5°	1031.8	1032.3	1032.8	1032.9	1032.8	1032.7	1032.5	1032.4
140°	1062.5	1063.2	1063.8	1064.3	1064.5	1064.7	1064.9	1065.2
142.5°	1090.9	1091.4	1091.9	1092.1	1092.2	1092.2	1092.3	1092.3
145°	1131.5	1131.7	1131.9	1132.3	1132.7	1133.1	1133.6	1134.0
147.5°	1167.1	1167.3	1167.5	1167.7	1167.9	1168.1	1168.4	1168.6
150°	1189.9	1189.9	1189.9	1190.0	1190.3	1190.5	1190.7	1190.9
152.5°	1209.8	1210.2	1210.5	1210.6	1210.5	1210.4	1210.2	1210.1
155°	1236.6	1237.5	1238.4	1238.5	1237.9	1237.2	1236.5	1235.9
157.5°	1259.7	1260.9	1262.0	1262.0	1260.9	1259.7	1258.6	1257.4
160°	1274.5	1275.8	1277.1	1277.1	1275.8	1274.5	1273.1	1271.8
162.5°	1286.4	1287.8	1289.1	1289.0	1287.5	1286.0	1284.5	1283.0
165°	1303.3	1305.1	1306.8	1306.7	1304.7	1302.7	1300.7	1298.7
167.5°	1315.6	1317.6	1319.5	1319.4	1317.2	1315.0	1312.7	1310.5
170°	1323.3	1325.0	1326.8	1326.6	1324.4	1322.2	1319.9	1317.7
172.5°	1328.1	1329.8	1331.6	1331.3	1328.9	1326.5	1324.1	1321.7
175°	1333.7	1335.7	1337.7	1337.3	1334.7	1332.0	1329.4	1326.7
177.5°	1335.9	1337.3	1338.8	1338.4	1336.3	1334.2	1332.0	1329.9
180°	1334.7	1334.7	1334.7	1334.7	1334.7	1334.7	1334.7	1334.7

(END OF REPORT)