

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333008

Luminaire Tested: **S124RDIP-S1195D1035U835-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333008  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124RDIP-S1195D1035U835-4F0-1E-UDD-F4  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1035 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8516.7 lumens  
Efficiency: N/A  
Efficacy: 127.5 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 66.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333008

CATALOG NUMBER: S124RDIP-S1195D1035U835-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

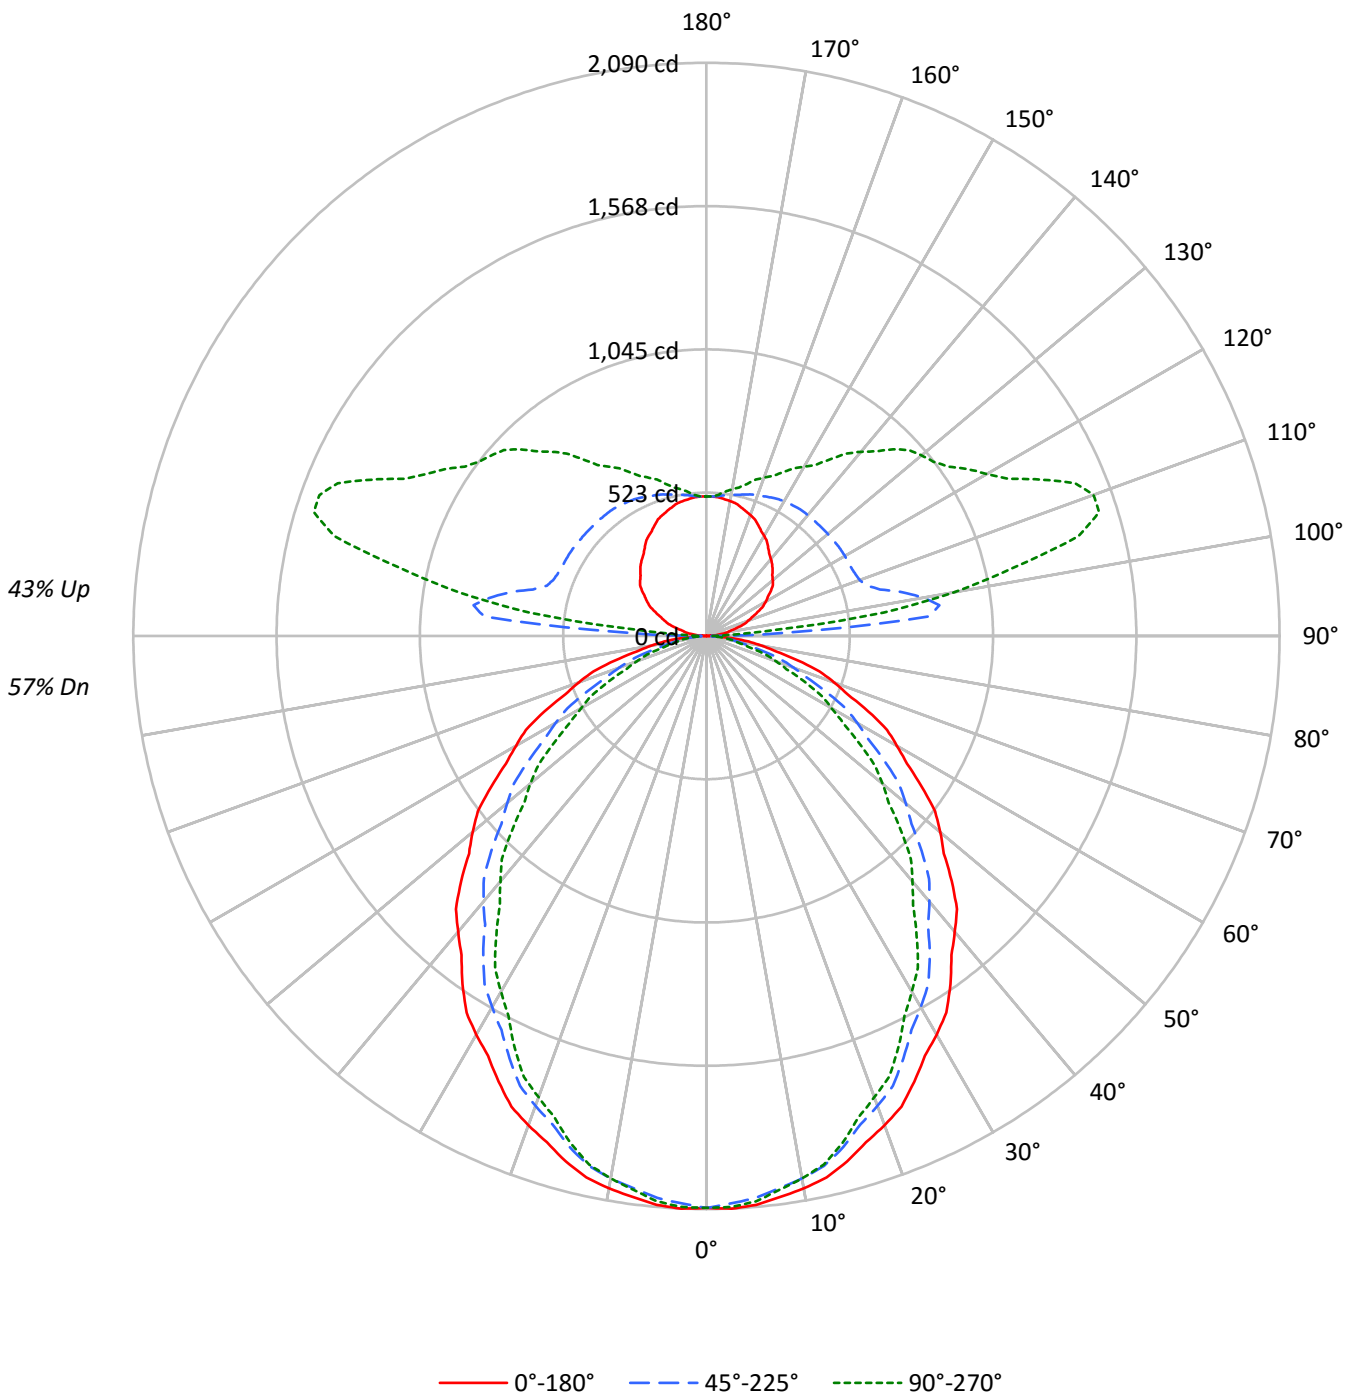



TEST NUMBER: P333008

CATALOG NUMBER: S124RDIP-S1195D1035U835-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	57																				
1	100	95	92	88	93	89	86	83	77	74	72	66	64	62	55	54	53	48																				
2	91	84	78	72	84	78	73	68	68	64	60	58	55	53	49	47	45	41																				
3	83	74	66	61	77	69	63	57	60	55	51	52	48	45	44	41	39	35																				
4	76	65	58	52	71	61	54	49	53	48	44	46	42	39	39	36	34	30																				
5	70	58	50	44	65	55	48	42	48	42	38	42	37	34	36	32	30	26																				
6	65	53	45	39	60	49	42	37	43	38	33	38	33	30	32	29	26	23																				
7	60	48	40	34	56	45	38	33	39	34	29	34	30	26	30	26	23	21																				
8	56	43	36	30	52	41	34	29	36	30	26	32	27	24	27	24	21	19																				
9	52	40	32	27	48	37	31	26	33	27	24	29	25	21	25	22	19	17																				
10	49	36	29	24	45	34	28	23	31	25	21	27	22	19	23	20	17	15																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	16835	16835	16835
5°	16874	16667	16771
10°	16768	16467	16467
15°	16575	16121	16002
20°	16311	15667	15378
25°	15973	15134	14750
30°	15645	14573	13962
35°	15281	13991	13172
40°	14842	13328	12318
45°	14439	12670	11449
50°	13978	11912	10528
55°	13485	11125	9529
60°	12943	10261	8507
65°	12445	9181	7503
70°	11722	7990	6371
75°	10808	6625	5181
80°	9428	5049	4751
85°	7984	4585	4289



TEST NUMBER: P333008

CATALOG NUMBER: S124RDIP-S1195D1035U835-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	195.9	2.3
10°-20°	546.3	6.4
20°-30°	788.8	9.3
30°-40°	894.2	10.5
40°-50°	863.5	10.1
50°-60°	718.0	8.4
60°-70°	495.8	5.8
70°-80°	251.3	3.0
80°-90°	67.3	0.8
90°-100°	367.0	4.3
100°-110°	763.9	9.0
110°-120°	684.2	8.0
120°-130°	575.5	6.8
130°-140°	479.9	5.6
140°-150°	366.6	4.3
150°-160°	257.7	3.0
160°-170°	151.6	1.8
170°-180°	49.3	0.6
0°-30°	1531.0	18.0
0°-40°	2425.2	28.5
0°-60°	4006.7	47.0
0°-90°	4821.0	56.6
90°-120°	1815.1	21.3
90°-150°	3237.1	38.0
90°-180°	3696.0	43.4
0°-180°	8516.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2085	2085	2085	2085	2085	
5°	2082	2075	2057	2072	2070	197
15°	1983	1967	1929	1925	1915	559
25°	1793	1762	1699	1672	1656	826
35°	1550	1498	1420	1367	1336	968
45°	1265	1204	1110	1034	1003	975
55°	958	892	790	710	677	857
65°	652	581	481	415	393	643
75°	346	287	212	177	166	366
85°	86	56	50	46	46	97
90°	1	8	18	20	21	6
95°	33	104	814	403	244	37
105°	117	169	655	1410	1405	125
115°	206	258	584	1122	1349	204
125°	286	340	581	955	1076	255
135°	340	405	576	848	962	263
145°	392	449	573	715	786	246
155°	446	482	557	631	658	206
165°	486	501	534	566	574	137
175°	507	508	512	519	517	48
180°	508	508	508	508	508	



TEST NUMBER: P333008

CATALOG NUMBER: S124RDIP-S1195D1035U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2085.4	2085.4	2085.4	2085.4	2085.4	2085.4	2085.4	2085.4	2085.4	2085.4	2085.4
2.5°	2090.5	2089.4	2088.3	2087.1	2086.0	2083.9	2080.8	2077.6	2074.5	2071.4	2074.5
5°	2082.2	2080.8	2079.4	2078.0	2076.6	2073.7	2069.5	2065.2	2061.0	2056.7	2060.2
7.5°	2063.4	2061.9	2060.4	2058.9	2057.4	2053.9	2048.4	2042.9	2037.3	2031.8	2034.1
10°	2045.5	2043.7	2042.0	2040.2	2038.4	2034.3	2028.0	2021.6	2015.2	2008.8	2010.2
12.5°	2022.5	2020.5	2018.4	2016.3	2014.3	2009.5	2002.0	1994.5	1986.9	1979.4	1980.3
15°	1983.2	1980.0	1976.9	1973.7	1970.5	1964.4	1955.6	1946.7	1937.8	1928.9	1928.2
17.5°	1935.7	1931.0	1926.4	1921.8	1917.2	1909.6	1898.9	1888.3	1877.6	1867.0	1865.0
20°	1898.6	1894.0	1889.4	1884.8	1880.2	1871.8	1859.8	1847.7	1835.6	1823.6	1820.7
22.5°	1857.7	1852.6	1847.4	1842.2	1837.0	1828.0	1815.0	1802.1	1789.2	1776.3	1772.0
25°	1793.2	1786.8	1780.4	1774.1	1767.7	1757.2	1742.7	1728.1	1713.6	1699.0	1693.0
27.5°	1725.5	1717.5	1709.5	1701.5	1693.4	1681.7	1666.1	1650.6	1635.0	1619.5	1612.0
30°	1678.3	1669.4	1660.5	1651.6	1642.8	1630.0	1613.3	1596.6	1580.0	1563.3	1554.4
32.5°	1628.4	1618.4	1608.4	1598.4	1588.4	1574.8	1557.5	1540.3	1523.0	1505.8	1495.5
35°	1550.5	1539.1	1527.8	1516.4	1505.1	1490.5	1472.8	1455.1	1437.3	1419.6	1407.5
37.5°	1467.2	1455.4	1443.7	1432.0	1420.3	1404.6	1385.0	1365.3	1345.7	1326.0	1312.5
40°	1408.4	1396.7	1385.0	1373.3	1361.5	1345.6	1325.4	1305.1	1284.9	1264.7	1249.8
42.5°	1352.2	1339.9	1327.6	1315.3	1303.1	1286.4	1265.3	1244.2	1223.2	1202.1	1186.9
45°	1264.7	1251.5	1238.4	1225.3	1212.2	1194.9	1173.7	1152.4	1131.1	1109.8	1092.4
47.5°	1174.3	1160.7	1147.2	1133.6	1120.1	1102.2	1080.1	1057.9	1035.8	1013.7	995.6
50°	1113.0	1099.1	1085.3	1071.5	1057.6	1039.3	1016.6	993.9	971.2	948.5	930.8
52.5°	1050.4	1036.8	1023.3	1009.7	996.2	977.7	954.5	931.2	907.9	884.6	866.6
55°	958.1	943.9	929.7	915.5	901.3	882.7	859.6	836.6	813.5	790.4	772.0
57.5°	866.7	852.0	837.2	822.5	807.7	789.0	766.3	743.5	720.8	698.1	679.4
60°	801.6	787.4	773.2	759.0	744.8	726.4	703.7	681.0	658.2	635.5	617.1
62.5°	742.8	728.1	713.3	698.6	683.8	664.8	641.5	618.2	594.9	571.7	554.6
65°	651.5	636.2	621.0	605.7	590.5	571.5	548.8	526.1	503.4	480.6	465.4
67.5°	556.6	542.0	527.4	512.8	498.2	480.3	459.2	438.2	417.1	396.0	382.9
70°	496.6	481.7	466.8	451.9	437.0	419.4	399.2	379.0	358.8	338.5	326.8
72.5°	432.7	419.3	405.8	392.3	378.8	362.5	343.4	324.3	305.2	286.1	276.1
75°	346.5	333.4	320.2	307.1	294.0	279.1	262.4	245.7	229.1	212.4	204.2
77.5°	259.0	247.9	236.7	225.6	214.4	202.1	188.6	175.2	161.7	148.2	143.4
80°	202.8	192.5	182.2	171.9	161.6	151.2	140.5	129.9	119.2	108.6	107.5
82.5°	154.3	144.8	135.4	125.9	116.5	108.7	102.6	96.5	90.4	84.3	83.5
85°	86.2	79.1	72.0	64.9	57.8	53.8	52.7	51.6	50.6	49.5	48.8
87.5°	29.6	27.7	26.0	24.0	21.9	20.6	21.5	21.2	21.4	21.5	21.0
90°	1.0	3.0	6.0	7.0	8.0	8.0	14.0	14.0	16.0	18.0	17.0
92.5°	11.4	16.6	26.0	38.1	52.7	73.5	124.2	201.7	277.1	316.7	263.8
95°	32.9	35.9	45.9	58.9	82.9	124.8	211.6	375.4	614.0	813.6	836.6
97.5°	59.1	59.1	67.7	79.7	100.2	135.4	202.3	337.4	574.6	856.9	1051.0
100°	75.9	75.9	82.9	94.8	113.8	145.8	204.7	317.5	521.1	802.6	1058.2
102.5°	91.8	93.4	99.6	110.8	129.0	159.3	212.6	311.9	485.2	734.8	998.3
105°	116.8	119.8	124.8	136.8	154.7	183.7	231.6	314.5	454.2	654.9	889.5
107.5°	144.4	146.4	151.3	164.1	181.3	209.8	253.8	329.2	448.6	610.2	801.6
110°	162.7	164.7	169.7	181.7	199.7	226.6	270.5	340.4	450.2	595.0	757.7



TEST NUMBER: P333008

CATALOG NUMBER: S124RDIP-S1195D1035U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	180.3	182.3	188.1	199.3	217.2	244.2	286.5	352.4	455.0	587.8	733.0
115°	205.7	208.6	215.6	225.6	244.6	271.5	311.5	371.4	464.2	584.0	709.8
117.5°	232.0	234.8	241.0	252.0	269.7	297.7	335.6	390.7	474.0	583.0	699.4
120°	249.6	251.6	258.6	269.5	286.5	314.5	352.4	404.3	481.2	583.0	693.8
122.5°	265.6	267.5	274.5	284.7	303.3	330.4	368.4	417.1	488.4	582.2	687.4
125°	286.5	290.5	296.5	307.5	326.4	354.4	390.3	436.3	499.2	581.0	676.9
127.5°	305.1	308.3	315.5	328.0	347.8	376.0	410.7	452.8	507.7	578.8	662.7
130°	315.5	319.5	327.4	342.4	361.4	390.3	424.3	463.2	514.1	578.0	653.9
132.5°	325.8	329.0	339.4	353.6	374.2	401.5	435.5	473.6	519.7	577.2	645.9
135°	340.4	344.4	354.4	371.4	392.3	418.3	451.2	487.2	528.1	576.0	633.9
137.5°	355.0	358.8	369.8	385.9	407.7	432.5	463.2	496.8	533.1	575.8	623.5
140°	365.4	368.4	379.4	396.3	417.3	441.3	471.2	503.1	537.1	575.0	618.0
142.5°	376.6	379.6	389.7	405.9	426.1	449.2	478.4	507.9	540.3	575.0	613.2
145°	392.3	395.3	405.3	419.3	438.3	460.2	486.2	513.1	542.1	573.0	605.0
147.5°	410.1	411.1	419.9	434.3	450.0	469.8	494.2	517.7	543.1	569.4	597.6
150°	421.3	422.3	430.3	442.3	457.2	476.2	498.2	520.1	543.1	567.0	592.0
152.5°	431.7	431.9	439.9	451.0	464.4	481.8	501.4	521.7	541.5	563.0	585.6
155°	446.2	447.2	453.2	463.2	474.2	489.2	506.1	523.1	539.1	557.1	576.0
157.5°	460.4	460.4	466.0	473.8	483.4	495.2	509.5	523.1	536.5	550.9	566.2
160°	469.2	469.2	473.2	480.2	488.2	499.2	511.1	523.1	534.1	546.1	559.1
162.5°	477.2	476.4	479.6	485.8	493.0	501.6	512.7	523.1	531.7	541.3	552.7
165°	486.2	486.2	488.2	493.2	498.2	504.1	513.1	521.1	527.1	534.1	542.1
167.5°	495.2	494.2	495.2	499.0	501.8	506.3	512.9	518.7	522.3	526.9	532.5
170°	499.2	498.2	499.2	502.2	504.1	507.1	512.1	517.1	519.1	522.1	526.1
172.5°	503.1	502.2	502.3	504.5	505.7	507.9	511.3	515.5	515.9	517.3	520.5
175°	507.1	506.1	506.1	507.1	508.1	508.1	510.1	513.1	512.1	512.1	514.1
177.5°	508.9	508.1	507.3	508.1	508.1	508.1	508.9	510.5	508.9	508.9	509.7
180°	508.1	508.1	508.1	508.1	508.1	508.1	508.1	508.1	508.1	508.1	508.1



TEST NUMBER: P333008

CATALOG NUMBER: S124RDIP-S1195D1035U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	2085.4	2085.4	2085.4	2085.4	2085.4	2085.4	2085.4	2085.4
2.5°	2077.6	2080.8	2083.9	2085.3	2085.0	2084.7	2084.4	2084.2
5°	2063.8	2067.3	2070.9	2072.3	2071.6	2070.9	2070.2	2069.5
7.5°	2036.3	2038.6	2040.9	2041.4	2040.3	2039.2	2038.0	2036.9
10°	2011.6	2013.0	2014.5	2014.5	2013.0	2011.6	2010.2	2008.8
12.5°	1981.1	1982.0	1982.8	1982.2	1980.3	1978.3	1976.3	1974.3
15°	1927.5	1926.8	1926.1	1924.5	1922.0	1919.5	1917.1	1914.6
17.5°	1863.0	1861.0	1859.0	1856.2	1852.4	1848.6	1844.9	1841.1
20°	1817.9	1815.0	1812.2	1808.5	1803.9	1799.3	1794.6	1790.0
22.5°	1767.8	1763.5	1759.3	1755.3	1751.5	1747.7	1744.0	1740.2
25°	1686.9	1680.9	1674.9	1670.1	1666.5	1663.0	1659.4	1655.9
27.5°	1604.6	1597.1	1589.7	1583.4	1578.3	1573.2	1568.1	1563.0
30°	1545.5	1536.7	1527.8	1520.5	1514.8	1509.2	1503.5	1497.8
32.5°	1485.2	1474.9	1464.6	1456.8	1451.4	1446.0	1440.6	1435.2
35°	1395.4	1383.4	1371.3	1362.1	1355.7	1349.3	1342.9	1336.5
37.5°	1299.0	1285.5	1272.1	1262.1	1255.7	1249.3	1243.0	1236.6
40°	1234.9	1220.0	1205.1	1194.4	1188.0	1181.6	1175.3	1168.9
42.5°	1171.7	1156.5	1141.3	1130.4	1123.7	1117.1	1110.4	1103.7
45°	1075.0	1057.6	1040.2	1028.3	1022.0	1015.6	1009.2	1002.8
47.5°	977.6	959.6	941.6	929.0	922.0	915.0	907.9	900.9
50°	913.0	895.3	877.5	865.3	858.6	851.8	845.1	838.3
52.5°	848.6	830.6	812.5	800.0	793.0	786.0	778.9	771.9
55°	753.5	735.1	716.6	704.0	697.3	690.5	683.8	677.0
57.5°	660.7	641.9	623.2	611.3	606.2	601.0	595.9	590.8
60°	598.6	580.2	561.7	549.7	544.0	538.3	532.6	526.9
62.5°	537.6	520.6	503.5	492.7	488.2	483.7	479.1	474.6
65°	450.1	434.9	419.6	409.8	405.6	401.3	397.1	392.8
67.5°	369.8	356.6	343.5	334.6	329.9	325.2	320.5	315.8
70°	315.1	303.4	291.7	284.1	280.5	277.0	273.4	269.9
72.5°	266.1	256.1	246.1	239.5	236.2	233.0	229.7	226.4
75°	196.1	187.9	179.7	174.6	172.5	170.3	168.2	166.1
77.5°	138.7	133.9	129.2	126.5	125.8	125.2	124.6	123.9
80°	106.5	105.4	104.3	103.6	103.3	102.9	102.6	102.2
82.5°	82.8	82.0	81.2	80.6	80.3	79.9	79.6	79.2
85°	48.1	47.4	46.7	46.3	46.3	46.3	46.3	46.3
87.5°	20.9	20.8	20.7	20.7	21.2	21.7	21.8	22.1
90°	18.0	19.0	20.0	20.0	21.0	22.0	21.0	21.0
92.5°	196.1	147.6	117.4	97.4	85.7	80.3	76.9	76.9
95°	739.7	585.0	451.2	354.4	305.5	274.5	256.6	243.6
97.5°	1093.0	1035.4	937.8	833.6	761.9	701.8	671.9	651.1
100°	1204.0	1223.9	1175.0	1101.1	1014.3	953.4	923.4	915.5
102.5°	1198.4	1297.4	1311.6	1280.8	1227.5	1183.4	1151.9	1145.5
105°	1118.1	1290.8	1389.6	1430.6	1432.6	1424.6	1410.6	1404.6
107.5°	1004.1	1188.0	1327.2	1416.2	1465.5	1488.3	1498.3	1500.9
110°	935.4	1108.1	1252.9	1362.7	1433.6	1475.5	1493.5	1502.5





TEST NUMBER: P333008

CATALOG NUMBER: S124RDIP-S1195D1035U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	885.1	1037.8	1174.6	1284.4	1364.9	1415.6	1440.8	1455.3
115°	834.6	957.4	1074.2	1170.0	1248.9	1308.8	1340.7	1348.7
117.5°	809.8	911.5	1003.3	1084.6	1151.9	1202.2	1234.5	1240.7
120°	798.6	891.5	971.4	1042.2	1099.1	1143.1	1169.0	1180.0
122.5°	789.1	878.7	951.4	1013.5	1061.6	1099.1	1121.1	1132.1
125°	772.7	858.5	927.4	982.3	1022.3	1051.2	1070.2	1076.2
127.5°	752.7	834.8	903.5	955.6	995.7	1021.5	1037.4	1043.4
130°	736.8	815.6	883.5	936.4	977.3	1002.3	1018.3	1024.3
132.5°	720.0	794.1	860.3	913.3	953.4	981.5	996.7	1002.7
135°	696.8	761.7	822.6	872.5	912.5	940.4	956.4	962.4
137.5°	675.9	730.8	782.1	827.2	864.5	892.1	905.3	912.5
140°	663.9	710.8	755.7	797.6	832.6	854.6	868.5	876.5
142.5°	652.7	694.0	732.6	768.9	799.8	820.2	832.6	838.2
145°	636.9	670.9	700.8	728.8	753.7	770.7	780.7	785.7
147.5°	623.9	650.9	674.9	696.8	715.2	729.8	737.4	739.1
150°	616.0	638.9	658.9	676.9	692.8	705.8	711.8	712.8
152.5°	607.2	626.9	645.3	660.1	673.7	684.2	687.8	688.8
155°	594.0	610.0	624.9	636.9	646.9	654.9	657.9	657.9
157.5°	579.8	593.2	605.8	615.4	622.9	628.9	630.7	630.7
160°	571.0	582.0	593.0	601.0	607.0	613.0	614.0	614.0
162.5°	562.2	571.6	580.2	587.4	591.8	597.8	598.8	598.0
165°	550.1	556.1	563.0	568.0	572.0	576.0	575.0	574.0
167.5°	538.3	542.9	548.5	551.5	553.5	556.1	555.9	555.1
170°	531.1	534.1	538.1	541.1	543.1	544.1	543.1	543.1
172.5°	524.7	526.9	529.3	531.5	532.7	533.7	532.7	531.1
175°	516.1	517.1	519.1	519.1	519.1	521.1	519.1	517.1
177.5°	510.5	511.3	511.3	512.1	511.3	512.1	510.5	508.9
180°	508.1	508.1	508.1	508.1	508.1	508.1	508.1	508.1

(END OF REPORT)