

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P332892

Luminaire Tested: **S124RDIP-S350D1205U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332892
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIP-S350D1205U835-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1205 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6238.3 lumens
Efficiency: N/A
Efficacy: 147.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 42.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332892

CATALOG NUMBER: S124RDIP-S350D1205U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

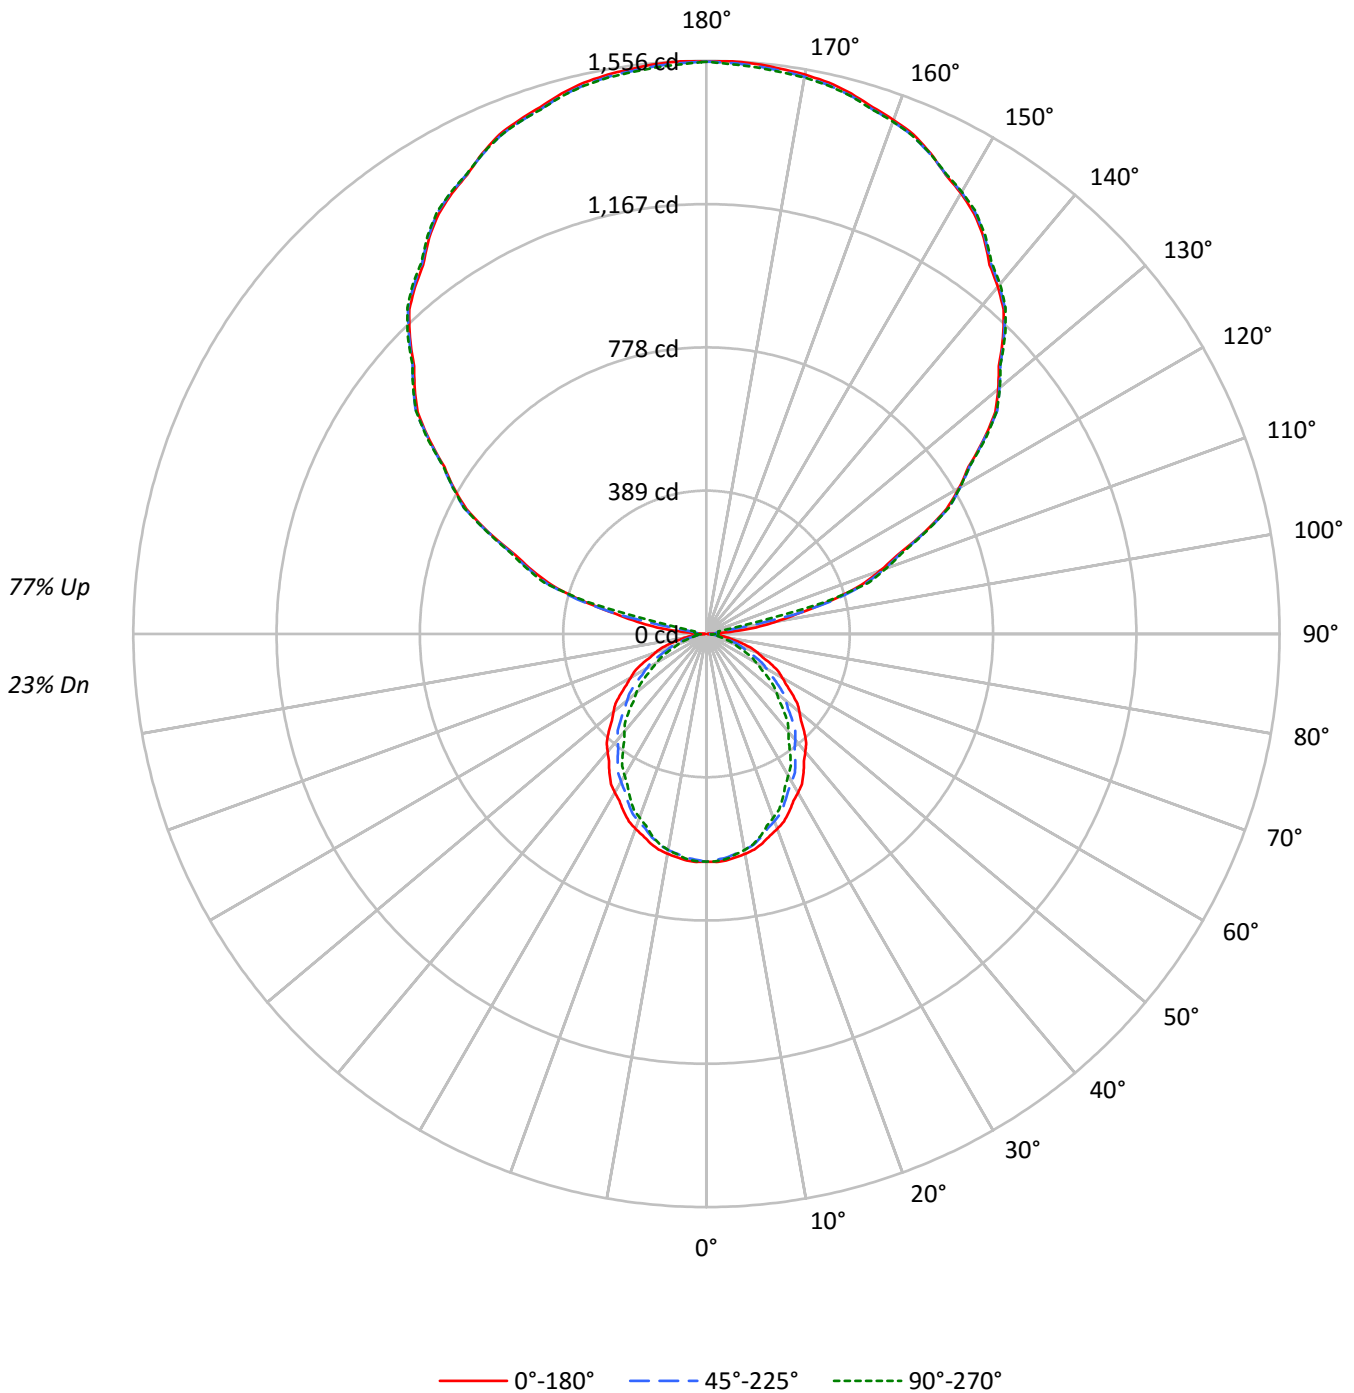



TEST NUMBER: P332892

CATALOG NUMBER: S124RDIP-S350D1205U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	89	89	89	89	68	68	68	49	49	49	31	31	31	23
1	92	88	84	81	81	78	75	72	60	58	56	43	42	41	28	27	27	20
2	84	77	71	66	74	68	63	59	53	49	47	38	36	34	25	23	23	17
3	76	67	61	55	68	60	54	50	46	42	39	34	31	29	22	20	19	14
4	70	60	52	46	62	53	47	42	41	37	33	30	27	25	20	18	17	12
5	64	53	45	40	57	47	41	36	37	32	29	27	24	22	18	16	15	11
6	59	47	40	34	52	42	36	31	33	28	25	24	21	19	16	14	13	9
7	54	43	35	30	48	38	32	27	30	25	22	22	19	17	15	13	11	8
8	50	39	31	26	44	35	28	24	27	22	19	20	17	15	13	12	10	8
9	47	35	28	23	41	31	25	21	25	20	17	18	15	13	12	11	9	7
10	43	32	25	21	39	29	23	19	23	18	15	17	14	12	11	10	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4991	4991	4991
5°	5002	4941	4971
10°	4970	4882	4882
15°	4914	4779	4743
20°	4835	4643	4558
25°	4735	4486	4372
30°	4638	4320	4139
35°	4529	4147	3905
40°	4400	3951	3652
45°	4280	3756	3394
50°	4143	3532	3121
55°	3997	3298	2825
60°	3836	3042	2522
65°	3689	2722	2223
70°	3474	2367	1888
75°	3203	1965	1535
80°	2794	1497	1409
85°	2371	1362	1269



TEST NUMBER: P332892

CATALOG NUMBER: S124RDIP-S350D1205U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.1	0.9
10°-20°	161.9	2.6
20°-30°	233.8	3.7
30°-40°	265.1	4.2
40°-50°	255.9	4.1
50°-60°	212.8	3.4
60°-70°	147.0	2.4
70°-80°	74.5	1.2
80°-90°	23.6	0.4
90°-100°	53.1	0.9
100°-110°	338.8	5.4
110°-120°	648.1	10.4
120°-130°	822.7	13.2
130°-140°	880.2	14.1
140°-150°	823.1	13.2
150°-160°	663.8	10.6
160°-170°	428.1	6.9
170°-180°	147.6	2.4
0°-30°	453.8	7.3
0°-40°	718.9	11.5
0°-60°	1187.7	19.0
0°-90°	1432.7	23.0
90°-120°	1040.0	16.7
90°-150°	3566.1	57.2
90°-180°	4806.0	77.0
0°-180°	6238.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	618	618	618	618	618	
5°	617	615	610	614	613	59
15°	588	583	572	571	568	166
25°	532	522	504	496	491	245
35°	460	444	421	405	396	287
45°	375	357	329	307	297	289
55°	284	264	234	211	201	254
65°	193	172	142	123	116	191
75°	103	85	63	53	49	108
85°	26	16	15	14	14	29
90°	4	16	26	32	35	4
95°	64	27	26	32	34	82
105°	350	357	362	370	331	366
115°	653	656	655	658	658	642
125°	918	922	920	924	925	819
135°	1139	1138	1142	1145	1147	877
145°	1313	1316	1316	1318	1320	820
155°	1440	1441	1437	1442	1438	663
165°	1519	1513	1513	1521	1512	429
175°	1554	1547	1548	1557	1544	148
180°	1554	1554	1554	1554	1554	



TEST NUMBER: P332892

CATALOG NUMBER: S124RDIP-S350D1205U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	618.2	618.2	618.2	618.2	618.2	618.2	618.2	618.2	618.2	618.2	618.2
2.5°	619.7	619.3	619.0	618.7	618.3	617.7	616.8	615.9	614.9	614.0	614.9
5°	617.2	616.8	616.4	616.0	615.5	614.7	613.4	612.2	610.9	609.7	610.7
7.5°	611.6	611.2	610.8	610.3	609.9	608.8	607.2	605.5	603.9	602.3	602.9
10°	606.3	605.8	605.3	604.8	604.2	603.0	601.1	599.2	597.3	595.5	595.9
12.5°	599.5	598.9	598.3	597.7	597.1	595.7	593.4	591.2	589.0	586.7	587.0
15°	587.9	586.9	586.0	585.0	584.1	582.3	579.7	577.0	574.4	571.8	571.6
17.5°	573.8	572.4	571.0	569.7	568.3	566.0	562.9	559.7	556.6	553.4	552.8
20°	562.8	561.4	560.1	558.7	557.3	554.9	551.3	547.7	544.1	540.5	539.7
22.5°	550.7	549.1	547.6	546.1	544.5	541.8	538.0	534.2	530.4	526.5	525.3
25°	531.6	529.7	527.8	525.9	524.0	520.9	516.6	512.3	507.9	503.6	501.8
27.5°	511.5	509.1	506.7	504.4	502.0	498.5	493.9	489.3	484.7	480.1	477.8
30°	497.5	494.8	492.2	489.6	487.0	483.2	478.2	473.3	468.3	463.4	460.8
32.5°	482.7	479.7	476.8	473.8	470.8	466.8	461.7	456.6	451.5	446.4	443.3
35°	459.6	456.2	452.9	449.5	446.1	441.8	436.6	431.3	426.1	420.8	417.2
37.5°	434.9	431.4	428.0	424.5	421.0	416.4	410.5	404.7	398.9	393.1	389.1
40°	417.5	414.0	410.5	407.1	403.6	398.9	392.9	386.9	380.9	374.9	370.5
42.5°	400.8	397.2	393.5	389.9	386.3	381.3	375.1	368.8	362.6	356.3	351.8
45°	374.9	371.0	367.1	363.2	359.3	354.2	347.9	341.6	335.3	329.0	323.8
47.5°	348.1	344.1	340.1	336.0	332.0	326.7	320.2	313.6	307.0	300.5	295.1
50°	329.9	325.8	321.7	317.6	313.5	308.1	301.4	294.6	287.9	281.2	275.9
52.5°	311.4	307.3	303.3	299.3	295.3	289.8	282.9	276.0	269.1	262.2	256.9
55°	284.0	279.8	275.6	271.4	267.2	261.6	254.8	248.0	241.1	234.3	228.8
57.5°	256.9	252.5	248.2	243.8	239.4	233.9	227.1	220.4	213.7	206.9	201.4
60°	237.6	233.4	229.2	225.0	220.8	215.3	208.6	201.8	195.1	188.4	182.9
62.5°	220.2	215.8	211.4	207.1	202.7	197.1	190.2	183.3	176.4	169.5	164.4
65°	193.1	188.6	184.1	179.6	175.0	169.4	162.7	155.9	149.2	142.5	138.0
67.5°	165.0	160.7	156.3	152.0	147.7	142.4	136.1	129.9	123.6	117.4	113.5
70°	147.2	142.8	138.4	134.0	129.5	124.3	118.3	112.3	106.3	100.3	96.9
72.5°	128.3	124.3	120.3	116.3	112.3	107.5	101.8	96.1	90.5	84.8	81.9
75°	102.7	98.8	94.9	91.0	87.1	82.7	77.8	72.8	67.9	63.0	60.5
77.5°	76.8	73.5	70.2	66.9	63.6	59.9	55.9	51.9	47.9	43.9	42.5
80°	60.1	57.1	54.0	51.0	47.9	44.8	41.7	38.5	35.3	32.2	31.9
82.5°	45.7	42.9	40.1	37.3	34.5	32.2	30.4	28.6	26.8	25.0	24.8
85°	25.6	23.5	21.4	19.2	17.1	15.9	15.6	15.3	15.0	14.7	14.5
87.5°	9.4	9.3	9.2	9.1	9.0	9.1	9.4	9.8	10.1	10.4	10.6
90°	3.5	6.3	9.2	12.0	14.8	17.3	19.4	21.4	23.5	25.6	27.1
92.5°	14.6	14.8	15.0	15.1	15.3	16.4	18.4	20.5	22.6	24.6	26.2
95°	63.9	55.1	46.3	37.6	28.8	24.5	24.8	25.0	25.3	25.6	27.1
97.5°	135.7	141.2	146.7	152.1	157.6	145.9	117.1	88.3	59.5	30.7	30.8
100°	190.6	195.2	199.9	204.5	209.2	193.7	158.0	122.4	86.8	51.1	46.7
102.5°	251.9	255.3	258.7	262.1	265.5	264.9	260.3	255.6	251.0	246.3	199.0
105°	349.7	351.3	352.8	354.4	355.9	357.4	358.7	359.9	361.2	362.5	364.9
107.5°	440.6	441.4	442.2	442.9	443.7	445.0	446.7	448.5	450.2	452.0	453.1
110°	502.0	502.7	503.5	504.3	505.1	506.2	507.8	509.3	510.9	512.4	512.9



TEST NUMBER: P332892

CATALOG NUMBER: S124RDIP-S350D1205U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	561.5	562.9	564.2	565.6	567.0	568.1	568.8	569.5	570.3	571.0	570.9
115°	653.0	653.8	654.6	655.3	656.1	656.4	656.1	655.9	655.6	655.3	655.9
117.5°	735.5	736.5	737.6	738.6	739.6	740.4	741.0	741.6	742.2	742.7	742.6
120°	791.3	792.3	793.4	794.4	795.4	795.8	795.6	795.3	795.0	794.8	795.3
122.5°	843.3	844.0	844.6	845.2	845.8	846.3	846.7	847.0	847.4	847.8	848.1
125°	917.9	919.0	920.0	921.0	922.1	922.3	921.8	921.3	920.8	920.3	921.0
127.5°	988.6	988.8	989.1	989.4	989.6	990.3	991.5	992.7	993.9	995.1	994.9
130°	1034.1	1034.4	1034.7	1034.9	1035.2	1035.7	1036.5	1037.2	1038.0	1038.8	1039.0
132.5°	1076.0	1076.4	1076.9	1077.4	1077.8	1078.6	1079.5	1080.5	1081.5	1082.5	1082.7
135°	1138.7	1138.5	1138.2	1137.9	1137.7	1138.1	1139.1	1140.1	1141.2	1142.2	1142.7
137.5°	1194.3	1194.4	1194.5	1194.6	1194.7	1195.3	1196.4	1197.6	1198.7	1199.8	1200.4
140°	1230.5	1231.0	1231.5	1232.1	1232.6	1233.1	1233.6	1234.1	1234.6	1235.2	1235.9
142.5°	1263.0	1264.0	1264.9	1265.8	1266.8	1267.4	1267.7	1268.0	1268.3	1268.6	1269.2
145°	1313.0	1313.8	1314.6	1315.3	1316.1	1316.5	1316.5	1316.5	1316.5	1316.5	1316.8
147.5°	1352.7	1354.2	1355.6	1357.1	1358.5	1359.1	1358.9	1358.6	1358.3	1358.1	1358.3
150°	1381.6	1382.6	1383.6	1384.7	1385.7	1386.1	1385.8	1385.6	1385.3	1385.0	1385.0
152.5°	1405.7	1406.6	1407.4	1408.2	1409.0	1409.2	1408.8	1408.3	1407.8	1407.4	1407.8
155°	1439.7	1439.9	1440.2	1440.4	1440.7	1440.4	1439.7	1438.9	1438.1	1437.3	1438.4
157.5°	1468.2	1468.1	1467.9	1467.8	1467.6	1467.1	1466.2	1465.4	1464.5	1463.6	1464.9
160°	1485.0	1484.2	1483.4	1482.7	1481.9	1481.4	1481.1	1480.8	1480.6	1480.3	1481.9
162.5°	1499.8	1498.9	1497.9	1496.9	1495.9	1495.3	1495.0	1494.8	1494.5	1494.3	1495.8
165°	1518.7	1517.4	1516.1	1514.8	1513.5	1512.9	1512.9	1512.9	1512.9	1512.9	1514.9
167.5°	1533.5	1532.2	1530.9	1529.5	1528.2	1527.4	1527.3	1527.1	1527.0	1526.8	1529.1
170°	1541.9	1540.4	1538.8	1537.3	1535.7	1535.1	1535.3	1535.6	1535.8	1536.1	1538.2
172.5°	1547.5	1545.9	1544.4	1542.8	1541.3	1540.6	1540.9	1541.2	1541.4	1541.7	1543.7
175°	1553.5	1552.0	1550.4	1548.9	1547.3	1546.7	1546.9	1547.2	1547.5	1547.7	1550.0
177.5°	1556.3	1554.9	1553.4	1552.0	1550.5	1550.0	1550.4	1550.8	1551.3	1551.7	1553.3
180°	1553.5	1553.5	1553.5	1553.5	1553.5	1553.5	1553.5	1553.5	1553.5	1553.5	1553.5



TEST NUMBER: P332892

CATALOG NUMBER: S124RDIP-S350D1205U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	618.2	618.2	618.2	618.2	618.2	618.2	618.2	618.2
2.5°	615.9	616.8	617.7	618.1	618.0	618.0	617.9	617.8
5°	611.8	612.8	613.9	614.3	614.1	613.9	613.6	613.4
7.5°	603.6	604.3	605.0	605.1	604.8	604.5	604.1	603.8
10°	596.3	596.7	597.1	597.1	596.7	596.3	595.9	595.5
12.5°	587.2	587.5	587.8	587.6	587.0	586.4	585.8	585.2
15°	571.4	571.2	570.9	570.5	569.7	569.0	568.3	567.5
17.5°	552.2	551.7	551.1	550.2	549.1	548.0	546.9	545.8
20°	538.9	538.0	537.2	536.1	534.7	533.3	532.0	530.6
22.5°	524.0	522.7	521.5	520.3	519.2	518.1	517.0	515.8
25°	500.0	498.3	496.5	495.1	494.0	492.9	491.9	490.8
27.5°	475.6	473.4	471.2	469.4	467.8	466.3	464.8	463.3
30°	458.1	455.5	452.9	450.7	449.0	447.4	445.7	444.0
32.5°	440.3	437.2	434.2	431.8	430.2	428.6	427.0	425.4
35°	413.6	410.1	406.5	403.8	401.9	400.0	398.1	396.2
37.5°	385.1	381.1	377.1	374.1	372.2	370.3	368.4	366.5
40°	366.0	361.6	357.2	354.1	352.2	350.3	348.4	346.5
42.5°	347.3	342.8	338.3	335.1	333.1	331.1	329.1	327.2
45°	318.7	313.5	308.3	304.8	302.9	301.0	299.1	297.3
47.5°	289.8	284.4	279.1	275.4	273.3	271.2	269.1	267.1
50°	270.6	265.4	260.1	256.5	254.5	252.5	250.5	248.5
52.5°	251.5	246.2	240.9	237.1	235.1	233.0	230.9	228.8
55°	223.4	217.9	212.4	208.7	206.7	204.7	202.7	200.7
57.5°	195.8	190.3	184.7	181.2	179.7	178.2	176.6	175.1
60°	177.4	172.0	166.5	162.9	161.2	159.6	157.9	156.2
62.5°	159.4	154.3	149.3	146.1	144.7	143.4	142.0	140.7
65°	133.4	128.9	124.4	121.5	120.2	119.0	117.7	116.4
67.5°	109.6	105.7	101.8	99.2	97.8	96.4	95.0	93.6
70°	93.4	89.9	86.5	84.2	83.1	82.1	81.0	80.0
72.5°	78.9	75.9	73.0	71.0	70.0	69.1	68.1	67.1
75°	58.1	55.7	53.3	51.8	51.1	50.5	49.9	49.2
77.5°	41.1	39.7	38.3	37.5	37.3	37.1	36.9	36.7
80°	31.6	31.2	30.9	30.7	30.6	30.5	30.4	30.3
82.5°	24.5	24.3	24.1	23.9	23.8	23.7	23.6	23.5
85°	14.3	14.0	13.8	13.7	13.7	13.7	13.7	13.7
87.5°	10.9	11.1	11.3	11.5	11.7	11.9	12.1	12.3
90°	28.7	30.2	31.8	32.8	33.3	33.8	34.3	34.9
92.5°	27.7	29.3	30.8	31.7	31.8	31.9	32.0	32.1
95°	28.7	30.2	31.8	32.7	32.9	33.2	33.4	33.7
97.5°	31.0	31.1	31.3	31.5	31.8	32.0	32.3	32.5
100°	42.3	38.0	33.6	31.5	31.8	32.0	32.3	32.5
102.5°	151.6	104.3	56.9	33.3	33.3	33.4	33.4	33.5
105°	367.2	369.5	371.8	368.3	359.0	349.7	340.5	331.2
107.5°	454.3	455.4	456.5	457.6	458.6	459.6	460.5	461.5
110°	513.5	514.0	514.5	515.1	515.9	516.7	517.5	518.2



TEST NUMBER: P332892

CATALOG NUMBER: S124RDIP-S350D1205U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	570.8	570.7	570.6	571.0	572.0	573.0	574.0	574.9
115°	656.4	656.9	657.4	657.7	657.7	657.7	657.7	657.7
117.5°	742.5	742.4	742.3	742.2	742.1	742.0	741.9	741.8
120°	795.8	796.3	796.8	796.8	796.3	795.8	795.3	794.8
122.5°	848.4	848.7	849.0	848.9	848.4	847.9	847.3	846.8
125°	921.8	922.6	923.4	923.9	924.1	924.4	924.7	924.9
127.5°	994.8	994.6	994.5	994.3	994.1	993.9	993.7	993.5
130°	1039.3	1039.6	1039.8	1039.9	1039.9	1039.9	1039.9	1039.9
132.5°	1083.0	1083.3	1083.5	1083.5	1083.3	1083.1	1082.9	1082.7
135°	1143.2	1143.7	1144.3	1144.8	1145.3	1145.8	1146.3	1146.8
137.5°	1201.0	1201.5	1202.1	1202.3	1202.2	1202.0	1201.8	1201.7
140°	1236.7	1237.5	1238.3	1238.8	1239.0	1239.3	1239.5	1239.8
142.5°	1269.8	1270.3	1270.9	1271.2	1271.3	1271.3	1271.4	1271.4
145°	1317.0	1317.3	1317.5	1317.9	1318.4	1318.9	1319.5	1320.0
147.5°	1358.5	1358.7	1358.9	1359.1	1359.4	1359.7	1359.9	1360.2
150°	1385.0	1385.0	1385.0	1385.2	1385.4	1385.7	1386.0	1386.2
152.5°	1408.2	1408.6	1409.0	1409.1	1409.0	1408.8	1408.7	1408.5
155°	1439.4	1440.4	1441.5	1441.6	1440.8	1440.0	1439.3	1438.5
157.5°	1466.3	1467.6	1469.0	1469.0	1467.6	1466.3	1464.9	1463.6
160°	1483.4	1485.0	1486.5	1486.5	1485.0	1483.4	1481.9	1480.3
162.5°	1497.4	1498.9	1500.5	1500.4	1498.6	1496.9	1495.1	1493.3
165°	1517.0	1519.1	1521.1	1521.0	1518.7	1516.3	1514.0	1511.7
167.5°	1531.4	1533.6	1535.9	1535.7	1533.2	1530.6	1528.0	1525.4
170°	1540.2	1542.3	1544.4	1544.1	1541.5	1538.9	1536.4	1533.8
172.5°	1545.8	1547.9	1549.9	1549.6	1546.8	1544.0	1541.2	1538.4
175°	1552.4	1554.7	1557.0	1556.6	1553.5	1550.4	1547.3	1544.2
177.5°	1555.0	1556.6	1558.3	1557.9	1555.4	1552.9	1550.4	1548.0
180°	1553.5	1553.5	1553.5	1553.5	1553.5	1553.5	1553.5	1553.5

(END OF REPORT)