

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332954

Luminaire Tested: **S124RDIP-S795D1205U835-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332954  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124RDIP-S795D1205U835-4F0-1E-UDD-F4  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7514.4 lumens  
Efficiency: N/A  
Efficacy: 132.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 56.9  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332954

CATALOG NUMBER: S124RDIP-S795D1205U835-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

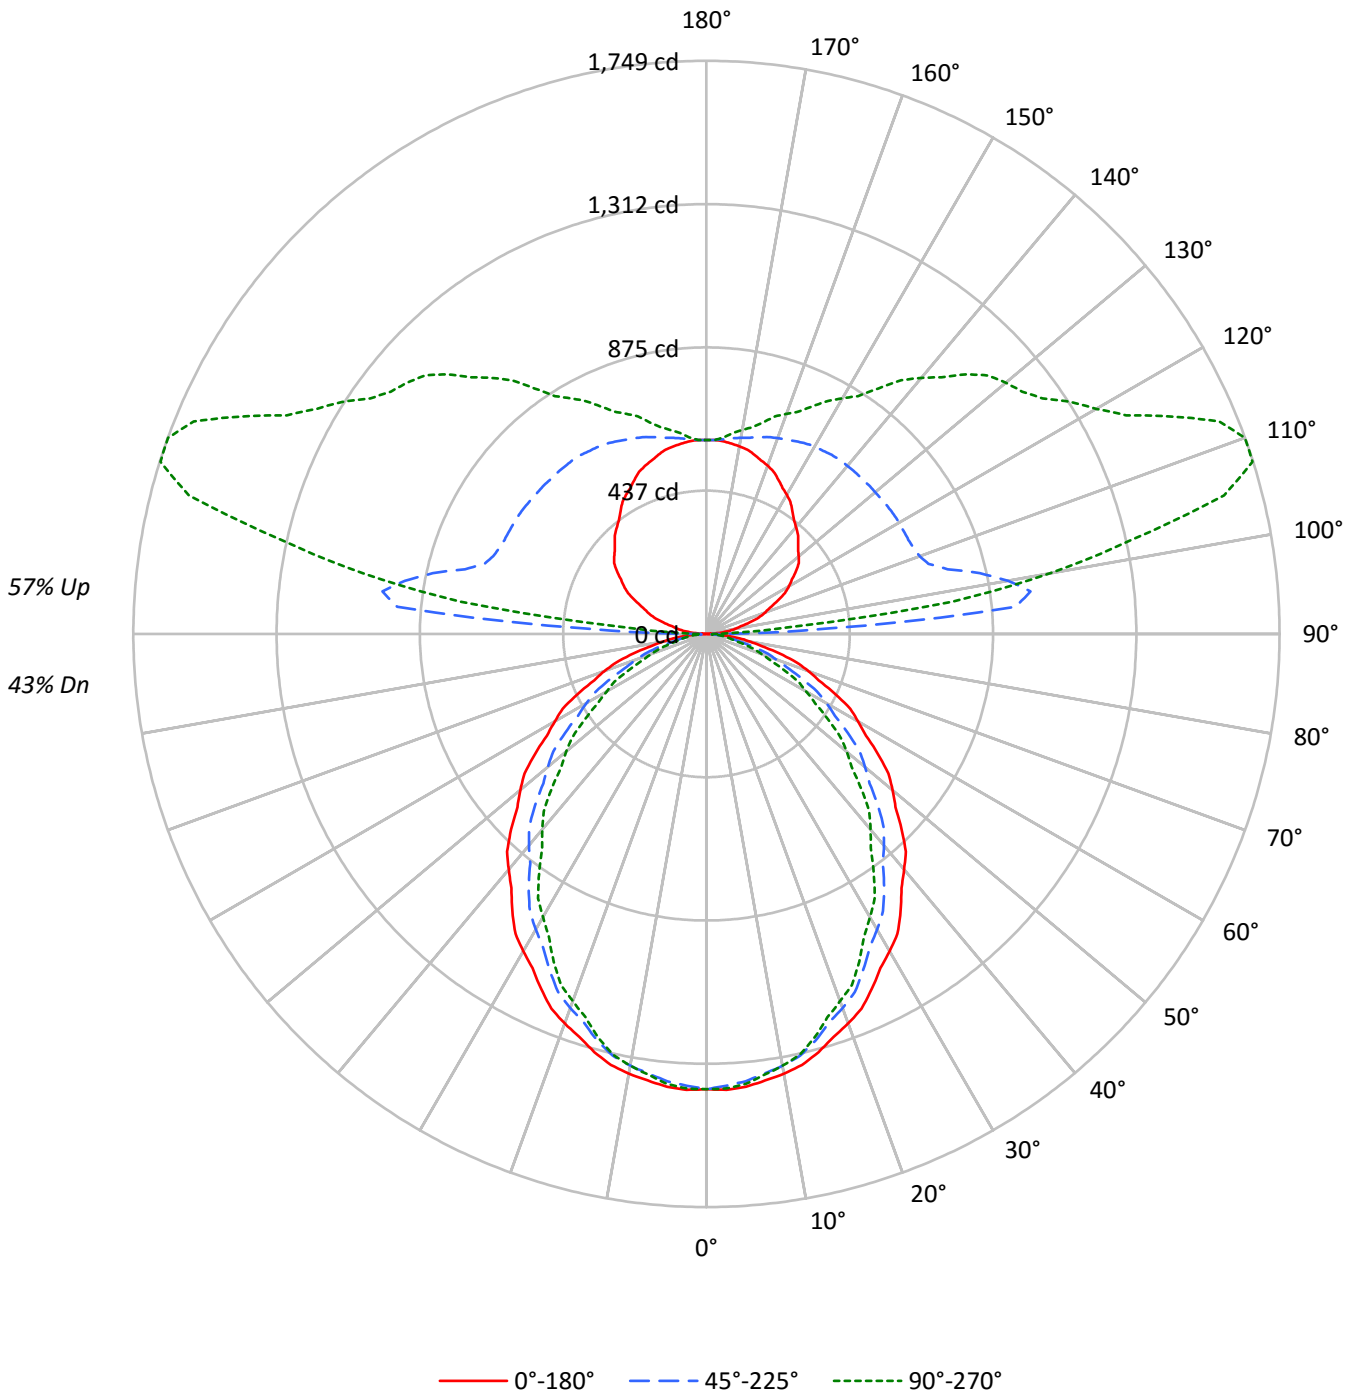



TEST NUMBER: P332954

CATALOG NUMBER: S124RDIP-S795D1205U835-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	43																				
1	96	92	88	85	88	84	81	78	70	68	66	56	55	54	44	43	42	36																				
2	88	81	75	70	80	74	69	65	61	58	55	50	47	45	39	37	36	31																				
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	35	33	31	26																				
4	74	63	55	49	67	58	51	46	48	43	39	39	36	33	31	29	27	23																				
5	68	56	48	42	62	52	45	40	43	38	34	36	32	29	28	25	23	20																				
6	62	50	43	37	57	47	40	34	39	34	30	32	28	25	26	23	21	18																				
7	58	46	38	32	53	42	35	30	35	30	26	29	25	22	23	21	18	16																				
8	53	41	34	29	49	38	32	27	32	27	23	27	23	20	22	19	17	14																				
9	50	38	30	25	45	35	28	24	30	25	21	25	21	18	20	17	15	13																				
10	46	35	28	23	42	32	26	21	27	22	19	23	19	16	18	16	14	12																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	11215	11215	11215
5°	11240	11102	11171
10°	11170	10969	10969
15°	11041	10739	10659
20°	10865	10436	10244
25°	10640	10081	9825
30°	10421	9707	9300
35°	10178	9319	8774
40°	9887	8878	8205
45°	9618	8440	7626
50°	9311	7935	7013
55°	8983	7410	6348
60°	8622	6835	5667
65°	8290	6117	4999
70°	7808	5323	4244
75°	7199	4414	3450
80°	6281	3361	3166
85°	5317	3057	2853



TEST NUMBER: P332954

CATALOG NUMBER: S124RDIP-S795D1205U835-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	130.5	1.7
10°-20°	363.9	4.8
20°-30°	525.5	7.0
30°-40°	595.6	7.9
40°-50°	575.2	7.7
50°-60°	478.3	6.4
60°-70°	330.3	4.4
70°-80°	167.4	2.2
80°-90°	46.2	0.6
90°-100°	427.2	5.7
100°-110°	889.1	11.8
110°-120°	796.4	10.6
120°-130°	669.9	8.9
130°-140°	558.5	7.4
140°-150°	426.7	5.7
150°-160°	299.9	4.0
160°-170°	176.4	2.3
170°-180°	57.4	0.8
0°-30°	1019.8	13.6
0°-40°	1615.5	21.5
0°-60°	2668.9	35.5
0°-90°	3212.8	42.8
90°-120°	2112.7	28.1
90°-150°	3767.8	50.1
90°-180°	4302.0	57.3
0°-180°	7514.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1389	1389	1389	1389	1389	
5°	1387	1382	1370	1380	1378	132
15°	1321	1311	1285	1282	1275	372
25°	1194	1174	1132	1114	1103	550
35°	1033	998	946	910	890	645
45°	842	802	739	689	668	649
55°	638	594	526	473	451	571
65°	434	387	320	276	262	428
75°	231	191	142	118	111	244
85°	57	37	33	31	31	65
90°	1	9	21	23	24	5
95°	38	121	947	469	284	43
105°	136	197	762	1641	1635	145
115°	239	300	680	1306	1570	237
125°	334	396	676	1111	1253	297
135°	396	472	670	987	1120	306
145°	457	523	667	832	914	287
155°	519	561	648	734	766	239
165°	566	583	622	658	668	160
175°	590	592	596	604	602	56
180°	592	592	592	592	592	



TEST NUMBER: P332954

CATALOG NUMBER: S124RDIP-S795D1205U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2
2.5°	1392.6	1391.8	1391.0	1390.3	1389.5	1388.1	1386.0	1384.0	1381.9	1379.8	1381.9
5°	1387.0	1386.1	1385.1	1384.2	1383.2	1381.4	1378.5	1375.7	1372.8	1370.0	1372.4
7.5°	1374.5	1373.5	1372.5	1371.5	1370.5	1368.2	1364.5	1360.8	1357.1	1353.4	1354.9
10°	1362.6	1361.4	1360.2	1359.0	1357.8	1355.1	1350.9	1346.6	1342.4	1338.1	1339.0
12.5°	1347.2	1345.9	1344.5	1343.1	1341.8	1338.6	1333.6	1328.5	1323.5	1318.5	1319.1
15°	1321.1	1319.0	1316.8	1314.7	1312.6	1308.6	1302.6	1296.7	1290.8	1284.9	1284.4
17.5°	1289.4	1286.3	1283.2	1280.2	1277.1	1272.0	1264.9	1257.8	1250.7	1243.6	1242.3
20°	1264.7	1261.6	1258.6	1255.5	1252.4	1246.9	1238.8	1230.8	1222.7	1214.7	1212.8
22.5°	1237.5	1234.0	1230.6	1227.1	1223.7	1217.6	1209.0	1200.4	1191.8	1183.2	1180.4
25°	1194.5	1190.2	1186.0	1181.7	1177.5	1170.5	1160.8	1151.1	1141.4	1131.7	1127.7
27.5°	1149.4	1144.1	1138.7	1133.4	1128.0	1120.2	1109.8	1099.5	1089.1	1078.8	1073.8
30°	1117.9	1112.0	1106.1	1100.2	1094.3	1085.8	1074.7	1063.6	1052.4	1041.3	1035.4
32.5°	1084.7	1078.1	1071.4	1064.7	1058.1	1049.0	1037.5	1026.0	1014.5	1003.0	996.2
35°	1032.8	1025.3	1017.7	1010.1	1002.6	992.9	981.1	969.2	957.4	945.6	937.6
37.5°	977.3	969.5	961.7	953.9	946.1	935.7	922.6	909.5	896.4	883.3	874.3
40°	938.2	930.4	922.6	914.8	907.0	896.3	882.8	869.4	855.9	842.4	832.5
42.5°	900.7	892.5	884.4	876.2	868.0	856.9	842.9	828.8	814.8	800.7	790.6
45°	842.4	833.7	824.9	816.2	807.4	796.0	781.8	767.6	753.4	739.3	727.7
47.5°	782.2	773.2	764.2	755.1	746.1	734.2	719.5	704.7	690.0	675.2	663.2
50°	741.4	732.2	722.9	713.7	704.5	692.3	677.2	662.1	646.9	631.8	620.0
52.5°	699.7	690.7	681.6	672.6	663.6	651.3	635.8	620.3	604.8	589.3	577.3
55°	638.2	628.7	619.3	609.8	600.4	588.0	572.6	557.2	541.9	526.5	514.2
57.5°	577.4	567.5	557.7	547.9	538.0	525.5	510.4	495.3	480.2	465.0	452.6
60°	534.0	524.5	515.1	505.6	496.1	483.9	468.7	453.6	438.5	423.3	411.0
62.5°	494.8	485.0	475.2	465.3	455.5	442.8	427.3	411.8	396.3	380.8	369.4
65°	434.0	423.8	413.6	403.5	393.3	380.7	365.5	350.4	335.3	320.2	310.0
67.5°	370.8	361.1	351.3	341.6	331.8	320.0	305.9	291.9	277.8	263.8	255.0
70°	330.8	320.9	310.9	301.0	291.1	279.4	265.9	252.4	239.0	225.5	217.7
72.5°	288.3	279.3	270.3	261.3	252.3	241.5	228.8	216.0	203.3	190.6	183.9
75°	230.8	222.1	213.3	204.6	195.8	185.9	174.8	163.7	152.6	141.5	136.0
77.5°	172.5	165.1	157.7	150.3	142.8	134.6	125.7	116.7	107.7	98.7	95.5
80°	135.1	128.2	121.4	114.5	107.7	100.7	93.6	86.5	79.4	72.3	71.6
82.5°	102.8	96.5	90.2	83.9	77.6	72.4	68.4	64.3	60.2	56.2	55.6
85°	57.4	52.7	48.0	43.3	38.5	35.8	35.1	34.4	33.7	33.0	32.5
87.5°	19.8	18.8	17.9	16.7	15.4	14.5	15.7	15.5	15.8	16.1	15.7
90°	1.2	3.5	7.0	8.1	9.3	9.3	16.3	16.3	18.6	20.9	19.8
92.5°	13.2	19.3	30.2	44.4	61.4	85.5	144.6	234.7	322.6	368.6	307.0
95°	38.3	41.8	53.5	68.6	96.4	145.3	246.3	436.9	714.6	947.0	973.8
97.5°	68.8	68.8	78.8	92.7	116.7	157.6	235.4	392.8	668.8	997.5	1223.4
100°	88.3	88.3	96.4	110.4	132.5	169.7	238.2	369.5	606.6	934.2	1231.7
102.5°	106.9	108.8	116.0	129.0	150.1	185.5	247.5	363.0	564.7	855.2	1162.0
105°	136.0	139.4	145.3	159.2	180.1	213.8	269.6	366.0	528.7	762.3	1035.3
107.5°	168.0	170.3	176.2	191.0	211.0	244.3	295.4	383.2	522.2	710.2	933.1
110°	189.4	191.7	197.5	211.5	232.4	263.8	314.9	396.2	524.1	692.6	882.0



TEST NUMBER: P332954

CATALOG NUMBER: S124RDIP-S795D1205U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	209.9	212.2	218.9	231.9	252.9	284.2	333.5	410.2	529.6	684.2	853.1
115°	239.4	242.9	251.0	262.6	284.7	316.1	362.5	432.3	540.3	679.8	826.2
117.5°	270.0	273.3	280.5	293.3	314.0	346.5	390.7	454.8	551.7	678.6	814.1
120°	290.5	292.8	301.0	313.7	333.5	366.0	410.2	470.6	560.1	678.6	807.6
122.5°	309.1	311.4	319.6	331.4	353.0	384.6	428.8	485.5	568.5	677.7	800.2
125°	333.5	338.1	345.1	357.9	380.0	412.5	454.3	507.8	581.0	676.3	787.8
127.5°	355.1	358.8	367.2	381.8	404.8	437.6	478.0	527.1	591.0	673.7	771.3
130°	367.2	371.8	381.1	398.6	420.6	454.3	493.9	539.2	598.4	672.8	761.1
132.5°	379.3	383.0	395.1	411.6	435.5	467.4	506.9	551.3	604.9	671.9	751.8
135°	396.2	400.9	412.5	432.3	456.7	486.9	525.2	567.1	614.7	670.5	737.9
137.5°	413.2	417.6	430.4	449.2	474.6	503.4	539.2	578.2	620.5	670.2	725.8
140°	425.3	428.8	441.6	461.3	485.7	513.6	548.5	585.6	625.2	669.3	719.3
142.5°	438.3	441.8	453.6	472.5	495.9	522.9	556.8	591.2	628.9	669.3	713.7
145°	456.7	460.2	471.8	488.0	510.1	535.7	565.9	597.3	631.0	667.0	704.2
147.5°	477.3	478.5	488.7	505.5	523.8	546.8	575.2	602.6	632.1	662.8	695.6
150°	490.4	491.5	500.8	514.8	532.2	554.3	579.8	605.4	632.1	660.0	689.1
152.5°	502.4	502.7	512.0	525.0	540.6	560.8	583.6	607.3	630.3	655.4	681.6
155°	519.4	520.6	527.5	539.2	552.0	569.4	589.1	608.9	627.5	648.4	670.5
157.5°	535.9	535.9	542.4	551.5	562.6	576.4	593.1	608.9	624.5	641.2	659.1
160°	546.1	546.1	550.8	558.9	568.2	581.0	594.9	608.9	621.7	635.6	650.7
162.5°	555.4	554.5	558.2	565.4	573.8	583.8	596.8	608.9	618.9	630.0	643.3
165°	565.9	565.9	568.2	574.0	579.8	586.8	597.3	606.6	613.5	621.7	631.0
167.5°	576.4	575.2	576.4	580.8	584.0	589.4	597.0	603.8	608.0	613.3	619.8
170°	581.0	579.8	581.0	584.5	586.8	590.3	596.1	601.9	604.2	607.7	612.4
172.5°	585.6	584.5	584.7	587.3	588.7	591.2	595.2	600.1	600.5	602.1	605.9
175°	590.3	589.1	589.1	590.3	591.5	591.5	593.8	597.3	596.1	596.1	598.4
177.5°	592.4	591.5	590.5	591.5	591.5	591.5	592.4	594.2	592.4	592.4	593.3
180°	591.5	591.5	591.5	591.5	591.5	591.5	591.5	591.5	591.5	591.5	591.5



TEST NUMBER: P332954

CATALOG NUMBER: S124RDIP-S795D1205U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2
2.5°	1384.0	1386.0	1388.1	1389.1	1388.9	1388.7	1388.5	1388.3
5°	1374.7	1377.1	1379.5	1380.4	1379.9	1379.5	1379.0	1378.5
7.5°	1356.4	1358.0	1359.5	1359.8	1359.1	1358.3	1357.6	1356.8
10°	1340.0	1340.9	1341.9	1341.9	1340.9	1340.0	1339.0	1338.1
12.5°	1319.7	1320.2	1320.8	1320.4	1319.1	1317.8	1316.4	1315.1
15°	1284.0	1283.5	1283.0	1282.0	1280.3	1278.6	1277.0	1275.3
17.5°	1241.0	1239.7	1238.3	1236.4	1233.9	1231.4	1228.9	1226.4
20°	1210.9	1209.0	1207.1	1204.7	1201.6	1198.5	1195.4	1192.4
22.5°	1177.6	1174.7	1171.9	1169.2	1166.7	1164.2	1161.7	1159.2
25°	1123.7	1119.7	1115.7	1112.5	1110.1	1107.8	1105.4	1103.0
27.5°	1068.8	1063.9	1058.9	1054.7	1051.3	1047.9	1044.5	1041.1
30°	1029.5	1023.6	1017.7	1012.8	1009.1	1005.3	1001.5	997.7
32.5°	989.3	982.5	975.6	970.4	966.8	963.2	959.6	956.0
35°	929.5	921.5	913.5	907.3	903.1	898.8	894.5	890.3
37.5°	865.3	856.3	847.3	840.7	836.5	832.2	828.0	823.7
40°	822.6	812.6	802.7	795.6	791.4	787.1	782.9	778.6
42.5°	780.5	770.4	760.3	753.0	748.5	744.1	739.7	735.2
45°	716.1	704.5	692.9	685.0	680.7	676.5	672.2	668.0
47.5°	651.2	639.2	627.2	618.8	614.2	609.5	604.8	600.1
50°	608.2	596.4	584.5	576.4	571.9	567.4	562.9	558.4
52.5°	565.3	553.3	541.2	532.9	528.2	523.5	518.9	514.2
55°	501.9	489.6	477.4	469.0	464.5	460.0	455.5	451.0
57.5°	440.1	427.6	415.1	407.2	403.8	400.4	397.0	393.6
60°	398.8	386.5	374.2	366.1	362.4	358.6	354.8	351.0
62.5°	358.1	346.8	335.4	328.2	325.2	322.2	319.1	316.1
65°	299.8	289.7	279.5	273.0	270.2	267.3	264.5	261.7
67.5°	246.3	237.6	228.8	222.9	219.8	216.6	213.5	210.4
70°	209.9	202.1	194.3	189.2	186.9	184.5	182.1	179.8
72.5°	177.3	170.6	163.9	159.5	157.4	155.2	153.0	150.8
75°	130.6	125.2	119.7	116.3	114.9	113.5	112.0	110.6
77.5°	92.4	89.2	86.0	84.2	83.8	83.4	83.0	82.5
80°	70.9	70.2	69.5	69.0	68.8	68.5	68.3	68.1
82.5°	55.1	54.6	54.1	53.7	53.5	53.2	53.0	52.8
85°	32.0	31.6	31.1	30.8	30.8	30.8	30.8	30.8
87.5°	15.7	15.8	15.8	15.8	16.2	16.6	16.6	16.8
90°	20.9	22.1	23.2	23.2	24.4	25.6	24.4	24.4
92.5°	228.2	171.7	136.7	113.4	99.7	93.4	89.5	89.5
95°	861.0	680.9	525.2	412.5	355.6	319.6	298.6	283.5
97.5°	1272.2	1205.2	1091.6	970.3	886.8	816.9	782.0	757.9
100°	1401.4	1424.6	1367.7	1281.7	1180.6	1109.7	1074.9	1065.6
102.5°	1394.9	1510.1	1526.6	1490.8	1428.8	1377.4	1340.7	1333.3
105°	1301.4	1502.5	1617.5	1665.1	1667.5	1658.2	1641.9	1634.9
107.5°	1168.7	1382.8	1544.8	1648.4	1705.8	1732.3	1743.9	1747.0
110°	1088.8	1289.8	1458.3	1586.1	1668.6	1717.4	1738.4	1748.8





TEST NUMBER: P332954

CATALOG NUMBER: S124RDIP-S795D1205U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1030.2	1208.0	1367.2	1495.0	1588.7	1647.7	1677.0	1694.0
115°	971.4	1114.4	1250.3	1361.9	1453.7	1523.4	1560.6	1569.9
117.5°	942.6	1060.9	1167.8	1262.4	1340.7	1399.3	1436.9	1444.1
120°	929.6	1037.7	1130.6	1213.1	1279.4	1330.5	1360.7	1373.5
122.5°	918.4	1022.8	1107.4	1179.7	1235.7	1279.4	1304.9	1317.7
125°	899.4	999.3	1079.5	1143.4	1189.9	1223.6	1245.7	1252.6
127.5°	876.1	971.7	1051.6	1112.3	1159.0	1189.0	1207.6	1214.5
130°	857.6	949.4	1028.4	1090.0	1137.6	1166.6	1185.2	1192.2
132.5°	838.0	924.3	1001.4	1063.0	1109.7	1142.5	1160.1	1167.1
135°	811.1	886.6	957.5	1015.6	1062.1	1094.6	1113.2	1120.2
137.5°	786.7	850.6	910.3	962.8	1006.3	1038.4	1053.7	1062.1
140°	772.7	827.3	879.6	928.4	969.1	994.7	1010.9	1020.2
142.5°	759.7	807.8	852.7	895.0	931.0	954.7	969.1	975.6
145°	741.4	780.9	815.7	848.3	877.3	897.1	908.7	914.5
147.5°	726.3	757.6	785.5	811.1	832.5	849.4	858.3	860.3
150°	717.0	743.7	766.9	787.8	806.4	821.5	828.5	829.7
152.5°	706.7	729.7	751.1	768.3	784.1	796.4	800.6	801.8
155°	691.4	710.0	727.4	741.4	753.0	762.3	765.8	765.8
157.5°	674.9	690.5	705.1	716.3	725.1	732.1	734.2	734.2
160°	664.7	677.4	690.2	699.5	706.5	713.5	714.6	714.6
162.5°	654.4	665.4	675.4	683.7	688.8	695.8	697.0	696.0
165°	640.3	647.2	655.4	661.2	665.8	670.5	669.3	668.2
167.5°	626.6	631.9	638.4	641.9	644.2	647.2	647.0	646.1
170°	618.2	621.7	626.3	629.8	632.1	633.3	632.1	632.1
172.5°	610.7	613.3	616.1	618.6	620.0	621.2	620.0	618.2
175°	600.8	601.9	604.2	604.2	604.2	606.6	604.2	601.9
177.5°	594.2	595.2	595.2	596.1	595.2	596.1	594.2	592.4
180°	591.5	591.5	591.5	591.5	591.5	591.5	591.5	591.5

(END OF REPORT)