

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P332636-935

Luminaire Tested: **S124DIP-S1020D590U935-4F0-1E-UDD-A4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332636-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S1020D590U935-4F0-1E-UDD-A4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 590 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5783.9 lumens
Efficiency: N/A
Efficacy: 118.5 lumens/watt
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

Luminous Intensity Polar Plot

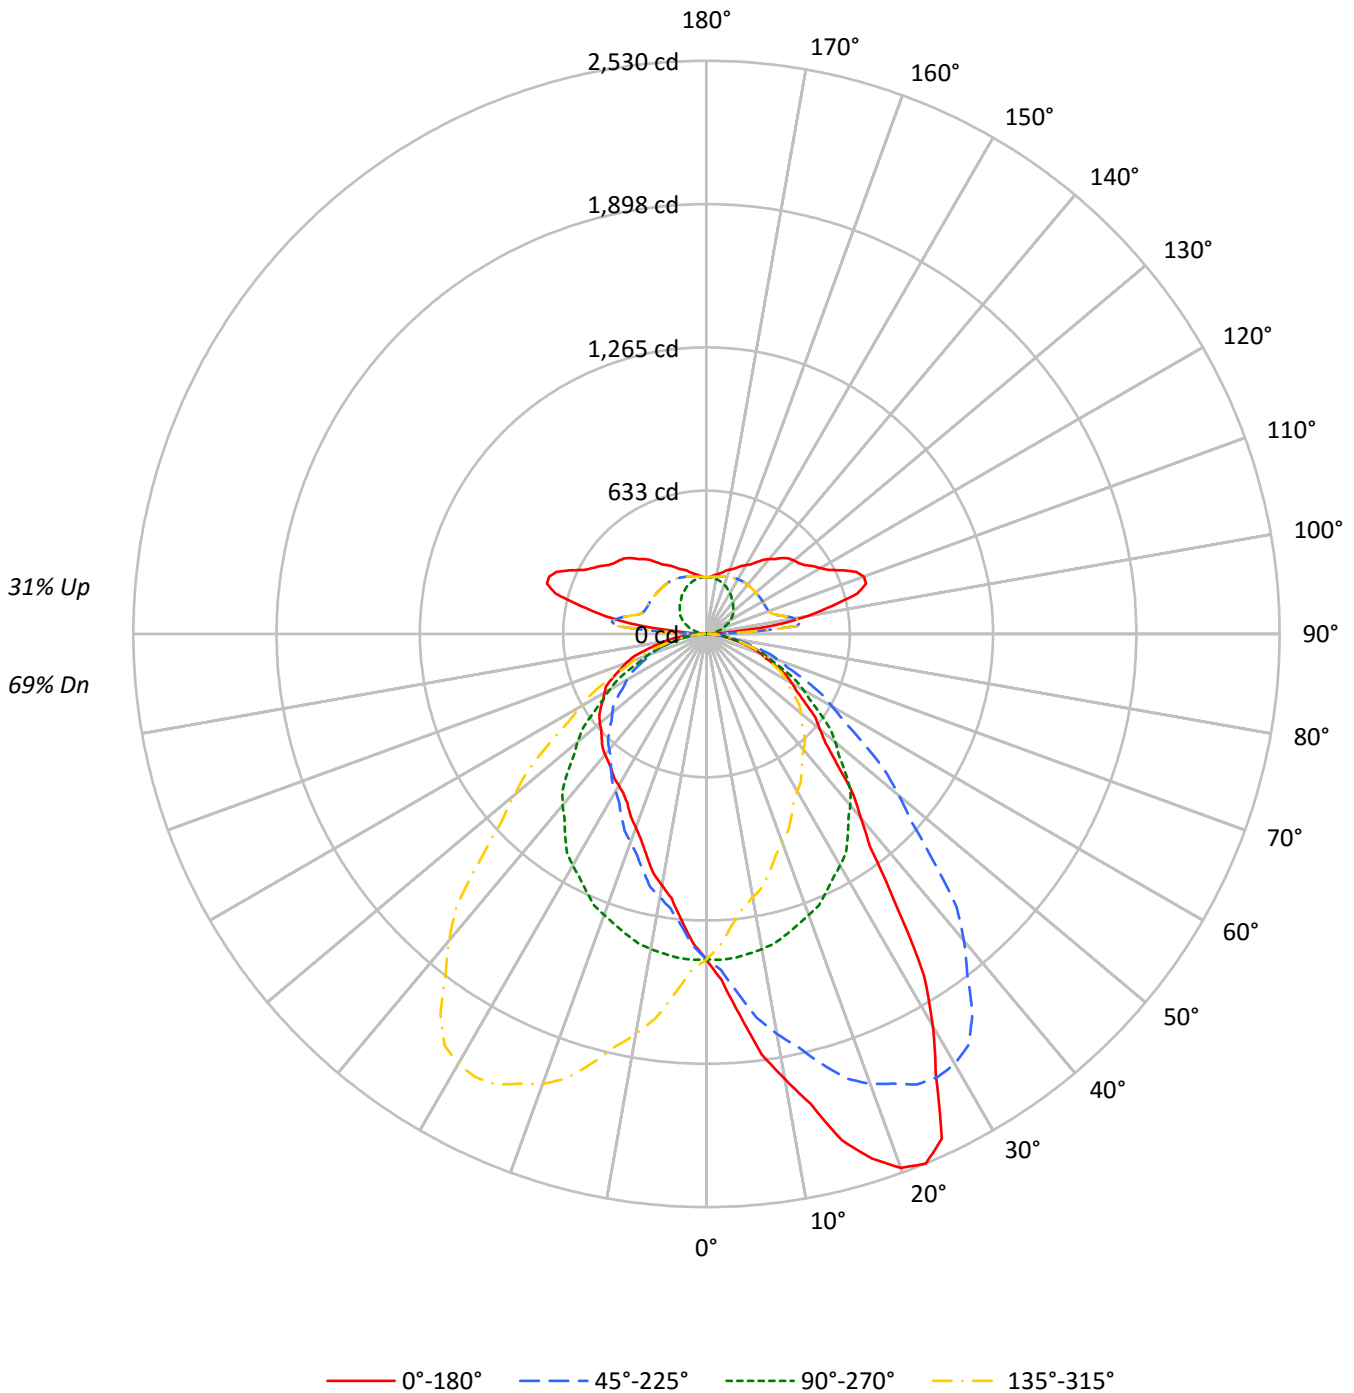



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	105	105	105	105	94	94	94	83	83	83	73	73	73	69
1	102	98	94	90	96	93	89	86	83	80	78	74	72	70	65	64	62	58
2	93	86	80	74	88	81	76	71	73	69	65	65	62	59	58	55	53	49
3	85	76	68	62	80	72	65	60	65	59	55	58	54	50	51	48	46	42
4	78	67	59	53	74	64	57	51	58	52	47	52	47	43	46	43	39	36
5	72	60	52	46	68	57	50	44	52	46	41	47	42	38	42	38	35	32
6	67	54	46	40	63	52	44	39	47	41	36	42	37	33	38	34	31	28
7	62	49	41	35	58	47	40	34	43	36	32	39	33	30	35	31	27	25
8	57	45	37	32	54	43	36	31	39	33	29	35	30	27	32	28	25	22
9	54	41	33	28	51	39	32	27	36	30	26	33	28	24	30	25	22	20
10	50	38	30	26	47	36	29	25	33	27	23	30	25	22	27	23	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	11599	11599	11599	11599
5°	13661	11629	10264	11629
10°	16356	11579	9241	11579
15°	19351	11462	8487	11462
20°	21549	11342	7814	11342
25°	21896	11166	7349	11166
30°	18632	10997	7202	10997
35°	14325	10723	7203	10723
40°	11166	10400	7339	10400
45°	9310	9914	7462	9914
50°	8194	9323	7714	9323
55°	7506	8612	8025	8612
60°	7035	7976	8399	7976
65°	6550	7265	8709	7265
70°	5986	6559	8908	6559
75°	5346	5774	8799	5774
80°	4482	4733	8522	4733
85°	3307	3418	8160	3418



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.0	2.4
10°-20°	431.5	7.5
20°-30°	684.2	11.8
30°-40°	761.4	13.2
40°-50°	693.1	12.0
50°-60°	566.4	9.8
60°-70°	404.3	7.0
70°-80°	222.6	3.8
80°-90°	62.2	1.1
90°-100°	180.6	3.1
100°-110°	375.8	6.5
110°-120°	336.6	5.8
120°-130°	283.1	4.9
130°-140°	236.1	4.1
140°-150°	180.4	3.1
150°-160°	126.8	2.2
160°-170°	74.6	1.3
170°-180°	24.3	0.4
0°-30°	1255.6	21.7
0°-40°	2017.1	34.9
0°-60°	3276.5	56.6
0°-90°	3965.7	68.6
90°-120°	893.0	15.4
90°-150°	1592.6	27.5
90°-180°	1818.0	31.4
0°-180°	5783.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1437	1437	1437	1437	1437	
5°	1686	1435	1267	1435	1686	171
15°	2315	1371	1016	1371	2315	654
25°	2458	1254	825	1254	2458	1084
35°	1454	1088	731	1088	1454	923
45°	816	868	654	868	816	642
55°	533	612	570	612	533	482
65°	343	380	456	380	343	339
75°	171	185	282	185	171	182
85°	36	37	88	37	36	44
90°	10	0	10	0	10	10
95°	120	16	120	16	120	186
105°	691	57	691	57	691	683
115°	664	101	664	101	664	659
125°	529	141	529	141	529	481
135°	474	168	474	168	474	365
145°	386	193	386	193	386	245
155°	324	220	324	220	324	151
165°	282	239	282	239	282	81
175°	254	250	254	250	254	25
180°	250	250	250	250	250	



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8
2.5°	1529.2	1528.8	1524.0	1523.0	1519.7	1515.4	1514.5	1506.8	1491.6	1484.5	1482.6
5°	1685.7	1697.5	1682.0	1679.1	1677.3	1657.7	1647.5	1635.6	1608.3	1592.2	1579.7
7.5°	1872.3	1873.7	1867.0	1861.5	1846.3	1829.2	1803.5	1776.2	1743.5	1709.6	1683.9
10°	1995.2	1999.9	1992.2	1991.0	1960.7	1941.6	1903.5	1871.4	1834.4	1793.4	1755.9
12.5°	2124.7	2118.0	2114.1	2088.6	2083.0	2048.2	2004.0	1970.9	1914.0	1866.7	1816.8
15°	2315.4	2302.3	2294.0	2258.8	2241.6	2193.4	2146.3	2110.1	2035.7	1964.8	1911.2
17.5°	2427.2	2440.4	2421.1	2406.7	2362.1	2328.2	2280.2	2204.0	2145.8	2057.8	1990.2
20°	2508.3	2509.4	2498.7	2483.8	2448.7	2405.9	2353.5	2270.1	2200.5	2113.0	2020.2
22.5°	2530.1	2530.4	2525.8	2511.9	2485.4	2450.6	2397.8	2328.2	2243.9	2148.7	2055.9
25°	2458.2	2455.8	2461.3	2476.7	2466.6	2455.8	2425.5	2373.7	2295.2	2194.5	2094.6
27.5°	2191.1	2207.5	2237.7	2275.9	2312.6	2340.5	2348.4	2337.8	2289.1	2206.3	2101.6
30°	1998.7	2019.0	2041.6	2079.7	2153.4	2195.7	2242.2	2277.3	2257.6	2191.6	2094.0
32.5°	1787.3	1792.3	1825.9	1869.2	1936.8	2018.1	2091.7	2163.0	2186.7	2152.1	2070.6
35°	1453.5	1461.8	1498.1	1541.0	1623.8	1723.1	1833.8	1932.7	2014.2	2046.9	2005.3
37.5°	1186.1	1210.0	1235.7	1281.8	1354.6	1444.1	1559.1	1687.0	1808.5	1889.9	1903.8
40°	1059.5	1074.4	1092.8	1127.9	1189.8	1277.9	1376.7	1523.2	1652.3	1769.0	1807.1
42.5°	959.5	968.2	979.5	1011.2	1058.4	1146.0	1236.2	1365.0	1494.7	1634.2	1698.1
45°	815.5	824.4	843.4	861.9	897.6	958.3	1042.2	1148.1	1278.5	1413.1	1530.9
47.5°	711.4	717.1	728.4	748.2	778.5	818.6	886.8	975.3	1096.1	1226.8	1352.3
50°	652.4	657.1	666.1	683.9	707.1	742.8	798.7	881.5	976.1	1107.7	1230.9
52.5°	605.7	607.6	614.2	626.3	644.7	674.8	720.7	789.1	877.1	994.4	1117.1
55°	533.3	535.7	541.7	550.6	566.6	585.7	620.8	672.0	748.8	850.6	957.1
57.5°	473.8	475.4	480.4	483.9	497.1	512.6	539.6	576.2	634.4	720.7	815.8
60°	435.7	434.5	440.5	443.4	452.4	465.5	486.3	521.4	572.0	641.6	729.1
62.5°	398.6	396.9	401.9	405.8	411.0	422.1	439.1	466.7	507.7	570.7	646.3
65°	342.9	340.4	343.5	348.2	352.9	359.0	371.4	395.8	428.5	473.8	531.5
67.5°	286.9	289.4	289.9	292.2	295.0	303.1	311.7	328.9	352.0	388.2	437.1
70°	253.6	254.2	256.6	256.6	258.3	265.4	272.6	282.8	305.3	338.7	378.6
72.5°	220.2	222.7	221.8	223.7	225.0	229.7	235.0	244.6	263.9	288.7	322.4
75°	171.4	173.2	173.2	173.8	175.6	177.4	181.5	188.6	202.3	220.8	244.0
77.5°	125.0	125.3	126.1	128.2	128.2	131.0	134.1	139.9	146.6	159.3	173.4
80°	96.4	97.6	97.0	98.2	98.2	100.6	101.8	108.9	111.9	120.2	131.6
82.5°	70.7	71.9	71.8	73.4	74.4	74.9	76.5	79.4	82.4	89.7	94.4
85°	35.7	36.9	35.7	36.9	38.7	39.3	41.1	41.7	44.1	45.8	50.0
87.5°	12.6	13.9	14.0	14.5	15.3	15.8	16.2	15.6	17.4	18.0	19.6
90°	10.3	10.3	10.8	10.3	9.8	9.8	9.3	8.9	8.4	8.9	7.8
92.5°	37.8	37.8	39.5	42.1	48.0	57.8	72.6	96.4	129.8	155.8	136.4
95°	119.9	126.2	135.1	150.3	174.4	222.0	287.8	363.9	411.6	400.3	302.0
97.5°	320.3	330.5	345.3	374.9	410.1	461.4	509.5	537.7	517.1	421.6	282.8
100°	450.4	454.3	469.1	499.0	541.7	578.1	602.2	592.4	520.6	394.9	256.4
102.5°	563.5	566.7	582.2	603.9	630.2	645.3	638.3	589.6	491.1	361.5	238.7
105°	691.0	694.0	700.9	704.8	703.9	683.7	635.1	550.1	437.6	322.2	223.5
107.5°	738.4	737.1	732.2	721.0	696.7	653.0	584.4	494.0	394.4	300.2	220.8
110°	739.2	734.8	725.9	705.3	670.5	616.4	545.2	460.2	372.8	292.7	221.5



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	716.0	708.9	696.5	671.5	631.9	577.9	510.6	435.5	360.6	289.2	223.9
115°	663.6	659.6	643.9	614.4	575.7	528.5	471.1	410.6	349.2	287.3	228.4
117.5°	610.4	607.3	591.4	566.7	533.6	493.6	448.4	398.4	344.1	286.8	233.2
120°	580.6	575.1	562.4	540.8	512.7	477.9	438.6	393.0	341.4	286.8	236.8
122.5°	557.0	551.6	540.8	522.3	498.6	468.0	432.3	388.2	338.2	286.5	240.3
125°	529.4	526.5	517.2	502.9	483.3	456.2	422.4	380.1	333.0	285.9	245.6
127.5°	513.3	510.4	502.6	489.9	470.1	444.5	410.7	370.3	326.1	284.7	249.8
130°	503.9	501.0	493.1	480.9	460.7	434.6	401.3	362.5	321.7	284.4	253.0
132.5°	493.4	490.3	482.9	469.1	449.3	423.3	390.6	354.2	317.8	284.0	255.7
135°	473.5	470.5	462.7	448.9	429.3	404.7	374.8	342.9	311.9	283.4	259.8
137.5°	448.9	445.4	438.9	425.3	407.0	384.8	359.6	332.5	306.8	283.3	262.3
140°	431.3	427.3	420.4	409.7	392.4	371.8	349.7	326.6	304.0	282.9	264.2
142.5°	412.3	409.7	403.6	393.5	378.3	360.4	341.5	321.2	301.7	282.9	265.8
145°	386.5	384.1	379.2	370.8	358.5	344.8	330.0	313.3	297.6	281.9	266.7
147.5°	363.7	362.7	359.0	351.9	342.9	332.0	320.2	306.9	294.0	280.2	267.2
150°	350.7	350.2	347.2	340.9	333.0	324.2	314.4	303.1	291.3	279.0	267.2
152.5°	338.9	338.4	336.7	331.4	324.8	317.5	308.4	298.7	288.1	277.0	266.4
155°	323.6	323.6	322.2	318.3	313.3	307.5	300.1	292.2	283.4	274.1	265.2
157.5°	310.3	310.3	309.4	306.5	302.7	298.0	291.9	285.2	278.6	271.0	264.0
160°	302.0	302.0	301.6	298.6	295.7	291.7	286.4	280.9	275.1	268.6	262.8
162.5°	294.2	294.6	294.1	291.2	289.0	285.4	281.2	276.6	271.9	266.3	261.6
165°	282.4	282.9	283.4	281.5	279.5	277.0	273.5	270.6	266.7	262.8	259.3
167.5°	273.1	273.5	273.5	272.3	271.3	269.8	267.1	264.8	262.0	259.2	257.0
170°	267.2	267.2	267.7	267.2	266.2	264.8	262.8	261.3	258.8	256.8	255.4
172.5°	261.3	262.1	262.6	262.1	261.5	260.5	259.2	258.1	256.1	254.5	253.8
175°	254.4	255.4	256.4	255.4	255.4	255.4	254.4	253.9	253.0	251.9	251.9
177.5°	250.4	251.2	251.9	251.6	251.9	251.6	251.6	251.2	250.8	250.4	250.4
180°	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8
2.5°	1483.1	1476.4	1471.6	1467.8	1457.3	1451.1	1446.4	1439.7	1432.1	1424.0	1414.0
5°	1567.2	1547.0	1532.1	1509.5	1488.1	1470.2	1451.7	1435.0	1414.8	1392.8	1376.7
7.5°	1655.6	1625.6	1587.0	1553.5	1515.9	1483.2	1453.9	1423.8	1392.7	1362.4	1334.7
10°	1711.8	1673.2	1630.3	1579.7	1532.1	1489.8	1450.5	1412.5	1375.5	1338.6	1307.1
12.5°	1772.3	1724.1	1660.8	1601.6	1548.3	1491.8	1444.3	1397.7	1353.1	1314.3	1277.6
15°	1853.5	1783.8	1710.6	1631.5	1561.3	1495.2	1430.3	1371.4	1321.4	1270.1	1234.5
17.5°	1903.4	1817.2	1733.5	1650.8	1565.7	1482.5	1412.5	1344.5	1281.9	1231.1	1186.0
20°	1936.2	1850.5	1746.4	1663.6	1562.5	1476.7	1395.8	1320.2	1254.7	1200.6	1154.1
22.5°	1964.8	1865.8	1761.6	1652.7	1552.0	1461.0	1372.4	1296.4	1229.5	1172.4	1127.9
25°	1980.3	1866.6	1753.5	1645.2	1530.9	1423.1	1342.8	1253.5	1182.1	1122.0	1074.4
27.5°	1981.9	1860.4	1732.4	1612.1	1494.1	1393.8	1292.4	1212.5	1138.4	1074.9	1029.2
30°	1976.7	1849.9	1712.4	1582.1	1463.6	1354.7	1266.6	1179.7	1104.1	1041.0	993.4
32.5°	1960.1	1828.0	1686.7	1548.8	1426.0	1319.5	1228.6	1145.9	1072.2	1010.0	960.1
35°	1911.9	1781.5	1630.9	1487.5	1361.8	1254.1	1172.0	1088.0	1014.3	955.3	907.1
37.5°	1836.5	1718.6	1565.6	1417.1	1293.7	1185.5	1104.1	1028.3	961.7	901.9	852.5
40°	1770.7	1667.2	1513.6	1369.0	1235.7	1132.7	1056.5	986.9	920.8	864.3	817.3
42.5°	1695.1	1604.8	1463.2	1309.9	1181.4	1078.0	1003.7	941.2	878.9	826.6	779.6
45°	1560.0	1500.6	1367.2	1225.5	1091.7	994.0	923.2	868.4	816.1	764.8	725.6
47.5°	1404.8	1375.3	1263.1	1128.5	1001.4	905.2	843.8	793.2	747.3	703.9	669.3
50°	1300.5	1286.2	1189.2	1059.5	938.1	847.6	785.7	742.3	702.9	664.9	632.1
52.5°	1197.7	1197.2	1109.7	990.9	878.6	791.4	730.0	689.4	655.3	624.4	595.0
55°	1040.4	1057.1	988.7	882.7	782.1	703.5	648.2	611.9	588.1	562.5	540.4
57.5°	896.0	923.7	867.2	773.9	690.0	617.6	569.4	542.1	516.8	501.3	485.3
60°	801.8	827.9	783.9	705.3	626.2	564.3	518.4	494.0	472.0	461.3	450.0
62.5°	718.0	741.3	708.7	635.8	567.1	507.6	468.9	445.5	430.6	418.9	411.4
65°	598.2	617.9	589.9	536.9	477.9	430.3	398.8	380.3	366.1	361.3	352.9
67.5°	483.5	501.4	486.3	441.3	394.0	358.0	333.3	315.6	307.1	303.0	297.0
70°	415.4	433.3	417.2	378.0	341.6	311.3	288.1	277.9	269.1	267.3	258.9
72.5°	357.8	370.0	354.0	323.2	292.1	266.6	248.6	238.0	233.3	230.1	225.6
75°	268.5	279.1	268.5	244.6	222.6	204.7	189.2	185.1	179.8	178.0	175.0
77.5°	190.0	199.2	191.1	176.2	159.7	145.9	137.6	132.2	131.0	127.9	129.4
80°	145.3	151.2	143.4	133.4	120.2	110.7	104.8	101.8	98.2	97.0	99.4
82.5°	104.3	106.9	103.0	96.2	86.4	80.2	76.2	72.8	72.0	72.2	72.2
85°	54.2	53.6	53.0	47.0	44.1	39.9	37.5	36.9	36.3	37.5	38.7
87.5°	19.5	20.0	18.9	17.0	15.4	13.9	13.2	12.5	13.2	13.9	14.5
90°	6.9	6.9	4.0	4.0	3.4	2.9	1.5	0.5	1.5	2.9	3.4
92.5°	99.2	61.1	36.2	25.9	18.8	12.7	8.2	5.6	8.2	12.7	18.8
95°	184.7	104.1	61.4	40.7	29.0	22.6	17.7	16.2	17.7	22.6	29.0
97.5°	166.0	99.5	66.6	49.3	39.2	33.3	29.1	29.1	29.1	33.3	39.2
100°	156.2	100.7	71.7	56.0	46.7	40.7	37.4	37.4	37.4	40.7	46.7
102.5°	153.4	104.6	78.4	63.5	54.5	49.0	46.0	45.2	46.0	49.0	54.5
105°	154.7	113.9	90.4	76.1	67.3	61.4	59.0	57.4	59.0	61.4	67.3
107.5°	162.0	124.8	103.2	89.2	80.8	74.5	72.0	71.0	72.0	74.5	80.8
110°	167.5	133.1	111.5	98.2	89.4	83.5	81.0	80.1	81.0	83.5	89.4



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	173.4	140.9	120.1	106.9	98.1	92.6	89.7	88.7	89.7	92.6	98.1
115°	182.7	153.3	133.6	120.4	111.0	106.1	102.6	101.2	102.6	106.1	111.0
117.5°	192.3	165.1	146.5	132.7	124.0	118.6	115.5	114.2	115.5	118.6	124.0
120°	198.9	173.4	154.7	140.9	132.6	127.2	123.8	122.8	123.8	127.2	132.6
122.5°	205.2	181.2	162.6	149.2	140.1	135.1	131.6	130.6	131.6	135.1	140.1
125°	214.6	192.0	174.4	160.6	151.3	145.9	142.9	140.9	142.9	145.9	151.3
127.5°	222.8	202.1	184.9	171.1	161.4	155.2	151.7	150.1	151.7	155.2	161.4
130°	227.9	208.7	192.0	177.8	168.5	161.1	157.1	155.2	157.1	161.1	168.5
132.5°	233.0	214.2	197.5	184.1	174.0	167.0	161.9	160.3	161.9	167.0	174.0
135°	239.7	222.0	205.8	193.0	182.7	174.4	169.4	167.5	169.4	174.4	182.7
137.5°	244.4	227.9	212.8	200.6	189.9	181.9	176.5	174.7	176.5	181.9	189.9
140°	247.5	231.9	217.1	205.3	195.0	186.7	181.2	179.8	181.2	186.7	195.0
142.5°	249.9	235.4	221.0	209.7	199.7	191.7	186.8	185.3	186.8	191.7	199.7
145°	252.4	239.2	226.4	215.6	206.3	199.4	194.5	193.0	194.5	199.4	206.3
147.5°	254.7	243.1	231.2	221.4	213.6	206.6	202.2	201.7	202.2	206.6	213.6
150°	255.9	245.1	234.3	225.0	217.6	211.7	207.8	207.2	207.8	211.7	217.6
152.5°	256.7	246.7	237.0	228.5	221.9	216.4	212.5	212.4	212.5	216.4	221.9
155°	257.4	249.0	240.6	233.3	227.9	223.0	220.1	219.6	220.1	223.0	227.9
157.5°	257.4	250.7	243.6	237.8	233.1	229.3	226.5	226.5	226.5	229.3	233.1
160°	257.4	251.5	245.6	240.1	236.3	232.8	230.8	230.8	230.8	232.8	236.3
162.5°	257.4	252.3	246.8	242.5	239.0	235.9	234.4	234.8	234.4	235.9	239.0
165°	256.4	252.4	248.1	245.1	242.6	240.1	239.2	239.2	239.2	240.1	242.6
167.5°	255.2	252.4	249.1	246.8	245.5	243.6	243.1	243.6	243.1	243.6	245.5
170°	254.4	251.9	249.5	248.1	247.0	245.6	245.1	245.6	245.1	245.6	247.0
172.5°	253.7	251.6	249.9	248.8	248.2	247.1	247.0	247.5	247.0	247.1	248.2
175°	252.4	251.0	250.0	250.0	249.5	249.0	249.0	249.5	249.0	249.0	249.5
177.5°	251.2	250.4	250.0	250.0	250.0	249.6	250.0	250.4	250.0	249.6	250.0
180°	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8
2.5°	1409.2	1405.0	1398.8	1390.2	1383.0	1375.4	1373.6	1370.6	1376.4	1371.6	1370.2
5°	1363.0	1350.6	1334.5	1316.0	1305.3	1289.9	1286.9	1280.9	1275.0	1274.4	1268.4
7.5°	1314.1	1295.8	1274.7	1255.9	1238.5	1221.6	1210.6	1208.2	1199.4	1194.2	1188.3
10°	1282.7	1260.1	1235.7	1217.8	1197.6	1179.7	1167.3	1160.1	1154.1	1147.5	1141.6
12.5°	1245.5	1221.5	1201.4	1182.1	1158.0	1144.4	1123.9	1111.5	1110.3	1110.4	1094.9
15°	1202.3	1178.5	1147.5	1120.2	1107.1	1080.9	1069.6	1055.3	1046.4	1037.4	1030.4
17.5°	1153.0	1123.3	1099.2	1067.7	1042.7	1021.8	1007.0	998.4	985.0	972.3	963.2
20°	1122.0	1090.5	1064.8	1031.5	1004.1	978.5	966.0	954.2	944.0	933.3	923.2
22.5°	1090.5	1057.6	1026.2	993.9	968.5	941.4	929.4	913.2	903.5	897.6	887.4
25°	1041.0	1005.3	969.6	938.7	912.5	888.6	872.6	860.1	849.4	844.6	838.1
27.5°	987.2	951.7	917.2	882.1	852.4	835.1	822.3	812.8	806.7	800.3	797.4
30°	953.0	916.0	879.2	846.4	819.0	801.8	789.9	783.3	778.5	775.6	772.6
32.5°	918.2	881.8	842.9	813.0	788.5	773.2	764.1	757.6	755.2	754.1	753.0
35°	862.5	825.5	789.9	763.1	739.9	733.9	726.2	722.6	721.4	725.6	727.4
37.5°	808.6	774.3	741.4	715.4	700.3	691.6	688.9	689.1	693.3	697.0	701.3
40°	773.8	740.5	709.5	686.9	672.6	667.3	666.1	669.0	673.8	678.0	682.7
42.5°	739.9	707.1	679.0	657.8	647.8	642.9	643.7	646.6	653.3	658.4	665.6
45°	687.5	660.1	632.7	615.4	607.1	608.3	608.3	613.6	620.2	627.9	635.7
47.5°	638.1	610.4	588.0	573.4	569.1	568.1	571.4	578.4	587.8	597.4	608.2
50°	604.8	578.5	558.9	545.8	541.1	542.9	547.6	554.1	565.4	577.4	588.7
52.5°	570.9	547.1	528.9	516.8	513.4	516.7	521.4	531.8	541.7	554.5	568.2
55°	518.4	498.2	483.9	475.0	473.8	475.6	481.0	492.2	506.5	522.6	535.7
57.5°	466.1	449.3	436.2	430.0	430.6	432.2	441.1	454.5	469.8	486.9	503.8
60°	430.9	415.4	404.8	400.0	400.5	404.2	414.8	427.4	446.4	463.0	481.0
62.5°	397.6	384.0	373.8	369.5	368.7	376.5	386.8	399.8	418.8	437.4	456.7
65°	344.1	333.3	325.0	322.6	324.4	330.4	343.5	360.7	376.8	396.4	416.6
67.5°	291.6	282.8	277.2	278.2	280.3	289.1	300.1	315.0	333.2	353.5	373.6
70°	258.3	249.9	245.2	245.8	249.4	260.1	269.7	284.5	304.2	325.0	341.6
72.5°	224.0	218.5	214.3	216.8	220.3	227.7	239.6	254.5	271.8	291.2	308.8
75°	172.0	172.0	169.6	171.4	176.8	183.9	192.9	208.4	225.6	241.1	255.4
77.5°	127.6	126.3	127.9	130.0	133.1	141.5	151.8	162.8	175.8	191.3	203.1
80°	97.6	98.2	101.2	104.8	106.0	112.5	123.2	133.4	143.4	156.5	167.8
82.5°	73.4	74.0	75.5	80.0	81.2	88.3	95.1	105.2	114.4	123.2	132.6
85°	39.9	39.9	42.9	44.6	47.6	52.3	56.6	62.5	70.9	76.8	85.7
87.5°	16.0	16.0	18.5	19.5	21.1	23.7	24.5	29.9	31.9	34.4	38.7
90°	4.0	4.0	6.9	6.9	7.8	8.9	8.4	8.9	9.3	9.8	9.8
92.5°	25.9	36.2	61.1	99.2	136.4	155.8	129.8	96.4	72.6	57.8	48.0
95°	40.7	61.4	104.1	184.7	302.0	400.3	411.6	363.9	287.8	222.0	174.4
97.5°	49.3	66.6	99.5	166.0	282.8	421.6	517.1	537.7	509.5	461.4	410.1
100°	56.0	71.7	100.7	156.2	256.4	394.9	520.6	592.4	602.2	578.1	541.7
102.5°	63.5	78.4	104.6	153.4	238.7	361.5	491.1	589.6	638.3	645.3	630.2
105°	76.1	90.4	113.9	154.7	223.5	322.2	437.6	550.1	635.1	683.7	703.9
107.5°	89.2	103.2	124.8	162.0	220.8	300.2	394.4	494.0	584.4	653.0	696.7
110°	98.2	111.5	133.1	167.5	221.5	292.7	372.8	460.2	545.2	616.4	670.5



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	106.9	120.1	140.9	173.4	223.9	289.2	360.6	435.5	510.6	577.9	631.9
115°	120.4	133.6	153.3	182.7	228.4	287.3	349.2	410.6	471.1	528.5	575.7
117.5°	132.7	146.5	165.1	192.3	233.2	286.8	344.1	398.4	448.4	493.6	533.6
120°	140.9	154.7	173.4	198.9	236.8	286.8	341.4	393.0	438.6	477.9	512.7
122.5°	149.2	162.6	181.2	205.2	240.3	286.5	338.2	388.2	432.3	468.0	498.6
125°	160.6	174.4	192.0	214.6	245.6	285.9	333.0	380.1	422.4	456.2	483.3
127.5°	171.1	184.9	202.1	222.8	249.8	284.7	326.1	370.3	410.7	444.5	470.1
130°	177.8	192.0	208.7	227.9	253.0	284.4	321.7	362.5	401.3	434.6	460.7
132.5°	184.1	197.5	214.2	233.0	255.7	284.0	317.8	354.2	390.6	423.3	449.3
135°	193.0	205.8	222.0	239.7	259.8	283.4	311.9	342.9	374.8	404.7	429.3
137.5°	200.6	212.8	227.9	244.4	262.3	283.3	306.8	332.5	359.6	384.8	407.0
140°	205.3	217.1	231.9	247.5	264.2	282.9	304.0	326.6	349.7	371.8	392.4
142.5°	209.7	221.0	235.4	249.9	265.8	282.9	301.7	321.2	341.5	360.4	378.3
145°	215.6	226.4	239.2	252.4	266.7	281.9	297.6	313.3	330.0	344.8	358.5
147.5°	221.4	231.2	243.1	254.7	267.2	280.2	294.0	306.9	320.2	332.0	342.9
150°	225.0	234.3	245.1	255.9	267.2	279.0	291.3	303.1	314.4	324.2	333.0
152.5°	228.5	237.0	246.7	256.7	266.4	277.0	288.1	298.7	308.4	317.5	324.8
155°	233.3	240.6	249.0	257.4	265.2	274.1	283.4	292.2	300.1	307.5	313.3
157.5°	237.8	243.6	250.7	257.4	264.0	271.0	278.6	285.2	291.9	298.0	302.7
160°	240.1	245.6	251.5	257.4	262.8	268.6	275.1	280.9	286.4	291.7	295.7
162.5°	242.5	246.8	252.3	257.4	261.6	266.3	271.9	276.6	281.2	285.4	289.0
165°	245.1	248.1	252.4	256.4	259.3	262.8	266.7	270.6	273.5	277.0	279.5
167.5°	246.8	249.1	252.4	255.2	257.0	259.2	262.0	264.8	267.1	269.8	271.3
170°	248.1	249.5	251.9	254.4	255.4	256.8	258.8	261.3	262.8	264.8	266.2
172.5°	248.8	249.9	251.6	253.7	253.8	254.5	256.1	258.1	259.2	260.5	261.5
175°	250.0	250.0	251.0	252.4	251.9	251.9	253.0	253.9	254.4	255.4	255.4
177.5°	250.0	250.0	250.4	251.2	250.4	250.4	250.8	251.2	251.6	251.6	251.9
180°	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8
2.5°	1369.2	1368.3	1364.9	1364.5	1364.9	1368.3	1369.2	1370.2	1371.6	1376.4	1370.6
5°	1264.8	1261.9	1260.1	1266.6	1260.1	1261.9	1264.8	1268.4	1274.4	1275.0	1280.9
7.5°	1186.1	1183.8	1178.5	1176.9	1178.5	1183.8	1186.1	1188.3	1194.2	1199.4	1208.2
10°	1135.7	1133.2	1128.5	1127.3	1128.5	1133.2	1135.7	1141.6	1147.5	1154.1	1160.1
12.5°	1087.1	1082.4	1081.4	1082.5	1081.4	1082.4	1087.1	1094.9	1110.4	1110.3	1111.5
15°	1022.6	1020.2	1013.7	1015.5	1013.7	1020.2	1022.6	1030.4	1037.4	1046.4	1055.3
17.5°	959.0	956.1	948.2	955.2	948.2	956.1	959.0	963.2	972.3	985.0	998.4
20°	919.0	914.2	910.1	909.5	910.1	914.2	919.0	923.2	933.3	944.0	954.2
22.5°	880.9	876.7	876.2	872.4	876.2	876.7	880.9	887.4	897.6	903.5	913.2
25°	833.3	829.1	827.9	825.0	827.9	829.1	833.3	838.1	844.6	849.4	860.1
27.5°	796.8	794.7	792.6	793.5	792.6	794.7	796.8	797.4	800.3	806.7	812.8
30°	774.4	773.8	772.6	772.6	772.6	773.8	774.4	772.6	775.6	778.5	783.3
32.5°	755.8	755.7	756.4	756.4	756.4	755.7	755.8	753.0	754.1	755.2	757.6
35°	729.7	731.5	732.7	730.9	732.7	731.5	729.7	727.4	725.6	721.4	722.6
37.5°	706.2	707.9	709.6	711.6	709.6	707.9	706.2	701.3	697.0	693.3	689.1
40°	688.0	692.2	693.4	696.4	693.4	692.2	688.0	682.7	678.0	673.8	669.0
42.5°	670.9	675.5	678.6	679.2	678.6	675.5	670.9	665.6	658.4	653.3	646.6
45°	644.6	649.4	653.6	653.6	653.6	649.4	644.6	635.7	627.9	620.2	613.6
47.5°	617.3	624.2	628.4	629.5	628.4	624.2	617.3	608.2	597.4	587.8	578.4
50°	598.8	607.1	611.3	614.2	611.3	607.1	598.8	588.7	577.4	565.4	554.1
52.5°	580.7	589.0	594.6	596.2	594.6	589.0	580.7	568.2	554.5	541.7	531.8
55°	549.4	561.3	567.8	570.2	567.8	561.3	549.4	535.7	522.6	506.5	492.2
57.5°	519.9	530.8	538.5	540.2	538.5	530.8	519.9	503.8	486.9	469.8	454.5
60°	497.0	508.9	518.4	520.2	518.4	508.9	497.0	481.0	463.0	446.4	427.4
62.5°	473.6	486.0	494.6	499.3	494.6	486.0	473.6	456.7	437.4	418.8	399.8
65°	433.3	445.8	454.2	455.9	454.2	445.8	433.3	416.6	396.4	376.8	360.7
67.5°	389.3	401.7	407.3	410.7	407.3	401.7	389.3	373.6	353.5	333.2	315.0
70°	358.3	368.4	374.4	377.4	374.4	368.4	358.3	341.6	325.0	304.2	284.5
72.5°	323.0	333.6	340.6	341.2	340.6	333.6	323.0	308.8	291.2	271.8	254.5
75°	269.1	278.5	282.1	282.1	282.1	278.5	269.1	255.4	241.1	225.6	208.4
77.5°	212.9	217.8	222.4	223.3	222.4	217.8	212.9	203.1	191.3	175.8	162.8
80°	176.8	179.8	183.3	183.3	183.3	179.8	176.8	167.8	156.5	143.4	133.4
82.5°	139.7	142.2	145.7	145.3	145.7	142.2	139.7	132.6	123.2	114.4	105.2
85°	84.6	89.9	89.3	88.1	89.3	89.9	84.6	85.7	76.8	70.9	62.5
87.5°	40.1	40.7	42.1	43.0	42.1	40.7	40.1	38.7	34.4	31.9	29.9
90°	10.3	10.8	10.3	10.3	10.3	10.8	10.3	9.8	9.8	9.3	8.9
92.5°	42.1	39.5	37.8	37.8	37.8	39.5	42.1	48.0	57.8	72.6	96.4
95°	150.3	135.1	126.2	119.9	126.2	135.1	150.3	174.4	222.0	287.8	363.9
97.5°	374.9	345.3	330.5	320.3	330.5	345.3	374.9	410.1	461.4	509.5	537.7
100°	499.0	469.1	454.3	450.4	454.3	469.1	499.0	541.7	578.1	602.2	592.4
102.5°	603.9	582.2	566.7	563.5	566.7	582.2	603.9	630.2	645.3	638.3	589.6
105°	704.8	700.9	694.0	691.0	694.0	700.9	704.8	703.9	683.7	635.1	550.1
107.5°	721.0	732.2	737.1	738.4	737.1	732.2	721.0	696.7	653.0	584.4	494.0
110°	705.3	725.9	734.8	739.2	734.8	725.9	705.3	670.5	616.4	545.2	460.2



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	671.5	696.5	708.9	716.0	708.9	696.5	671.5	631.9	577.9	510.6	435.5
115°	614.4	643.9	659.6	663.6	659.6	643.9	614.4	575.7	528.5	471.1	410.6
117.5°	566.7	591.4	607.3	610.4	607.3	591.4	566.7	533.6	493.6	448.4	398.4
120°	540.8	562.4	575.1	580.6	575.1	562.4	540.8	512.7	477.9	438.6	393.0
122.5°	522.3	540.8	551.6	557.0	551.6	540.8	522.3	498.6	468.0	432.3	388.2
125°	502.9	517.2	526.5	529.4	526.5	517.2	502.9	483.3	456.2	422.4	380.1
127.5°	489.9	502.6	510.4	513.3	510.4	502.6	489.9	470.1	444.5	410.7	370.3
130°	480.9	493.1	501.0	503.9	501.0	493.1	480.9	460.7	434.6	401.3	362.5
132.5°	469.1	482.9	490.3	493.4	490.3	482.9	469.1	449.3	423.3	390.6	354.2
135°	448.9	462.7	470.5	473.5	470.5	462.7	448.9	429.3	404.7	374.8	342.9
137.5°	425.3	438.9	445.4	448.9	445.4	438.9	425.3	407.0	384.8	359.6	332.5
140°	409.7	420.4	427.3	431.3	427.3	420.4	409.7	392.4	371.8	349.7	326.6
142.5°	393.5	403.6	409.7	412.3	409.7	403.6	393.5	378.3	360.4	341.5	321.2
145°	370.8	379.2	384.1	386.5	384.1	379.2	370.8	358.5	344.8	330.0	313.3
147.5°	351.9	359.0	362.7	363.7	362.7	359.0	351.9	342.9	332.0	320.2	306.9
150°	340.9	347.2	350.2	350.7	350.2	347.2	340.9	333.0	324.2	314.4	303.1
152.5°	331.4	336.7	338.4	338.9	338.4	336.7	331.4	324.8	317.5	308.4	298.7
155°	318.3	322.2	323.6	323.6	323.6	322.2	318.3	313.3	307.5	300.1	292.2
157.5°	306.5	309.4	310.3	310.3	310.3	309.4	306.5	302.7	298.0	291.9	285.2
160°	298.6	301.6	302.0	302.0	302.0	301.6	298.6	295.7	291.7	286.4	280.9
162.5°	291.2	294.1	294.6	294.2	294.6	294.1	291.2	289.0	285.4	281.2	276.6
165°	281.5	283.4	282.9	282.4	282.9	283.4	281.5	279.5	277.0	273.5	270.6
167.5°	272.3	273.5	273.5	273.1	273.5	273.5	272.3	271.3	269.8	267.1	264.8
170°	267.2	267.7	267.2	267.2	267.2	267.7	267.2	266.2	264.8	262.8	261.3
172.5°	262.1	262.6	262.1	261.3	262.1	262.6	262.1	261.5	260.5	259.2	258.1
175°	255.4	256.4	255.4	254.4	255.4	256.4	255.4	255.4	255.4	254.4	253.9
177.5°	251.6	251.9	251.2	250.4	251.2	251.9	251.6	251.9	251.6	251.6	251.2
180°	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8
2.5°	1373.6	1375.4	1383.0	1390.2	1398.8	1405.0	1409.2	1414.0	1424.0	1432.1	1439.7
5°	1286.9	1289.9	1305.3	1316.0	1334.5	1350.6	1363.0	1376.7	1392.8	1414.8	1435.0
7.5°	1210.6	1221.6	1238.5	1255.9	1274.7	1295.8	1314.1	1334.7	1362.4	1392.7	1423.8
10°	1167.3	1179.7	1197.6	1217.8	1235.7	1260.1	1282.7	1307.1	1338.6	1375.5	1412.5
12.5°	1123.9	1144.4	1158.0	1182.1	1201.4	1221.5	1245.5	1277.6	1314.3	1353.1	1397.7
15°	1069.6	1080.9	1107.1	1120.2	1147.5	1178.5	1202.3	1234.5	1270.1	1321.4	1371.4
17.5°	1007.0	1021.8	1042.7	1067.7	1099.2	1123.3	1153.0	1186.0	1231.1	1281.9	1344.5
20°	966.0	978.5	1004.1	1031.5	1064.8	1090.5	1122.0	1154.1	1200.6	1254.7	1320.2
22.5°	929.4	941.4	968.5	993.9	1026.2	1057.6	1090.5	1127.9	1172.4	1229.5	1296.4
25°	872.6	888.6	912.5	938.7	969.6	1005.3	1041.0	1074.4	1122.0	1182.1	1253.5
27.5°	822.3	835.1	852.4	882.1	917.2	951.7	987.2	1029.2	1074.9	1138.4	1212.5
30°	789.9	801.8	819.0	846.4	879.2	916.0	953.0	993.4	1041.0	1104.1	1179.7
32.5°	764.1	773.2	788.5	813.0	842.9	881.8	918.2	960.1	1010.0	1072.2	1145.9
35°	726.2	733.9	739.9	763.1	789.9	825.5	862.5	907.1	955.3	1014.3	1088.0
37.5°	688.9	691.6	700.3	715.4	741.4	774.3	808.6	852.5	901.9	961.7	1028.3
40°	666.1	667.3	672.6	686.9	709.5	740.5	773.8	817.3	864.3	920.8	986.9
42.5°	643.7	642.9	647.8	657.8	679.0	707.1	739.9	779.6	826.6	878.9	941.2
45°	608.3	608.3	607.1	615.4	632.7	660.1	687.5	725.6	764.8	816.1	868.4
47.5°	571.4	568.1	569.1	573.4	588.0	610.4	638.1	669.3	703.9	747.3	793.2
50°	547.6	542.9	541.1	545.8	558.9	578.5	604.8	632.1	664.9	702.9	742.3
52.5°	521.4	516.7	513.4	516.8	528.9	547.1	570.9	595.0	624.4	655.3	689.4
55°	481.0	475.6	473.8	475.0	483.9	498.2	518.4	540.4	562.5	588.1	611.9
57.5°	441.1	432.2	430.6	430.0	436.2	449.3	466.1	485.3	501.3	516.8	542.1
60°	414.8	404.2	400.5	400.0	404.8	415.4	430.9	450.0	461.3	472.0	494.0
62.5°	386.8	376.5	368.7	369.5	373.8	384.0	397.6	411.4	418.9	430.6	445.5
65°	343.5	330.4	324.4	322.6	325.0	333.3	344.1	352.9	361.3	366.1	380.3
67.5°	300.1	289.1	280.3	278.2	277.2	282.8	291.6	297.0	303.0	307.1	315.6
70°	269.7	260.1	249.4	245.8	245.2	249.9	258.3	258.9	267.3	269.1	277.9
72.5°	239.6	227.7	220.3	216.8	214.3	218.5	224.0	225.6	230.1	233.3	238.0
75°	192.9	183.9	176.8	171.4	169.6	172.0	172.0	175.0	178.0	179.8	185.1
77.5°	151.8	141.5	133.1	130.0	127.9	126.3	127.6	129.4	127.9	131.0	132.2
80°	123.2	112.5	106.0	104.8	101.2	98.2	97.6	99.4	97.0	98.2	101.8
82.5°	95.1	88.3	81.2	80.0	75.5	74.0	73.4	72.2	72.2	72.0	72.8
85°	56.6	52.3	47.6	44.6	42.9	39.9	39.9	38.7	37.5	36.3	36.9
87.5°	24.5	23.7	21.1	19.5	18.5	16.0	16.0	14.5	13.9	13.2	12.5
90°	8.4	8.9	7.8	6.9	6.9	4.0	4.0	3.4	2.9	1.5	0.5
92.5°	129.8	155.8	136.4	99.2	61.1	36.2	25.9	18.8	12.7	8.2	5.6
95°	411.6	400.3	302.0	184.7	104.1	61.4	40.7	29.0	22.6	17.7	16.2
97.5°	517.1	421.6	282.8	166.0	99.5	66.6	49.3	39.2	33.3	29.1	29.1
100°	520.6	394.9	256.4	156.2	100.7	71.7	56.0	46.7	40.7	37.4	37.4
102.5°	491.1	361.5	238.7	153.4	104.6	78.4	63.5	54.5	49.0	46.0	45.2
105°	437.6	322.2	223.5	154.7	113.9	90.4	76.1	67.3	61.4	59.0	57.4
107.5°	394.4	300.2	220.8	162.0	124.8	103.2	89.2	80.8	74.5	72.0	71.0
110°	372.8	292.7	221.5	167.5	133.1	111.5	98.2	89.4	83.5	81.0	80.1



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	360.6	289.2	223.9	173.4	140.9	120.1	106.9	98.1	92.6	89.7	88.7
115°	349.2	287.3	228.4	182.7	153.3	133.6	120.4	111.0	106.1	102.6	101.2
117.5°	344.1	286.8	233.2	192.3	165.1	146.5	132.7	124.0	118.6	115.5	114.2
120°	341.4	286.8	236.8	198.9	173.4	154.7	140.9	132.6	127.2	123.8	122.8
122.5°	338.2	286.5	240.3	205.2	181.2	162.6	149.2	140.1	135.1	131.6	130.6
125°	333.0	285.9	245.6	214.6	192.0	174.4	160.6	151.3	145.9	142.9	140.9
127.5°	326.1	284.7	249.8	222.8	202.1	184.9	171.1	161.4	155.2	151.7	150.1
130°	321.7	284.4	253.0	227.9	208.7	192.0	177.8	168.5	161.1	157.1	155.2
132.5°	317.8	284.0	255.7	233.0	214.2	197.5	184.1	174.0	167.0	161.9	160.3
135°	311.9	283.4	259.8	239.7	222.0	205.8	193.0	182.7	174.4	169.4	167.5
137.5°	306.8	283.3	262.3	244.4	227.9	212.8	200.6	189.9	181.9	176.5	174.7
140°	304.0	282.9	264.2	247.5	231.9	217.1	205.3	195.0	186.7	181.2	179.8
142.5°	301.7	282.9	265.8	249.9	235.4	221.0	209.7	199.7	191.7	186.8	185.3
145°	297.6	281.9	266.7	252.4	239.2	226.4	215.6	206.3	199.4	194.5	193.0
147.5°	294.0	280.2	267.2	254.7	243.1	231.2	221.4	213.6	206.6	202.2	201.7
150°	291.3	279.0	267.2	255.9	245.1	234.3	225.0	217.6	211.7	207.8	207.2
152.5°	288.1	277.0	266.4	256.7	246.7	237.0	228.5	221.9	216.4	212.5	212.4
155°	283.4	274.1	265.2	257.4	249.0	240.6	233.3	227.9	223.0	220.1	219.6
157.5°	278.6	271.0	264.0	257.4	250.7	243.6	237.8	233.1	229.3	226.5	226.5
160°	275.1	268.6	262.8	257.4	251.5	245.6	240.1	236.3	232.8	230.8	230.8
162.5°	271.9	266.3	261.6	257.4	252.3	246.8	242.5	239.0	235.9	234.4	234.8
165°	266.7	262.8	259.3	256.4	252.4	248.1	245.1	242.6	240.1	239.2	239.2
167.5°	262.0	259.2	257.0	255.2	252.4	249.1	246.8	245.5	243.6	243.1	243.6
170°	258.8	256.8	255.4	254.4	251.9	249.5	248.1	247.0	245.6	245.1	245.6
172.5°	256.1	254.5	253.8	253.7	251.6	249.9	248.8	248.2	247.1	247.0	247.5
175°	253.0	251.9	251.9	252.4	251.0	250.0	250.0	249.5	249.0	249.0	249.5
177.5°	250.8	250.4	250.4	251.2	250.4	250.0	250.0	250.0	249.6	250.0	250.4
180°	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8
2.5°	1446.4	1451.1	1457.3	1467.8	1471.6	1476.4	1483.1	1482.6	1484.5	1491.6	1506.8
5°	1451.7	1470.2	1488.1	1509.5	1532.1	1547.0	1567.2	1579.7	1592.2	1608.3	1635.6
7.5°	1453.9	1483.2	1515.9	1553.5	1587.0	1625.6	1655.6	1683.9	1709.6	1743.5	1776.2
10°	1450.5	1489.8	1532.1	1579.7	1630.3	1673.2	1711.8	1755.9	1793.4	1834.4	1871.4
12.5°	1444.3	1491.8	1548.3	1601.6	1660.8	1724.1	1772.3	1816.8	1866.7	1914.0	1970.9
15°	1430.3	1495.2	1561.3	1631.5	1710.6	1783.8	1853.5	1911.2	1964.8	2035.7	2110.1
17.5°	1412.5	1482.5	1565.7	1650.8	1733.5	1817.2	1903.4	1990.2	2057.8	2145.8	2204.0
20°	1395.8	1476.7	1562.5	1663.6	1746.4	1850.5	1936.2	2020.2	2113.0	2200.5	2270.1
22.5°	1372.4	1461.0	1552.0	1652.7	1761.6	1865.8	1964.8	2055.9	2148.7	2243.9	2328.2
25°	1342.8	1423.1	1530.9	1645.2	1753.5	1866.6	1980.3	2094.6	2194.5	2295.2	2373.7
27.5°	1292.4	1393.8	1494.1	1612.1	1732.4	1860.4	1981.9	2101.6	2206.3	2289.1	2337.8
30°	1266.6	1354.7	1463.6	1582.1	1712.4	1849.9	1976.7	2094.0	2191.6	2257.6	2277.3
32.5°	1228.6	1319.5	1426.0	1548.8	1686.7	1828.0	1960.1	2070.6	2152.1	2186.7	2163.0
35°	1172.0	1254.1	1361.8	1487.5	1630.9	1781.5	1911.9	2005.3	2046.9	2014.2	1932.7
37.5°	1104.1	1185.5	1293.7	1417.1	1565.6	1718.6	1836.5	1903.8	1889.9	1808.5	1687.0
40°	1056.5	1132.7	1235.7	1369.0	1513.6	1667.2	1770.7	1807.1	1769.0	1652.3	1523.2
42.5°	1003.7	1078.0	1181.4	1309.9	1463.2	1604.8	1695.1	1698.1	1634.2	1494.7	1365.0
45°	923.2	994.0	1091.7	1225.5	1367.2	1500.6	1560.0	1530.9	1413.1	1278.5	1148.1
47.5°	843.8	905.2	1001.4	1128.5	1263.1	1375.3	1404.8	1352.3	1226.8	1096.1	975.3
50°	785.7	847.6	938.1	1059.5	1189.2	1286.2	1300.5	1230.9	1107.7	976.1	881.5
52.5°	730.0	791.4	878.6	990.9	1109.7	1197.2	1197.7	1117.1	994.4	877.1	789.1
55°	648.2	703.5	782.1	882.7	988.7	1057.1	1040.4	957.1	850.6	748.8	672.0
57.5°	569.4	617.6	690.0	773.9	867.2	923.7	896.0	815.8	720.7	634.4	576.2
60°	518.4	564.3	626.2	705.3	783.9	827.9	801.8	729.1	641.6	572.0	521.4
62.5°	468.9	507.6	567.1	635.8	708.7	741.3	718.0	646.3	570.7	507.7	466.7
65°	398.8	430.3	477.9	536.9	589.9	617.9	598.2	531.5	473.8	428.5	395.8
67.5°	333.3	358.0	394.0	441.3	486.3	501.4	483.5	437.1	388.2	352.0	328.9
70°	288.1	311.3	341.6	378.0	417.2	433.3	415.4	378.6	338.7	305.3	282.8
72.5°	248.6	266.6	292.1	323.2	354.0	370.0	357.8	322.4	288.7	263.9	244.6
75°	189.2	204.7	222.6	244.6	268.5	279.1	268.5	244.0	220.8	202.3	188.6
77.5°	137.6	145.9	159.7	176.2	191.1	199.2	190.0	173.4	159.3	146.6	139.9
80°	104.8	110.7	120.2	133.4	143.4	151.2	145.3	131.6	120.2	111.9	108.9
82.5°	76.2	80.2	86.4	96.2	103.0	106.9	104.3	94.4	89.7	82.4	79.4
85°	37.5	39.9	44.1	47.0	53.0	53.6	54.2	50.0	45.8	44.1	41.7
87.5°	13.2	13.9	15.4	17.0	18.9	20.0	19.5	19.6	18.0	17.4	15.6
90°	1.5	2.9	3.4	4.0	4.0	6.9	6.9	7.8	8.9	8.4	8.9
92.5°	8.2	12.7	18.8	25.9	36.2	61.1	99.2	136.4	155.8	129.8	96.4
95°	17.7	22.6	29.0	40.7	61.4	104.1	184.7	302.0	400.3	411.6	363.9
97.5°	29.1	33.3	39.2	49.3	66.6	99.5	166.0	282.8	421.6	517.1	537.7
100°	37.4	40.7	46.7	56.0	71.7	100.7	156.2	256.4	394.9	520.6	592.4
102.5°	46.0	49.0	54.5	63.5	78.4	104.6	153.4	238.7	361.5	491.1	589.6
105°	59.0	61.4	67.3	76.1	90.4	113.9	154.7	223.5	322.2	437.6	550.1
107.5°	72.0	74.5	80.8	89.2	103.2	124.8	162.0	220.8	300.2	394.4	494.0
110°	81.0	83.5	89.4	98.2	111.5	133.1	167.5	221.5	292.7	372.8	460.2



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	89.7	92.6	98.1	106.9	120.1	140.9	173.4	223.9	289.2	360.6	435.5
115°	102.6	106.1	111.0	120.4	133.6	153.3	182.7	228.4	287.3	349.2	410.6
117.5°	115.5	118.6	124.0	132.7	146.5	165.1	192.3	233.2	286.8	344.1	398.4
120°	123.8	127.2	132.6	140.9	154.7	173.4	198.9	236.8	286.8	341.4	393.0
122.5°	131.6	135.1	140.1	149.2	162.6	181.2	205.2	240.3	286.5	338.2	388.2
125°	142.9	145.9	151.3	160.6	174.4	192.0	214.6	245.6	285.9	333.0	380.1
127.5°	151.7	155.2	161.4	171.1	184.9	202.1	222.8	249.8	284.7	326.1	370.3
130°	157.1	161.1	168.5	177.8	192.0	208.7	227.9	253.0	284.4	321.7	362.5
132.5°	161.9	167.0	174.0	184.1	197.5	214.2	233.0	255.7	284.0	317.8	354.2
135°	169.4	174.4	182.7	193.0	205.8	222.0	239.7	259.8	283.4	311.9	342.9
137.5°	176.5	181.9	189.9	200.6	212.8	227.9	244.4	262.3	283.3	306.8	332.5
140°	181.2	186.7	195.0	205.3	217.1	231.9	247.5	264.2	282.9	304.0	326.6
142.5°	186.8	191.7	199.7	209.7	221.0	235.4	249.9	265.8	282.9	301.7	321.2
145°	194.5	199.4	206.3	215.6	226.4	239.2	252.4	266.7	281.9	297.6	313.3
147.5°	202.2	206.6	213.6	221.4	231.2	243.1	254.7	267.2	280.2	294.0	306.9
150°	207.8	211.7	217.6	225.0	234.3	245.1	255.9	267.2	279.0	291.3	303.1
152.5°	212.5	216.4	221.9	228.5	237.0	246.7	256.7	266.4	277.0	288.1	298.7
155°	220.1	223.0	227.9	233.3	240.6	249.0	257.4	265.2	274.1	283.4	292.2
157.5°	226.5	229.3	233.1	237.8	243.6	250.7	257.4	264.0	271.0	278.6	285.2
160°	230.8	232.8	236.3	240.1	245.6	251.5	257.4	262.8	268.6	275.1	280.9
162.5°	234.4	235.9	239.0	242.5	246.8	252.3	257.4	261.6	266.3	271.9	276.6
165°	239.2	240.1	242.6	245.1	248.1	252.4	256.4	259.3	262.8	266.7	270.6
167.5°	243.1	243.6	245.5	246.8	249.1	252.4	255.2	257.0	259.2	262.0	264.8
170°	245.1	245.6	247.0	248.1	249.5	251.9	254.4	255.4	256.8	258.8	261.3
172.5°	247.0	247.1	248.2	248.8	249.9	251.6	253.7	253.8	254.5	256.1	258.1
175°	249.0	249.0	249.5	250.0	250.0	251.0	252.4	251.9	251.9	253.0	253.9
177.5°	250.0	249.6	250.0	250.0	250.0	250.4	251.2	250.4	250.4	250.8	251.2
180°	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8	1436.8
2.5°	1514.5	1515.4	1519.7	1523.0	1524.0	1528.8	1529.2
5°	1647.5	1657.7	1677.3	1679.1	1682.0	1697.5	1685.7
7.5°	1803.5	1829.2	1846.3	1861.5	1867.0	1873.7	1872.3
10°	1903.5	1941.6	1960.7	1991.0	1992.2	1999.9	1995.2
12.5°	2004.0	2048.2	2083.0	2088.6	2114.1	2118.0	2124.7
15°	2146.3	2193.4	2241.6	2258.8	2294.0	2302.3	2315.4
17.5°	2280.2	2328.2	2362.1	2406.7	2421.1	2440.4	2427.2
20°	2353.5	2405.9	2448.7	2483.8	2498.7	2509.4	2508.3
22.5°	2397.8	2450.6	2485.4	2511.9	2525.8	2530.4	2530.1
25°	2425.5	2455.8	2466.6	2476.7	2461.3	2455.8	2458.2
27.5°	2348.4	2340.5	2312.6	2275.9	2237.7	2207.5	2191.1
30°	2242.2	2195.7	2153.4	2079.7	2041.6	2019.0	1998.7
32.5°	2091.7	2018.1	1936.8	1869.2	1825.9	1792.3	1787.3
35°	1833.8	1723.1	1623.8	1541.0	1498.1	1461.8	1453.5
37.5°	1559.1	1444.1	1354.6	1281.8	1235.7	1210.0	1186.1
40°	1376.7	1277.9	1189.8	1127.9	1092.8	1074.4	1059.5
42.5°	1236.2	1146.0	1058.4	1011.2	979.5	968.2	959.5
45°	1042.2	958.3	897.6	861.9	843.4	824.4	815.5
47.5°	886.8	818.6	778.5	748.2	728.4	717.1	711.4
50°	798.7	742.8	707.1	683.9	666.1	657.1	652.4
52.5°	720.7	674.8	644.7	626.3	614.2	607.6	605.7
55°	620.8	585.7	566.6	550.6	541.7	535.7	533.3
57.5°	539.6	512.6	497.1	483.9	480.4	475.4	473.8
60°	486.3	465.5	452.4	443.4	440.5	434.5	435.7
62.5°	439.1	422.1	411.0	405.8	401.9	396.9	398.6
65°	371.4	359.0	352.9	348.2	343.5	340.4	342.9
67.5°	311.7	303.1	295.0	292.2	289.9	289.4	286.9
70°	272.6	265.4	258.3	256.6	256.6	254.2	253.6
72.5°	235.0	229.7	225.0	223.7	221.8	222.7	220.2
75°	181.5	177.4	175.6	173.8	173.2	173.2	171.4
77.5°	134.1	131.0	128.2	128.2	126.1	125.3	125.0
80°	101.8	100.6	98.2	98.2	97.0	97.6	96.4
82.5°	76.5	74.9	74.4	73.4	71.8	71.9	70.7
85°	41.1	39.3	38.7	36.9	35.7	36.9	35.7
87.5°	16.2	15.8	15.3	14.5	14.0	13.9	12.6
90°	9.3	9.8	9.8	10.3	10.8	10.3	10.3
92.5°	72.6	57.8	48.0	42.1	39.5	37.8	37.8
95°	287.8	222.0	174.4	150.3	135.1	126.2	119.9
97.5°	509.5	461.4	410.1	374.9	345.3	330.5	320.3
100°	602.2	578.1	541.7	499.0	469.1	454.3	450.4
102.5°	638.3	645.3	630.2	603.9	582.2	566.7	563.5
105°	635.1	683.7	703.9	704.8	700.9	694.0	691.0
107.5°	584.4	653.0	696.7	721.0	732.2	737.1	738.4
110°	545.2	616.4	670.5	705.3	725.9	734.8	739.2



TEST NUMBER: P332636-935

CATALOG NUMBER: S124DIP-S1020D590U935-4F0-1E-UDD-A4

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	510.6	577.9	631.9	671.5	696.5	708.9	716.0
115°	471.1	528.5	575.7	614.4	643.9	659.6	663.6
117.5°	448.4	493.6	533.6	566.7	591.4	607.3	610.4
120°	438.6	477.9	512.7	540.8	562.4	575.1	580.6
122.5°	432.3	468.0	498.6	522.3	540.8	551.6	557.0
125°	422.4	456.2	483.3	502.9	517.2	526.5	529.4
127.5°	410.7	444.5	470.1	489.9	502.6	510.4	513.3
130°	401.3	434.6	460.7	480.9	493.1	501.0	503.9
132.5°	390.6	423.3	449.3	469.1	482.9	490.3	493.4
135°	374.8	404.7	429.3	448.9	462.7	470.5	473.5
137.5°	359.6	384.8	407.0	425.3	438.9	445.4	448.9
140°	349.7	371.8	392.4	409.7	420.4	427.3	431.3
142.5°	341.5	360.4	378.3	393.5	403.6	409.7	412.3
145°	330.0	344.8	358.5	370.8	379.2	384.1	386.5
147.5°	320.2	332.0	342.9	351.9	359.0	362.7	363.7
150°	314.4	324.2	333.0	340.9	347.2	350.2	350.7
152.5°	308.4	317.5	324.8	331.4	336.7	338.4	338.9
155°	300.1	307.5	313.3	318.3	322.2	323.6	323.6
157.5°	291.9	298.0	302.7	306.5	309.4	310.3	310.3
160°	286.4	291.7	295.7	298.6	301.6	302.0	302.0
162.5°	281.2	285.4	289.0	291.2	294.1	294.6	294.2
165°	273.5	277.0	279.5	281.5	283.4	282.9	282.4
167.5°	267.1	269.8	271.3	272.3	273.5	273.5	273.1
170°	262.8	264.8	266.2	267.2	267.7	267.2	267.2
172.5°	259.2	260.5	261.5	262.1	262.6	262.1	261.3
175°	254.4	255.4	255.4	255.4	256.4	255.4	254.4
177.5°	251.6	251.6	251.9	251.6	251.9	251.2	250.4
180°	250.0	250.0	250.0	250.0	250.0	250.0	250.0

(END OF REPORT)