

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332694-935

Luminaire Tested: **S124DIP-S1195D810U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332694-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S1195D810U935-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7189.9 lumens
Efficiency: N/A
Efficacy: 118.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332694-935

CATALOG NUMBER: S124DIP-S1195D810U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

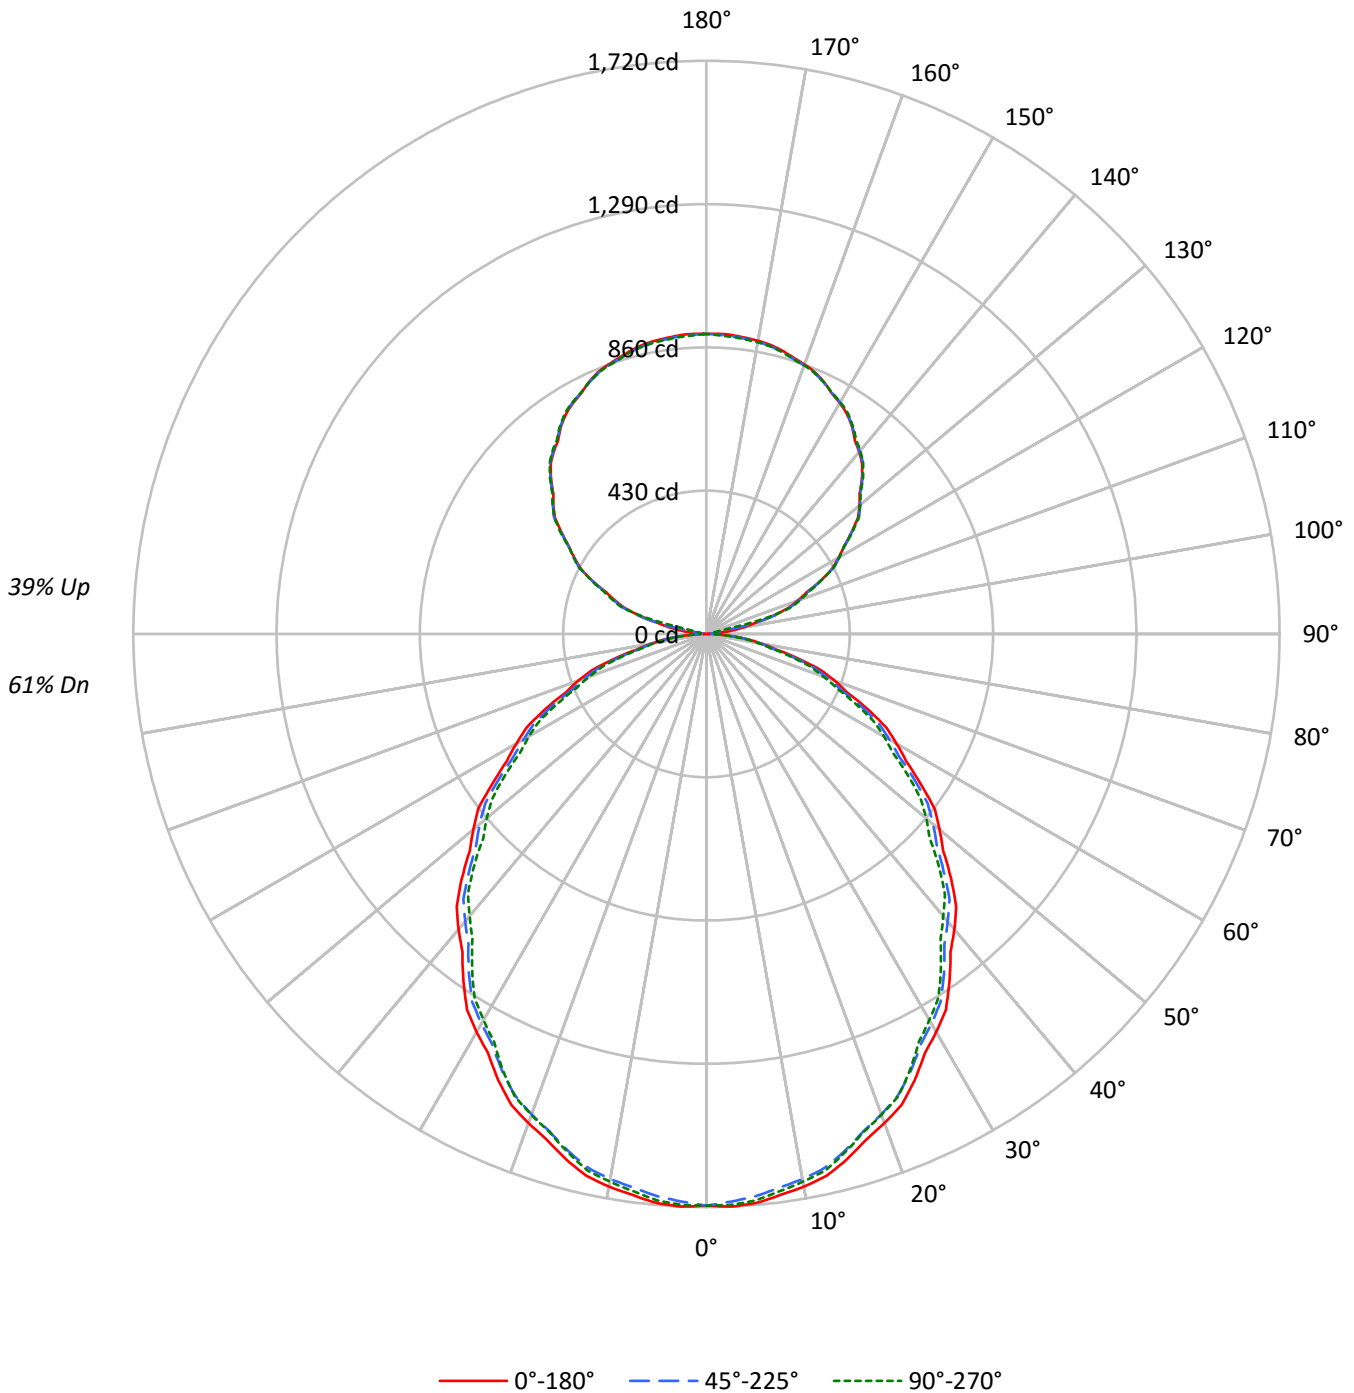



TEST NUMBER: P332694-935

CATALOG NUMBER: S124DIP-S1195D810U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	66	66	66	66	66	66	66	66	66	61		
1	100	96	92	88	94	90	86	83	79	76	74	68	66	65	59	57	56	56	56	56	56	56	56	52		
2	91	84	77	72	85	79	73	68	69	65	61	60	57	54	52	49	47	47	47	47	47	47	47	43		
3	83	74	66	60	78	69	62	57	61	56	51	53	49	46	46	43	40	40	40	40	40	40	40	37		
4	76	65	57	51	71	61	54	48	54	48	44	47	43	39	41	37	35	35	35	35	35	35	35	31		
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30	30	30	30	30	30	30	27		
6	65	52	44	38	60	49	42	36	44	38	33	38	34	30	33	30	27	27	27	27	27	27	27	24		
7	60	47	39	33	56	45	37	32	40	34	29	35	30	26	31	27	24	24	24	24	24	24	24	21		
8	56	43	35	30	52	41	33	28	36	30	26	32	27	24	28	24	21	21	21	21	21	21	21	19		
9	52	39	32	26	48	37	30	25	33	27	23	29	25	21	26	22	19	19	19	19	19	19	19	17		
10	48	36	29	24	45	34	27	23	31	25	21	27	23	19	24	20	17	17	17	17	17	17	17	16		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13852	13852	13852
5°	13893	13726	13827
10°	13806	13615	13682
15°	13639	13422	13456
20°	13418	13181	13193
25°	13165	12908	12871
30°	12855	12585	12470
35°	12534	12249	12086
40°	12199	11866	11649
45°	11851	11490	11270
50°	11465	11154	10810
55°	11050	10719	10372
60°	10634	10233	9923
65°	10164	9769	9377
70°	9640	9151	8795
75°	8833	8406	8191
80°	7861	7541	7350
85°	6873	6623	6493



TEST NUMBER: P332694-935

CATALOG NUMBER: S124DIP-S1195D810U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	161.6	2.2
10°-20°	455.3	6.3
20°-30°	670.1	9.3
30°-40°	779.0	10.8
40°-50°	779.1	10.8
50°-60°	681.5	9.5
60°-70°	506.1	7.0
70°-80°	287.5	4.0
80°-90°	85.6	1.2
90°-100°	30.8	0.4
100°-110°	196.3	2.7
110°-120°	375.5	5.2
120°-130°	476.7	6.6
130°-140°	510.0	7.1
140°-150°	476.9	6.6
150°-160°	384.6	5.3
160°-170°	248.0	3.4
170°-180°	85.5	1.2
0°-30°	1287.0	17.9
0°-40°	2066.0	28.7
0°-60°	3526.5	49.0
0°-90°	4405.7	61.3
90°-120°	602.6	8.4
90°-150°	2066.1	28.7
90°-180°	2784.0	38.7
0°-180°	7189.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1716	1716	1716	1716	1716	
5°	1714	1708	1694	1708	1706	163
15°	1632	1626	1606	1613	1610	460
25°	1478	1468	1449	1450	1445	680
35°	1272	1262	1243	1233	1226	795
45°	1038	1028	1006	992	987	800
55°	785	780	762	746	737	703
65°	532	525	511	498	491	527
75°	283	276	270	264	263	301
85°	74	74	72	71	70	82
90°	2	9	15	19	20	6
95°	37	15	15	19	20	48
105°	203	207	210	214	192	212
115°	378	380	380	381	381	372
125°	532	534	533	535	536	475
135°	660	659	662	663	664	508
145°	761	763	763	763	765	475
155°	834	835	833	835	833	384
165°	880	877	876	881	876	249
175°	900	896	897	902	895	86
180°	900	900	900	900	900	



TEST NUMBER: P332694-935

CATALOG NUMBER: S124DIP-S1195D810U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1720.2	1719.5	1718.7	1718.0	1717.3	1715.5	1712.9	1710.2	1707.5	1704.9	1707.3
5°	1714.4	1713.2	1712.0	1710.8	1709.6	1707.3	1703.9	1700.6	1697.2	1693.8	1697.2
7.5°	1698.5	1697.3	1696.1	1694.8	1693.6	1691.2	1687.4	1683.7	1680.0	1676.2	1679.0
10°	1684.2	1683.0	1681.8	1680.5	1679.3	1676.7	1672.8	1668.8	1664.8	1660.9	1663.3
12.5°	1665.5	1664.3	1663.0	1661.8	1660.6	1657.9	1653.7	1649.5	1645.3	1641.1	1643.7
15°	1631.9	1630.7	1629.5	1628.3	1627.0	1624.2	1619.5	1615.0	1610.4	1605.9	1607.7
17.5°	1591.6	1590.0	1588.5	1587.0	1585.4	1582.5	1578.1	1573.8	1569.5	1565.1	1566.3
20°	1561.9	1560.3	1558.8	1557.3	1555.7	1552.6	1548.1	1543.5	1539.0	1534.3	1535.2
22.5°	1529.9	1527.9	1526.0	1523.9	1521.9	1518.5	1514.0	1509.4	1504.9	1500.2	1501.9
25°	1478.0	1475.8	1473.7	1471.5	1469.4	1466.2	1461.9	1457.7	1453.4	1449.1	1449.4
27.5°	1418.6	1416.3	1414.2	1412.0	1409.8	1406.7	1402.7	1398.8	1394.8	1390.8	1390.1
30°	1379.0	1376.6	1374.1	1371.7	1369.2	1366.0	1362.0	1358.1	1354.1	1350.1	1348.9
32.5°	1337.2	1335.0	1332.8	1330.6	1328.4	1325.2	1320.9	1316.7	1312.5	1308.3	1306.8
35°	1271.8	1269.6	1267.5	1265.3	1263.2	1260.0	1255.7	1251.5	1247.2	1242.9	1240.7
37.5°	1202.7	1200.8	1198.9	1196.9	1194.9	1191.6	1187.1	1182.5	1177.8	1173.3	1171.0
40°	1157.6	1155.2	1152.7	1150.3	1147.9	1144.4	1139.8	1135.1	1130.6	1126.0	1122.9
42.5°	1109.2	1107.8	1106.3	1104.8	1103.4	1100.1	1095.0	1089.9	1084.9	1079.8	1076.2
45°	1038.0	1035.9	1033.7	1031.6	1029.5	1026.0	1021.1	1016.2	1011.2	1006.4	1003.1
47.5°	963.5	962.0	960.5	959.1	957.6	954.7	950.1	945.6	941.1	936.6	932.8
50°	912.9	911.7	910.4	909.2	908.0	905.3	901.0	896.7	892.4	888.1	883.9
52.5°	863.4	861.9	860.5	859.0	857.6	854.5	850.1	845.5	841.0	836.5	832.7
55°	785.1	784.1	783.3	782.3	781.4	778.8	774.5	770.3	765.9	761.6	758.0
57.5°	710.2	709.2	708.2	707.1	706.1	703.4	699.2	695.0	690.8	686.6	683.1
60°	658.6	657.0	655.5	654.0	652.5	649.7	645.8	641.8	637.7	633.8	631.0
62.5°	608.0	606.7	605.4	604.1	602.9	600.1	595.9	591.7	587.5	583.2	580.7
65°	532.1	530.5	529.0	527.4	526.0	523.7	520.6	517.5	514.5	511.4	508.4
67.5°	455.6	454.3	452.8	451.4	450.0	447.8	444.9	442.0	439.0	436.1	433.2
70°	408.4	406.2	404.1	401.9	399.8	397.5	395.0	392.6	390.1	387.7	385.3
72.5°	357.7	355.6	353.4	351.3	349.2	347.2	345.2	343.2	341.3	339.3	337.3
75°	283.2	281.7	280.2	278.6	277.1	275.6	274.1	272.5	271.0	269.5	268.3
77.5°	212.0	211.3	210.7	210.0	209.3	208.3	207.0	205.6	204.3	202.9	202.6
80°	169.1	168.2	167.3	166.3	165.5	164.7	164.1	163.4	162.8	162.2	161.6
82.5°	127.3	126.9	126.5	126.1	125.6	125.4	125.2	125.1	124.9	124.8	124.5
85°	74.2	74.2	74.2	74.2	74.2	74.0	73.4	72.8	72.1	71.5	71.5
87.5°	29.0	29.1	29.2	29.3	29.4	29.4	29.4	29.4	29.4	29.4	29.5
90°	2.0	3.7	5.3	7.0	8.6	10.0	11.2	12.4	13.6	14.8	15.7
92.5°	8.5	8.6	8.7	8.8	8.9	9.5	10.7	11.9	13.1	14.3	15.2
95°	37.0	31.9	26.9	21.8	16.7	14.2	14.4	14.6	14.6	14.8	15.7
97.5°	78.6	81.8	85.0	88.2	91.4	84.6	67.8	51.1	34.4	17.7	17.8
100°	110.4	113.1	115.8	118.5	121.1	112.2	91.5	70.9	50.3	29.6	27.0
102.5°	145.9	147.9	149.9	151.9	153.9	153.5	150.8	148.1	145.4	142.8	115.3
105°	202.6	203.5	204.4	205.3	206.2	207.1	207.8	208.5	209.3	210.0	211.4
107.5°	255.3	255.7	256.1	256.7	257.1	257.8	258.8	259.8	260.9	261.9	262.5
110°	290.8	291.3	291.7	292.1	292.7	293.3	294.2	295.1	296.0	296.9	297.2



TEST NUMBER: P332694-935

CATALOG NUMBER: S124DIP-S1195D810U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	325.3	326.1	326.9	327.7	328.6	329.2	329.6	329.9	330.4	330.8	330.8
115°	378.3	378.8	379.3	379.7	380.1	380.3	380.1	380.0	379.9	379.7	380.0
117.5°	426.1	426.7	427.3	427.9	428.5	429.0	429.3	429.6	430.0	430.3	430.2
120°	458.5	459.1	459.7	460.3	460.8	461.1	460.9	460.8	460.6	460.5	460.8
122.5°	488.6	489.0	489.3	489.7	490.1	490.3	490.5	490.8	490.9	491.2	491.4
125°	531.8	532.4	533.0	533.6	534.3	534.3	534.1	533.8	533.5	533.2	533.6
127.5°	572.7	572.9	573.1	573.3	573.3	573.8	574.5	575.1	575.8	576.5	576.4
130°	599.2	599.3	599.4	599.6	599.8	600.0	600.5	601.0	601.4	601.8	602.0
132.5°	623.4	623.6	624.0	624.2	624.5	624.9	625.4	626.0	626.5	627.2	627.3
135°	659.8	659.6	659.4	659.3	659.2	659.4	660.0	660.6	661.2	661.8	662.0
137.5°	691.9	692.0	692.1	692.1	692.2	692.5	693.2	693.9	694.5	695.2	695.5
140°	712.9	713.3	713.5	713.9	714.1	714.5	714.7	715.1	715.3	715.6	716.1
142.5°	731.8	732.3	732.9	733.4	733.9	734.3	734.4	734.7	734.9	735.0	735.4
145°	760.7	761.2	761.6	762.1	762.5	762.8	762.8	762.8	762.8	762.8	762.9
147.5°	783.8	784.6	785.4	786.3	787.1	787.5	787.3	787.1	787.0	786.9	787.0
150°	800.5	801.1	801.7	802.3	802.8	803.1	802.9	802.8	802.6	802.5	802.5
152.5°	814.4	814.9	815.4	815.9	816.4	816.5	816.2	816.0	815.6	815.4	815.6
155°	834.1	834.2	834.4	834.6	834.7	834.6	834.1	833.6	833.2	832.8	833.4
157.5°	850.7	850.6	850.5	850.4	850.3	850.0	849.5	849.0	848.5	848.0	848.8
160°	860.4	859.9	859.5	859.0	858.6	858.2	858.2	858.0	857.8	857.6	858.6
162.5°	869.0	868.4	867.8	867.3	866.7	866.3	866.2	866.1	865.9	865.7	866.7
165°	879.9	879.2	878.4	877.6	876.9	876.5	876.5	876.5	876.5	876.5	877.7
167.5°	888.5	887.7	886.9	886.1	885.4	884.9	884.8	884.8	884.7	884.6	885.9
170°	893.4	892.4	891.6	890.6	889.8	889.4	889.5	889.7	889.8	890.0	891.1
172.5°	896.6	895.7	894.8	893.9	893.0	892.6	892.8	892.9	893.0	893.2	894.4
175°	900.1	899.1	898.3	897.4	896.5	896.1	896.3	896.4	896.6	896.7	898.0
177.5°	901.7	900.9	900.0	899.1	898.4	898.0	898.3	898.5	898.8	899.0	899.9
180°	900.1	900.1	900.1	900.1	900.1	900.1	900.1	900.1	900.1	900.1	900.1



TEST NUMBER: P332694-935

CATALOG NUMBER: S124DIP-S1195D810U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1709.7	1712.2	1714.6	1715.7	1715.5	1715.2	1714.9	1714.7
5°	1700.6	1703.9	1707.3	1708.7	1708.1	1707.4	1706.8	1706.2
7.5°	1681.6	1684.3	1687.0	1688.2	1687.8	1687.4	1687.0	1686.7
10°	1665.7	1668.2	1670.6	1671.5	1670.9	1670.3	1669.7	1669.0
12.5°	1646.4	1649.1	1651.8	1652.7	1651.8	1651.0	1650.1	1649.2
15°	1609.5	1611.4	1613.2	1613.6	1612.7	1611.8	1610.8	1610.0
17.5°	1567.5	1568.7	1569.8	1570.0	1569.4	1568.8	1568.2	1567.6
20°	1536.2	1537.1	1538.0	1538.2	1537.6	1537.0	1536.4	1535.7
22.5°	1503.6	1505.2	1506.8	1507.1	1506.1	1504.9	1503.8	1502.7
25°	1449.8	1450.0	1450.4	1449.8	1448.6	1447.4	1446.2	1445.0
27.5°	1389.3	1388.6	1387.8	1386.7	1385.2	1383.7	1382.2	1380.6
30°	1347.6	1346.4	1345.2	1343.8	1342.3	1340.8	1339.3	1337.7
32.5°	1305.4	1303.9	1302.4	1301.0	1299.4	1297.9	1296.4	1294.9
35°	1238.6	1236.5	1234.3	1232.5	1231.0	1229.4	1227.9	1226.4
37.5°	1168.6	1166.3	1164.0	1161.8	1159.9	1157.8	1155.8	1153.7
40°	1119.9	1116.8	1113.8	1111.5	1110.0	1108.5	1106.9	1105.4
42.5°	1072.7	1069.2	1065.7	1063.3	1062.3	1061.3	1060.2	1059.2
45°	999.7	996.3	993.0	990.8	989.9	988.9	988.1	987.1
47.5°	929.0	925.2	921.4	918.3	916.0	913.7	911.4	909.0
50°	879.6	875.3	871.1	868.0	866.2	864.4	862.5	860.7
52.5°	828.9	825.1	821.3	818.3	816.0	813.6	811.3	809.0
55°	754.3	750.7	747.0	744.2	742.4	740.6	738.7	736.9
57.5°	679.7	676.1	672.7	670.0	668.3	666.5	664.7	663.0
60°	628.3	625.6	622.8	620.7	619.1	617.6	616.1	614.6
62.5°	578.2	575.7	573.2	571.2	569.6	568.1	566.6	565.1
65°	505.3	502.3	499.2	497.0	495.4	493.9	492.3	490.9
67.5°	430.2	427.3	424.4	422.7	422.2	421.8	421.4	420.9
70°	382.8	380.4	377.9	376.3	375.3	374.4	373.5	372.6
72.5°	335.4	333.5	331.5	330.0	329.2	328.2	327.3	326.4
75°	267.0	265.8	264.6	263.8	263.6	263.2	262.9	262.6
77.5°	202.2	201.8	201.5	200.9	200.1	199.3	198.5	197.7
80°	161.0	160.4	159.8	159.4	159.0	158.7	158.4	158.1
82.5°	124.1	123.7	123.4	123.0	122.7	122.4	122.1	121.8
85°	71.5	71.5	71.5	71.4	71.0	70.7	70.4	70.1
87.5°	29.7	29.9	30.0	30.2	30.2	30.3	30.4	30.5
90°	16.6	17.5	18.4	19.0	19.3	19.6	19.9	20.2
92.5°	16.1	17.0	17.8	18.3	18.4	18.4	18.5	18.6
95°	16.6	17.5	18.4	18.9	19.1	19.2	19.4	19.5
97.5°	18.0	18.1	18.2	18.3	18.4	18.5	18.7	18.9
100°	24.5	22.0	19.5	18.3	18.4	18.5	18.7	18.9
102.5°	87.8	60.4	33.0	19.3	19.3	19.3	19.4	19.4
105°	212.8	214.0	215.4	213.4	208.0	202.6	197.3	191.8
107.5°	263.2	263.8	264.5	265.1	265.7	266.2	266.8	267.4
110°	297.5	297.8	298.1	298.4	298.9	299.4	299.8	300.2



TEST NUMBER: P332694-935

CATALOG NUMBER: S124DIP-S1195D810U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	330.7	330.6	330.5	330.8	331.4	332.0	332.5	333.1
115°	380.3	380.6	380.9	381.1	381.1	381.1	381.1	381.1
117.5°	430.2	430.2	430.1	430.0	430.0	429.9	429.8	429.8
120°	461.1	461.4	461.7	461.7	461.4	461.1	460.8	460.5
122.5°	491.5	491.7	491.9	491.8	491.5	491.2	490.9	490.6
125°	534.1	534.5	534.9	535.3	535.5	535.5	535.7	535.9
127.5°	576.4	576.3	576.2	576.1	575.9	575.8	575.8	575.6
130°	602.2	602.3	602.4	602.5	602.5	602.5	602.5	602.5
132.5°	627.5	627.6	627.8	627.8	627.7	627.5	627.4	627.3
135°	662.4	662.6	663.0	663.2	663.6	663.8	664.2	664.4
137.5°	695.8	696.1	696.5	696.5	696.5	696.4	696.3	696.2
140°	716.5	717.0	717.4	717.7	717.9	718.0	718.2	718.3
142.5°	735.6	736.0	736.3	736.5	736.5	736.6	736.6	736.6
145°	763.0	763.2	763.4	763.5	763.9	764.1	764.5	764.7
147.5°	787.1	787.2	787.3	787.5	787.6	787.7	787.9	788.1
150°	802.5	802.5	802.5	802.5	802.7	802.8	803.0	803.1
152.5°	815.9	816.1	816.3	816.4	816.3	816.2	816.1	816.1
155°	834.0	834.6	835.2	835.3	834.7	834.3	833.9	833.4
157.5°	849.5	850.3	851.1	851.1	850.3	849.5	848.8	848.0
160°	859.5	860.4	861.3	861.3	860.4	859.5	858.6	857.6
162.5°	867.5	868.4	869.4	869.3	868.2	867.2	866.3	865.2
165°	878.9	880.1	881.3	881.2	879.9	878.6	877.2	875.8
167.5°	887.3	888.6	889.8	889.8	888.3	886.7	885.3	883.8
170°	892.3	893.5	894.8	894.6	893.1	891.7	890.1	888.6
172.5°	895.6	896.8	898.0	897.8	896.2	894.6	892.9	891.3
175°	899.4	900.8	902.1	901.9	900.1	898.3	896.5	894.7
177.5°	901.0	901.9	902.8	902.6	901.1	899.7	898.3	896.8
180°	900.1	900.1	900.1	900.1	900.1	900.1	900.1	900.1

(END OF REPORT)