

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332614-935

Luminaire Tested: **S124DIP-S795D1035U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332614-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S795D1035U935-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1035 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6019.2 lumens
Efficiency: N/A
Efficacy: 115.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332614-935

CATALOG NUMBER: S124DIP-S795D1035U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

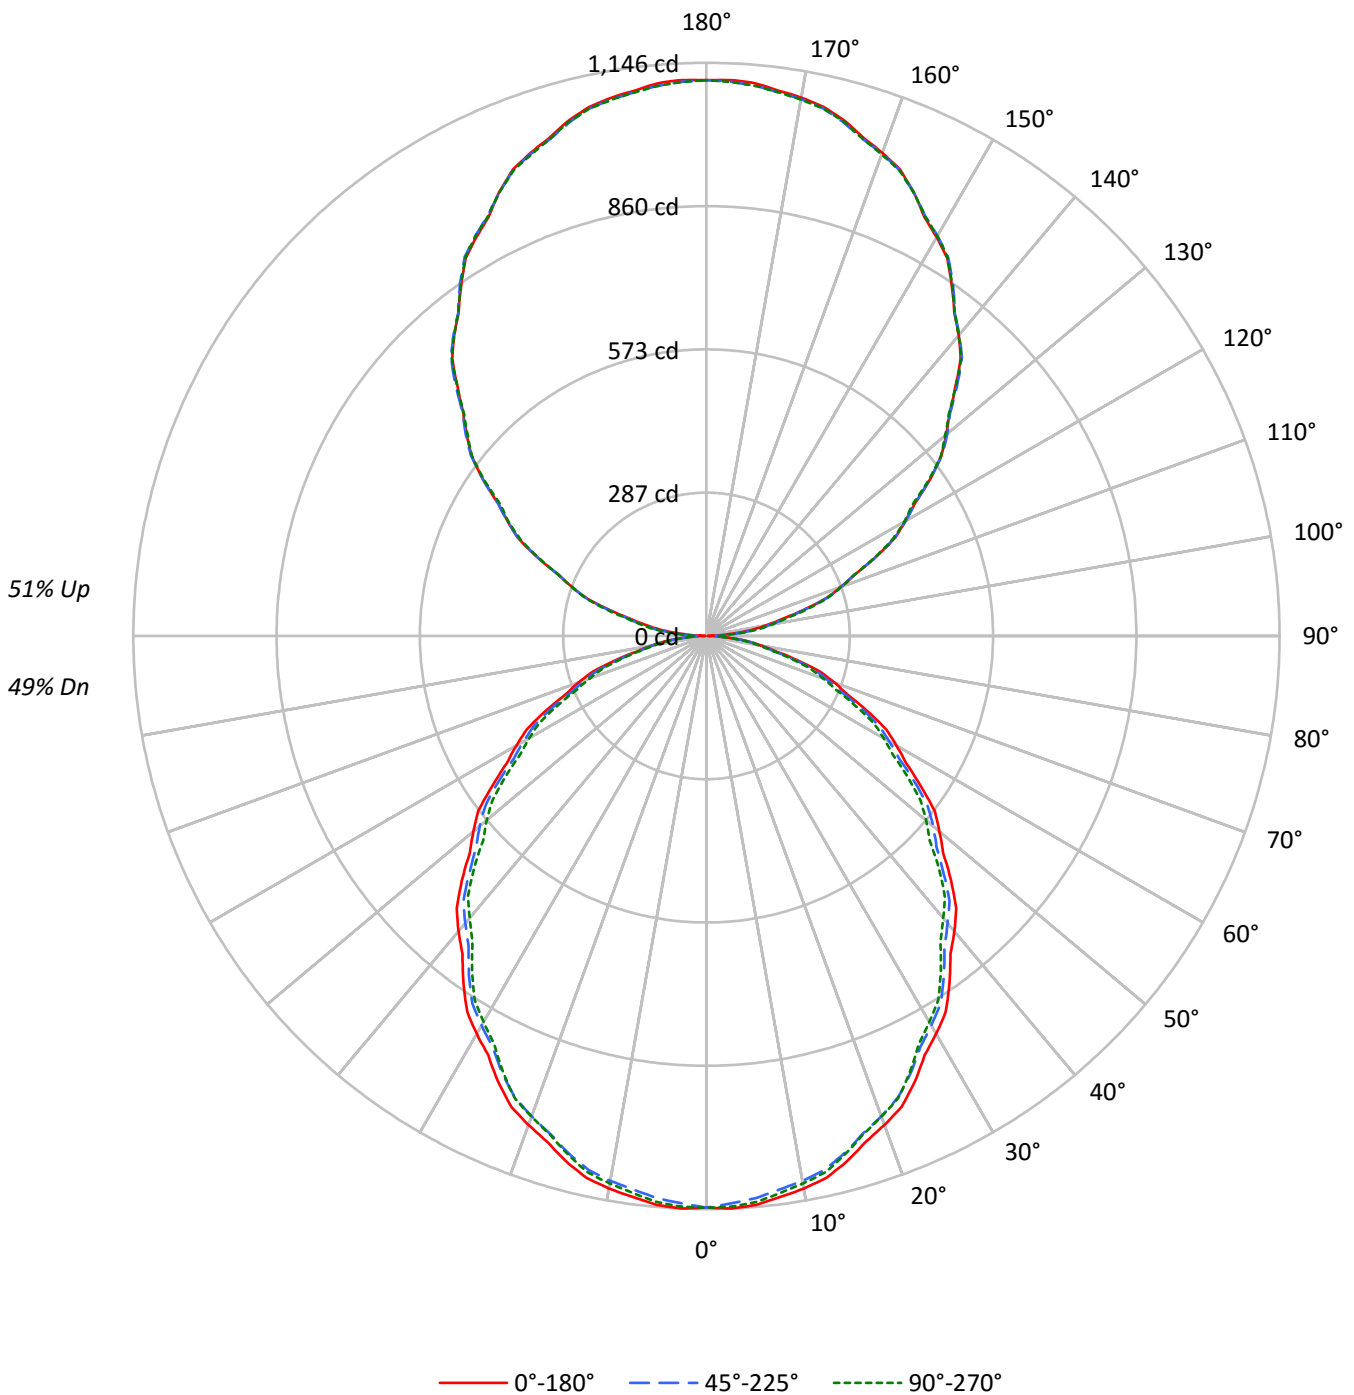



TEST NUMBER: P332614-935

CATALOG NUMBER: S124DIP-S795D1035U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	83	83	83	68	68	68	55	55	55	49
1	97	93	89	86	90	86	83	80	72	70	68	60	58	57	49	47	46	41
2	89	81	75	70	81	75	70	65	63	59	56	53	50	47	43	41	39	34
3	81	71	64	58	74	66	60	54	56	51	47	47	43	40	38	35	33	29
4	74	63	55	49	68	59	52	46	50	44	40	41	38	34	34	31	29	25
5	68	56	48	42	62	52	45	40	44	39	35	37	33	30	30	27	25	22
6	63	51	42	37	57	47	40	34	40	34	30	34	29	26	28	24	22	19
7	58	46	38	32	53	42	35	30	36	31	27	31	26	23	25	22	20	17
8	54	41	34	28	49	39	32	27	33	28	24	28	24	21	23	20	17	15
9	50	38	30	25	46	35	28	24	30	25	21	26	21	18	21	18	16	14
10	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9227	9227	9227
5°	9255	9143	9210
10°	9197	9069	9114
15°	9086	8940	8964
20°	8937	8781	8789
25°	8769	8598	8573
30°	8563	8383	8307
35°	8348	8159	8051
40°	8126	7904	7759
45°	7895	7654	7507
50°	7637	7430	7200
55°	7361	7142	6909
60°	7083	6817	6610
65°	6770	6508	6245
70°	6420	6097	5858
75°	5883	5599	5459
80°	5235	5026	4895
85°	4576	4409	4326



TEST NUMBER: P332614-935

CATALOG NUMBER: S124DIP-S795D1035U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.6	1.8
10°-20°	303.3	5.0
20°-30°	446.4	7.4
30°-40°	518.9	8.6
40°-50°	518.9	8.6
50°-60°	453.9	7.5
60°-70°	337.1	5.6
70°-80°	191.5	3.2
80°-90°	58.6	1.0
90°-100°	73.3	1.2
100°-110°	217.1	3.6
110°-120°	368.5	6.1
120°-130°	485.9	8.1
130°-140°	545.7	9.1
140°-150°	536.2	8.9
150°-160°	451.0	7.5
160°-170°	300.1	5.0
170°-180°	105.1	1.7
0°-30°	857.3	14.2
0°-40°	1376.2	22.9
0°-60°	2349.1	39.0
0°-90°	2936.3	48.8
90°-120°	658.9	10.9
90°-150°	2226.8	37.0
90°-180°	3083.0	51.2
0°-180°	6019.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1143	1143	1143	1143	1143	
5°	1142	1138	1128	1138	1136	108
15°	1087	1083	1070	1075	1072	306
25°	984	978	965	966	962	453
35°	847	840	828	822	817	529
45°	692	685	670	661	658	533
55°	523	520	507	497	491	468
65°	354	350	341	332	327	351
75°	189	184	180	176	175	200
85°	49	49	48	48	47	54
90°	3	12	19	24	26	6
95°	52	59	65	68	68	57
105°	200	201	205	207	210	213
115°	375	375	373	372	371	369
125°	546	546	545	543	541	486
135°	704	709	709	707	705	544
145°	855	858	859	858	856	535
155°	980	980	979	982	979	451
165°	1066	1064	1062	1067	1064	301
175°	1110	1105	1104	1110	1104	105
180°	1111	1111	1111	1111	1111	



TEST NUMBER: P332614-935

CATALOG NUMBER: S124DIP-S795D1035U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0
2.5°	1145.9	1145.4	1144.9	1144.4	1143.9	1142.8	1141.0	1139.2	1137.4	1135.7	1137.2
5°	1142.0	1141.3	1140.4	1139.6	1138.8	1137.2	1135.0	1132.7	1130.5	1128.3	1130.5
7.5°	1131.4	1130.6	1129.8	1128.9	1128.2	1126.5	1124.0	1121.5	1119.0	1116.5	1118.4
10°	1121.9	1121.1	1120.2	1119.5	1118.6	1116.9	1114.2	1111.6	1109.0	1106.3	1107.9
12.5°	1109.4	1108.6	1107.8	1107.0	1106.2	1104.3	1101.6	1098.7	1096.0	1093.1	1094.9
15°	1087.1	1086.2	1085.5	1084.6	1083.8	1081.9	1078.8	1075.8	1072.7	1069.7	1070.9
17.5°	1060.1	1059.1	1058.1	1057.1	1056.1	1054.1	1051.3	1048.4	1045.4	1042.6	1043.4
20°	1040.3	1039.3	1038.4	1037.3	1036.3	1034.2	1031.2	1028.1	1025.1	1022.1	1022.7
22.5°	1019.2	1017.8	1016.4	1015.1	1013.7	1011.6	1008.5	1005.5	1002.4	999.4	1000.5
25°	984.5	983.1	981.6	980.2	978.8	976.6	973.8	970.9	968.1	965.3	965.4
27.5°	944.9	943.5	942.0	940.6	939.1	937.0	934.4	931.8	929.1	926.4	925.9
30°	918.6	917.0	915.3	913.7	912.1	909.9	907.2	904.7	902.0	899.3	898.5
32.5°	890.7	889.2	887.8	886.3	884.8	882.7	879.9	877.1	874.3	871.5	870.6
35°	847.1	845.7	844.3	842.8	841.5	839.3	836.5	833.6	830.8	827.9	826.5
37.5°	801.2	799.9	798.6	797.3	795.9	793.8	790.7	787.6	784.6	781.5	780.0
40°	771.1	769.5	767.8	766.2	764.6	762.2	759.2	756.1	753.1	750.0	748.0
42.5°	738.9	737.9	736.9	736.0	734.9	732.8	729.4	726.1	722.6	719.3	717.0
45°	691.5	690.0	688.6	687.2	685.8	683.4	680.2	676.9	673.6	670.4	668.1
47.5°	641.8	640.8	639.9	638.9	637.9	635.9	632.9	629.9	626.9	623.9	621.3
50°	608.1	607.3	606.5	605.6	604.9	603.0	600.2	597.4	594.4	591.6	588.8
52.5°	575.1	574.2	573.2	572.2	571.2	569.2	566.2	563.2	560.2	557.2	554.7
55°	523.0	522.3	521.7	521.1	520.5	518.8	515.9	513.1	510.2	507.4	504.9
57.5°	473.1	472.4	471.7	471.1	470.4	468.6	465.8	463.0	460.2	457.4	455.0
60°	438.7	437.6	436.6	435.7	434.6	432.7	430.2	427.5	424.8	422.2	420.3
62.5°	405.0	404.2	403.3	402.4	401.6	399.8	396.9	394.1	391.3	388.5	386.8
65°	354.4	353.4	352.4	351.4	350.3	348.8	346.8	344.7	342.7	340.7	338.6
67.5°	303.5	302.6	301.6	300.7	299.8	298.3	296.4	294.4	292.5	290.5	288.5
70°	272.0	270.6	269.1	267.7	266.3	264.8	263.1	261.5	259.8	258.3	256.7
72.5°	238.3	236.9	235.5	234.0	232.6	231.3	230.0	228.6	227.3	226.0	224.7
75°	188.6	187.6	186.7	185.6	184.6	183.6	182.5	181.5	180.6	179.5	178.7
77.5°	141.2	140.8	140.3	139.9	139.4	138.8	137.8	137.0	136.0	135.2	134.9
80°	112.6	112.0	111.4	110.8	110.2	109.7	109.3	108.9	108.5	108.1	107.6
82.5°	84.8	84.6	84.2	83.9	83.7	83.5	83.4	83.3	83.3	83.2	82.9
85°	49.4	49.4	49.4	49.4	49.4	49.2	48.8	48.5	48.0	47.6	47.6
87.5°	19.5	19.8	20.1	20.3	20.6	20.8	20.9	21.1	21.2	21.4	21.6
90°	2.6	4.6	6.8	8.9	11.0	12.8	14.3	15.8	17.4	18.9	20.1
92.5°	18.4	20.8	23.2	25.6	28.0	29.8	30.8	31.9	33.0	34.0	34.7
95°	51.6	53.3	55.0	56.7	58.5	59.9	61.3	62.7	64.0	65.3	65.9
97.5°	90.1	91.4	92.8	94.2	95.6	97.0	98.6	100.1	101.8	103.3	104.0
100°	120.3	121.1	121.8	122.6	123.4	124.6	126.3	128.0	129.8	131.5	131.9
102.5°	152.0	152.2	152.6	152.8	153.2	154.1	155.7	157.2	158.8	160.4	160.9
105°	200.3	200.4	200.6	200.8	201.0	201.5	202.2	203.0	203.8	204.6	205.1
107.5°	251.0	251.2	251.4	251.7	251.8	252.0	252.2	252.3	252.4	252.5	253.0
110°	285.3	285.7	286.1	286.5	286.9	287.0	286.7	286.5	286.4	286.2	285.8



TEST NUMBER: P332614-935

CATALOG NUMBER: S124DIP-S795D1035U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	321.1	321.2	321.2	321.3	321.4	321.2	320.9	320.6	320.2	319.9	319.8
115°	374.7	374.7	374.7	374.7	374.7	374.5	374.1	373.8	373.3	373.0	372.8
117.5°	425.2	425.4	425.5	425.7	425.9	425.8	425.5	425.2	425.0	424.7	424.0
120°	458.9	459.7	460.5	461.2	462.0	462.1	461.5	460.9	460.4	459.8	458.8
122.5°	494.0	494.3	494.6	494.9	495.2	495.2	495.0	494.6	494.4	494.1	493.5
125°	545.7	545.7	545.7	545.7	545.7	545.6	545.4	545.3	545.0	544.8	544.5
127.5°	592.6	593.2	593.7	594.3	595.0	595.0	594.8	594.4	594.2	593.8	593.5
130°	625.6	626.2	626.8	627.3	627.9	628.2	628.2	628.2	628.2	628.2	627.8
132.5°	659.4	659.8	660.1	660.6	661.0	661.2	661.0	660.8	660.6	660.6	660.1
135°	703.9	705.0	706.1	707.3	708.4	709.0	709.0	709.0	709.0	709.0	708.6
137.5°	752.3	752.9	753.4	753.9	754.5	754.8	755.2	755.5	755.8	756.1	755.6
140°	784.6	785.0	785.4	785.7	786.2	786.4	786.4	786.4	786.4	786.4	786.2
142.5°	814.2	814.6	814.9	815.4	815.7	815.8	815.7	815.5	815.4	815.2	815.2
145°	855.1	855.8	856.6	857.4	858.2	858.6	858.8	859.0	859.2	859.4	859.2
147.5°	895.7	896.6	897.5	898.5	899.3	899.7	899.6	899.4	899.2	899.1	899.0
150°	920.4	921.2	922.0	922.7	923.5	923.9	923.9	923.9	923.9	923.9	923.9
152.5°	943.8	944.3	944.7	945.2	945.6	945.9	946.1	946.2	946.4	946.5	947.0
155°	979.7	979.7	979.7	979.7	979.7	979.6	979.4	979.2	979.0	978.9	979.6
157.5°	1010.0	1009.6	1009.3	1008.9	1008.6	1008.4	1008.3	1008.3	1008.3	1008.2	1008.8
160°	1027.9	1027.6	1027.4	1027.3	1027.1	1026.9	1026.7	1026.5	1026.3	1026.1	1026.7
162.5°	1044.3	1043.9	1043.4	1042.8	1042.3	1042.0	1041.8	1041.6	1041.5	1041.2	1042.2
165°	1066.5	1065.9	1065.4	1064.8	1064.2	1063.8	1063.3	1063.0	1062.6	1062.2	1063.3
167.5°	1083.6	1082.7	1081.9	1081.2	1080.3	1080.0	1080.0	1080.0	1080.0	1080.1	1081.2
170°	1093.1	1092.2	1091.2	1090.3	1089.3	1088.9	1089.2	1089.3	1089.5	1089.7	1090.9
172.5°	1100.0	1099.2	1098.5	1097.6	1096.8	1096.4	1096.5	1096.5	1096.6	1096.6	1097.9
175°	1109.5	1108.5	1107.6	1106.6	1105.7	1105.1	1104.9	1104.7	1104.5	1104.3	1105.7
177.5°	1112.6	1111.8	1111.0	1110.3	1109.5	1109.1	1109.1	1109.1	1109.1	1109.1	1110.2
180°	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2



TEST NUMBER: P332614-935

CATALOG NUMBER: S124DIP-S795D1035U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0
2.5°	1138.8	1140.5	1142.1	1142.9	1142.7	1142.5	1142.4	1142.2
5°	1132.7	1135.0	1137.2	1138.2	1137.7	1137.4	1137.0	1136.5
7.5°	1120.2	1122.0	1123.7	1124.5	1124.3	1124.0	1123.8	1123.5
10°	1109.6	1111.2	1112.8	1113.4	1113.0	1112.6	1112.2	1111.8
12.5°	1096.7	1098.5	1100.3	1100.9	1100.4	1099.8	1099.2	1098.6
15°	1072.1	1073.3	1074.5	1074.9	1074.3	1073.7	1073.1	1072.5
17.5°	1044.1	1044.9	1045.7	1045.9	1045.4	1045.0	1044.7	1044.2
20°	1023.3	1023.9	1024.5	1024.6	1024.2	1023.8	1023.4	1023.0
22.5°	1001.5	1002.6	1003.8	1003.9	1003.2	1002.5	1001.7	1001.0
25°	965.7	965.9	966.1	965.8	965.0	964.1	963.4	962.5
27.5°	925.5	925.0	924.5	923.8	922.7	921.7	920.7	919.6
30°	897.7	896.9	896.0	895.2	894.1	893.1	892.1	891.1
32.5°	869.5	868.6	867.6	866.6	865.6	864.5	863.5	862.5
35°	825.1	823.6	822.2	821.0	819.9	819.0	817.9	816.9
37.5°	778.4	776.9	775.4	774.0	772.6	771.3	769.9	768.5
40°	746.0	744.0	741.9	740.4	739.3	738.4	737.4	736.3
42.5°	714.5	712.2	709.8	708.3	707.7	707.0	706.3	705.6
45°	665.9	663.7	661.4	660.0	659.4	658.8	658.1	657.5
47.5°	618.8	616.3	613.7	611.7	610.2	608.6	607.1	605.5
50°	585.9	583.1	580.2	578.2	577.0	575.8	574.5	573.3
52.5°	552.2	549.6	547.1	545.1	543.5	542.0	540.4	538.9
55°	502.5	500.1	497.6	495.8	494.6	493.4	492.1	490.9
57.5°	452.7	450.4	448.1	446.3	445.1	443.9	442.8	441.6
60°	418.5	416.7	414.8	413.5	412.4	411.4	410.4	409.4
62.5°	385.1	383.5	381.9	380.5	379.4	378.4	377.5	376.4
65°	336.7	334.6	332.5	331.1	330.0	329.0	328.0	326.9
67.5°	286.6	284.6	282.7	281.5	281.3	281.0	280.7	280.4
70°	255.0	253.4	251.8	250.6	250.0	249.4	248.8	248.2
72.5°	223.4	222.1	220.8	219.9	219.2	218.6	218.0	217.4
75°	177.9	177.0	176.2	175.7	175.6	175.3	175.1	175.0
77.5°	134.7	134.4	134.2	133.8	133.3	132.8	132.2	131.7
80°	107.3	106.9	106.4	106.2	105.9	105.7	105.6	105.3
82.5°	82.7	82.4	82.1	82.0	81.8	81.5	81.4	81.1
85°	47.6	47.6	47.6	47.5	47.4	47.1	46.9	46.7
87.5°	21.8	22.0	22.3	22.5	22.5	22.6	22.6	22.7
90°	21.2	22.4	23.5	24.3	24.6	25.1	25.4	25.7
92.5°	35.4	36.1	36.8	37.3	37.5	37.7	38.0	38.1
95°	66.5	67.1	67.6	67.9	67.9	67.9	67.9	67.9
97.5°	104.7	105.4	106.1	106.4	106.4	106.4	106.4	106.4
100°	132.2	132.6	133.0	133.2	133.2	133.2	133.2	133.2
102.5°	161.4	162.0	162.5	162.8	163.0	163.2	163.3	163.4
105°	205.7	206.3	206.8	207.4	207.9	208.5	209.1	209.7
107.5°	253.6	254.1	254.6	254.9	254.9	254.8	254.8	254.7
110°	285.4	285.0	284.6	284.7	285.3	285.9	286.5	287.1



TEST NUMBER: P332614-935

CATALOG NUMBER: S124DIP-S795D1035U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	319.7	319.6	319.6	319.6	319.7	319.8	319.9	320.0
115°	372.6	372.4	372.2	372.0	371.9	371.6	371.4	371.3
117.5°	423.4	422.8	422.1	421.6	421.2	420.9	420.4	420.1
120°	457.9	456.9	456.0	455.6	456.1	456.4	456.8	457.2
122.5°	492.8	492.2	491.5	490.9	490.2	489.5	488.8	488.1
125°	544.1	543.7	543.3	542.9	542.6	542.2	541.8	541.4
127.5°	593.1	592.7	592.3	591.9	591.7	591.3	591.1	590.7
130°	627.5	627.1	626.7	626.1	625.3	624.6	623.8	623.0
132.5°	659.8	659.4	659.0	658.7	658.3	658.1	657.7	657.5
135°	708.3	707.8	707.5	707.0	706.5	705.8	705.2	704.7
137.5°	755.1	754.6	754.1	753.9	754.1	754.1	754.2	754.4
140°	786.0	785.7	785.6	785.4	785.2	785.0	784.8	784.6
142.5°	815.1	815.1	815.1	815.0	815.0	814.9	814.9	814.9
145°	859.0	858.8	858.6	858.2	857.6	857.1	856.5	855.9
147.5°	898.8	898.6	898.5	898.3	898.1	897.9	897.8	897.6
150°	923.9	923.9	923.9	923.8	923.6	923.3	923.2	923.0
152.5°	947.4	947.9	948.4	948.4	947.9	947.4	946.8	946.3
155°	980.4	981.1	981.9	981.9	981.1	980.4	979.6	978.9
157.5°	1009.4	1010.0	1010.6	1010.5	1009.9	1009.2	1008.6	1007.9
160°	1027.3	1027.9	1028.4	1028.2	1027.3	1026.3	1025.4	1024.4
162.5°	1043.3	1044.3	1045.3	1045.4	1044.5	1043.5	1042.6	1041.6
165°	1064.5	1065.7	1066.8	1067.0	1066.3	1065.5	1064.7	1063.9
167.5°	1082.4	1083.6	1084.7	1084.7	1083.5	1082.3	1081.1	1080.0
170°	1092.0	1093.1	1094.3	1094.2	1092.9	1091.5	1090.2	1088.8
172.5°	1099.2	1100.4	1101.8	1101.7	1100.4	1099.1	1097.8	1096.4
175°	1107.0	1108.4	1109.7	1109.7	1108.4	1107.0	1105.7	1104.3
177.5°	1111.3	1112.3	1113.4	1113.4	1112.2	1110.9	1109.7	1108.5
180°	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2	1111.2

(END OF REPORT)