

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332966-935

Luminaire Tested: **S124RDIP-S1020D590U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332966-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIP-S1020D590U935-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 590 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5411.6 lumens
Efficiency: N/A
Efficacy: 110.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332966-935

CATALOG NUMBER: S124RDIP-S1020D590U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

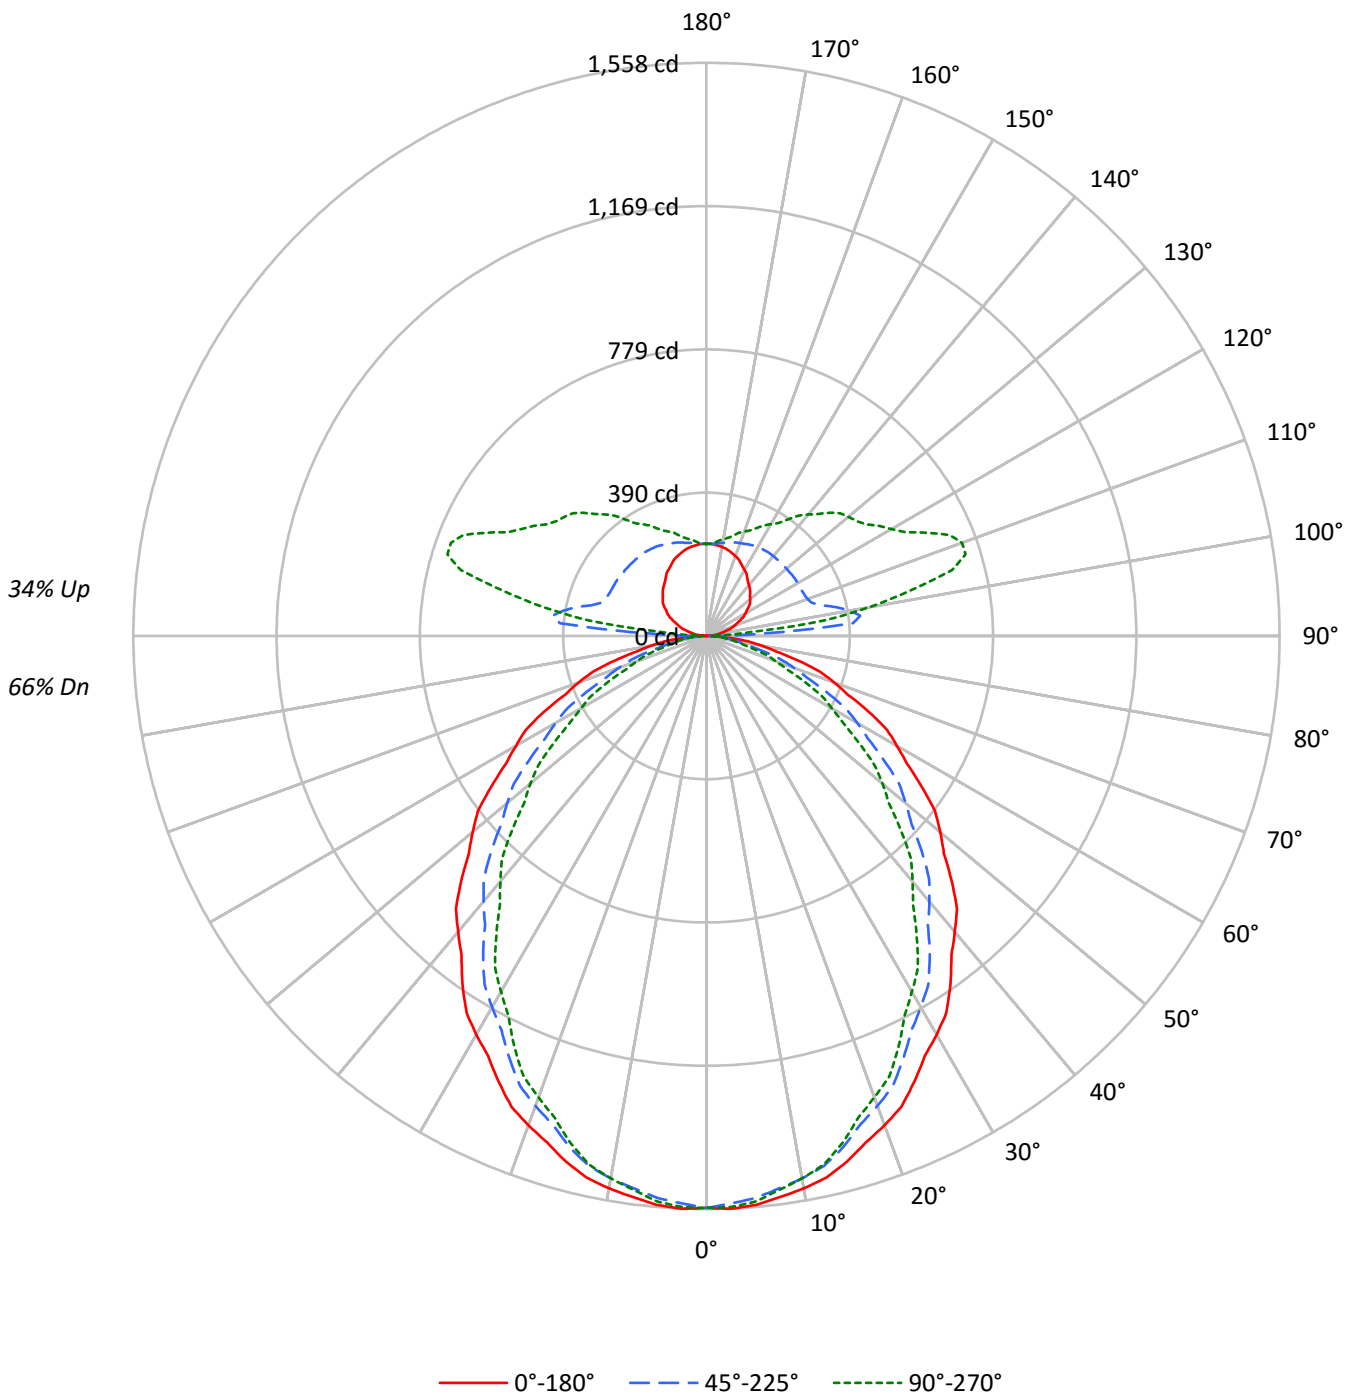



TEST NUMBER: P332966-935

CATALOG NUMBER: S124RDIP-S1020D590U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	105	105	105	105	92	92	92	81	81	81	71	71	71
1	102	98	94	90	96	92	89	86	82	79	77	72	70	69	64	62	61
2	93	86	79	74	87	81	75	71	72	68	64	64	61	58	56	54	52
3	85	76	68	62	80	72	65	60	64	59	54	57	53	49	50	47	44
4	78	67	59	53	73	64	56	51	57	51	47	51	46	43	45	42	39
5	72	60	52	46	67	57	50	44	51	45	41	46	41	37	41	37	34
6	66	54	46	40	62	51	44	39	46	40	36	42	37	33	37	33	30
7	62	49	41	35	58	47	39	34	42	36	32	38	33	29	34	30	27
8	57	45	37	31	54	43	35	30	39	33	28	35	30	26	31	27	24
9	53	41	33	28	50	39	32	27	36	30	25	32	27	24	29	25	22
10	50	38	30	26	47	36	29	25	33	27	23	30	25	22	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12551	12551	12551
5°	12580	12426	12503
10°	12500	12276	12276
15°	12357	12018	11929
20°	12160	11679	11465
25°	11908	11282	10996
30°	11663	10864	10409
35°	11392	10430	9819
40°	11065	9936	9183
45°	10764	9445	8535
50°	10420	8881	7850
55°	10054	8294	7104
60°	9649	7650	6344
65°	9278	6844	5593
70°	8738	5958	4749
75°	8057	4938	3862
80°	7029	3761	3543
85°	5956	3418	3196



TEST NUMBER: P332966-935

CATALOG NUMBER: S124RDIP-S1020D590U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	146.0	2.7
10°-20°	407.3	7.5
20°-30°	588.1	10.9
30°-40°	666.6	12.3
40°-50°	643.7	11.9
50°-60°	535.3	9.9
60°-70°	369.6	6.8
70°-80°	187.4	3.5
80°-90°	49.4	0.9
90°-100°	180.6	3.3
100°-110°	375.8	6.9
110°-120°	336.6	6.2
120°-130°	283.1	5.2
130°-140°	236.1	4.4
140°-150°	180.4	3.3
150°-160°	126.8	2.3
160°-170°	74.6	1.4
170°-180°	24.3	0.4
0°-30°	1141.4	21.1
0°-40°	1808.0	33.4
0°-60°	2987.0	55.2
0°-90°	3593.4	66.4
90°-120°	893.0	16.5
90°-150°	1592.6	29.4
90°-180°	1818.0	33.6
0°-180°	5411.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1555	1555	1555	1555	1555	
5°	1552	1547	1533	1544	1543	147
15°	1478	1467	1438	1435	1427	416
25°	1337	1314	1267	1247	1234	616
35°	1156	1117	1058	1019	996	722
45°	943	897	827	771	748	727
55°	714	665	589	530	505	639
65°	486	433	358	309	293	479
75°	258	214	158	132	124	273
85°	64	42	37	35	34	72
90°	0	4	9	10	10	4
95°	16	51	400	198	120	18
105°	57	83	322	694	691	61
115°	101	127	287	552	664	100
125°	141	168	286	470	529	125
135°	168	199	283	417	474	129
145°	193	221	282	352	386	121
155°	220	237	274	310	324	101
165°	239	247	263	278	282	68
175°	250	250	252	255	254	24
180°	250	250	250	250	250	



TEST NUMBER: P332966-935

CATALOG NUMBER: S124RDIP-S1020D590U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7
2.5°	1558.5	1557.6	1556.8	1556.0	1555.1	1553.5	1551.2	1548.9	1546.5	1544.2	1546.5
5°	1552.3	1551.3	1550.2	1549.1	1548.1	1545.9	1542.8	1539.6	1536.5	1533.3	1535.9
7.5°	1538.3	1537.1	1536.0	1534.9	1533.8	1531.2	1527.1	1522.9	1518.8	1514.7	1516.4
10°	1524.9	1523.6	1522.2	1521.0	1519.7	1516.6	1511.8	1507.1	1502.3	1497.5	1498.6
12.5°	1507.8	1506.2	1504.7	1503.2	1501.7	1498.1	1492.5	1486.9	1481.3	1475.7	1476.3
15°	1478.5	1476.1	1473.8	1471.4	1469.0	1464.5	1457.8	1451.2	1444.7	1438.0	1437.5
17.5°	1443.0	1439.6	1436.1	1432.7	1429.3	1423.6	1415.7	1407.7	1399.8	1391.8	1390.3
20°	1415.4	1412.0	1408.5	1405.1	1401.6	1395.4	1386.5	1377.4	1368.5	1359.4	1357.4
22.5°	1384.9	1381.0	1377.2	1373.4	1369.5	1362.7	1353.1	1343.5	1333.9	1324.2	1321.0
25°	1336.9	1332.1	1327.3	1322.6	1317.8	1310.0	1299.2	1288.3	1277.5	1266.6	1262.1
27.5°	1286.3	1280.4	1274.5	1268.4	1262.5	1253.7	1242.1	1230.5	1218.9	1207.3	1201.8
30°	1251.1	1244.5	1237.9	1231.3	1224.7	1215.1	1202.7	1190.2	1177.8	1165.4	1158.8
32.5°	1214.0	1206.5	1199.0	1191.6	1184.1	1174.0	1161.1	1148.3	1135.4	1122.6	1114.9
35°	1155.9	1147.5	1138.9	1130.5	1122.1	1111.2	1097.9	1084.8	1071.5	1058.3	1049.3
37.5°	1093.7	1085.0	1076.3	1067.6	1058.9	1047.1	1032.5	1017.9	1003.2	988.5	978.4
40°	1050.0	1041.2	1032.5	1023.7	1015.0	1003.2	988.1	972.9	957.9	942.8	931.7
42.5°	1008.1	998.9	989.7	980.6	971.5	959.0	943.3	927.6	911.9	896.1	884.8
45°	942.8	933.1	923.3	913.4	903.6	890.8	874.9	859.1	843.2	827.3	814.4
47.5°	875.5	865.3	855.2	845.2	835.0	821.7	805.2	788.7	772.1	755.7	742.3
50°	829.7	819.4	809.1	798.7	788.4	774.8	757.9	741.0	724.0	707.1	693.9
52.5°	783.1	772.9	762.8	752.8	742.6	728.9	711.5	694.2	676.8	659.5	646.1
55°	714.3	703.7	693.1	682.5	671.9	658.1	640.8	623.6	606.5	589.3	575.5
57.5°	646.2	635.2	624.1	613.1	602.2	588.1	571.3	554.3	537.4	520.5	506.5
60°	597.6	587.0	576.4	565.8	555.3	541.5	524.6	507.6	490.7	473.8	460.0
62.5°	553.8	542.8	531.8	520.7	509.8	495.6	478.2	460.9	443.5	426.2	413.5
65°	485.7	474.3	463.0	451.6	440.2	426.0	409.1	392.2	375.2	358.3	347.0
67.5°	415.0	404.1	393.2	382.3	371.3	358.1	342.3	326.7	310.9	295.2	285.4
70°	370.2	359.1	348.0	336.9	325.8	312.7	297.6	282.5	267.4	252.4	243.7
72.5°	322.6	312.5	302.5	292.5	282.4	270.3	256.1	241.8	227.6	213.4	205.9
75°	258.3	248.6	238.8	228.9	219.2	208.0	195.6	183.2	170.7	158.3	152.2
77.5°	193.1	184.8	176.5	168.2	159.9	150.7	140.6	130.6	120.5	110.5	106.9
80°	151.2	143.5	135.9	128.2	120.5	112.7	104.8	96.9	88.9	80.9	80.2
82.5°	115.0	108.0	100.9	93.8	86.9	81.0	76.5	72.0	67.4	62.9	62.3
85°	64.3	59.0	53.7	48.4	43.1	40.0	39.3	38.5	37.7	36.9	36.3
87.5°	22.0	20.5	19.1	17.5	15.9	15.0	15.3	15.2	15.2	15.1	14.8
90°	0.5	1.5	2.9	3.4	4.0	4.0	6.9	6.9	7.8	8.9	8.4
92.5°	5.6	8.2	12.7	18.8	25.9	36.2	61.1	99.2	136.4	155.8	129.8
95°	16.2	17.7	22.6	29.0	40.7	61.4	104.1	184.7	302.0	400.3	411.6
97.5°	29.1	29.1	33.3	39.2	49.3	66.6	99.5	166.0	282.8	421.6	517.1
100°	37.4	37.4	40.7	46.7	56.0	71.7	100.7	156.2	256.4	394.9	520.6
102.5°	45.2	46.0	49.0	54.5	63.5	78.4	104.6	153.4	238.7	361.5	491.1
105°	57.4	59.0	61.4	67.3	76.1	90.4	113.9	154.7	223.5	322.2	437.6
107.5°	71.0	72.0	74.5	80.8	89.2	103.2	124.8	162.0	220.8	300.2	394.4
110°	80.1	81.0	83.5	89.4	98.2	111.5	133.1	167.5	221.5	292.7	372.8



TEST NUMBER: P332966-935

CATALOG NUMBER: S124RDIP-S1020D590U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	88.7	89.7	92.6	98.1	106.9	120.1	140.9	173.4	223.9	289.2	360.6
115°	101.2	102.6	106.1	111.0	120.4	133.6	153.3	182.7	228.4	287.3	349.2
117.5°	114.2	115.5	118.6	124.0	132.7	146.5	165.1	192.3	233.2	286.8	344.1
120°	122.8	123.8	127.2	132.6	140.9	154.7	173.4	198.9	236.8	286.8	341.4
122.5°	130.6	131.6	135.1	140.1	149.2	162.6	181.2	205.2	240.3	286.5	338.2
125°	140.9	142.9	145.9	151.3	160.6	174.4	192.0	214.6	245.6	285.9	333.0
127.5°	150.1	151.7	155.2	161.4	171.1	184.9	202.1	222.8	249.8	284.7	326.1
130°	155.2	157.1	161.1	168.5	177.8	192.0	208.7	227.9	253.0	284.4	321.7
132.5°	160.3	161.9	167.0	174.0	184.1	197.5	214.2	233.0	255.7	284.0	317.8
135°	167.5	169.4	174.4	182.7	193.0	205.8	222.0	239.7	259.8	283.4	311.9
137.5°	174.7	176.5	181.9	189.9	200.6	212.8	227.9	244.4	262.3	283.3	306.8
140°	179.8	181.2	186.7	195.0	205.3	217.1	231.9	247.5	264.2	282.9	304.0
142.5°	185.3	186.8	191.7	199.7	209.7	221.0	235.4	249.9	265.8	282.9	301.7
145°	193.0	194.5	199.4	206.3	215.6	226.4	239.2	252.4	266.7	281.9	297.6
147.5°	201.7	202.2	206.6	213.6	221.4	231.2	243.1	254.7	267.2	280.2	294.0
150°	207.2	207.8	211.7	217.6	225.0	234.3	245.1	255.9	267.2	279.0	291.3
152.5°	212.4	212.5	216.4	221.9	228.5	237.0	246.7	256.7	266.4	277.0	288.1
155°	219.6	220.1	223.0	227.9	233.3	240.6	249.0	257.4	265.2	274.1	283.4
157.5°	226.5	226.5	229.3	233.1	237.8	243.6	250.7	257.4	264.0	271.0	278.6
160°	230.8	230.8	232.8	236.3	240.1	245.6	251.5	257.4	262.8	268.6	275.1
162.5°	234.8	234.4	235.9	239.0	242.5	246.8	252.3	257.4	261.6	266.3	271.9
165°	239.2	239.2	240.1	242.6	245.1	248.1	252.4	256.4	259.3	262.8	266.7
167.5°	243.6	243.1	243.6	245.5	246.8	249.1	252.4	255.2	257.0	259.2	262.0
170°	245.6	245.1	245.6	247.0	248.1	249.5	251.9	254.4	255.4	256.8	258.8
172.5°	247.5	247.0	247.1	248.2	248.8	249.9	251.6	253.7	253.8	254.5	256.1
175°	249.5	249.0	249.0	249.5	250.0	250.0	251.0	252.4	251.9	251.9	253.0
177.5°	250.4	250.0	249.6	250.0	250.0	250.0	250.4	251.2	250.4	250.4	250.8
180°	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0



TEST NUMBER: P332966-935

CATALOG NUMBER: S124RDIP-S1020D590U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7
2.5°	1548.9	1551.2	1553.5	1554.6	1554.4	1554.2	1553.9	1553.8
5°	1538.5	1541.2	1543.9	1544.9	1544.4	1543.9	1543.3	1542.8
7.5°	1518.1	1519.8	1521.5	1521.9	1521.0	1520.2	1519.3	1518.5
10°	1499.7	1500.7	1501.8	1501.8	1500.7	1499.7	1498.6	1497.5
12.5°	1476.9	1477.6	1478.2	1477.7	1476.3	1474.8	1473.3	1471.9
15°	1437.0	1436.4	1435.9	1434.7	1432.9	1431.0	1429.2	1427.3
17.5°	1388.9	1387.4	1386.0	1383.8	1381.0	1378.2	1375.4	1372.5
20°	1355.2	1353.1	1351.0	1348.2	1344.8	1341.4	1337.9	1334.5
22.5°	1317.8	1314.7	1311.6	1308.5	1305.7	1303.0	1300.1	1297.4
25°	1257.6	1253.1	1248.6	1245.0	1242.4	1239.8	1237.1	1234.5
27.5°	1196.2	1190.7	1185.1	1180.4	1176.6	1172.8	1169.0	1165.2
30°	1152.2	1145.6	1138.9	1133.5	1129.3	1125.1	1120.8	1116.6
32.5°	1107.2	1099.6	1091.9	1086.1	1082.0	1078.0	1074.0	1070.0
35°	1040.3	1031.3	1022.3	1015.5	1010.6	1005.9	1001.2	996.3
37.5°	968.5	958.4	948.3	940.9	936.2	931.3	926.6	921.9
40°	920.6	909.5	898.4	890.4	885.7	880.9	876.2	871.4
42.5°	873.5	862.2	850.8	842.7	837.8	832.8	827.8	822.9
45°	801.4	788.4	775.5	766.6	761.9	757.1	752.3	747.6
47.5°	728.8	715.4	701.9	692.6	687.3	682.1	676.8	671.7
50°	680.6	667.4	654.2	645.1	640.1	635.0	630.0	625.0
52.5°	632.6	619.1	605.7	596.4	591.2	585.9	580.7	575.5
55°	561.7	548.0	534.3	524.9	519.8	514.8	509.8	504.7
57.5°	492.5	478.5	464.6	455.7	451.9	448.1	444.3	440.5
60°	446.3	432.5	418.8	409.7	405.5	401.3	397.1	392.9
62.5°	400.8	388.1	375.4	367.3	363.9	360.6	357.1	353.8
65°	335.5	324.2	312.8	305.6	302.4	299.2	296.0	292.8
67.5°	275.6	265.9	256.1	249.4	245.9	242.5	238.9	235.5
70°	234.9	226.2	217.5	211.7	209.1	206.5	203.8	201.2
72.5°	198.4	191.0	183.5	178.6	176.1	173.7	171.3	168.8
75°	146.2	140.1	134.0	130.2	128.5	127.0	125.4	123.8
77.5°	103.4	99.9	96.3	94.3	93.8	93.3	92.8	92.4
80°	79.4	78.6	77.7	77.2	77.0	76.7	76.5	76.2
82.5°	61.6	61.1	60.5	60.1	59.8	59.6	59.3	59.1
85°	35.8	35.3	34.8	34.5	34.5	34.5	34.5	34.5
87.5°	14.6	14.6	14.5	14.5	14.7	15.1	15.2	15.4
90°	8.9	9.3	9.8	9.8	10.3	10.8	10.3	10.3
92.5°	96.4	72.6	57.8	48.0	42.1	39.5	37.8	37.8
95°	363.9	287.8	222.0	174.4	150.3	135.1	126.2	119.9
97.5°	537.7	509.5	461.4	410.1	374.9	345.3	330.5	320.3
100°	592.4	602.2	578.1	541.7	499.0	469.1	454.3	450.4
102.5°	589.6	638.3	645.3	630.2	603.9	582.2	566.7	563.5
105°	550.1	635.1	683.7	703.9	704.8	700.9	694.0	691.0
107.5°	494.0	584.4	653.0	696.7	721.0	732.2	737.1	738.4
110°	460.2	545.2	616.4	670.5	705.3	725.9	734.8	739.2



TEST NUMBER: P332966-935

CATALOG NUMBER: S124RDIP-S1020D590U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	435.5	510.6	577.9	631.9	671.5	696.5	708.9	716.0
115°	410.6	471.1	528.5	575.7	614.4	643.9	659.6	663.6
117.5°	398.4	448.4	493.6	533.6	566.7	591.4	607.3	610.4
120°	393.0	438.6	477.9	512.7	540.8	562.4	575.1	580.6
122.5°	388.2	432.3	468.0	498.6	522.3	540.8	551.6	557.0
125°	380.1	422.4	456.2	483.3	502.9	517.2	526.5	529.4
127.5°	370.3	410.7	444.5	470.1	489.9	502.6	510.4	513.3
130°	362.5	401.3	434.6	460.7	480.9	493.1	501.0	503.9
132.5°	354.2	390.6	423.3	449.3	469.1	482.9	490.3	493.4
135°	342.9	374.8	404.7	429.3	448.9	462.7	470.5	473.5
137.5°	332.5	359.6	384.8	407.0	425.3	438.9	445.4	448.9
140°	326.6	349.7	371.8	392.4	409.7	420.4	427.3	431.3
142.5°	321.2	341.5	360.4	378.3	393.5	403.6	409.7	412.3
145°	313.3	330.0	344.8	358.5	370.8	379.2	384.1	386.5
147.5°	306.9	320.2	332.0	342.9	351.9	359.0	362.7	363.7
150°	303.1	314.4	324.2	333.0	340.9	347.2	350.2	350.7
152.5°	298.7	308.4	317.5	324.8	331.4	336.7	338.4	338.9
155°	292.2	300.1	307.5	313.3	318.3	322.2	323.6	323.6
157.5°	285.2	291.9	298.0	302.7	306.5	309.4	310.3	310.3
160°	280.9	286.4	291.7	295.7	298.6	301.6	302.0	302.0
162.5°	276.6	281.2	285.4	289.0	291.2	294.1	294.6	294.2
165°	270.6	273.5	277.0	279.5	281.5	283.4	282.9	282.4
167.5°	264.8	267.1	269.8	271.3	272.3	273.5	273.5	273.1
170°	261.3	262.8	264.8	266.2	267.2	267.7	267.2	267.2
172.5°	258.1	259.2	260.5	261.5	262.1	262.6	262.1	261.3
175°	253.9	254.4	255.4	255.4	255.4	256.4	255.4	254.4
177.5°	251.2	251.6	251.6	251.9	251.6	251.9	251.2	250.4
180°	250.0	250.0	250.0	250.0	250.0	250.0	250.0	250.0

(END OF REPORT)