

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332910-935

Luminaire Tested: **S124RDIP-S575D810U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332910-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124RDIP-S575D810U935-4F0-1E-UDD-F  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 810 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4808.5 lumens  
Efficiency: N/A  
Efficacy: 125.2 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 38.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332910-935

CATALOG NUMBER: S124RDIP-S575D810U935-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

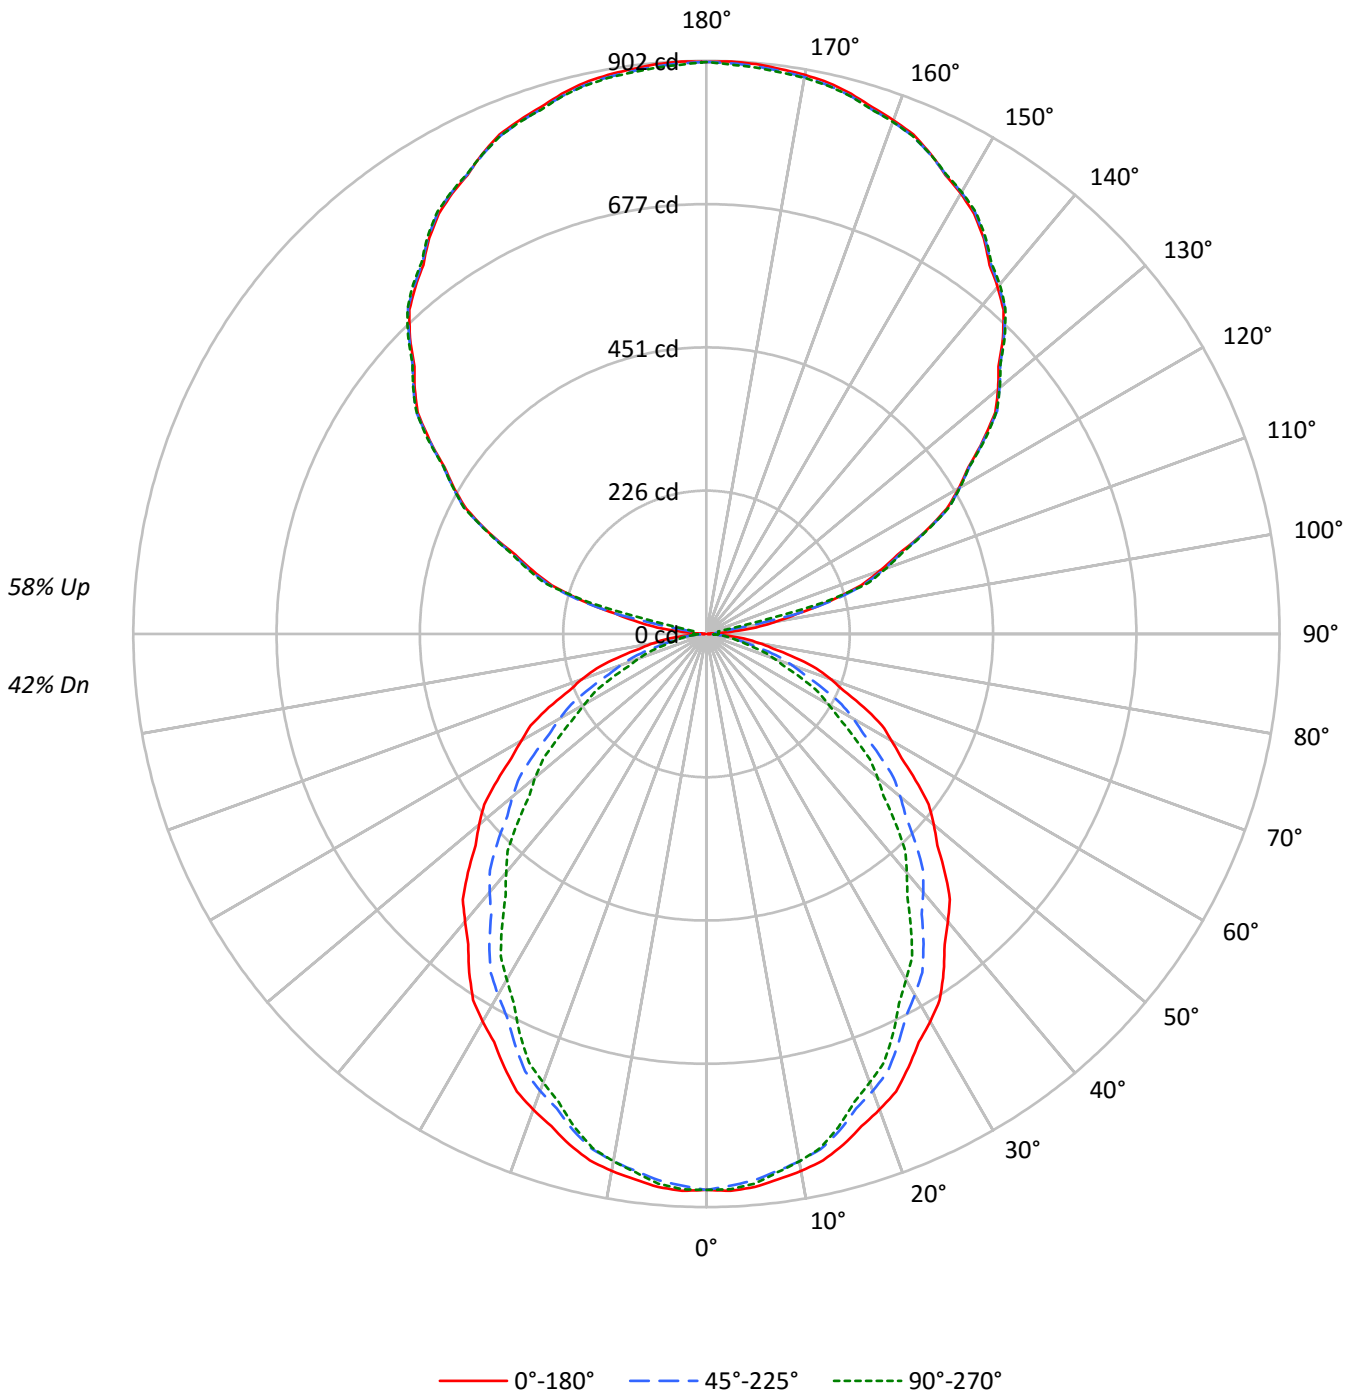



TEST NUMBER: P332910-935

CATALOG NUMBER: S124RDIP-S575D810U935-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	44	43	42	36
2	88	81	75	70	80	74	69	64	61	57	54	49	47	45	39	37	35	30
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	34	32	30	26
4	73	63	55	49	67	58	51	46	48	43	39	39	36	33	31	28	26	22
5	67	56	48	42	61	52	45	40	43	38	34	35	31	28	28	25	23	20
6	62	50	42	37	57	46	39	34	39	34	30	32	28	25	25	23	20	17
7	57	45	38	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15
8	53	41	34	28	49	38	31	27	32	27	23	27	23	20	21	18	16	14
9	50	38	30	25	45	35	28	24	29	24	21	24	21	18	20	17	15	13
10	46	35	27	23	42	32	26	21	27	22	19	23	19	16	18	15	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	7064	7064	7064
5°	7080	6994	7037
10°	7035	6909	6909
15°	6955	6764	6714
20°	6844	6574	6453
25°	6702	6350	6188
30°	6564	6114	5858
35°	6412	5870	5527
40°	6227	5592	5168
45°	6058	5316	4804
50°	5865	4999	4417
55°	5658	4669	3997
60°	5430	4306	3570
65°	5223	3851	3148
70°	4919	3354	2672
75°	4535	2779	2174
80°	3956	2115	1994
85°	3353	1927	1806



TEST NUMBER: P332910-935

CATALOG NUMBER: S124RDIP-S575D810U935-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	82.2	1.7
10°-20°	229.2	4.8
20°-30°	331.0	6.9
30°-40°	375.2	7.8
40°-50°	362.3	7.5
50°-60°	301.3	6.3
60°-70°	208.0	4.3
70°-80°	105.4	2.2
80°-90°	29.7	0.6
90°-100°	30.8	0.6
100°-110°	196.3	4.1
110°-120°	375.5	7.8
120°-130°	476.7	9.9
130°-140°	510.0	10.6
140°-150°	476.9	9.9
150°-160°	384.6	8.0
160°-170°	248.0	5.2
170°-180°	85.5	1.8
0°-30°	642.4	13.4
0°-40°	1017.6	21.2
0°-60°	1681.1	35.0
0°-90°	2024.2	42.1
90°-120°	602.6	12.5
90°-150°	2066.1	43.0
90°-180°	2784.0	57.9
0°-180°	4808.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	875	875	875	875	875	
5°	874	871	863	869	868	83
15°	832	825	809	808	803	234
25°	752	740	713	702	695	347
35°	651	628	596	573	561	406
45°	531	505	466	434	421	409
55°	402	374	332	298	284	359
65°	273	244	202	174	165	270
75°	145	120	89	74	70	154
85°	36	23	21	20	20	41
90°	2	9	15	19	20	3
95°	37	15	15	19	20	48
105°	203	207	210	214	192	212
115°	378	380	380	381	381	372
125°	532	534	533	535	536	475
135°	660	659	662	663	664	508
145°	761	763	763	763	765	475
155°	834	835	833	835	833	384
165°	880	877	876	881	876	249
175°	900	896	897	902	895	86
180°	900	900	900	900	900	



TEST NUMBER: P332910-935

CATALOG NUMBER: S124RDIP-S575D810U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0
2.5°	877.2	876.7	876.2	875.7	875.3	874.3	873.1	871.8	870.4	869.1	870.4
5°	873.7	873.1	872.5	871.8	871.3	870.1	868.3	866.5	864.7	863.0	864.4
7.5°	865.7	865.1	864.5	863.9	863.2	861.8	859.5	857.1	854.8	852.5	853.4
10°	858.2	857.6	856.8	856.0	855.3	853.6	850.9	848.2	845.5	842.8	843.4
12.5°	848.6	847.7	846.9	846.0	845.2	843.2	840.0	836.8	833.7	830.5	830.9
15°	832.2	830.8	829.5	828.1	826.7	824.2	820.5	816.8	813.0	809.3	809.1
17.5°	812.2	810.2	808.3	806.3	804.4	801.2	796.8	792.3	787.8	783.3	782.6
20°	796.6	794.7	792.7	790.8	788.8	785.4	780.3	775.2	770.2	765.2	764.0
22.5°	779.5	777.3	775.2	772.9	770.8	767.0	761.6	756.1	750.7	745.3	743.5
25°	752.4	749.8	747.0	744.3	741.7	737.3	731.2	725.0	718.9	712.9	710.3
27.5°	724.0	720.7	717.3	713.9	710.5	705.6	699.0	692.6	686.0	679.5	676.4
30°	704.1	700.4	696.7	693.0	689.3	683.9	676.9	669.9	662.9	655.9	652.2
32.5°	683.3	679.1	674.9	670.6	666.5	660.7	653.5	646.3	639.0	631.8	627.5
35°	650.6	645.8	641.0	636.3	631.5	625.4	617.9	610.5	603.0	595.6	590.6
37.5°	615.6	610.7	605.8	600.9	595.9	589.4	581.1	572.8	564.6	556.4	550.7
40°	590.9	586.0	581.1	576.2	571.3	564.6	556.1	547.6	539.2	530.6	524.3
42.5°	567.3	562.2	557.1	551.9	546.7	539.8	530.9	522.0	513.2	504.4	498.0
45°	530.6	525.1	519.6	514.1	508.6	501.4	492.4	483.5	474.6	465.6	458.3
47.5°	492.8	487.1	481.3	475.6	469.9	462.4	453.1	443.9	434.6	425.3	417.8
50°	467.0	461.2	455.4	449.5	443.8	436.1	426.5	417.1	407.5	398.0	390.5
52.5°	440.7	435.1	429.4	423.7	417.9	410.3	400.5	390.7	380.9	371.2	363.6
55°	402.0	396.1	390.1	384.1	378.2	370.3	360.7	351.0	341.3	331.7	323.9
57.5°	363.7	357.5	351.3	345.1	338.9	331.1	321.5	311.9	302.5	292.9	285.1
60°	336.3	330.4	324.4	318.5	312.5	304.8	295.2	285.7	276.2	266.7	258.9
62.5°	311.7	305.5	299.3	293.1	286.9	279.0	269.1	259.4	249.6	239.9	232.7
65°	273.4	267.0	260.5	254.2	247.7	239.8	230.2	220.8	211.2	201.6	195.3
67.5°	233.6	227.4	221.3	215.2	209.1	201.6	192.7	183.8	175.0	166.2	160.7
70°	208.4	202.1	195.9	189.6	183.4	176.0	167.5	159.0	150.5	142.1	137.2
72.5°	181.6	175.9	170.2	164.6	158.9	152.1	144.1	136.1	128.0	120.0	115.9
75°	145.4	139.9	134.4	128.9	123.4	117.1	110.1	103.1	96.1	89.1	85.7
77.5°	108.7	104.0	99.4	94.6	90.0	84.8	79.1	73.5	67.8	62.2	60.2
80°	85.1	80.8	76.5	72.2	67.8	63.5	59.0	54.5	50.0	45.5	45.1
82.5°	64.7	60.8	56.8	52.9	48.9	45.6	43.0	40.5	38.0	35.4	35.0
85°	36.2	33.2	30.2	27.2	24.3	22.6	22.1	21.7	21.2	20.8	20.5
87.5°	12.7	12.1	11.5	10.8	10.2	10.0	10.1	10.2	10.3	10.5	10.5
90°	2.0	3.7	5.3	7.0	8.6	10.0	11.2	12.4	13.6	14.8	15.7
92.5°	8.5	8.6	8.7	8.8	8.9	9.5	10.7	11.9	13.1	14.3	15.2
95°	37.0	31.9	26.9	21.8	16.7	14.2	14.4	14.6	14.6	14.8	15.7
97.5°	78.6	81.8	85.0	88.2	91.4	84.6	67.8	51.1	34.4	17.7	17.8
100°	110.4	113.1	115.8	118.5	121.1	112.2	91.5	70.9	50.3	29.6	27.0
102.5°	145.9	147.9	149.9	151.9	153.9	153.5	150.8	148.1	145.4	142.8	115.3
105°	202.6	203.5	204.4	205.3	206.2	207.1	207.8	208.5	209.3	210.0	211.4
107.5°	255.3	255.7	256.1	256.7	257.1	257.8	258.8	259.8	260.9	261.9	262.5
110°	290.8	291.3	291.7	292.1	292.7	293.3	294.2	295.1	296.0	296.9	297.2



TEST NUMBER: P332910-935

CATALOG NUMBER: S124RDIP-S575D810U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	325.3	326.1	326.9	327.7	328.6	329.2	329.6	329.9	330.4	330.8	330.8
115°	378.3	378.8	379.3	379.7	380.1	380.3	380.1	380.0	379.9	379.7	380.0
117.5°	426.1	426.7	427.3	427.9	428.5	429.0	429.3	429.6	430.0	430.3	430.2
120°	458.5	459.1	459.7	460.3	460.8	461.1	460.9	460.8	460.6	460.5	460.8
122.5°	488.6	489.0	489.3	489.7	490.1	490.3	490.5	490.8	490.9	491.2	491.4
125°	531.8	532.4	533.0	533.6	534.3	534.3	534.1	533.8	533.5	533.2	533.6
127.5°	572.7	572.9	573.1	573.3	573.3	573.8	574.5	575.1	575.8	576.5	576.4
130°	599.2	599.3	599.4	599.6	599.8	600.0	600.5	601.0	601.4	601.8	602.0
132.5°	623.4	623.6	624.0	624.2	624.5	624.9	625.4	626.0	626.5	627.2	627.3
135°	659.8	659.6	659.4	659.3	659.2	659.4	660.0	660.6	661.2	661.8	662.0
137.5°	691.9	692.0	692.1	692.1	692.2	692.5	693.2	693.9	694.5	695.2	695.5
140°	712.9	713.3	713.5	713.9	714.1	714.5	714.7	715.1	715.3	715.6	716.1
142.5°	731.8	732.3	732.9	733.4	733.9	734.3	734.4	734.7	734.9	735.0	735.4
145°	760.7	761.2	761.6	762.1	762.5	762.8	762.8	762.8	762.8	762.8	762.9
147.5°	783.8	784.6	785.4	786.3	787.1	787.5	787.3	787.1	787.0	786.9	787.0
150°	800.5	801.1	801.7	802.3	802.8	803.1	802.9	802.8	802.6	802.5	802.5
152.5°	814.4	814.9	815.4	815.9	816.4	816.5	816.2	816.0	815.6	815.4	815.6
155°	834.1	834.2	834.4	834.6	834.7	834.6	834.1	833.6	833.2	832.8	833.4
157.5°	850.7	850.6	850.5	850.4	850.3	850.0	849.5	849.0	848.5	848.0	848.8
160°	860.4	859.9	859.5	859.0	858.6	858.2	858.2	858.0	857.8	857.6	858.6
162.5°	869.0	868.4	867.8	867.3	866.7	866.3	866.2	866.1	865.9	865.7	866.7
165°	879.9	879.2	878.4	877.6	876.9	876.5	876.5	876.5	876.5	876.5	877.7
167.5°	888.5	887.7	886.9	886.1	885.4	884.9	884.8	884.8	884.7	884.6	885.9
170°	893.4	892.4	891.6	890.6	889.8	889.4	889.5	889.7	889.8	890.0	891.1
172.5°	896.6	895.7	894.8	893.9	893.0	892.6	892.8	892.9	893.0	893.2	894.4
175°	900.1	899.1	898.3	897.4	896.5	896.1	896.3	896.4	896.6	896.7	898.0
177.5°	901.7	900.9	900.0	899.1	898.4	898.0	898.3	898.5	898.8	899.0	899.9
180°	900.1	900.1	900.1	900.1	900.1	900.1	900.1	900.1	900.1	900.1	900.1



TEST NUMBER: P332910-935

CATALOG NUMBER: S124RDIP-S575D810U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	875.0	875.0	875.0	875.0	875.0	875.0	875.0	875.0
2.5°	871.8	873.1	874.3	874.9	874.9	874.7	874.6	874.5
5°	865.9	867.5	868.9	869.5	869.2	868.9	868.6	868.3
7.5°	854.4	855.3	856.4	856.5	856.1	855.6	855.1	854.6
10°	844.0	844.6	845.2	845.2	844.6	844.0	843.4	842.8
12.5°	831.2	831.6	832.0	831.7	830.9	830.1	829.2	828.4
15°	808.7	808.5	808.1	807.5	806.4	805.4	804.3	803.3
17.5°	781.7	780.8	780.0	778.8	777.2	775.7	774.0	772.5
20°	762.8	761.6	760.3	758.8	756.9	754.9	753.0	751.1
22.5°	741.8	739.9	738.1	736.5	734.9	733.3	731.8	730.1
25°	707.8	705.2	702.7	700.8	699.2	697.8	696.3	694.7
27.5°	673.2	670.1	667.0	664.3	662.2	660.0	658.0	655.8
30°	648.5	644.7	641.0	638.0	635.6	633.2	630.9	628.4
32.5°	623.2	618.9	614.5	611.2	609.0	606.7	604.4	602.2
35°	585.5	580.4	575.4	571.5	568.9	566.1	563.4	560.8
37.5°	545.0	539.4	533.7	529.6	526.8	524.2	521.5	518.8
40°	518.1	511.9	505.6	501.2	498.4	495.8	493.1	490.4
42.5°	491.6	485.3	478.9	474.3	471.5	468.7	465.9	463.1
45°	451.1	443.8	436.4	431.4	428.8	426.1	423.4	420.8
47.5°	410.2	402.6	395.0	389.8	386.8	383.9	381.0	378.0
50°	383.1	375.7	368.2	363.1	360.2	357.4	354.6	351.7
52.5°	356.0	348.4	341.0	335.7	332.7	329.8	326.8	323.9
55°	316.2	308.4	300.7	295.4	292.6	289.7	286.9	284.0
57.5°	277.2	269.3	261.5	256.5	254.3	252.2	250.0	247.9
60°	251.2	243.4	235.7	230.7	228.3	225.8	223.5	221.1
62.5°	225.6	218.4	211.3	206.7	204.8	202.9	201.0	199.1
65°	188.9	182.4	176.1	171.9	170.2	168.4	166.6	164.8
67.5°	155.2	149.6	144.1	140.4	138.4	136.5	134.5	132.5
70°	132.2	127.3	122.3	119.2	117.7	116.2	114.7	113.2
72.5°	111.7	107.5	103.2	100.5	99.1	97.7	96.3	95.0
75°	82.2	78.9	75.4	73.3	72.3	71.5	70.6	69.7
77.5°	58.2	56.2	54.2	53.0	52.8	52.5	52.3	52.0
80°	44.7	44.3	43.7	43.5	43.3	43.1	43.0	42.9
82.5°	34.7	34.4	34.1	33.8	33.7	33.5	33.4	33.2
85°	20.1	19.9	19.5	19.5	19.5	19.5	19.5	19.5
87.5°	10.6	10.7	10.7	10.8	11.0	11.2	11.4	11.5
90°	16.6	17.5	18.4	19.0	19.3	19.6	19.9	20.2
92.5°	16.1	17.0	17.8	18.3	18.4	18.4	18.5	18.6
95°	16.6	17.5	18.4	18.9	19.1	19.2	19.4	19.5
97.5°	18.0	18.1	18.2	18.3	18.4	18.5	18.7	18.9
100°	24.5	22.0	19.5	18.3	18.4	18.5	18.7	18.9
102.5°	87.8	60.4	33.0	19.3	19.3	19.3	19.4	19.4
105°	212.8	214.0	215.4	213.4	208.0	202.6	197.3	191.8
107.5°	263.2	263.8	264.5	265.1	265.7	266.2	266.8	267.4
110°	297.5	297.8	298.1	298.4	298.9	299.4	299.8	300.2





TEST NUMBER: P332910-935

CATALOG NUMBER: S124RDIP-S575D810U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	330.7	330.6	330.5	330.8	331.4	332.0	332.5	333.1
115°	380.3	380.6	380.9	381.1	381.1	381.1	381.1	381.1
117.5°	430.2	430.2	430.1	430.0	430.0	429.9	429.8	429.8
120°	461.1	461.4	461.7	461.7	461.4	461.1	460.8	460.5
122.5°	491.5	491.7	491.9	491.8	491.5	491.2	490.9	490.6
125°	534.1	534.5	534.9	535.3	535.5	535.5	535.7	535.9
127.5°	576.4	576.3	576.2	576.1	575.9	575.8	575.8	575.6
130°	602.2	602.3	602.4	602.5	602.5	602.5	602.5	602.5
132.5°	627.5	627.6	627.8	627.8	627.7	627.5	627.4	627.3
135°	662.4	662.6	663.0	663.2	663.6	663.8	664.2	664.4
137.5°	695.8	696.1	696.5	696.5	696.5	696.4	696.3	696.2
140°	716.5	717.0	717.4	717.7	717.9	718.0	718.2	718.3
142.5°	735.6	736.0	736.3	736.5	736.5	736.6	736.6	736.6
145°	763.0	763.2	763.4	763.5	763.9	764.1	764.5	764.7
147.5°	787.1	787.2	787.3	787.5	787.6	787.7	787.9	788.1
150°	802.5	802.5	802.5	802.5	802.7	802.8	803.0	803.1
152.5°	815.9	816.1	816.3	816.4	816.3	816.2	816.1	816.1
155°	834.0	834.6	835.2	835.3	834.7	834.3	833.9	833.4
157.5°	849.5	850.3	851.1	851.1	850.3	849.5	848.8	848.0
160°	859.5	860.4	861.3	861.3	860.4	859.5	858.6	857.6
162.5°	867.5	868.4	869.4	869.3	868.2	867.2	866.3	865.2
165°	878.9	880.1	881.3	881.2	879.9	878.6	877.2	875.8
167.5°	887.3	888.6	889.8	889.8	888.3	886.7	885.3	883.8
170°	892.3	893.5	894.8	894.6	893.1	891.7	890.1	888.6
172.5°	895.6	896.8	898.0	897.8	896.2	894.6	892.9	891.3
175°	899.4	900.8	902.1	901.9	900.1	898.3	896.5	894.7
177.5°	901.0	901.9	902.8	902.6	901.1	899.7	898.3	896.8
180°	900.1	900.1	900.1	900.1	900.1	900.1	900.1	900.1

(END OF REPORT)