

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332930-935

Luminaire Tested: **S124RDIP-S795D365U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332930-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIP-S795D365U935-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 365 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3890.7 lumens
Efficiency: N/A
Efficacy: 111.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 35
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332930-935

CATALOG NUMBER: S124RDIP-S795D365U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

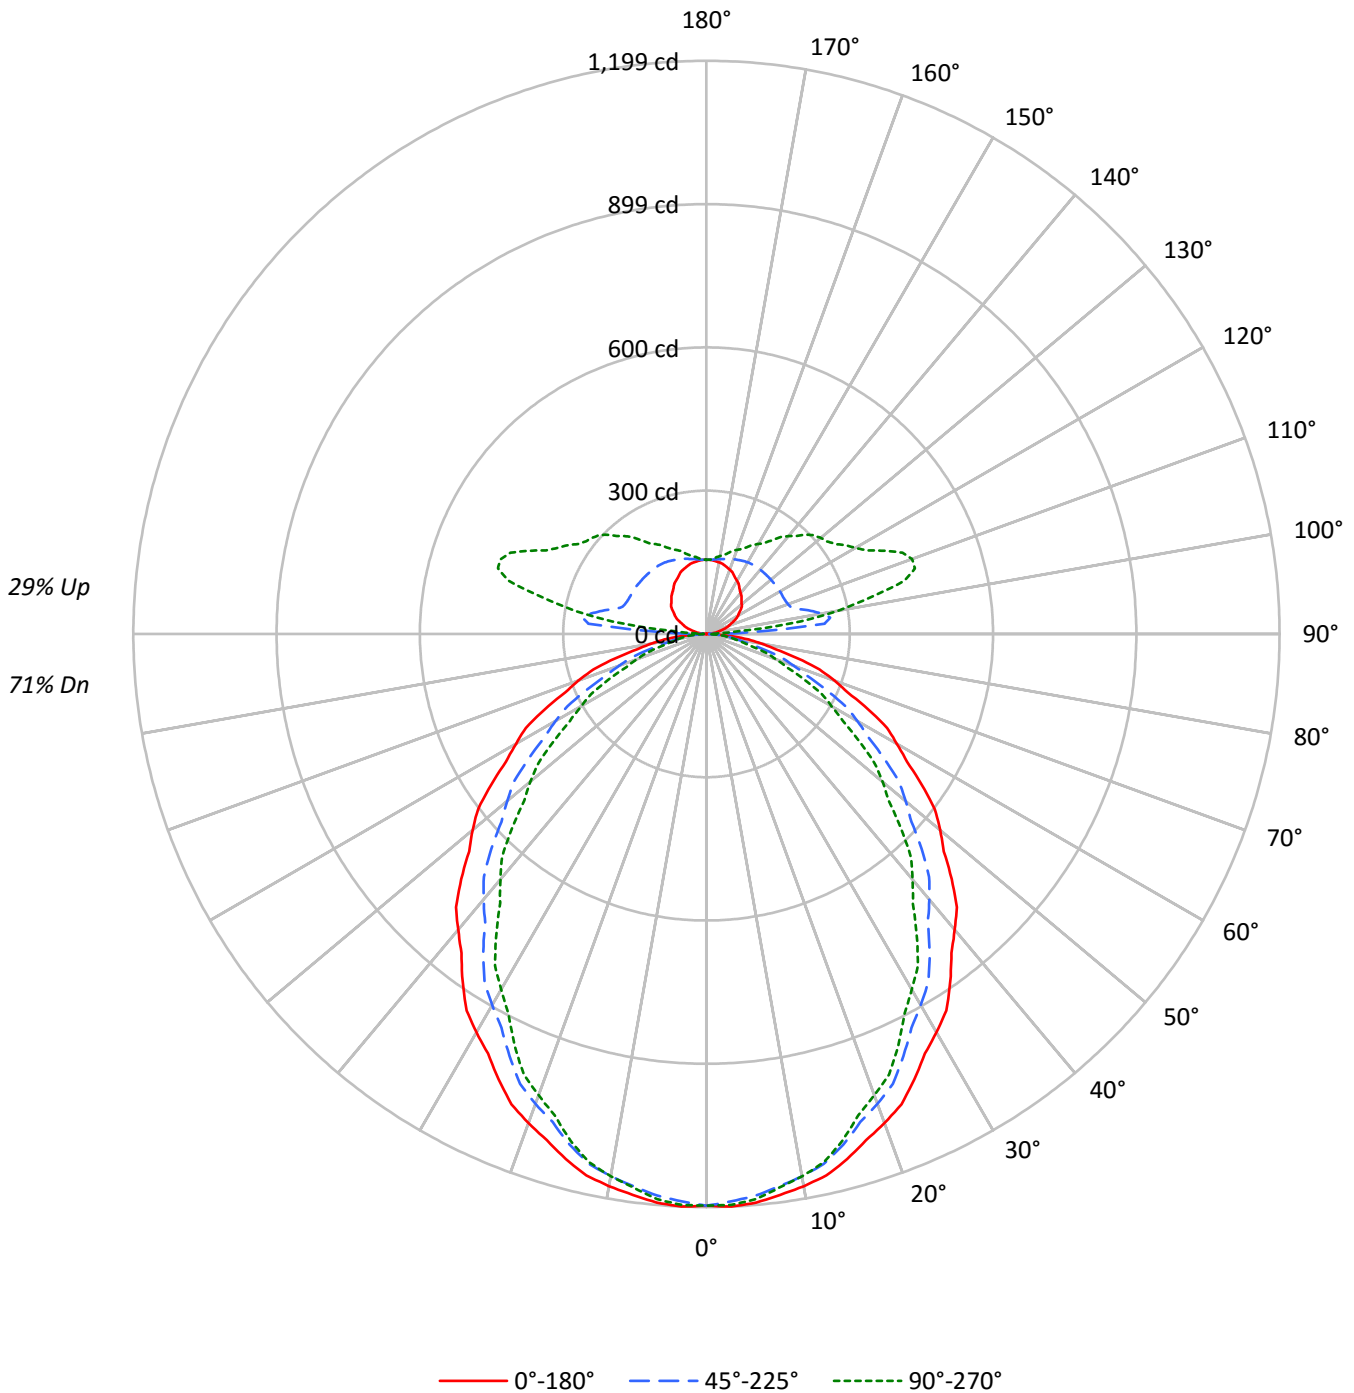



TEST NUMBER: P332930-935

CATALOG NUMBER: S124RDIP-S795D365U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	75	75	75	71
1	103	99	95	91	97	94	90	87	84	81	79	75	73	72	67	66	65	61
2	94	87	80	75	89	82	77	72	74	70	66	67	63	60	60	57	55	51
3	86	76	69	63	81	73	66	61	66	60	56	59	55	52	53	50	47	44
4	79	68	60	54	75	65	58	52	59	53	48	53	48	45	48	44	41	38
5	73	61	53	47	69	58	51	45	53	47	42	48	43	39	43	39	36	33
6	67	55	47	41	63	52	45	39	48	41	37	43	38	34	39	35	32	29
7	62	50	42	36	59	48	40	35	44	37	33	40	34	31	36	32	28	26
8	58	45	37	32	55	43	36	31	40	34	29	36	31	27	33	29	26	23
9	54	42	34	29	51	40	33	28	37	31	26	34	28	25	31	26	23	21
10	51	38	31	26	48	37	30	25	34	28	24	31	26	23	29	24	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9656	9656	9656
5°	9678	9559	9618
10°	9617	9444	9444
15°	9507	9246	9177
20°	9355	8985	8820
25°	9161	8679	8459
30°	8972	8358	8007
35°	8763	8024	7554
40°	8513	7644	7065
45°	8281	7267	6566
50°	8017	6832	6038
55°	7734	6380	5465
60°	7424	5885	4879
65°	7138	5266	4304
70°	6722	4584	3654
75°	6198	3799	2969
80°	5407	2896	2724
85°	4576	2631	2455



TEST NUMBER: P332930-935

CATALOG NUMBER: S124RDIP-S795D365U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	112.4	2.9
10°-20°	313.3	8.1
20°-30°	452.4	11.6
30°-40°	512.8	13.2
40°-50°	495.2	12.7
50°-60°	411.8	10.6
60°-70°	284.4	7.3
70°-80°	144.1	3.7
80°-90°	37.8	1.0
90°-100°	111.9	2.9
100°-110°	232.8	6.0
110°-120°	208.5	5.4
120°-130°	175.4	4.5
130°-140°	146.3	3.8
140°-150°	111.7	2.9
150°-160°	78.5	2.0
160°-170°	46.2	1.2
170°-180°	15.0	0.4
0°-30°	878.1	22.6
0°-40°	1390.9	35.7
0°-60°	2297.9	59.1
0°-90°	2764.2	71.0
90°-120°	553.3	14.2
90°-150°	986.7	25.4
90°-180°	1126.0	28.9
0°-180°	3890.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1196	1196	1196	1196	1196	
5°	1194	1190	1180	1188	1187	113
15°	1138	1128	1106	1104	1098	320
25°	1028	1011	974	959	950	474
35°	889	859	814	784	766	555
45°	725	690	636	593	575	559
55°	550	512	453	407	388	491
65°	374	333	276	238	225	369
75°	199	164	122	102	95	210
85°	49	32	28	27	26	56
90°	0	2	6	6	6	3
95°	10	32	248	123	74	11
105°	36	52	200	430	428	38
115°	63	79	178	342	411	62
125°	87	104	177	291	328	78
135°	104	124	176	258	293	80
145°	120	137	175	218	239	75
155°	136	147	170	192	200	63
165°	148	153	163	172	175	42
175°	154	155	156	158	158	15
180°	155	155	155	155	155	



TEST NUMBER: P332930-935

CATALOG NUMBER: S124RDIP-S795D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1
2.5°	1199.0	1198.3	1197.7	1197.0	1196.4	1195.2	1193.3	1191.6	1189.8	1188.0	1189.8
5°	1194.2	1193.4	1192.6	1191.8	1190.9	1189.4	1186.9	1184.5	1182.0	1179.6	1181.6
7.5°	1183.4	1182.6	1181.7	1180.9	1180.0	1178.0	1174.8	1171.6	1168.5	1165.3	1166.6
10°	1173.2	1172.2	1171.1	1170.1	1169.1	1166.7	1163.1	1159.4	1155.8	1152.1	1152.9
12.5°	1159.9	1158.8	1157.6	1156.4	1155.3	1152.5	1148.2	1143.8	1139.5	1135.2	1135.7
15°	1137.5	1135.7	1133.8	1132.0	1130.1	1126.7	1121.5	1116.5	1111.4	1106.3	1105.9
17.5°	1110.2	1107.5	1104.8	1102.3	1099.6	1095.2	1089.1	1083.0	1076.9	1070.7	1069.6
20°	1088.9	1086.2	1083.7	1081.0	1078.3	1073.6	1066.6	1059.7	1052.7	1045.9	1044.2
22.5°	1065.5	1062.5	1059.5	1056.5	1053.6	1048.4	1040.9	1033.5	1026.1	1018.7	1016.3
25°	1028.5	1024.8	1021.1	1017.4	1013.8	1007.8	999.4	991.1	982.7	974.4	970.9
27.5°	989.6	985.1	980.4	975.9	971.2	964.5	955.5	946.7	937.7	928.8	924.5
30°	962.5	957.4	952.4	947.3	942.2	934.9	925.3	915.8	906.1	896.6	891.5
32.5°	933.9	928.2	922.5	916.7	911.0	903.2	893.3	883.4	873.5	863.6	857.7
35°	889.2	882.8	876.2	869.7	863.2	854.9	844.7	834.5	824.3	814.2	807.3
37.5°	841.5	834.7	828.0	821.3	814.6	805.6	794.4	783.1	771.8	760.5	752.8
40°	807.8	801.1	794.4	787.6	780.9	771.7	760.1	748.6	736.9	725.3	716.8
42.5°	775.5	768.4	761.5	754.4	747.3	737.8	725.7	713.6	701.5	689.4	680.7
45°	725.3	717.8	710.2	702.7	695.2	685.4	673.1	660.9	648.7	636.5	626.5
47.5°	673.5	665.7	658.0	650.1	642.4	632.1	619.5	606.7	594.1	581.3	571.0
50°	638.3	630.4	622.4	614.5	606.6	596.1	583.1	570.1	557.0	544.0	533.8
52.5°	602.4	594.7	586.9	579.1	571.4	560.8	547.4	534.1	520.7	507.4	497.1
55°	549.5	541.3	533.2	525.0	516.9	506.3	493.0	479.7	466.6	453.3	442.7
57.5°	497.1	488.6	480.2	471.7	463.2	452.5	439.5	426.5	413.5	400.4	389.7
60°	459.8	451.6	443.5	435.3	427.1	416.6	403.6	390.5	377.5	364.5	353.9
62.5°	426.0	417.6	409.1	400.6	392.2	381.3	367.9	354.6	341.2	327.9	318.1
65°	373.7	364.9	356.1	347.4	338.6	327.8	314.7	301.7	288.7	275.7	266.9
67.5°	319.3	310.9	302.5	294.1	285.7	275.5	263.4	251.3	239.2	227.1	219.6
70°	284.8	276.3	267.7	259.2	250.6	240.6	228.9	217.3	205.8	194.2	187.4
72.5°	248.2	240.5	232.7	225.0	217.2	207.9	197.0	186.0	175.0	164.1	158.3
75°	198.7	191.2	183.7	176.2	168.6	160.1	150.5	140.9	131.4	121.8	117.1
77.5°	148.5	142.2	135.8	129.4	123.0	115.9	108.2	100.5	92.7	85.0	82.2
80°	116.3	110.4	104.5	98.6	92.7	86.7	80.6	74.5	68.4	62.3	61.6
82.5°	88.5	83.1	77.7	72.2	66.8	62.3	58.9	55.4	51.8	48.4	47.9
85°	49.4	45.4	41.3	37.3	33.1	30.8	30.2	29.6	29.0	28.4	28.0
87.5°	16.9	15.8	14.6	13.3	12.1	11.4	11.6	11.5	11.4	11.4	11.1
90°	0.3	0.9	1.8	2.2	2.4	2.4	4.2	4.2	4.9	5.5	5.2
92.5°	3.4	5.1	7.9	11.6	16.1	22.4	37.9	61.5	84.5	96.5	80.4
95°	10.1	10.9	14.0	18.0	25.2	38.1	64.5	114.4	187.2	248.0	255.0
97.5°	18.0	18.0	20.7	24.3	30.6	41.2	61.6	102.9	175.1	261.2	320.4
100°	23.2	23.2	25.2	28.9	34.7	44.4	62.4	96.8	158.9	244.7	322.5
102.5°	28.0	28.5	30.4	33.8	39.3	48.6	64.8	95.1	147.9	223.9	304.3
105°	35.6	36.5	38.1	41.7	47.2	56.0	70.6	95.8	138.4	199.6	271.1
107.5°	44.0	44.6	46.1	50.0	55.3	64.0	77.3	100.4	136.7	186.0	244.4
110°	49.6	50.2	51.7	55.4	60.9	69.1	82.5	103.8	137.2	181.3	231.0



TEST NUMBER: P332930-935

CATALOG NUMBER: S124RDIP-S795D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	54.9	55.5	57.3	60.7	66.2	74.4	87.3	107.5	138.7	179.2	223.4
115°	62.7	63.6	65.7	68.8	74.6	82.7	95.0	113.2	141.5	178.1	216.4
117.5°	70.7	71.5	73.4	76.8	82.2	90.7	102.3	119.1	144.5	177.7	213.2
120°	76.1	76.7	78.8	82.1	87.3	95.8	107.5	123.2	146.7	177.7	211.5
122.5°	80.9	81.5	83.7	86.8	92.5	100.7	112.3	127.2	148.9	177.5	209.6
125°	87.3	88.5	90.4	93.8	99.5	108.1	119.0	132.9	152.1	177.1	206.3
127.5°	93.0	93.9	96.2	100.0	106.0	114.6	125.2	138.0	154.8	176.4	202.0
130°	96.2	97.4	99.8	104.4	110.1	119.0	129.3	141.2	156.7	176.2	199.3
132.5°	99.4	100.3	103.5	107.8	114.1	122.3	132.8	144.4	158.4	176.0	196.9
135°	103.8	105.0	108.1	113.2	119.6	127.5	137.5	148.5	161.0	175.6	193.2
137.5°	108.2	109.3	112.7	117.6	124.2	131.8	141.2	151.4	162.5	175.6	190.1
140°	111.4	112.3	115.6	120.8	127.2	134.5	143.6	153.3	163.7	175.3	188.4
142.5°	114.8	115.7	118.8	123.7	129.8	136.9	145.9	154.8	164.7	175.3	186.9
145°	119.6	120.5	123.6	127.8	133.6	140.3	148.2	156.4	165.2	174.7	184.4
147.5°	125.0	125.3	128.0	132.3	137.2	143.2	150.6	157.8	165.6	173.6	182.2
150°	128.4	128.7	131.1	134.8	139.4	145.2	151.9	158.5	165.6	172.8	180.5
152.5°	131.6	131.6	134.1	137.5	141.5	146.9	152.8	159.0	165.1	171.6	178.5
155°	136.0	136.3	138.2	141.2	144.6	149.1	154.3	159.5	164.4	169.8	175.6
157.5°	140.3	140.3	142.1	144.4	147.3	150.9	155.3	159.5	163.5	167.9	172.6
160°	143.0	143.0	144.2	146.4	148.8	152.1	155.8	159.5	162.8	166.4	170.4
162.5°	145.4	145.3	146.2	148.1	150.2	152.9	156.3	159.5	162.0	165.0	168.5
165°	148.2	148.2	148.8	150.3	151.9	153.7	156.4	158.9	160.7	162.8	165.2
167.5°	150.9	150.6	150.9	152.1	152.9	154.4	156.4	158.1	159.2	160.6	162.3
170°	152.1	151.9	152.1	153.1	153.7	154.5	156.1	157.6	158.3	159.1	160.4
172.5°	153.3	153.1	153.1	153.8	154.1	154.8	155.8	157.1	157.3	157.6	158.7
175°	154.5	154.3	154.3	154.5	154.9	154.9	155.5	156.4	156.1	156.1	156.7
177.5°	155.2	154.9	154.6	154.9	154.9	154.9	155.2	155.6	155.2	155.2	155.4
180°	154.9	154.9	154.9	154.9	154.9	154.9	154.9	154.9	154.9	154.9	154.9



TEST NUMBER: P332930-935

CATALOG NUMBER: S124RDIP-S795D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1
2.5°	1191.6	1193.3	1195.2	1196.0	1195.8	1195.7	1195.5	1195.3
5°	1183.6	1185.7	1187.7	1188.5	1188.1	1187.7	1187.3	1186.9
7.5°	1167.9	1169.2	1170.5	1170.8	1170.2	1169.5	1168.9	1168.2
10°	1153.7	1154.5	1155.4	1155.4	1154.5	1153.7	1152.9	1152.1
12.5°	1136.3	1136.7	1137.2	1136.9	1135.7	1134.6	1133.4	1132.3
15°	1105.5	1105.1	1104.7	1103.8	1102.3	1100.9	1099.5	1098.0
17.5°	1068.5	1067.4	1066.2	1064.5	1062.4	1060.2	1058.1	1055.9
20°	1042.6	1040.9	1039.3	1037.2	1034.6	1031.9	1029.2	1026.7
22.5°	1013.9	1011.4	1009.0	1006.7	1004.5	1002.4	1000.2	998.1
25°	967.5	964.1	960.6	957.9	955.8	953.8	951.7	949.7
27.5°	920.2	916.0	911.7	908.1	905.2	902.2	899.3	896.4
30°	886.4	881.3	876.2	872.0	868.8	865.6	862.3	859.0
32.5°	851.8	845.9	840.0	835.5	832.4	829.3	826.2	823.1
35°	800.3	793.4	786.5	781.2	777.6	773.9	770.2	766.5
37.5°	745.0	737.3	729.5	723.8	720.2	716.5	712.9	709.2
40°	708.3	699.6	691.1	685.0	681.4	677.7	674.1	670.4
42.5°	672.0	663.3	654.6	648.3	644.5	640.7	636.9	633.0
45°	616.6	606.6	596.6	589.8	586.1	582.5	578.8	575.1
47.5°	560.7	550.4	540.0	532.8	528.8	524.8	520.7	516.7
50°	523.7	513.5	503.3	496.3	492.4	488.5	484.7	480.8
52.5°	486.7	476.4	466.0	458.8	454.8	450.7	446.8	442.7
55°	432.1	421.5	411.0	403.8	399.9	396.1	392.2	388.3
57.5°	378.9	368.2	357.4	350.6	347.7	344.7	341.8	338.9
60°	343.4	332.8	322.2	315.2	312.0	308.8	305.5	302.2
62.5°	308.3	298.6	288.8	282.6	280.0	277.4	274.7	272.2
65°	258.1	249.4	240.6	235.1	232.6	230.1	227.7	225.3
67.5°	212.1	204.6	197.0	191.9	189.2	186.5	183.8	181.2
70°	180.7	174.0	167.3	162.9	160.9	158.9	156.8	154.8
72.5°	152.7	146.9	141.1	137.3	135.5	133.6	131.7	129.8
75°	112.4	107.8	103.1	100.1	98.9	97.7	96.4	95.2
77.5°	79.6	76.8	74.0	72.5	72.2	71.8	71.5	71.0
80°	61.0	60.4	59.8	59.4	59.2	59.0	58.8	58.6
82.5°	47.4	47.0	46.6	46.2	46.1	45.8	45.6	45.5
85°	27.6	27.2	26.8	26.5	26.5	26.5	26.5	26.5
87.5°	11.0	10.9	10.8	10.8	11.0	11.3	11.4	11.5
90°	5.5	5.8	6.1	6.1	6.4	6.7	6.4	6.4
92.5°	59.8	44.9	35.8	29.7	26.1	24.5	23.4	23.4
95°	225.5	178.3	137.5	108.1	93.1	83.7	78.2	74.2
97.5°	333.1	315.6	285.9	254.1	232.2	214.0	204.8	198.5
100°	367.0	373.1	358.2	335.6	309.2	290.6	281.5	279.1
102.5°	365.3	395.5	399.8	390.4	374.2	360.8	351.1	349.1
105°	340.8	393.5	423.6	436.1	436.7	434.2	430.0	428.2
107.5°	306.1	362.1	404.5	431.7	446.7	453.7	456.7	457.4
110°	285.2	337.8	381.9	415.3	437.0	449.8	455.2	458.0



TEST NUMBER: P332930-935

CATALOG NUMBER: S124RDIP-S795D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	269.8	316.3	358.0	391.5	416.0	431.5	439.2	443.6
115°	254.4	291.8	327.4	356.6	380.6	398.9	408.7	411.1
117.5°	246.8	277.8	305.8	330.6	351.1	366.4	376.3	378.2
120°	243.4	271.7	296.1	317.7	335.0	348.4	356.4	359.7
122.5°	240.5	267.9	290.0	308.9	323.6	335.0	341.7	345.1
125°	235.6	261.7	282.7	299.5	311.6	320.5	326.2	328.0
127.5°	229.5	254.4	275.4	291.3	303.5	311.3	316.2	318.1
130°	224.5	248.7	269.3	285.4	297.9	305.5	310.4	312.2
132.5°	219.5	242.0	262.3	278.4	290.6	299.2	303.8	305.7
135°	212.4	232.2	250.7	266.0	278.1	286.6	291.5	293.3
137.5°	206.0	222.7	238.4	252.1	263.6	271.9	276.0	278.1
140°	202.3	216.6	230.3	243.1	253.8	260.5	264.8	267.2
142.5°	199.0	211.5	223.3	234.4	243.8	250.0	253.8	255.5
145°	194.2	204.5	213.6	222.1	229.7	234.9	238.0	239.4
147.5°	190.2	198.4	205.7	212.4	218.0	222.5	224.7	225.3
150°	187.8	194.8	200.9	206.3	211.2	215.2	217.0	217.2
152.5°	185.1	191.1	196.7	201.2	205.3	208.5	209.7	210.0
155°	181.1	185.9	190.5	194.2	197.2	199.6	200.5	200.5
157.5°	176.8	180.8	184.7	187.6	189.9	191.7	192.3	192.3
160°	174.1	177.4	180.7	183.2	185.0	186.8	187.2	187.2
162.5°	171.4	174.3	176.8	179.1	180.4	182.2	182.5	182.3
165°	167.6	169.5	171.6	173.1	174.4	175.6	175.3	175.0
167.5°	164.1	165.5	167.2	168.1	168.7	169.5	169.4	169.2
170°	161.9	162.8	164.0	165.0	165.6	165.8	165.6	165.6
172.5°	160.0	160.6	161.4	162.0	162.4	162.6	162.4	161.9
175°	157.3	157.6	158.3	158.3	158.3	158.9	158.3	157.6
177.5°	155.6	155.8	155.8	156.1	155.8	156.1	155.6	155.2
180°	154.9	154.9	154.9	154.9	154.9	154.9	154.9	154.9

(END OF REPORT)