

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332650-840

Luminaire Tested: **S124DIP-S1020D810U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332650-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S1020D810U840-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7306.8 lumens
Efficiency: N/A
Efficacy: 134.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332650-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

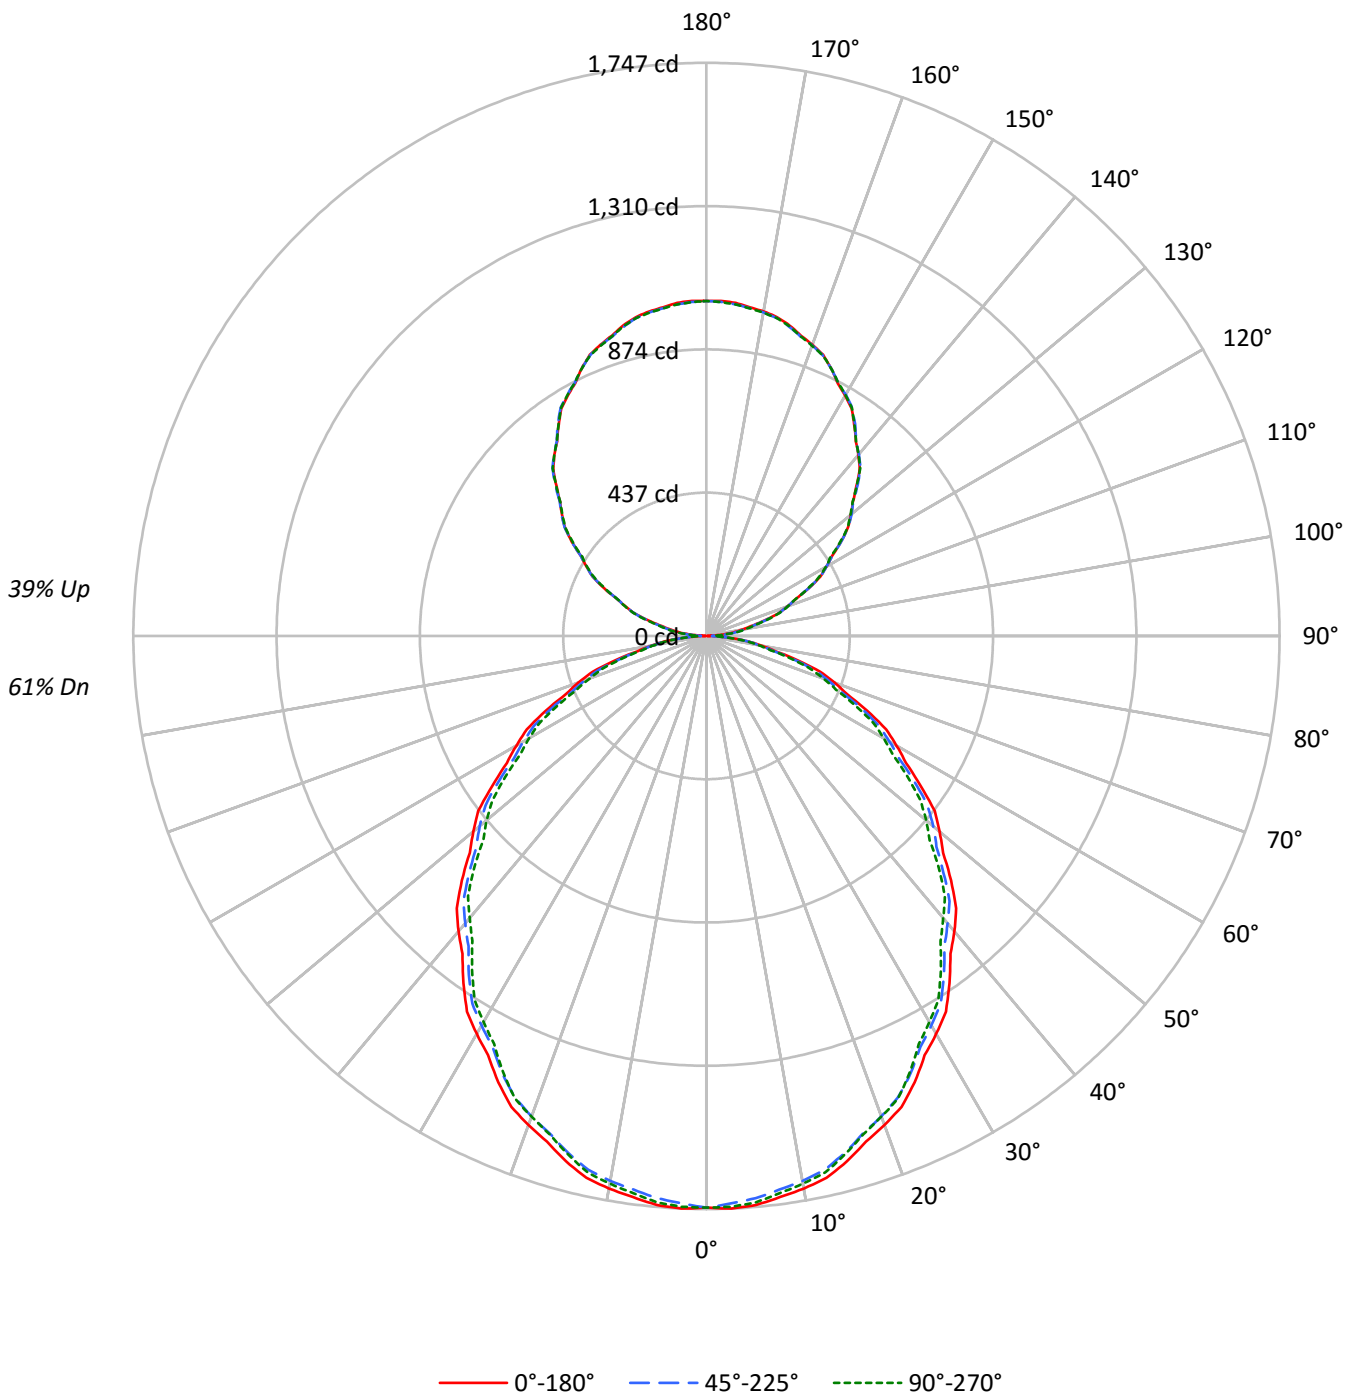



TEST NUMBER: P332650-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	66	66	66	61
1	100	96	92	88	94	90	86	83	79	76	74	68	66	65	59	57	56	51
2	91	84	77	72	85	79	73	68	69	65	61	60	57	54	52	49	47	43
3	83	74	66	60	78	69	62	57	61	56	51	53	49	46	46	43	40	36
4	76	65	57	51	71	61	54	48	54	48	44	47	43	39	41	37	35	31
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30	27
6	65	52	44	38	60	49	42	36	44	38	33	38	34	30	33	30	27	24
7	60	47	39	33	56	45	37	32	40	34	29	35	30	26	31	27	24	21
8	56	43	35	30	52	41	33	28	36	30	26	32	27	24	28	24	21	19
9	52	39	32	26	48	37	30	25	33	27	23	29	25	21	26	22	19	17
10	48	36	29	24	45	34	27	23	31	25	21	27	23	19	24	20	17	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14067	14067	14067
5°	14109	13940	14041
10°	14021	13827	13896
15°	13852	13630	13665
20°	13626	13387	13399
25°	13370	13109	13071
30°	13055	12781	12665
35°	12728	12439	12275
40°	12390	12052	11830
45°	12036	11669	11445
50°	11645	11328	10977
55°	11222	10888	10534
60°	10798	10393	10077
65°	10323	9922	9522
70°	9788	9293	8932
75°	8971	8537	8319
80°	7987	7657	7466
85°	6984	6725	6595



TEST NUMBER: P332650-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	164.1	2.2
10°-20°	462.4	6.3
20°-30°	680.5	9.3
30°-40°	791.1	10.8
40°-50°	791.2	10.8
50°-60°	692.1	9.5
60°-70°	514.0	7.0
70°-80°	292.0	4.0
80°-90°	87.3	1.2
90°-100°	67.3	0.9
100°-110°	199.5	2.7
110°-120°	338.5	4.6
120°-130°	446.4	6.1
130°-140°	501.3	6.9
140°-150°	492.6	6.7
150°-160°	414.3	5.7
160°-170°	275.7	3.8
170°-180°	96.5	1.3
0°-30°	1307.0	17.9
0°-40°	2098.1	28.7
0°-60°	3581.3	49.0
0°-90°	4474.6	61.2
90°-120°	605.4	8.3
90°-150°	2045.7	28.0
90°-180°	2832.0	38.8
0°-180°	7306.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1742	1742	1742	1742	1742	
5°	1741	1735	1720	1735	1733	165
15°	1657	1651	1631	1638	1635	467
25°	1501	1491	1472	1473	1467	690
35°	1292	1281	1262	1253	1246	807
45°	1054	1044	1022	1007	1002	812
55°	797	792	774	757	748	714
65°	540	533	519	506	498	535
75°	288	281	274	268	267	306
85°	75	75	73	72	71	83
90°	2	11	17	22	24	7
95°	47	54	60	62	62	53
105°	184	185	188	190	193	195
115°	344	344	343	342	341	339
125°	501	501	501	499	497	447
135°	647	651	651	650	647	500
145°	786	789	790	789	786	491
155°	900	900	899	902	899	414
165°	980	977	976	980	977	276
175°	1019	1015	1014	1020	1014	97
180°	1021	1021	1021	1021	1021	



TEST NUMBER: P332650-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5
2.5°	1747.0	1746.3	1745.5	1744.7	1744.0	1742.2	1739.5	1736.8	1734.0	1731.3	1733.8
5°	1741.1	1739.9	1738.7	1737.4	1736.2	1733.8	1730.4	1727.0	1723.6	1720.2	1723.6
7.5°	1725.0	1723.6	1722.4	1721.2	1720.0	1717.5	1713.6	1709.9	1706.1	1702.3	1705.1
10°	1710.4	1709.2	1707.9	1706.7	1705.5	1702.8	1698.8	1694.8	1690.7	1686.7	1689.1
12.5°	1691.4	1690.2	1688.9	1687.7	1686.5	1683.6	1679.4	1675.2	1670.8	1666.6	1669.3
15°	1657.4	1656.1	1654.9	1653.7	1652.3	1649.4	1644.8	1640.1	1635.5	1630.8	1632.6
17.5°	1616.3	1614.8	1613.2	1611.6	1610.1	1607.1	1602.7	1598.3	1593.9	1589.5	1590.6
20°	1586.1	1584.6	1583.1	1581.4	1579.9	1576.8	1572.2	1567.5	1562.9	1558.2	1559.1
22.5°	1553.8	1551.7	1549.6	1547.6	1545.6	1542.2	1537.5	1532.9	1528.2	1523.6	1525.3
25°	1501.0	1498.8	1496.6	1494.4	1492.3	1489.0	1484.7	1480.4	1476.0	1471.7	1472.0
27.5°	1440.7	1438.5	1436.1	1433.9	1431.7	1428.6	1424.5	1420.5	1416.4	1412.4	1411.7
30°	1400.5	1398.0	1395.4	1393.0	1390.5	1387.3	1383.2	1379.2	1375.1	1371.1	1369.9
32.5°	1358.0	1355.7	1353.5	1351.3	1349.1	1345.7	1341.5	1337.3	1332.9	1328.7	1327.2
35°	1291.5	1289.4	1287.2	1285.1	1282.8	1279.6	1275.3	1270.9	1266.6	1262.2	1260.0
37.5°	1221.4	1219.4	1217.5	1215.5	1213.5	1210.2	1205.5	1200.8	1196.2	1191.5	1189.2
40°	1175.7	1173.2	1170.6	1168.2	1165.7	1162.2	1157.5	1152.9	1148.2	1143.6	1140.4
42.5°	1126.5	1125.0	1123.5	1122.1	1120.5	1117.2	1112.1	1106.9	1101.8	1096.6	1093.0
45°	1054.2	1052.0	1049.9	1047.6	1045.5	1041.9	1036.9	1032.0	1027.0	1022.1	1018.7
47.5°	978.5	977.0	975.5	974.0	972.5	969.5	964.9	960.3	955.7	951.1	947.3
50°	927.2	925.8	924.6	923.4	922.1	919.4	915.0	910.7	906.4	902.0	897.7
52.5°	876.9	875.4	873.8	872.4	870.9	867.9	863.2	858.7	854.0	849.5	845.7
55°	797.3	796.3	795.4	794.5	793.6	790.9	786.6	782.2	777.9	773.6	769.8
57.5°	721.3	720.2	719.2	718.1	717.1	714.4	710.1	705.9	701.6	697.3	693.8
60°	668.8	667.2	665.7	664.2	662.6	659.8	655.8	651.8	647.7	643.7	640.9
62.5°	617.4	616.1	614.8	613.5	612.2	609.5	605.1	600.9	596.5	592.3	589.8
65°	540.4	538.8	537.2	535.7	534.1	531.8	528.7	525.6	522.5	519.4	516.3
67.5°	462.7	461.3	459.9	458.5	457.0	454.8	451.8	448.9	445.9	442.9	439.9
70°	414.7	412.5	410.3	408.2	406.0	403.6	401.2	398.7	396.3	393.7	391.2
72.5°	363.3	361.1	359.0	356.8	354.7	352.5	350.5	348.6	346.6	344.6	342.6
75°	287.6	286.1	284.5	283.0	281.4	279.8	278.3	276.8	275.2	273.7	272.5
77.5°	215.3	214.6	213.9	213.3	212.6	211.6	210.2	208.8	207.4	206.1	205.7
80°	171.8	170.8	169.9	169.0	168.0	167.2	166.6	166.0	165.4	164.7	164.1
82.5°	129.3	128.9	128.5	127.9	127.5	127.2	127.1	127.0	126.9	126.7	126.4
85°	75.4	75.4	75.4	75.4	75.4	75.1	74.4	73.8	73.2	72.6	72.6
87.5°	29.5	29.7	29.8	29.9	30.1	30.2	30.2	30.2	30.3	30.3	30.5
90°	2.3	4.3	6.3	8.2	10.1	11.7	13.1	14.5	16.0	17.4	18.4
92.5°	16.9	19.1	21.3	23.5	25.8	27.4	28.3	29.3	30.3	31.3	31.9
95°	47.4	49.0	50.5	52.1	53.7	55.1	56.4	57.6	58.8	60.0	60.5
97.5°	82.7	84.0	85.2	86.5	87.8	89.2	90.6	92.0	93.4	94.9	95.5
100°	110.6	111.2	111.9	112.6	113.3	114.5	116.0	117.6	119.2	120.8	121.2
102.5°	139.6	139.9	140.2	140.5	140.7	141.6	143.0	144.4	145.9	147.3	147.8
105°	184.0	184.1	184.3	184.5	184.7	185.1	185.8	186.5	187.2	187.9	188.4
107.5°	230.6	230.8	231.0	231.2	231.4	231.6	231.7	231.8	231.9	232.0	232.5
110°	262.2	262.5	262.8	263.2	263.5	263.6	263.5	263.3	263.1	262.9	262.6



TEST NUMBER: P332650-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	295.0	295.0	295.1	295.2	295.3	295.1	294.8	294.5	294.2	293.9	293.8
115°	344.3	344.3	344.3	344.3	344.3	344.1	343.7	343.4	343.0	342.6	342.4
117.5°	390.6	390.8	390.9	391.0	391.2	391.1	390.9	390.6	390.4	390.2	389.6
120°	421.6	422.3	423.0	423.7	424.4	424.4	423.9	423.4	422.9	422.4	421.5
122.5°	453.8	454.0	454.3	454.6	454.9	454.9	454.7	454.4	454.2	453.9	453.3
125°	501.3	501.3	501.3	501.3	501.3	501.2	501.1	500.9	500.7	500.6	500.2
127.5°	544.4	544.9	545.5	546.0	546.5	546.6	546.3	546.1	545.8	545.5	545.2
130°	574.7	575.3	575.8	576.3	576.8	577.1	577.1	577.1	577.1	577.1	576.7
132.5°	605.7	606.1	606.5	606.8	607.2	607.3	607.2	607.1	606.9	606.8	606.4
135°	646.6	647.6	648.7	649.7	650.9	651.4	651.4	651.4	651.4	651.4	651.0
137.5°	691.2	691.7	692.1	692.6	693.1	693.5	693.8	694.1	694.3	694.6	694.2
140°	720.8	721.1	721.5	721.9	722.3	722.4	722.4	722.4	722.4	722.4	722.3
142.5°	748.0	748.3	748.7	749.0	749.4	749.5	749.3	749.2	749.0	748.9	748.9
145°	785.6	786.3	787.0	787.7	788.4	788.8	789.0	789.1	789.3	789.5	789.3
147.5°	822.8	823.6	824.5	825.4	826.2	826.6	826.4	826.3	826.1	826.0	825.9
150°	845.6	846.3	847.0	847.7	848.4	848.7	848.7	848.7	848.7	848.7	848.7
152.5°	867.1	867.5	867.9	868.3	868.7	869.0	869.1	869.3	869.4	869.6	870.0
155°	900.0	900.0	900.0	900.0	900.0	899.9	899.8	899.6	899.4	899.3	899.9
157.5°	927.9	927.5	927.2	926.9	926.6	926.3	926.3	926.3	926.2	926.2	926.8
160°	944.2	944.0	943.9	943.7	943.5	943.3	943.2	943.0	942.8	942.7	943.2
162.5°	959.4	959.0	958.5	958.1	957.6	957.3	957.0	956.9	956.7	956.5	957.6
165°	979.8	979.3	978.8	978.2	977.7	977.2	976.8	976.5	976.1	975.8	976.8
167.5°	995.4	994.6	993.9	993.2	992.5	992.1	992.1	992.2	992.2	992.2	993.3
170°	1004.2	1003.4	1002.5	1001.6	1000.8	1000.4	1000.6	1000.8	1000.9	1001.1	1002.1
172.5°	1010.6	1009.9	1009.1	1008.4	1007.6	1007.2	1007.3	1007.3	1007.3	1007.4	1008.6
175°	1019.3	1018.3	1017.4	1016.6	1015.7	1015.2	1015.0	1014.8	1014.7	1014.5	1015.7
177.5°	1022.1	1021.4	1020.7	1020.0	1019.3	1019.0	1019.0	1019.0	1019.0	1019.0	1019.9
180°	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8



TEST NUMBER: P332650-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5
2.5°	1736.3	1738.8	1741.3	1742.4	1742.1	1741.9	1741.6	1741.4
5°	1727.0	1730.4	1733.8	1735.3	1734.6	1733.9	1733.3	1732.7
7.5°	1707.8	1710.5	1713.2	1714.4	1714.0	1713.6	1713.2	1712.9
10°	1691.6	1694.1	1696.6	1697.5	1696.9	1696.3	1695.7	1695.1
12.5°	1672.0	1674.8	1677.5	1678.4	1677.6	1676.7	1675.8	1675.0
15°	1634.6	1636.4	1638.3	1638.7	1637.8	1636.9	1636.0	1635.0
17.5°	1591.9	1593.1	1594.2	1594.5	1593.9	1593.3	1592.7	1592.0
20°	1560.0	1561.0	1562.0	1562.1	1561.5	1560.8	1560.2	1559.6
22.5°	1526.9	1528.6	1530.2	1530.6	1529.4	1528.3	1527.2	1526.1
25°	1472.3	1472.6	1472.9	1472.4	1471.2	1470.0	1468.6	1467.4
27.5°	1411.0	1410.2	1409.5	1408.4	1406.7	1405.2	1403.6	1402.1
30°	1368.7	1367.4	1366.1	1364.7	1363.2	1361.6	1360.1	1358.6
32.5°	1325.6	1324.2	1322.7	1321.2	1319.6	1318.1	1316.6	1314.9
35°	1257.9	1255.7	1253.5	1251.6	1250.1	1248.6	1247.0	1245.5
37.5°	1186.8	1184.5	1182.1	1179.9	1177.9	1175.8	1173.8	1171.7
40°	1137.3	1134.2	1131.1	1128.8	1127.2	1125.7	1124.2	1122.6
42.5°	1089.4	1085.8	1082.2	1079.8	1078.8	1077.7	1076.7	1075.7
45°	1015.2	1011.8	1008.4	1006.2	1005.3	1004.4	1003.4	1002.5
47.5°	943.4	939.6	935.7	932.6	930.3	927.9	925.5	923.2
50°	893.3	889.0	884.6	881.5	879.6	877.8	876.0	874.0
52.5°	841.8	837.9	834.0	831.0	828.6	826.3	823.9	821.5
55°	766.1	762.3	758.6	755.9	754.0	752.1	750.2	748.4
57.5°	690.2	686.7	683.2	680.4	678.6	676.9	675.1	673.3
60°	638.1	635.3	632.5	630.4	628.7	627.2	625.7	624.1
62.5°	587.2	584.6	582.1	580.1	578.6	576.9	575.4	573.9
65°	513.2	510.1	507.0	504.6	503.1	501.6	500.0	498.5
67.5°	437.0	433.9	431.0	429.3	428.8	428.4	428.0	427.6
70°	388.8	386.3	383.8	382.1	381.2	380.2	379.3	378.4
72.5°	340.6	338.6	336.7	335.2	334.3	333.4	332.4	331.4
75°	271.1	269.9	268.7	267.9	267.6	267.3	267.0	266.7
77.5°	205.3	205.0	204.6	204.0	203.2	202.4	201.6	200.8
80°	163.5	162.9	162.3	161.8	161.5	161.2	160.9	160.6
82.5°	126.0	125.6	125.3	124.9	124.6	124.3	124.0	123.7
85°	72.6	72.6	72.6	72.4	72.1	71.8	71.5	71.2
87.5°	30.7	30.9	31.1	31.3	31.3	31.4	31.5	31.5
90°	19.5	20.5	21.6	22.3	22.6	23.0	23.3	23.7
92.5°	32.5	33.1	33.8	34.2	34.4	34.6	34.8	35.0
95°	61.1	61.6	62.1	62.4	62.4	62.4	62.4	62.4
97.5°	96.1	96.7	97.5	97.8	97.8	97.8	97.8	97.8
100°	121.5	121.9	122.2	122.4	122.4	122.4	122.4	122.4
102.5°	148.3	148.8	149.3	149.6	149.8	149.9	150.1	150.2
105°	188.9	189.5	190.0	190.6	191.1	191.6	192.1	192.7
107.5°	233.0	233.4	233.9	234.2	234.1	234.1	234.1	234.0
110°	262.2	261.9	261.5	261.6	262.2	262.7	263.2	263.7



TEST NUMBER: P332650-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	293.7	293.7	293.6	293.6	293.7	293.8	293.9	294.0
115°	342.2	342.1	341.9	341.7	341.6	341.4	341.2	341.0
117.5°	389.0	388.4	387.8	387.3	387.0	386.6	386.3	385.9
120°	420.6	419.7	418.9	418.6	419.0	419.3	419.7	420.0
122.5°	452.7	452.2	451.6	451.0	450.3	449.7	449.1	448.5
125°	499.9	499.5	499.2	498.8	498.5	498.1	497.8	497.4
127.5°	544.8	544.5	544.1	543.8	543.5	543.3	543.0	542.7
130°	576.4	576.0	575.7	575.2	574.5	573.8	573.1	572.4
132.5°	606.1	605.7	605.4	605.1	604.8	604.5	604.2	604.0
135°	650.7	650.3	649.9	649.4	648.9	648.4	647.9	647.4
137.5°	693.7	693.3	692.8	692.6	692.7	692.8	692.9	693.1
140°	722.1	721.9	721.6	721.5	721.3	721.1	720.9	720.8
142.5°	748.8	748.8	748.8	748.7	748.7	748.7	748.6	748.6
145°	789.1	789.0	788.8	788.4	787.9	787.4	786.9	786.4
147.5°	825.7	825.6	825.4	825.3	825.1	824.9	824.8	824.6
150°	848.7	848.7	848.7	848.6	848.5	848.3	848.1	847.9
152.5°	870.4	870.8	871.2	871.2	870.8	870.3	869.9	869.4
155°	900.6	901.3	902.0	902.0	901.3	900.6	899.9	899.3
157.5°	927.3	927.9	928.4	928.3	927.8	927.2	926.6	925.9
160°	943.7	944.2	944.7	944.6	943.7	942.8	942.0	941.1
162.5°	958.5	959.4	960.4	960.4	959.5	958.7	957.8	956.8
165°	978.0	979.0	980.1	980.2	979.5	978.8	978.1	977.4
167.5°	994.3	995.4	996.4	996.4	995.3	994.2	993.2	992.1
170°	1003.2	1004.2	1005.3	1005.2	1004.0	1002.8	1001.5	1000.3
172.5°	1009.8	1011.0	1012.2	1012.2	1011.0	1009.7	1008.5	1007.2
175°	1016.9	1018.1	1019.5	1019.5	1018.1	1016.9	1015.7	1014.5
177.5°	1020.9	1021.9	1022.9	1022.8	1021.7	1020.6	1019.5	1018.2
180°	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8

(END OF REPORT)