

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332651-840

Luminaire Tested: **S124DIP-S1020D810U840-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332651-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S1020D810U840-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7396.9 lumens
Efficiency: N/A
Efficacy: 136.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332651-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

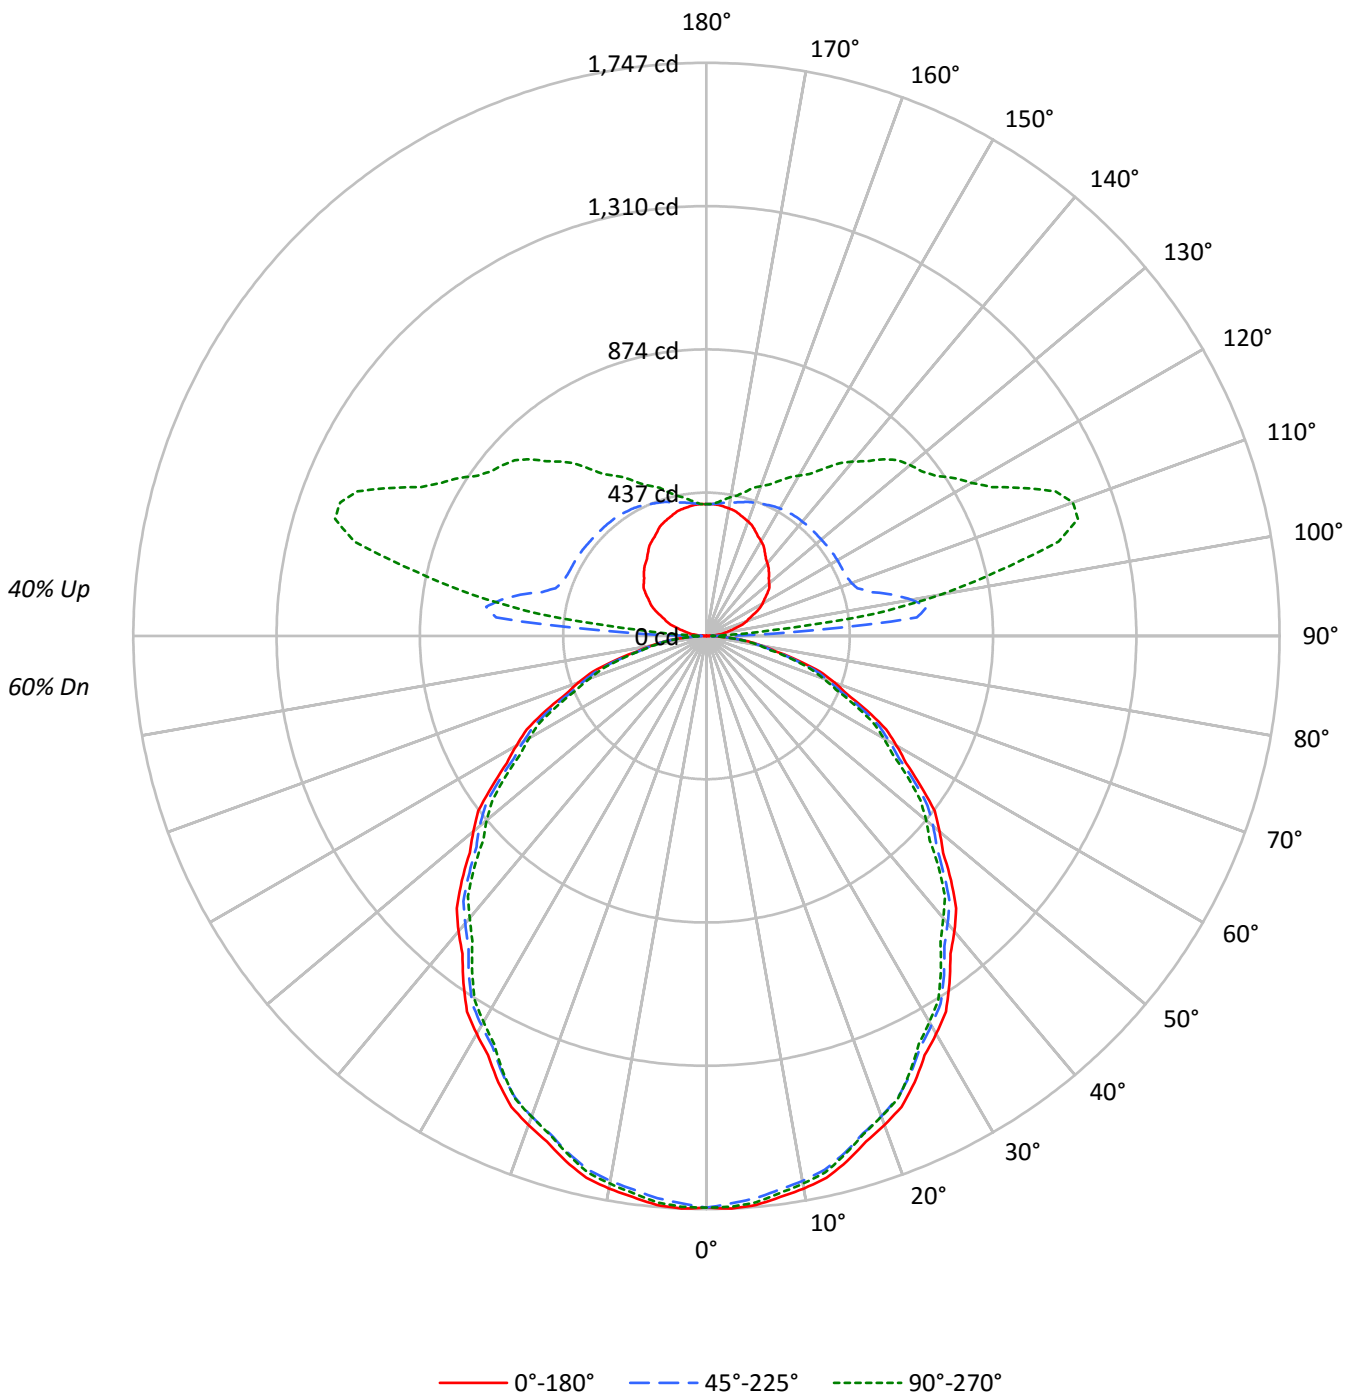



TEST NUMBER: P332651-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	66	66	66	60
1	100	96	92	88	93	90	86	83	78	76	73	68	66	64	58	57	55	51
2	91	84	77	72	85	78	73	68	69	64	61	59	56	53	51	49	47	43
3	83	73	66	60	77	69	62	57	60	55	51	53	49	45	45	42	40	36
4	76	65	57	51	71	61	54	48	54	48	44	47	42	39	40	37	34	31
5	70	58	50	44	65	55	47	42	48	42	38	42	37	34	36	33	30	27
6	64	52	44	38	60	49	42	36	43	37	33	38	33	30	33	29	26	24
7	60	47	39	33	56	44	37	32	39	33	29	35	30	26	30	26	23	21
8	55	43	35	30	52	40	33	28	36	30	26	32	27	23	28	24	21	19
9	52	39	32	26	48	37	30	25	33	27	23	29	24	21	26	22	19	17
10	48	36	29	24	45	34	27	23	30	25	21	27	22	19	24	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14067	14067	14067
5°	14109	13940	14041
10°	14021	13827	13896
15°	13852	13630	13665
20°	13626	13387	13399
25°	13370	13109	13071
30°	13055	12781	12665
35°	12728	12439	12275
40°	12390	12052	11830
45°	12036	11669	11445
50°	11645	11328	10977
55°	11222	10888	10534
60°	10798	10393	10077
65°	10323	9922	9522
70°	9788	9293	8932
75°	8971	8537	8319
80°	7987	7657	7466
85°	6984	6725	6595



TEST NUMBER: P332651-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	164.1	2.2
10°-20°	462.4	6.3
20°-30°	680.5	9.2
30°-40°	791.1	10.7
40°-50°	791.2	10.7
50°-60°	692.1	9.4
60°-70°	514.0	6.9
70°-80°	292.0	3.9
80°-90°	86.5	1.2
90°-100°	290.3	3.9
100°-110°	604.2	8.2
110°-120°	541.2	7.3
120°-130°	455.2	6.2
130°-140°	379.6	5.1
140°-150°	290.0	3.9
150°-160°	203.8	2.8
160°-170°	119.9	1.6
170°-180°	39.0	0.5
0°-30°	1307.0	17.7
0°-40°	2098.1	28.4
0°-60°	3581.3	48.4
0°-90°	4473.8	60.5
90°-120°	1435.7	19.4
90°-150°	2560.4	34.6
90°-180°	2923.0	39.5
0°-180°	7396.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1742	1742	1742	1742	1742	
5°	1741	1735	1720	1735	1733	165
15°	1657	1651	1631	1638	1635	467
25°	1501	1491	1472	1473	1467	690
35°	1292	1281	1262	1253	1246	807
45°	1054	1044	1022	1007	1002	812
55°	797	792	774	757	748	714
65°	540	533	519	506	498	535
75°	288	281	274	268	267	306
85°	75	75	73	72	71	83
90°	1	6	14	16	17	5
95°	26	82	644	319	193	29
105°	92	134	518	1115	1111	99
115°	163	204	462	888	1067	161
125°	227	269	460	755	851	202
135°	269	321	456	670	761	208
145°	310	355	453	565	622	195
155°	353	381	441	499	520	163
165°	385	396	422	447	454	109
175°	401	402	405	411	409	38
180°	402	402	402	402	402	



TEST NUMBER: P332651-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5
2.5°	1747.0	1746.3	1745.5	1744.7	1744.0	1742.2	1739.5	1736.8	1734.0	1731.3	1733.8
5°	1741.1	1739.9	1738.7	1737.4	1736.2	1733.8	1730.4	1727.0	1723.6	1720.2	1723.6
7.5°	1725.0	1723.6	1722.4	1721.2	1720.0	1717.5	1713.6	1709.9	1706.1	1702.3	1705.1
10°	1710.4	1709.2	1707.9	1706.7	1705.5	1702.8	1698.8	1694.8	1690.7	1686.7	1689.1
12.5°	1691.4	1690.2	1688.9	1687.7	1686.5	1683.6	1679.4	1675.2	1670.8	1666.6	1669.3
15°	1657.4	1656.1	1654.9	1653.7	1652.3	1649.4	1644.8	1640.1	1635.5	1630.8	1632.6
17.5°	1616.3	1614.8	1613.2	1611.6	1610.1	1607.1	1602.7	1598.3	1593.9	1589.5	1590.6
20°	1586.1	1584.6	1583.1	1581.4	1579.9	1576.8	1572.2	1567.5	1562.9	1558.2	1559.1
22.5°	1553.8	1551.7	1549.6	1547.6	1545.6	1542.2	1537.5	1532.9	1528.2	1523.6	1525.3
25°	1501.0	1498.8	1496.6	1494.4	1492.3	1489.0	1484.7	1480.4	1476.0	1471.7	1472.0
27.5°	1440.7	1438.5	1436.1	1433.9	1431.7	1428.6	1424.5	1420.5	1416.4	1412.4	1411.7
30°	1400.5	1398.0	1395.4	1393.0	1390.5	1387.3	1383.2	1379.2	1375.1	1371.1	1369.9
32.5°	1358.0	1355.7	1353.5	1351.3	1349.1	1345.7	1341.5	1337.3	1332.9	1328.7	1327.2
35°	1291.5	1289.4	1287.2	1285.1	1282.8	1279.6	1275.3	1270.9	1266.6	1262.2	1260.0
37.5°	1221.4	1219.4	1217.5	1215.5	1213.5	1210.2	1205.5	1200.8	1196.2	1191.5	1189.2
40°	1175.7	1173.2	1170.6	1168.2	1165.7	1162.2	1157.5	1152.9	1148.2	1143.6	1140.4
42.5°	1126.5	1125.0	1123.5	1122.1	1120.5	1117.2	1112.1	1106.9	1101.8	1096.6	1093.0
45°	1054.2	1052.0	1049.9	1047.6	1045.5	1041.9	1036.9	1032.0	1027.0	1022.1	1018.7
47.5°	978.5	977.0	975.5	974.0	972.5	969.5	964.9	960.3	955.7	951.1	947.3
50°	927.2	925.8	924.6	923.4	922.1	919.4	915.0	910.7	906.4	902.0	897.7
52.5°	876.9	875.4	873.8	872.4	870.9	867.9	863.2	858.7	854.0	849.5	845.7
55°	797.3	796.3	795.4	794.5	793.6	790.9	786.6	782.2	777.9	773.6	769.8
57.5°	721.3	720.2	719.2	718.1	717.1	714.4	710.1	705.9	701.6	697.3	693.8
60°	668.8	667.2	665.7	664.2	662.6	659.8	655.8	651.8	647.7	643.7	640.9
62.5°	617.4	616.1	614.8	613.5	612.2	609.5	605.1	600.9	596.5	592.3	589.8
65°	540.4	538.8	537.2	535.7	534.1	531.8	528.7	525.6	522.5	519.4	516.3
67.5°	462.7	461.3	459.9	458.5	457.0	454.8	451.8	448.9	445.9	442.9	439.9
70°	414.7	412.5	410.3	408.2	406.0	403.6	401.2	398.7	396.3	393.7	391.2
72.5°	363.3	361.1	359.0	356.8	354.7	352.5	350.5	348.6	346.6	344.6	342.6
75°	287.6	286.1	284.5	283.0	281.4	279.8	278.3	276.8	275.2	273.7	272.5
77.5°	215.3	214.6	213.9	213.3	212.6	211.6	210.2	208.8	207.4	206.1	205.7
80°	171.8	170.8	169.9	169.0	168.0	167.2	166.6	166.0	165.4	164.7	164.1
82.5°	129.3	128.9	128.5	127.9	127.5	127.2	127.1	127.0	126.9	126.7	126.4
85°	75.4	75.4	75.4	75.4	75.4	75.1	74.4	73.8	73.2	72.6	72.6
87.5°	29.2	29.3	29.5	29.4	29.3	29.1	29.8	29.5	29.6	29.7	29.5
90°	0.8	2.3	4.7	5.6	6.4	6.4	11.0	11.0	12.6	14.2	13.4
92.5°	9.0	13.1	20.5	30.2	41.7	58.1	98.3	159.5	219.2	250.4	208.6
95°	26.1	28.4	36.4	46.6	65.5	98.7	167.4	296.9	485.6	643.6	661.8
97.5°	46.8	46.8	53.5	63.0	79.3	107.0	160.0	266.9	454.5	677.8	831.3
100°	60.0	60.0	65.5	75.0	90.0	115.3	161.9	251.2	412.2	634.9	837.0
102.5°	72.6	73.9	78.8	87.7	102.0	126.0	168.1	246.7	383.7	581.2	789.6
105°	92.4	94.7	98.7	108.2	122.4	145.3	183.2	248.7	359.3	518.0	703.6
107.5°	114.2	115.7	119.7	129.8	143.4	166.0	200.8	260.4	354.9	482.6	634.1
110°	128.8	130.3	134.2	143.7	157.9	179.3	214.0	269.2	356.1	470.6	599.4



TEST NUMBER: P332651-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	142.6	144.2	148.8	157.6	171.8	193.2	226.6	278.7	359.9	464.9	579.8
115°	162.7	165.0	170.6	178.4	193.5	214.8	246.4	293.8	367.2	461.9	561.4
117.5°	183.5	185.7	190.7	199.3	213.4	235.5	265.5	309.0	375.0	461.1	553.2
120°	197.4	198.9	204.5	213.2	226.6	248.7	278.7	319.8	380.6	461.1	548.8
122.5°	210.1	211.7	217.1	225.2	239.8	261.4	291.3	329.9	386.3	460.5	543.7
125°	226.6	229.7	234.5	243.2	258.2	280.3	308.7	345.1	394.9	459.6	535.3
127.5°	241.4	243.9	249.5	259.4	275.1	297.4	324.9	358.2	401.6	457.9	524.1
130°	249.5	252.7	259.0	270.8	285.9	308.7	335.6	366.4	406.7	457.2	517.3
132.5°	257.7	260.2	268.5	279.7	296.0	317.6	344.5	374.6	411.1	456.6	510.9
135°	269.2	272.5	280.3	293.8	310.3	330.8	356.9	385.4	417.7	455.7	501.4
137.5°	280.8	283.8	292.5	305.3	322.4	342.0	366.4	392.9	421.6	455.4	493.2
140°	289.0	291.3	300.0	313.5	330.0	349.0	372.7	398.0	424.9	454.8	488.8
142.5°	297.8	300.2	308.3	321.0	337.0	355.4	378.4	401.7	427.4	454.8	485.0
145°	310.3	312.7	320.6	331.6	346.7	364.1	384.6	405.9	428.8	453.2	478.5
147.5°	324.4	325.2	332.1	343.5	356.0	371.6	390.9	409.5	429.6	450.4	472.7
150°	333.3	334.1	340.3	349.8	361.6	376.7	394.0	411.4	429.6	448.5	468.3
152.5°	341.4	341.6	347.9	356.8	367.4	381.1	396.6	412.6	428.3	445.4	463.2
155°	352.9	353.8	358.5	366.4	375.1	386.9	400.3	413.7	426.4	440.6	455.7
157.5°	364.2	364.2	368.6	374.8	382.3	391.6	403.0	413.7	424.3	435.8	447.9
160°	371.1	371.1	374.3	379.8	386.2	394.9	404.2	413.7	422.4	431.9	442.2
162.5°	377.5	376.8	379.3	384.3	389.9	396.7	405.6	413.7	420.6	428.2	437.2
165°	384.6	384.6	386.2	390.1	394.0	398.8	405.9	412.2	417.0	422.4	428.8
167.5°	391.6	390.9	391.6	394.7	396.9	400.5	405.8	410.3	413.1	416.8	421.2
170°	394.9	394.0	394.9	397.2	398.8	401.1	405.1	409.0	410.6	412.9	416.2
172.5°	398.0	397.2	397.4	399.1	400.0	401.7	404.5	407.8	408.1	409.2	411.7
175°	401.1	400.3	400.3	401.1	401.9	401.9	403.5	405.9	405.1	405.1	406.7
177.5°	402.5	401.9	401.3	401.9	401.9	401.9	402.5	403.8	402.5	402.5	403.1
180°	401.9	401.9	401.9	401.9	401.9	401.9	401.9	401.9	401.9	401.9	401.9



TEST NUMBER: P332651-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5
2.5°	1736.3	1738.8	1741.3	1742.4	1742.1	1741.9	1741.6	1741.4
5°	1727.0	1730.4	1733.8	1735.3	1734.6	1733.9	1733.3	1732.7
7.5°	1707.8	1710.5	1713.2	1714.4	1714.0	1713.6	1713.2	1712.9
10°	1691.6	1694.1	1696.6	1697.5	1696.9	1696.3	1695.7	1695.1
12.5°	1672.0	1674.8	1677.5	1678.4	1677.6	1676.7	1675.8	1675.0
15°	1634.6	1636.4	1638.3	1638.7	1637.8	1636.9	1636.0	1635.0
17.5°	1591.9	1593.1	1594.2	1594.5	1593.9	1593.3	1592.7	1592.0
20°	1560.0	1561.0	1562.0	1562.1	1561.5	1560.8	1560.2	1559.6
22.5°	1526.9	1528.6	1530.2	1530.6	1529.4	1528.3	1527.2	1526.1
25°	1472.3	1472.6	1472.9	1472.4	1471.2	1470.0	1468.6	1467.4
27.5°	1411.0	1410.2	1409.5	1408.4	1406.7	1405.2	1403.6	1402.1
30°	1368.7	1367.4	1366.1	1364.7	1363.2	1361.6	1360.1	1358.6
32.5°	1325.6	1324.2	1322.7	1321.2	1319.6	1318.1	1316.6	1314.9
35°	1257.9	1255.7	1253.5	1251.6	1250.1	1248.6	1247.0	1245.5
37.5°	1186.8	1184.5	1182.1	1179.9	1177.9	1175.8	1173.8	1171.7
40°	1137.3	1134.2	1131.1	1128.8	1127.2	1125.7	1124.2	1122.6
42.5°	1089.4	1085.8	1082.2	1079.8	1078.8	1077.7	1076.7	1075.7
45°	1015.2	1011.8	1008.4	1006.2	1005.3	1004.4	1003.4	1002.5
47.5°	943.4	939.6	935.7	932.6	930.3	927.9	925.5	923.2
50°	893.3	889.0	884.6	881.5	879.6	877.8	876.0	874.0
52.5°	841.8	837.9	834.0	831.0	828.6	826.3	823.9	821.5
55°	766.1	762.3	758.6	755.9	754.0	752.1	750.2	748.4
57.5°	690.2	686.7	683.2	680.4	678.6	676.9	675.1	673.3
60°	638.1	635.3	632.5	630.4	628.7	627.2	625.7	624.1
62.5°	587.2	584.6	582.1	580.1	578.6	576.9	575.4	573.9
65°	513.2	510.1	507.0	504.6	503.1	501.6	500.0	498.5
67.5°	437.0	433.9	431.0	429.3	428.8	428.4	428.0	427.6
70°	388.8	386.3	383.8	382.1	381.2	380.2	379.3	378.4
72.5°	340.6	338.6	336.7	335.2	334.3	333.4	332.4	331.4
75°	271.1	269.9	268.7	267.9	267.6	267.3	267.0	266.7
77.5°	205.3	205.0	204.6	204.0	203.2	202.4	201.6	200.8
80°	163.5	162.9	162.3	161.8	161.5	161.2	160.9	160.6
82.5°	126.0	125.6	125.3	124.9	124.6	124.3	124.0	123.7
85°	72.6	72.6	72.6	72.4	72.1	71.8	71.5	71.2
87.5°	29.7	29.8	30.0	30.0	30.1	30.3	30.1	30.1
90°	14.2	15.0	15.8	15.8	16.6	17.4	16.6	16.6
92.5°	155.1	116.7	92.9	77.1	67.8	63.5	60.8	60.8
95°	585.1	462.7	356.9	280.3	241.7	217.1	203.0	192.7
97.5°	864.4	819.0	741.7	659.3	602.7	555.1	531.4	515.0
100°	952.3	968.1	929.4	871.0	802.2	754.1	730.4	724.1
102.5°	947.9	1026.2	1037.4	1013.1	971.0	936.0	911.1	906.1
105°	884.4	1021.0	1099.1	1131.6	1133.2	1126.8	1115.8	1111.1
107.5°	794.3	939.7	1049.8	1120.1	1159.2	1177.2	1185.1	1187.1
110°	739.9	876.5	991.0	1077.8	1133.9	1167.1	1181.3	1188.4



TEST NUMBER: P332651-840

CATALOG NUMBER: S124DIP-S1020D810U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	700.1	820.9	929.1	1015.9	1079.5	1119.7	1139.6	1151.1
115°	660.1	757.3	849.6	925.4	987.8	1035.2	1060.5	1066.8
117.5°	640.6	720.9	793.6	857.9	911.1	950.9	976.4	981.4
120°	631.7	705.2	768.3	824.4	869.4	904.1	924.6	933.3
122.5°	624.1	695.0	752.6	801.6	839.7	869.4	886.8	895.4
125°	611.2	679.1	733.6	777.0	808.6	831.5	846.5	851.2
127.5°	595.4	660.2	714.6	755.9	787.6	808.0	820.6	825.4
130°	582.8	645.1	698.8	740.6	773.1	792.8	805.5	810.2
132.5°	569.5	628.0	680.5	722.4	754.1	776.4	788.4	793.1
135°	551.2	602.5	650.7	690.1	721.8	743.9	756.5	761.2
137.5°	534.6	578.0	618.6	654.3	683.8	705.6	716.0	721.8
140°	525.1	562.2	597.7	631.0	658.5	675.9	687.0	693.3
142.5°	516.2	549.0	579.5	608.1	632.7	648.7	658.5	663.0
145°	503.8	530.7	554.3	576.4	596.2	609.6	617.5	621.5
147.5°	493.5	514.8	533.8	551.2	565.7	577.2	583.2	584.6
150°	487.2	505.3	521.2	535.3	548.1	558.3	563.0	563.8
152.5°	480.3	495.8	510.4	522.1	532.8	541.2	544.0	544.8
155°	469.8	482.5	494.3	503.8	511.7	518.0	520.4	520.4
157.5°	458.6	469.2	479.2	486.8	492.7	497.5	498.9	498.9
160°	451.7	460.4	469.1	475.3	480.1	484.8	485.6	485.6
162.5°	444.7	452.1	459.0	464.6	468.1	472.8	473.6	473.0
165°	435.0	439.8	445.4	449.3	452.4	455.7	454.8	454.0
167.5°	425.8	429.4	433.8	436.2	437.8	439.8	439.7	439.0
170°	420.1	422.4	425.7	428.0	429.6	430.3	429.6	429.6
172.5°	415.1	416.8	418.7	420.4	421.3	422.1	421.3	420.1
175°	408.3	409.0	410.6	410.6	410.6	412.2	410.6	409.0
177.5°	403.8	404.5	404.5	405.1	404.5	405.1	403.8	402.5
180°	401.9	401.9	401.9	401.9	401.9	401.9	401.9	401.9

(END OF REPORT)