

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332506-840

Luminaire Tested: **S124DIP-S350D590U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332506-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124DIP-S350D590U840-4F0-1E-UDD-F1  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 590 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3599.2 lumens  
Efficiency: N/A  
Efficacy: 140.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 25.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332506-840

CATALOG NUMBER: S124DIP-S350D590U840-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

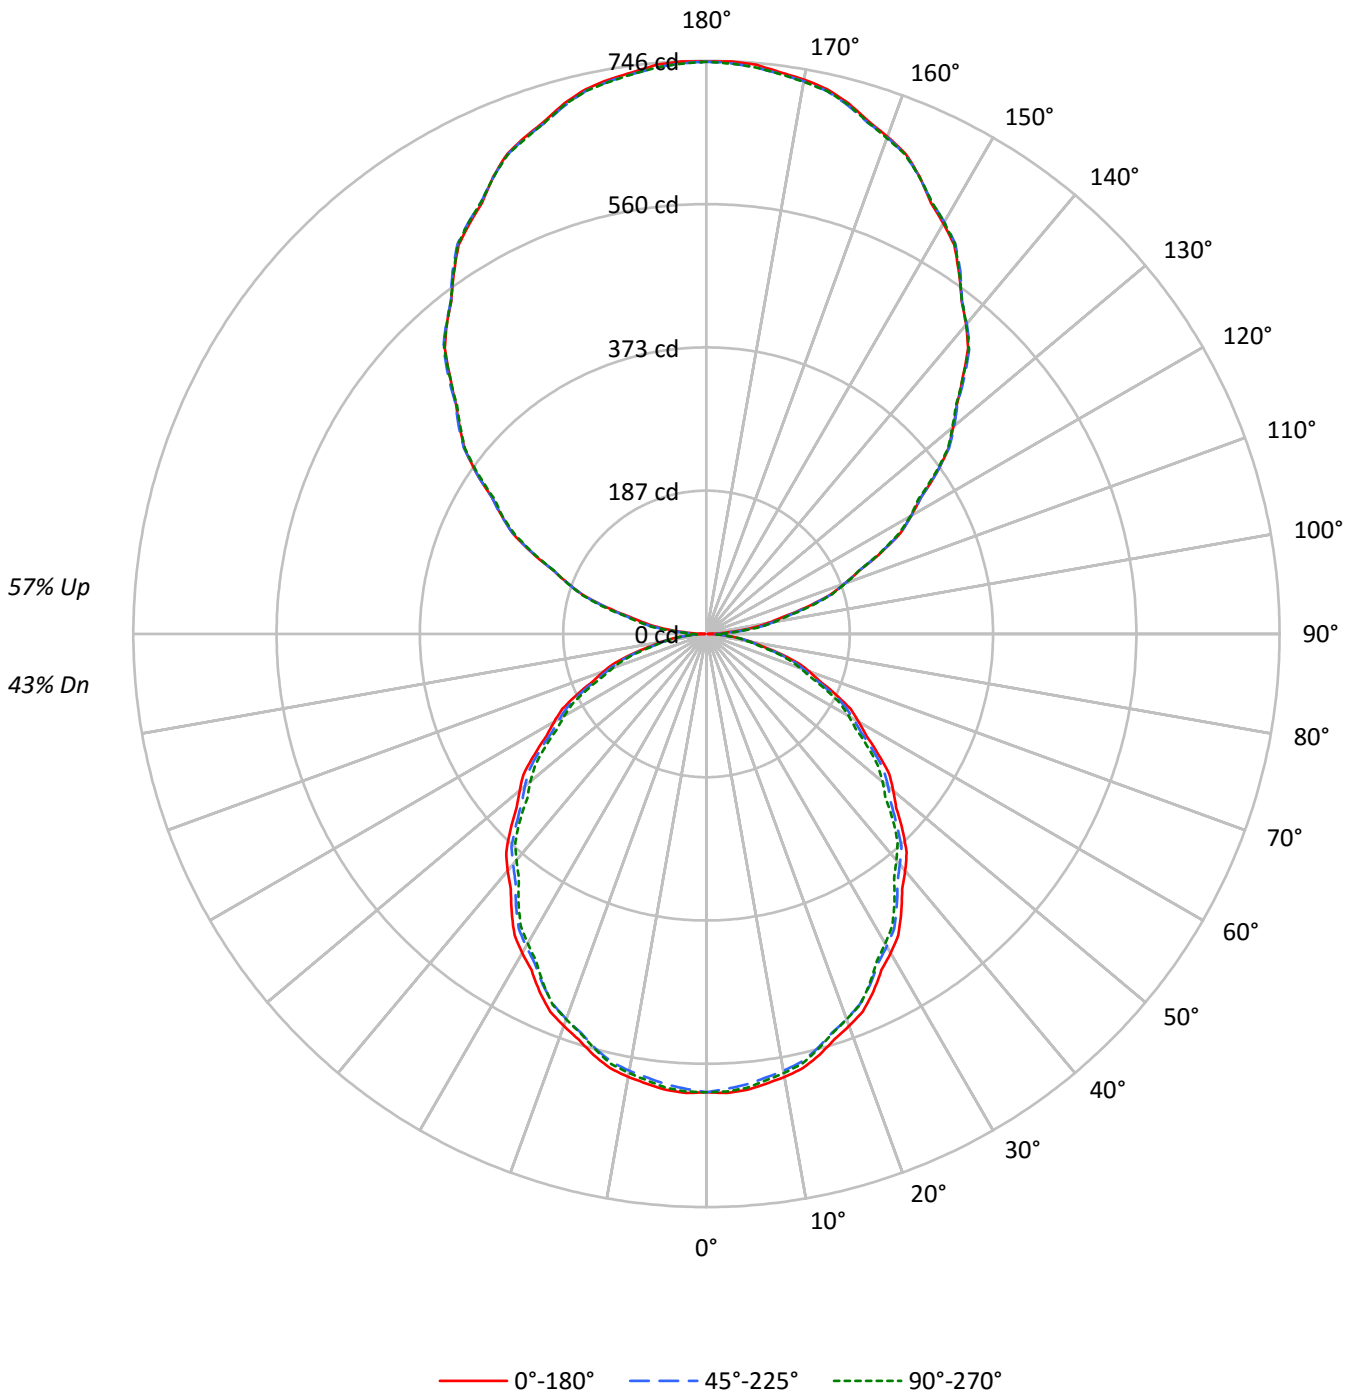



TEST NUMBER: P332506-840

CATALOG NUMBER: S124DIP-S350D590U840-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	43
1	96	92	88	84	88	84	81	78	69	67	65	56	54	53	43	42	42	36
2	87	80	74	69	80	73	68	64	61	57	54	49	46	44	38	37	35	30
3	80	70	63	57	73	65	58	53	54	49	45	43	40	37	34	32	30	25
4	73	62	54	48	66	57	50	45	48	42	38	39	35	32	30	28	26	22
5	67	55	47	41	61	51	44	39	42	37	33	35	31	28	27	25	22	19
6	62	50	42	36	56	46	39	33	38	33	29	31	27	24	25	22	20	17
7	57	45	37	31	52	41	34	29	35	29	25	28	24	21	23	20	17	15
8	53	41	33	28	48	37	31	26	32	26	22	26	22	19	21	18	16	13
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	27	22	18	22	18	15	18	15	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4816	4816	4816
5°	4830	4772	4807
10°	4800	4733	4757
15°	4741	4667	4679
20°	4665	4582	4587
25°	4577	4488	4475
30°	4470	4376	4336
35°	4357	4258	4202
40°	4241	4126	4051
45°	4120	3995	3919
50°	3986	3878	3758
55°	3842	3727	3606
60°	3696	3559	3450
65°	3534	3396	3261
70°	3352	3182	3059
75°	3072	2923	2848
80°	2734	2627	2552
85°	2399	2297	2251



TEST NUMBER: P332506-840

CATALOG NUMBER: S124DIP-S350D590U840-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	56.2	1.6
10°-20°	158.3	4.4
20°-30°	233.0	6.5
30°-40°	270.8	7.5
40°-50°	270.9	7.5
50°-60°	236.9	6.6
60°-70°	175.9	4.9
70°-80°	100.0	2.8
80°-90°	31.1	0.9
90°-100°	49.1	1.4
100°-110°	145.5	4.0
110°-120°	247.0	6.9
120°-130°	325.7	9.0
130°-140°	365.7	10.2
140°-150°	359.4	10.0
150°-160°	302.3	8.4
160°-170°	201.1	5.6
170°-180°	70.4	2.0
0°-30°	447.4	12.4
0°-40°	718.3	20.0
0°-60°	1226.1	34.1
0°-90°	1533.0	42.6
90°-120°	441.6	12.3
90°-150°	1492.4	41.5
90°-180°	2066.0	57.4
0°-180°	3599.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	596	596	596	596	596	
5°	596	594	589	594	593	57
15°	567	565	558	561	560	160
25°	514	510	504	504	502	236
35°	442	439	432	429	426	276
45°	361	357	350	345	343	278
55°	273	271	265	259	256	244
65°	185	182	178	173	171	183
75°	98	96	94	92	91	105
85°	26	26	25	25	24	28
90°	2	8	13	16	17	4
95°	34	40	44	45	46	38
105°	134	135	137	139	141	142
115°	251	251	250	249	249	248
125°	366	366	365	364	363	326
135°	472	475	475	474	472	365
145°	573	575	576	575	574	358
155°	657	657	656	658	656	302
165°	715	713	712	715	713	201
175°	744	741	740	744	740	71
180°	745	745	745	745	745	



TEST NUMBER: P332506-840

CATALOG NUMBER: S124DIP-S350D590U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	596.5	596.5	596.5	596.5	596.5	596.5	596.5	596.5	596.5	596.5	596.5
2.5°	598.0	597.8	597.5	597.3	597.0	596.4	595.5	594.6	593.7	592.7	593.6
5°	596.0	595.6	595.2	594.8	594.4	593.6	592.4	591.3	590.1	588.9	590.1
7.5°	590.6	590.1	589.7	589.3	588.9	587.9	586.6	585.4	584.1	582.8	583.7
10°	585.5	585.1	584.7	584.3	583.9	583.0	581.6	580.2	578.9	577.4	578.2
12.5°	579.1	578.7	578.2	577.7	577.3	576.4	574.9	573.5	572.0	570.6	571.5
15°	567.3	566.9	566.5	566.1	565.7	564.7	563.1	561.5	559.9	558.4	559.0
17.5°	553.3	552.8	552.3	551.8	551.2	550.2	548.7	547.1	545.6	544.1	544.5
20°	543.0	542.5	542.0	541.4	540.9	539.9	538.3	536.6	535.0	533.4	533.8
22.5°	531.9	531.2	530.5	529.8	529.1	528.0	526.3	524.8	523.2	521.6	522.2
25°	513.8	513.1	512.4	511.6	510.9	509.8	508.3	506.8	505.3	503.8	503.9
27.5°	493.2	492.4	491.7	490.9	490.2	489.1	487.7	486.4	484.9	483.5	483.3
30°	479.5	478.6	477.8	476.9	476.1	474.9	473.5	472.1	470.8	469.4	469.0
32.5°	464.9	464.1	463.3	462.6	461.8	460.7	459.3	457.8	456.4	454.8	454.3
35°	442.1	441.4	440.7	439.9	439.2	438.1	436.6	435.0	433.6	432.1	431.4
37.5°	418.2	417.5	416.8	416.2	415.5	414.3	412.7	411.1	409.5	407.9	407.1
40°	402.4	401.6	400.8	399.9	399.1	397.9	396.3	394.7	393.0	391.5	390.4
42.5°	385.7	385.2	384.7	384.2	383.6	382.4	380.7	378.9	377.2	375.5	374.2
45°	360.9	360.1	359.4	358.7	357.9	356.7	355.0	353.3	351.6	349.9	348.7
47.5°	335.0	334.5	334.0	333.5	333.0	331.9	330.3	328.7	327.2	325.6	324.3
50°	317.4	317.0	316.6	316.1	315.7	314.8	313.3	311.7	310.2	308.8	307.3
52.5°	300.2	299.6	299.1	298.6	298.1	297.1	295.5	294.0	292.4	290.8	289.5
55°	273.0	272.7	272.3	272.0	271.7	270.7	269.2	267.8	266.3	264.8	263.6
57.5°	246.9	246.6	246.2	245.9	245.5	244.6	243.1	241.7	240.1	238.7	237.5
60°	228.9	228.4	227.9	227.3	226.8	225.9	224.5	223.1	221.8	220.4	219.4
62.5°	211.4	211.0	210.5	210.1	209.5	208.6	207.1	205.7	204.2	202.8	201.9
65°	185.0	184.5	183.9	183.4	182.9	182.1	181.0	180.0	178.8	177.8	176.7
67.5°	158.4	157.9	157.4	156.9	156.4	155.7	154.7	153.7	152.7	151.6	150.6
70°	142.0	141.2	140.5	139.8	139.0	138.1	137.3	136.5	135.6	134.8	133.9
72.5°	124.4	123.6	122.9	122.2	121.4	120.7	120.0	119.4	118.7	118.0	117.2
75°	98.5	98.0	97.5	96.8	96.3	95.8	95.3	94.7	94.2	93.7	93.3
77.5°	73.7	73.5	73.2	73.0	72.8	72.4	72.0	71.5	71.0	70.6	70.4
80°	58.8	58.5	58.2	57.9	57.6	57.3	57.1	56.9	56.7	56.5	56.1
82.5°	44.2	44.1	43.9	43.8	43.6	43.5	43.5	43.5	43.4	43.4	43.3
85°	25.9	25.9	25.9	25.9	25.9	25.8	25.4	25.2	25.0	24.8	24.8
87.5°	10.3	10.5	10.7	10.9	11.1	11.2	11.3	11.5	11.6	11.7	11.8
90°	1.7	3.1	4.5	6.0	7.4	8.6	9.6	10.6	11.6	12.6	13.4
92.5°	12.3	13.9	15.6	17.2	18.8	19.9	20.7	21.4	22.1	22.8	23.2
95°	34.5	35.7	36.9	38.0	39.2	40.2	41.1	42.0	42.9	43.7	44.1
97.5°	60.4	61.3	62.2	63.1	64.0	65.0	66.0	67.2	68.2	69.3	69.7
100°	80.6	81.2	81.7	82.2	82.7	83.5	84.6	85.8	86.9	88.2	88.4
102.5°	101.8	102.0	102.2	102.4	102.6	103.3	104.3	105.3	106.4	107.4	107.9
105°	134.2	134.3	134.4	134.6	134.7	135.0	135.5	136.0	136.5	137.0	137.4
107.5°	168.1	168.3	168.4	168.6	168.8	169.0	169.0	169.1	169.2	169.3	169.6
110°	191.3	191.5	191.8	192.0	192.3	192.3	192.2	192.1	192.0	191.8	191.6



TEST NUMBER: P332506-840

CATALOG NUMBER: S124DIP-S350D590U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	215.2	215.2	215.3	215.3	215.4	215.3	215.1	214.8	214.6	214.4	214.3
115°	251.2	251.2	251.2	251.2	251.2	251.0	250.7	250.4	250.2	249.9	249.8
117.5°	285.0	285.1	285.2	285.3	285.4	285.4	285.2	285.0	284.8	284.7	284.2
120°	307.6	308.1	308.6	309.1	309.6	309.7	309.3	308.9	308.5	308.1	307.5
122.5°	331.0	331.2	331.4	331.6	331.8	331.9	331.7	331.5	331.3	331.2	330.7
125°	365.8	365.8	365.8	365.8	365.8	365.7	365.6	365.5	365.3	365.2	364.9
127.5°	397.2	397.6	398.0	398.4	398.7	398.8	398.6	398.4	398.2	398.0	397.8
130°	419.3	419.7	420.1	420.5	420.8	421.0	421.0	421.0	421.0	421.0	420.8
132.5°	441.9	442.2	442.4	442.7	443.0	443.1	443.0	442.9	442.8	442.7	442.4
135°	471.7	472.5	473.2	474.0	474.8	475.1	475.1	475.1	475.1	475.1	474.9
137.5°	504.2	504.5	504.9	505.2	505.6	505.9	506.1	506.3	506.5	506.8	506.4
140°	525.8	526.1	526.3	526.6	526.8	527.0	527.0	527.0	527.0	527.0	526.8
142.5°	545.6	545.9	546.2	546.4	546.7	546.7	546.6	546.5	546.4	546.3	546.3
145°	573.1	573.6	574.1	574.6	575.1	575.4	575.6	575.7	575.8	575.9	575.8
147.5°	600.3	600.9	601.5	602.1	602.8	603.0	602.9	602.8	602.7	602.6	602.5
150°	616.8	617.4	617.9	618.4	618.9	619.1	619.1	619.1	619.1	619.1	619.1
152.5°	632.6	632.9	633.2	633.5	633.8	634.0	634.1	634.2	634.3	634.4	634.7
155°	656.6	656.6	656.6	656.6	656.6	656.5	656.4	656.3	656.2	656.0	656.5
157.5°	676.9	676.6	676.4	676.2	676.0	675.8	675.8	675.8	675.8	675.7	676.1
160°	688.8	688.7	688.6	688.5	688.3	688.2	688.1	688.0	687.8	687.7	688.1
162.5°	699.9	699.6	699.2	698.9	698.6	698.3	698.2	698.1	698.0	697.8	698.5
165°	714.8	714.4	714.0	713.7	713.3	713.0	712.7	712.5	712.2	712.0	712.7
167.5°	726.2	725.7	725.1	724.6	724.1	723.8	723.8	723.9	723.9	723.9	724.7
170°	732.7	732.1	731.3	730.7	730.0	729.8	729.9	730.0	730.2	730.3	731.1
172.5°	737.2	736.7	736.2	735.7	735.1	734.9	734.9	734.9	734.9	735.0	735.8
175°	743.6	743.0	742.4	741.6	741.0	740.6	740.5	740.4	740.2	740.1	741.0
177.5°	745.7	745.2	744.7	744.2	743.6	743.4	743.4	743.4	743.4	743.4	744.1
180°	744.8	744.8	744.8	744.8	744.8	744.8	744.8	744.8	744.8	744.8	744.8



TEST NUMBER: P332506-840

CATALOG NUMBER: S124DIP-S350D590U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	596.5	596.5	596.5	596.5	596.5	596.5	596.5	596.5
2.5°	594.4	595.3	596.1	596.5	596.4	596.3	596.2	596.1
5°	591.3	592.4	593.6	594.0	593.8	593.6	593.4	593.2
7.5°	584.6	585.6	586.5	586.9	586.8	586.6	586.5	586.4
10°	579.2	580.0	580.9	581.2	581.0	580.7	580.5	580.3
12.5°	572.4	573.3	574.3	574.6	574.3	574.0	573.7	573.4
15°	559.6	560.2	560.9	561.0	560.7	560.4	560.1	559.8
17.5°	544.9	545.3	545.7	545.8	545.6	545.4	545.2	545.0
20°	534.1	534.4	534.7	534.8	534.5	534.3	534.1	533.9
22.5°	522.7	523.3	523.9	524.0	523.6	523.2	522.8	522.5
25°	504.0	504.1	504.2	504.1	503.6	503.2	502.8	502.4
27.5°	483.0	482.8	482.5	482.1	481.6	481.1	480.5	480.0
30°	468.6	468.2	467.7	467.3	466.7	466.2	465.6	465.1
32.5°	453.8	453.3	452.8	452.3	451.8	451.2	450.7	450.2
35°	430.6	429.9	429.1	428.5	428.0	427.5	426.9	426.4
37.5°	406.3	405.5	404.7	403.9	403.2	402.5	401.8	401.1
40°	389.4	388.3	387.3	386.5	385.9	385.4	384.9	384.4
42.5°	372.9	371.7	370.5	369.7	369.3	369.0	368.6	368.3
45°	347.6	346.4	345.3	344.5	344.2	343.9	343.6	343.3
47.5°	323.0	321.6	320.3	319.3	318.5	317.7	316.9	316.1
50°	305.8	304.4	302.9	301.7	301.1	300.5	299.8	299.2
52.5°	288.2	286.9	285.6	284.5	283.7	282.9	282.1	281.2
55°	262.3	260.9	259.7	258.7	258.1	257.5	256.8	256.2
57.5°	236.3	235.1	233.9	233.0	232.4	231.8	231.2	230.5
60°	218.4	217.5	216.5	215.8	215.3	214.7	214.2	213.7
62.5°	201.1	200.2	199.2	198.5	198.0	197.5	197.0	196.4
65°	175.7	174.6	173.6	172.8	172.3	171.7	171.2	170.7
67.5°	149.6	148.6	147.5	146.9	146.8	146.6	146.5	146.3
70°	133.1	132.3	131.4	130.8	130.5	130.2	129.9	129.6
72.5°	116.6	115.9	115.2	114.7	114.4	114.1	113.8	113.5
75°	92.8	92.4	92.0	91.7	91.6	91.5	91.4	91.3
77.5°	70.3	70.2	70.1	69.9	69.6	69.3	69.0	68.8
80°	55.9	55.7	55.5	55.4	55.2	55.1	55.0	54.9
82.5°	43.1	43.0	42.9	42.8	42.7	42.5	42.4	42.3
85°	24.8	24.8	24.8	24.8	24.7	24.6	24.4	24.3
87.5°	12.0	12.2	12.3	12.4	12.5	12.5	12.6	12.6
90°	14.2	14.9	15.8	16.3	16.6	16.8	17.1	17.3
92.5°	23.7	24.2	24.6	24.9	25.1	25.2	25.4	25.5
95°	44.5	44.9	45.3	45.5	45.5	45.5	45.5	45.5
97.5°	70.2	70.6	71.1	71.3	71.3	71.3	71.3	71.3
100°	88.7	88.9	89.2	89.3	89.3	89.3	89.3	89.3
102.5°	108.2	108.6	108.9	109.2	109.3	109.4	109.5	109.6
105°	137.8	138.3	138.7	139.0	139.4	139.8	140.2	140.6
107.5°	170.0	170.3	170.7	170.9	170.8	170.8	170.8	170.8
110°	191.3	191.1	190.8	190.9	191.3	191.6	192.0	192.4





TEST NUMBER: P332506-840

CATALOG NUMBER: S124DIP-S350D590U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	214.3	214.2	214.2	214.2	214.3	214.3	214.4	214.5
115°	249.7	249.6	249.4	249.3	249.2	249.0	248.9	248.8
117.5°	283.8	283.4	282.9	282.6	282.3	282.1	281.8	281.6
120°	306.9	306.2	305.6	305.4	305.7	305.9	306.2	306.4
122.5°	330.3	329.9	329.4	329.0	328.5	328.1	327.6	327.2
125°	364.7	364.4	364.2	363.9	363.7	363.3	363.1	362.8
127.5°	397.5	397.3	397.0	396.8	396.6	396.4	396.2	396.0
130°	420.5	420.3	420.0	419.6	419.1	418.6	418.1	417.6
132.5°	442.2	441.9	441.7	441.4	441.2	441.0	440.8	440.6
135°	474.6	474.4	474.1	473.8	473.4	473.0	472.7	472.3
137.5°	506.0	505.7	505.4	505.2	505.3	505.4	505.5	505.6
140°	526.7	526.6	526.5	526.3	526.2	526.1	526.0	525.8
142.5°	546.3	546.3	546.2	546.2	546.2	546.2	546.1	546.1
145°	575.7	575.6	575.4	575.2	574.8	574.4	574.0	573.7
147.5°	602.4	602.3	602.2	602.1	602.0	601.8	601.7	601.6
150°	619.1	619.1	619.1	619.1	618.9	618.8	618.7	618.6
152.5°	635.0	635.3	635.6	635.6	635.3	634.9	634.6	634.3
155°	657.0	657.5	658.1	658.1	657.5	657.0	656.5	656.0
157.5°	676.5	676.9	677.3	677.2	676.8	676.4	675.9	675.5
160°	688.5	688.8	689.2	689.1	688.5	687.8	687.2	686.6
162.5°	699.2	699.9	700.6	700.6	700.0	699.3	698.7	698.1
165°	713.5	714.2	715.0	715.1	714.6	714.1	713.6	713.1
167.5°	725.4	726.2	727.0	726.9	726.2	725.4	724.6	723.8
170°	731.8	732.7	733.4	733.4	732.5	731.5	730.6	729.7
172.5°	736.7	737.6	738.4	738.4	737.5	736.6	735.7	734.9
175°	741.9	742.9	743.7	743.7	742.9	741.9	741.0	740.1
177.5°	744.8	745.5	746.2	746.2	745.4	744.6	743.7	742.9
180°	744.8	744.8	744.8	744.8	744.8	744.8	744.8	744.8

(END OF REPORT)