

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332579-840

Luminaire Tested: **S124DIP-S575D1205U840-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332579-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S575D1205U840-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6864.0 lumens
Efficiency: N/A
Efficacy: 138.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332579-840

CATALOG NUMBER: S124DIP-S575D1205U840-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

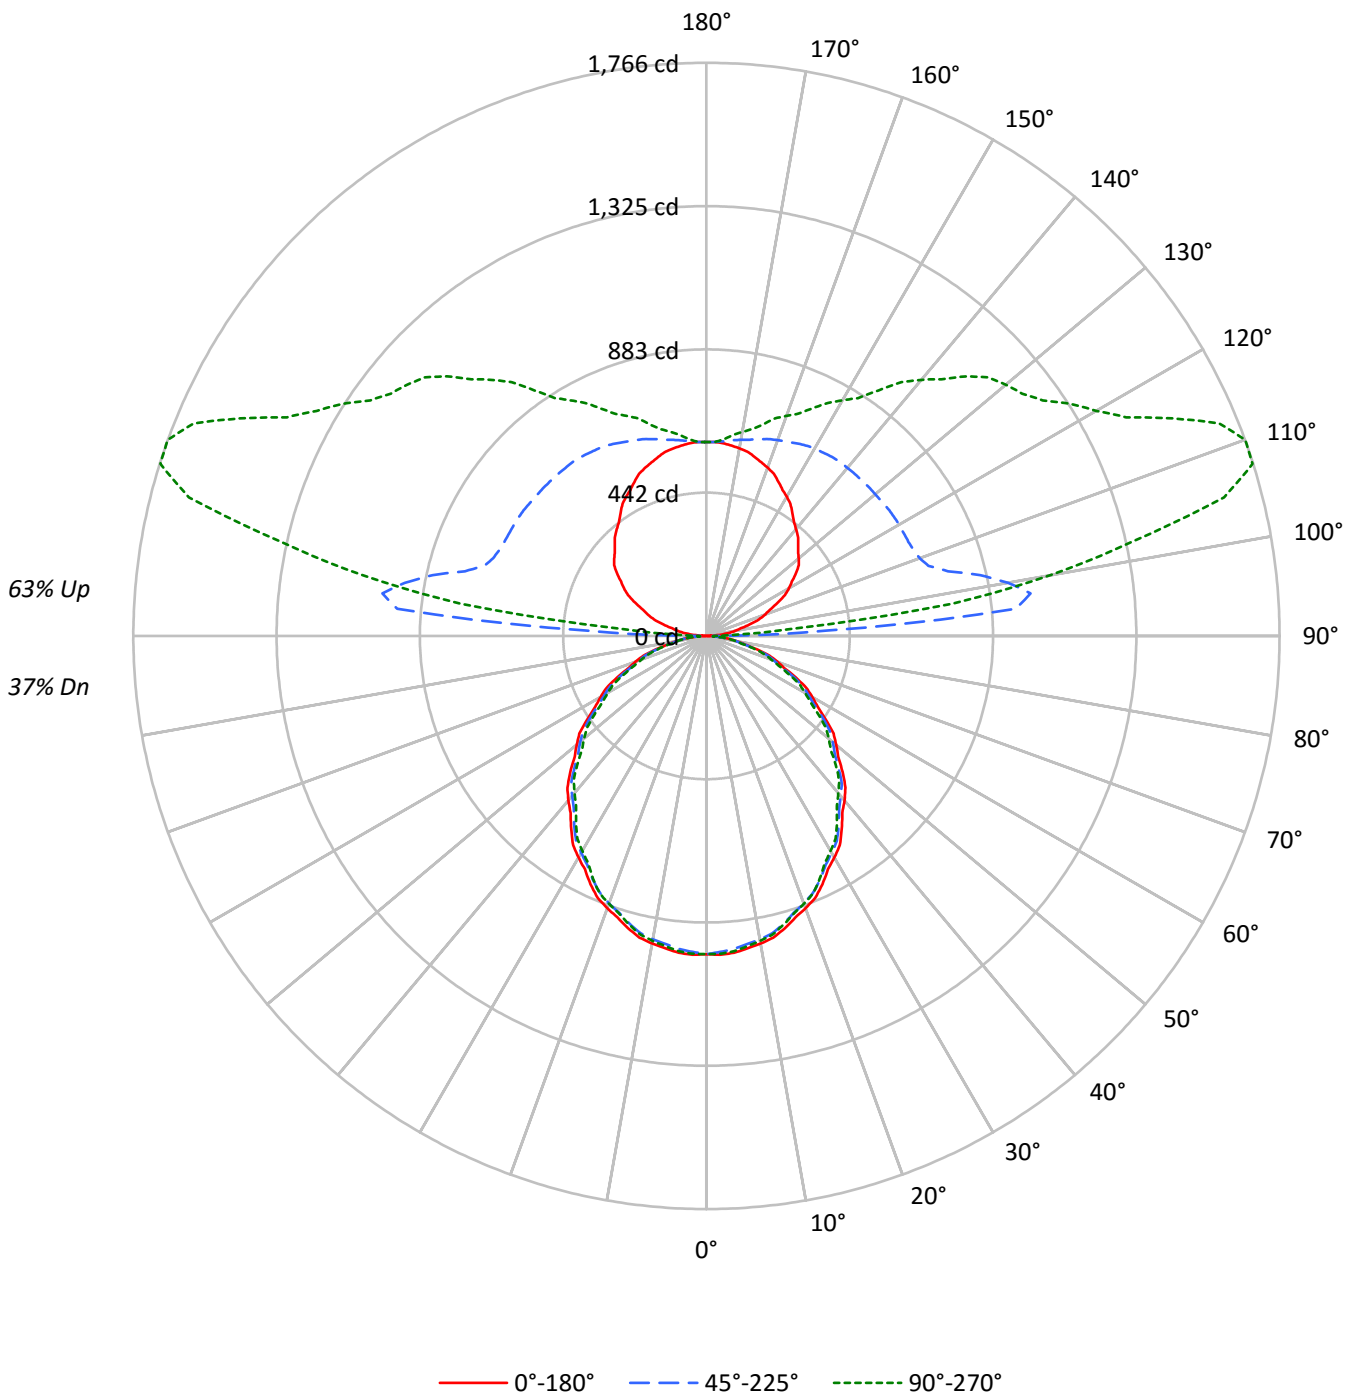



TEST NUMBER: P332579-840

CATALOG NUMBER: S124DIP-S575D1205U840-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	104	104	104	104	94	94	94	94	76	76	76		59	59	59		44	44	44	37
1	95	91	87	83	86	82	79	76	66	64	62		52	51	49		39	38	37	31
2	86	79	73	68	78	72	67	62	58	55	51		46	43	41		34	33	31	26
3	79	69	62	57	71	63	57	52	51	47	43		40	37	35		30	28	26	22
4	72	61	54	48	65	56	49	44	46	41	37		36	32	30		27	25	23	19
5	66	55	47	41	59	50	43	38	41	36	32		32	29	26		24	22	20	16
6	61	49	41	35	55	45	38	33	37	31	27		29	25	22		22	19	17	14
7	56	44	36	31	51	40	33	29	33	28	24		26	23	20		20	17	15	13
8	52	40	32	27	47	37	30	25	30	25	21		24	20	18		18	16	14	11
9	48	36	29	24	44	33	27	22	28	23	19		22	18	16		17	14	12	10
10	45	33	26	21	41	31	24	20	25	20	17		20	17	14		16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7917	7917	7917
5°	7942	7846	7903
10°	7891	7782	7820
15°	7796	7672	7691
20°	7669	7534	7541
25°	7525	7378	7357
30°	7347	7194	7127
35°	7164	7001	6908
40°	6973	6783	6658
45°	6774	6567	6441
50°	6553	6376	6178
55°	6315	6128	5928
60°	6077	5848	5670
65°	5809	5585	5358
70°	5509	5231	5028
75°	5050	4803	4682
80°	4491	4310	4203
85°	3927	3788	3714



TEST NUMBER: P332579-840

CATALOG NUMBER: S124DIP-S575D1205U840-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	92.4	1.3
10°-20°	260.2	3.8
20°-30°	383.0	5.6
30°-40°	445.3	6.5
40°-50°	445.3	6.5
50°-60°	389.5	5.7
60°-70°	289.3	4.2
70°-80°	164.3	2.4
80°-90°	50.7	0.7
90°-100°	431.4	6.3
100°-110°	897.9	13.1
110°-120°	804.2	11.7
120°-130°	676.5	9.9
130°-140°	564.1	8.2
140°-150°	430.9	6.3
150°-160°	302.9	4.4
160°-170°	178.2	2.6
170°-180°	58.0	0.8
0°-30°	735.6	10.7
0°-40°	1180.9	17.2
0°-60°	2015.7	29.4
0°-90°	2520.0	36.7
90°-120°	2133.5	31.1
90°-150°	3805.0	55.4
90°-180°	4344.0	63.3
0°-180°	6864.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	981	981	981	981	981	
5°	980	976	968	976	975	93
15°	933	929	918	922	920	263
25°	845	839	828	829	826	388
35°	727	721	710	705	701	454
45°	593	587	575	567	564	457
55°	449	446	435	426	421	402
65°	304	300	292	285	280	301
75°	162	158	154	151	150	172
85°	42	42	41	41	40	47
90°	1	9	21	23	25	4
95°	39	122	956	474	286	43
105°	137	199	770	1658	1651	146
115°	242	303	686	1319	1585	240
125°	337	400	683	1122	1265	300
135°	400	476	677	996	1131	309
145°	461	528	674	840	924	289
155°	524	566	655	742	773	242
165°	572	589	628	665	675	161
175°	596	597	602	610	608	57
180°	597	597	597	597	597	



TEST NUMBER: P332579-840

CATALOG NUMBER: S124DIP-S575D1205U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	980.7	980.7	980.7	980.7	980.7	980.7	980.7	980.7	980.7	980.7	980.7
2.5°	983.2	982.8	982.4	982.0	981.6	980.6	979.1	977.5	975.9	974.4	975.8
5°	980.0	979.3	978.6	977.9	977.1	975.8	973.9	972.0	970.1	968.2	970.1
7.5°	970.8	970.1	969.5	968.8	968.1	966.6	964.5	962.4	960.2	958.1	959.7
10°	962.6	962.0	961.3	960.6	959.9	958.4	956.1	953.8	951.6	949.3	950.7
12.5°	952.0	951.3	950.6	949.9	949.2	947.7	945.2	942.8	940.4	938.0	939.5
15°	932.8	932.1	931.4	930.7	930.0	928.4	925.7	923.1	920.5	917.9	918.9
17.5°	909.7	908.8	908.0	907.1	906.2	904.5	902.0	899.6	897.1	894.6	895.2
20°	892.7	891.8	891.0	890.1	889.2	887.5	884.8	882.2	879.6	877.0	877.5
22.5°	874.4	873.3	872.2	871.0	869.9	868.0	865.4	862.7	860.1	857.5	858.5
25°	844.8	843.5	842.3	841.1	839.9	838.1	835.6	833.1	830.7	828.3	828.5
27.5°	810.8	809.6	808.3	807.1	805.8	804.1	801.7	799.5	797.2	795.0	794.6
30°	788.2	786.8	785.4	784.0	782.6	780.7	778.5	776.2	774.0	771.7	771.0
32.5°	764.3	763.1	761.7	760.5	759.3	757.4	755.1	752.7	750.2	747.8	747.0
35°	726.9	725.7	724.5	723.3	722.1	720.1	717.7	715.3	712.9	710.4	709.1
37.5°	687.4	686.3	685.2	684.1	683.0	681.2	678.5	675.9	673.3	670.7	669.3
40°	661.7	660.2	658.8	657.5	656.1	654.1	651.5	648.8	646.2	643.6	641.9
42.5°	634.0	633.2	632.4	631.5	630.7	628.7	625.9	623.0	620.1	617.2	615.2
45°	593.3	592.1	590.9	589.7	588.4	586.4	583.6	580.8	578.0	575.2	573.3
47.5°	550.7	549.9	549.1	548.2	547.3	545.6	543.1	540.5	537.9	535.3	533.1
50°	521.8	521.1	520.4	519.7	519.0	517.5	515.0	512.5	510.1	507.7	505.2
52.5°	493.5	492.7	491.8	491.0	490.2	488.5	485.8	483.3	480.7	478.1	475.9
55°	448.7	448.2	447.7	447.2	446.7	445.1	442.7	440.2	437.8	435.4	433.2
57.5°	406.0	405.4	404.8	404.1	403.5	402.1	399.7	397.3	394.9	392.4	390.4
60°	376.4	375.6	374.7	373.8	372.9	371.3	369.1	366.8	364.6	362.2	360.7
62.5°	347.5	346.8	346.0	345.3	344.6	343.0	340.6	338.2	335.8	333.4	331.9
65°	304.1	303.3	302.4	301.5	300.6	299.3	297.6	295.8	294.1	292.4	290.5
67.5°	260.4	259.6	258.8	258.0	257.2	256.0	254.3	252.7	251.0	249.2	247.6
70°	233.4	232.2	231.0	229.7	228.5	227.2	225.8	224.4	223.0	221.6	220.3
72.5°	204.5	203.3	202.1	200.8	199.5	198.4	197.3	196.2	195.1	193.9	192.8
75°	161.9	161.0	160.2	159.3	158.3	157.5	156.6	155.7	154.9	154.0	153.3
77.5°	121.2	120.8	120.4	120.1	119.7	119.1	118.3	117.5	116.7	116.0	115.7
80°	96.6	96.1	95.6	95.1	94.5	94.1	93.8	93.4	93.1	92.7	92.4
82.5°	72.8	72.5	72.3	72.0	71.8	71.6	71.6	71.5	71.4	71.4	71.1
85°	42.4	42.4	42.4	42.4	42.4	42.2	41.9	41.6	41.2	40.9	40.9
87.5°	16.6	16.9	17.5	17.6	17.7	17.6	18.8	18.7	19.0	19.3	19.1
90°	1.2	3.5	7.1	8.2	9.4	9.4	16.5	16.5	18.8	21.1	20.0
92.5°	13.3	19.5	30.5	44.8	62.0	86.3	146.0	237.0	325.8	372.2	310.0
95°	38.7	42.2	54.0	69.3	97.4	146.7	248.7	441.2	721.6	956.3	983.4
97.5°	69.5	69.5	79.6	93.6	117.9	159.2	237.7	396.7	675.4	1007.3	1235.5
100°	89.2	89.2	97.4	111.5	133.8	171.4	240.5	373.1	612.6	943.4	1243.9
102.5°	108.0	109.9	117.1	130.3	151.6	187.3	249.9	366.6	570.3	863.6	1173.5
105°	137.3	140.8	146.7	160.8	181.9	215.9	272.3	369.6	533.9	769.8	1045.5
107.5°	169.7	172.0	177.9	192.9	213.1	246.7	298.3	387.0	527.4	717.2	942.3
110°	191.3	193.6	199.4	213.6	234.7	266.4	318.0	400.1	529.3	699.4	890.7



TEST NUMBER: P332579-840

CATALOG NUMBER: S124DIP-S575D1205U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	212.0	214.3	221.1	234.2	255.4	287.0	336.8	414.2	534.8	690.9	861.5
115°	241.8	245.3	253.5	265.2	287.5	319.2	366.1	436.6	545.6	686.5	834.4
117.5°	272.7	276.0	283.3	296.2	317.1	349.9	394.6	459.3	557.1	685.3	822.1
120°	293.4	295.7	304.0	316.8	336.8	369.6	414.2	475.2	565.6	685.3	815.6
122.5°	312.1	314.5	322.8	334.7	356.5	388.4	433.0	490.3	574.1	684.4	808.1
125°	336.8	341.4	348.5	361.4	383.7	416.6	458.8	512.8	586.7	683.0	795.6
127.5°	358.6	362.3	370.8	385.6	408.8	441.9	482.7	532.3	596.8	680.3	778.9
130°	370.8	375.5	384.9	402.5	424.7	458.8	498.8	544.5	604.3	679.4	768.6
132.5°	383.0	386.8	399.0	415.7	439.8	472.0	511.9	556.7	610.9	678.5	759.2
135°	400.1	404.9	416.6	436.6	461.2	491.7	530.4	572.7	620.8	677.1	745.2
137.5°	417.3	421.7	434.6	453.6	479.3	508.4	544.5	583.9	626.6	676.8	733.0
140°	429.5	433.0	446.0	465.9	490.5	518.7	553.9	591.4	631.4	675.9	726.4
142.5°	442.6	446.2	458.1	477.2	500.8	528.1	562.3	597.0	635.1	675.9	720.7
145°	461.2	464.7	476.5	492.8	515.1	541.0	571.5	603.2	637.2	673.6	711.1
147.5°	482.0	483.2	493.5	510.5	529.0	552.2	580.9	608.5	638.3	669.3	702.5
150°	495.2	496.3	505.7	519.9	537.5	559.8	585.5	611.4	638.3	666.5	695.9
152.5°	507.4	507.7	517.1	530.2	545.9	566.3	589.4	613.3	636.5	661.9	688.3
155°	524.5	525.7	532.7	544.5	557.4	575.0	594.9	614.9	633.7	654.8	677.1
157.5°	541.2	541.2	547.8	556.9	568.2	582.1	599.0	614.9	630.7	647.5	665.6
160°	551.5	551.5	556.2	564.4	573.8	586.7	600.8	614.9	627.8	641.9	657.1
162.5°	560.9	560.0	563.7	571.0	579.5	589.6	602.7	614.9	625.0	636.2	649.6
165°	571.5	571.5	573.8	579.7	585.5	592.6	603.2	612.6	619.6	627.8	637.2
167.5°	582.1	580.9	582.1	586.5	589.8	595.2	602.9	609.8	614.0	619.4	625.9
170°	586.7	585.5	586.7	590.3	592.6	596.1	602.0	607.8	610.2	613.7	618.4
172.5°	591.4	590.3	590.5	593.1	594.5	597.0	601.1	606.0	606.4	608.0	611.9
175°	596.1	594.9	594.9	596.1	597.3	597.3	599.7	603.2	602.0	602.0	604.3
177.5°	598.2	597.3	596.3	597.3	597.3	597.3	598.2	600.1	598.2	598.2	599.2
180°	597.3	597.3	597.3	597.3	597.3	597.3	597.3	597.3	597.3	597.3	597.3



TEST NUMBER: P332579-840

CATALOG NUMBER: S124DIP-S575D1205U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	980.7	980.7	980.7	980.7	980.7	980.7	980.7	980.7
2.5°	977.2	978.7	980.1	980.7	980.5	980.4	980.3	980.1
5°	972.0	973.9	975.8	976.6	976.2	975.9	975.5	975.2
7.5°	961.2	962.7	964.2	964.9	964.7	964.5	964.3	964.0
10°	952.1	953.5	954.9	955.4	955.0	954.7	954.3	954.0
12.5°	941.1	942.6	944.1	944.6	944.1	943.6	943.2	942.7
15°	920.0	921.0	922.0	922.3	921.8	921.3	920.7	920.2
17.5°	896.0	896.6	897.3	897.4	897.1	896.7	896.4	896.1
20°	878.1	878.6	879.1	879.2	878.8	878.5	878.2	877.8
22.5°	859.4	860.3	861.3	861.4	860.8	860.2	859.6	858.9
25°	828.6	828.8	829.0	828.7	828.0	827.3	826.6	825.9
27.5°	794.2	793.7	793.2	792.6	791.7	790.9	790.0	789.1
30°	770.3	769.6	768.9	768.1	767.2	766.4	765.5	764.6
32.5°	746.1	745.3	744.5	743.6	742.8	741.8	740.9	740.1
35°	707.9	706.7	705.5	704.5	703.6	702.7	701.9	700.9
37.5°	668.0	666.6	665.3	664.1	663.0	661.8	660.7	659.4
40°	640.2	638.3	636.6	635.3	634.4	633.6	632.7	631.8
42.5°	613.2	611.1	609.0	607.7	607.2	606.6	606.0	605.4
45°	571.4	569.5	567.5	566.3	565.8	565.3	564.7	564.2
47.5°	531.0	528.8	526.6	524.9	523.6	522.2	520.9	519.6
50°	502.7	500.3	497.9	496.1	495.0	494.0	493.0	491.9
52.5°	473.7	471.6	469.5	467.7	466.4	465.0	463.7	462.4
55°	431.2	429.1	427.0	425.4	424.3	423.3	422.2	421.2
57.5°	388.5	386.5	384.5	382.9	381.9	380.9	379.9	378.9
60°	359.1	357.6	356.0	354.8	353.9	353.0	352.1	351.2
62.5°	330.5	329.0	327.6	326.5	325.6	324.8	323.9	323.0
65°	288.8	287.1	285.4	284.1	283.2	282.3	281.4	280.5
67.5°	245.9	244.3	242.6	241.6	241.4	241.2	240.9	240.7
70°	218.8	217.4	216.0	215.1	214.5	214.0	213.5	213.0
72.5°	191.7	190.6	189.5	188.6	188.1	187.6	187.1	186.5
75°	152.6	151.9	151.3	150.8	150.6	150.5	150.3	150.1
77.5°	115.5	115.3	115.1	114.8	114.3	113.9	113.4	113.0
80°	92.0	91.7	91.3	91.1	90.9	90.7	90.6	90.4
82.5°	70.9	70.7	70.5	70.3	70.2	70.0	69.8	69.6
85°	40.9	40.9	40.9	40.8	40.6	40.4	40.3	40.1
87.5°	19.3	19.6	19.8	19.8	20.0	20.3	20.0	20.0
90°	21.1	22.3	23.4	23.4	24.6	25.9	24.6	24.6
92.5°	230.5	173.4	138.0	114.5	100.7	94.3	90.4	90.4
95°	869.5	687.6	530.4	416.6	359.1	322.8	301.5	286.3
97.5°	1284.8	1217.1	1102.4	979.9	895.5	825.0	789.7	765.4
100°	1415.2	1438.7	1381.2	1294.3	1192.2	1120.6	1085.5	1076.1
102.5°	1408.7	1525.0	1541.7	1505.5	1442.9	1391.0	1353.9	1346.5
105°	1314.2	1517.3	1633.5	1681.5	1683.9	1674.6	1658.1	1651.0
107.5°	1180.2	1396.4	1560.0	1664.7	1722.6	1749.4	1761.1	1764.2
110°	1099.5	1302.5	1472.7	1601.7	1685.1	1734.3	1755.5	1766.1



TEST NUMBER: P332579-840

CATALOG NUMBER: S124DIP-S575D1205U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1040.4	1219.9	1380.7	1509.7	1604.4	1664.0	1693.5	1710.7
115°	981.0	1125.4	1262.6	1375.3	1468.0	1538.4	1576.0	1585.4
117.5°	951.9	1071.4	1179.3	1274.9	1353.9	1413.1	1451.1	1458.3
120°	938.8	1047.9	1141.8	1225.1	1292.0	1343.6	1374.1	1387.0
122.5°	927.5	1032.9	1118.3	1191.3	1247.9	1292.0	1317.8	1330.7
125°	908.3	1009.2	1090.1	1154.7	1201.6	1235.7	1258.0	1265.0
127.5°	884.7	981.3	1062.0	1123.3	1170.4	1200.7	1219.5	1226.5
130°	866.1	958.8	1038.5	1100.8	1148.8	1178.1	1196.9	1204.0
132.5°	846.3	933.4	1011.3	1073.5	1120.6	1153.8	1171.5	1178.6
135°	819.1	895.3	966.9	1025.6	1072.6	1105.4	1124.2	1131.3
137.5°	794.5	859.0	919.3	972.3	1016.2	1048.6	1064.1	1072.6
140°	780.3	835.5	888.3	937.6	978.7	1004.5	1020.9	1030.3
142.5°	767.2	815.8	861.1	903.8	940.2	964.1	978.7	985.2
145°	748.7	788.6	823.7	856.7	886.0	905.9	917.7	923.5
147.5°	733.5	765.1	793.2	819.1	840.7	857.8	866.8	868.8
150°	724.1	751.0	774.5	795.6	814.4	829.6	836.7	837.9
152.5°	713.7	736.9	758.5	775.9	791.8	804.3	808.5	809.7
155°	698.2	717.0	734.6	748.7	760.4	769.8	773.4	773.4
157.5°	681.6	697.3	712.1	723.4	732.3	739.3	741.4	741.4
160°	671.3	684.1	697.0	706.4	713.5	720.5	721.6	721.6
162.5°	660.9	672.0	682.1	690.4	695.6	702.7	703.9	702.9
165°	646.6	653.6	661.9	667.7	672.4	677.1	675.9	674.8
167.5°	632.8	638.1	644.7	648.2	650.6	653.6	653.4	652.5
170°	624.3	627.8	632.5	636.0	638.3	639.5	638.3	638.3
172.5°	616.7	619.4	622.2	624.7	626.1	627.3	626.1	624.3
175°	606.7	607.8	610.2	610.2	610.2	612.6	610.2	607.8
177.5°	600.1	601.1	601.1	602.0	601.1	602.0	600.1	598.2
180°	597.3	597.3	597.3	597.3	597.3	597.3	597.3	597.3

(END OF REPORT)