

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332614-840

Luminaire Tested: **S124DIP-S795D1035U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332614-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S795D1035U840-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1035 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7060.0 lumens
Efficiency: N/A
Efficacy: 135.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332614-840

CATALOG NUMBER: S124DIP-S795D1035U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

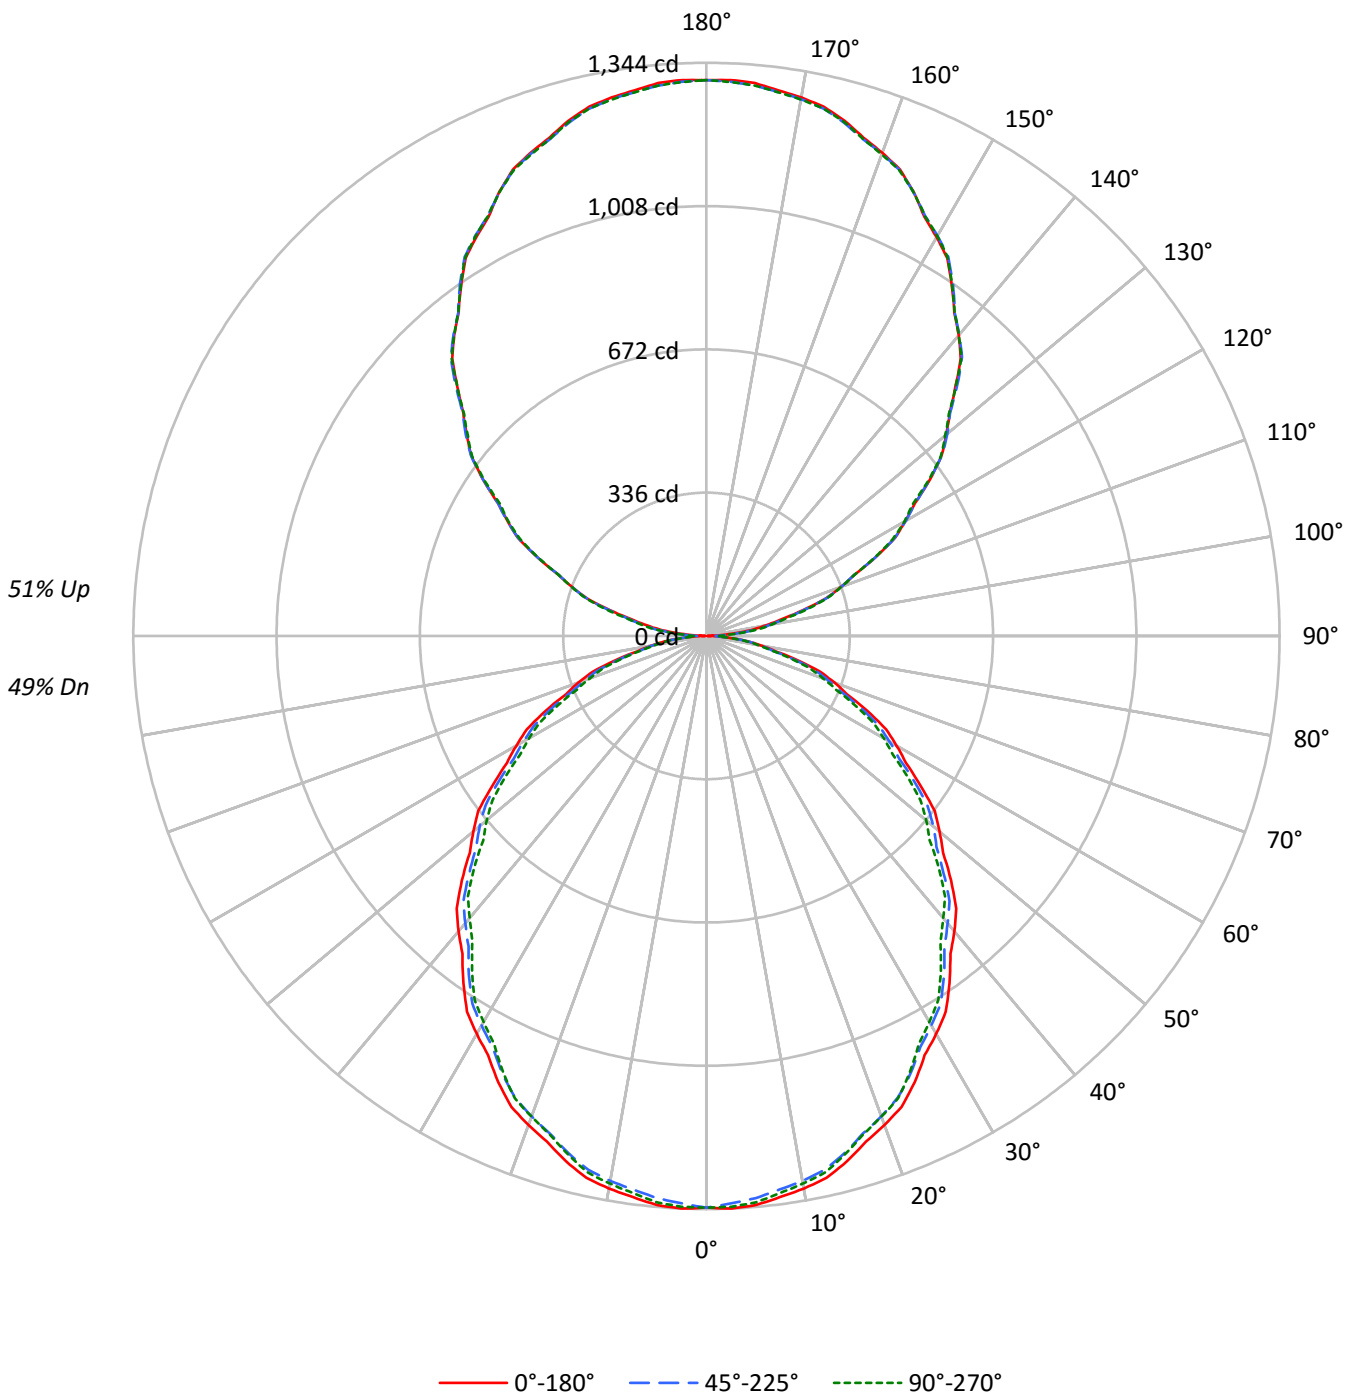



TEST NUMBER: P332614-840

CATALOG NUMBER: S124DIP-S795D1035U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	83	83	83	68	68	68	55	55	55	49
1	97	93	89	86	90	86	83	80	72	70	68	60	58	57	49	47	46	41
2	89	81	75	70	81	75	70	65	63	59	56	53	50	47	43	41	39	34
3	81	71	64	58	74	66	60	54	56	51	47	47	43	40	38	35	33	29
4	74	63	55	49	68	59	52	46	50	44	40	41	38	34	34	31	29	25
5	68	56	48	42	62	52	45	40	44	39	35	37	33	30	30	27	25	22
6	63	51	42	37	57	47	40	34	40	34	30	34	29	26	28	24	22	19
7	58	46	38	32	53	42	35	30	36	31	27	31	26	23	25	22	20	17
8	54	41	34	28	49	39	32	27	33	28	24	28	24	21	23	20	17	15
9	50	38	30	25	46	35	28	24	30	25	21	26	21	18	21	18	16	14
10	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10823	10823	10823
5°	10855	10724	10802
10°	10787	10637	10690
15°	10657	10486	10513
20°	10483	10299	10308
25°	10286	10085	10056
30°	10043	9833	9743
35°	9792	9570	9443
40°	9531	9271	9101
45°	9259	8977	8805
50°	8959	8715	8446
55°	8633	8376	8103
60°	8307	7995	7753
65°	7941	7633	7324
70°	7530	7152	6871
75°	6903	6569	6400
80°	6141	5890	5742
85°	5372	5169	5067



TEST NUMBER: P332614-840

CATALOG NUMBER: S124DIP-S795D1035U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	126.2	1.8
10°-20°	355.7	5.0
20°-30°	523.5	7.4
30°-40°	608.6	8.6
40°-50°	608.7	8.6
50°-60°	532.4	7.5
60°-70°	395.4	5.6
70°-80°	224.6	3.2
80°-90°	68.7	1.0
90°-100°	86.0	1.2
100°-110°	254.7	3.6
110°-120°	432.2	6.1
120°-130°	569.9	8.1
130°-140°	640.1	9.1
140°-150°	629.0	8.9
150°-160°	529.0	7.5
160°-170°	352.0	5.0
170°-180°	123.2	1.7
0°-30°	1005.5	14.2
0°-40°	1614.1	22.9
0°-60°	2755.2	39.0
0°-90°	3444.0	48.8
90°-120°	772.9	10.9
90°-150°	2611.8	37.0
90°-180°	3616.0	51.2
0°-180°	7060.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1341	1341	1341	1341	1341	
5°	1340	1335	1323	1334	1333	127
15°	1275	1270	1255	1260	1258	359
25°	1155	1147	1132	1133	1129	531
35°	994	986	971	964	958	621
45°	811	803	786	775	771	625
55°	613	609	595	583	576	549
65°	416	410	400	389	383	411
75°	221	216	211	206	205	235
85°	58	58	56	56	55	64
90°	3	14	22	28	30	7
95°	60	69	77	80	80	67
105°	235	236	240	243	246	249
115°	440	439	438	436	436	433
125°	640	640	639	637	635	570
135°	826	831	832	830	827	638
145°	1003	1007	1008	1007	1004	627
155°	1149	1149	1148	1152	1148	528
165°	1251	1248	1246	1251	1248	352
175°	1301	1297	1295	1302	1295	123
180°	1303	1303	1303	1303	1303	



TEST NUMBER: P332614-840

CATALOG NUMBER: S124DIP-S795D1035U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6
2.5°	1344.0	1343.4	1342.8	1342.3	1341.7	1340.4	1338.3	1336.2	1334.0	1332.0	1333.8
5°	1339.5	1338.6	1337.6	1336.7	1335.6	1333.8	1331.2	1328.6	1326.0	1323.3	1326.0
7.5°	1327.1	1326.1	1325.1	1324.1	1323.2	1321.3	1318.4	1315.5	1312.5	1309.6	1311.7
10°	1315.9	1314.9	1313.9	1313.0	1312.0	1310.0	1306.9	1303.8	1300.7	1297.6	1299.5
12.5°	1301.2	1300.3	1299.3	1298.4	1297.5	1295.3	1292.0	1288.7	1285.5	1282.1	1284.2
15°	1275.1	1274.0	1273.1	1272.1	1271.2	1269.0	1265.4	1261.8	1258.2	1254.7	1256.1
17.5°	1243.4	1242.2	1241.0	1239.9	1238.7	1236.4	1233.0	1229.6	1226.2	1222.8	1223.8
20°	1220.2	1219.0	1217.9	1216.7	1215.5	1213.0	1209.5	1205.9	1202.3	1198.8	1199.5
22.5°	1195.4	1193.8	1192.1	1190.6	1189.0	1186.5	1182.9	1179.3	1175.7	1172.2	1173.5
25°	1154.7	1153.1	1151.3	1149.7	1148.0	1145.5	1142.2	1138.8	1135.5	1132.2	1132.4
27.5°	1108.3	1106.6	1104.9	1103.2	1101.5	1099.0	1095.9	1092.9	1089.7	1086.6	1086.0
30°	1077.4	1075.5	1073.6	1071.7	1069.8	1067.2	1064.1	1061.1	1057.9	1054.8	1053.9
32.5°	1044.7	1043.0	1041.3	1039.6	1037.8	1035.3	1032.1	1028.7	1025.5	1022.2	1021.1
35°	993.6	991.9	990.3	988.6	986.9	984.4	981.1	977.8	974.4	971.1	969.4
37.5°	939.7	938.2	936.6	935.1	933.5	931.0	927.5	923.8	920.3	916.7	914.8
40°	904.4	902.5	900.6	898.7	896.8	894.0	890.5	886.9	883.3	879.7	877.4
42.5°	866.7	865.5	864.3	863.2	862.0	859.5	855.6	851.6	847.6	843.6	840.9
45°	811.0	809.3	807.7	806.0	804.4	801.5	797.8	794.0	790.1	786.3	783.7
47.5°	752.8	751.6	750.5	749.3	748.2	745.9	742.4	738.8	735.3	731.7	728.7
50°	713.3	712.3	711.3	710.3	709.4	707.3	704.0	700.6	697.2	693.9	690.5
52.5°	674.6	673.5	672.3	671.2	669.9	667.6	664.1	660.6	657.0	653.5	650.6
55°	613.4	612.6	611.9	611.2	610.5	608.4	605.1	601.8	598.4	595.1	592.2
57.5°	554.9	554.1	553.3	552.5	551.7	549.6	546.3	543.0	539.8	536.4	533.7
60°	514.5	513.3	512.1	511.0	509.8	507.6	504.5	501.4	498.3	495.2	493.0
62.5°	475.0	474.0	473.0	472.0	471.0	468.9	465.5	462.2	459.0	455.7	453.7
65°	415.7	414.5	413.3	412.1	410.9	409.1	406.8	404.3	401.9	399.6	397.2
67.5°	356.0	354.9	353.8	352.6	351.6	349.9	347.6	345.3	343.1	340.7	338.4
70°	319.0	317.4	315.7	314.0	312.4	310.5	308.6	306.7	304.8	303.0	301.0
72.5°	279.5	277.8	276.2	274.5	272.8	271.2	269.7	268.1	266.6	265.1	263.6
75°	221.3	220.0	218.9	217.7	216.5	215.3	214.1	212.9	211.8	210.6	209.5
77.5°	165.6	165.1	164.6	164.1	163.5	162.8	161.7	160.7	159.6	158.5	158.2
80°	132.1	131.4	130.7	130.0	129.3	128.7	128.2	127.7	127.2	126.7	126.2
82.5°	99.5	99.2	98.8	98.5	98.2	98.0	97.9	97.8	97.7	97.6	97.3
85°	58.0	58.0	58.0	58.0	58.0	57.8	57.3	56.9	56.4	55.8	55.8
87.5°	22.9	23.2	23.5	23.8	24.1	24.4	24.5	24.7	24.8	25.0	25.3
90°	3.0	5.5	8.0	10.4	12.9	15.0	16.8	18.6	20.4	22.2	23.5
92.5°	21.6	24.4	27.2	30.0	32.8	34.9	36.2	37.4	38.7	39.9	40.7
95°	60.5	62.5	64.5	66.6	68.6	70.3	71.9	73.5	75.0	76.6	77.3
97.5°	105.6	107.2	108.9	110.5	112.1	113.8	115.6	117.4	119.4	121.2	122.0
100°	141.1	142.0	142.9	143.8	144.7	146.1	148.1	150.2	152.2	154.2	154.7
102.5°	178.2	178.5	178.9	179.3	179.7	180.8	182.6	184.4	186.2	188.1	188.7
105°	234.9	235.1	235.3	235.5	235.8	236.3	237.2	238.1	239.0	239.9	240.5
107.5°	294.4	294.6	294.9	295.2	295.4	295.6	295.8	295.9	296.0	296.2	296.8
110°	334.7	335.1	335.6	336.0	336.5	336.6	336.6	336.1	335.9	335.7	335.2



TEST NUMBER: P332614-840

CATALOG NUMBER: S124DIP-S795D1035U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	376.6	376.7	376.8	376.9	377.0	376.8	376.4	376.0	375.6	375.2	375.1
115°	439.5	439.5	439.5	439.5	439.5	439.3	438.8	438.4	437.9	437.5	437.3
117.5°	498.8	499.0	499.1	499.3	499.5	499.4	499.1	498.8	498.5	498.2	497.4
120°	538.3	539.2	540.1	541.0	541.9	542.0	541.3	540.6	540.0	539.3	538.2
122.5°	579.4	579.8	580.1	580.5	580.8	580.9	580.6	580.2	579.9	579.6	578.9
125°	640.1	640.1	640.1	640.1	640.1	640.0	639.7	639.5	639.2	639.0	638.6
127.5°	695.1	695.8	696.4	697.1	697.8	697.9	697.6	697.2	696.9	696.5	696.1
130°	733.8	734.5	735.2	735.8	736.5	736.8	736.8	736.8	736.8	736.8	736.4
132.5°	773.4	773.9	774.3	774.8	775.3	775.5	775.3	775.1	774.9	774.8	774.3
135°	825.6	826.9	828.2	829.6	830.9	831.6	831.6	831.6	831.6	831.6	831.1
137.5°	882.4	883.0	883.6	884.2	884.9	885.3	885.8	886.2	886.5	886.9	886.3
140°	920.3	920.7	921.2	921.6	922.1	922.3	922.3	922.3	922.3	922.3	922.1
142.5°	954.9	955.4	955.8	956.3	956.7	956.8	956.7	956.5	956.3	956.1	956.1
145°	1002.9	1003.8	1004.7	1005.6	1006.5	1007.0	1007.3	1007.5	1007.7	1007.9	1007.7
147.5°	1050.6	1051.6	1052.7	1053.8	1054.8	1055.3	1055.1	1054.9	1054.7	1054.6	1054.4
150°	1079.5	1080.5	1081.4	1082.3	1083.2	1083.6	1083.6	1083.6	1083.6	1083.6	1083.6
152.5°	1107.0	1107.5	1108.0	1108.6	1109.1	1109.4	1109.6	1109.8	1110.0	1110.1	1110.8
155°	1149.1	1149.1	1149.1	1149.1	1149.1	1149.0	1148.7	1148.5	1148.3	1148.1	1149.0
157.5°	1184.6	1184.2	1183.8	1183.4	1183.0	1182.8	1182.7	1182.7	1182.7	1182.6	1183.3
160°	1205.6	1205.3	1205.1	1204.9	1204.7	1204.5	1204.2	1204.0	1203.8	1203.6	1204.2
162.5°	1224.9	1224.4	1223.8	1223.1	1222.5	1222.1	1221.9	1221.7	1221.5	1221.2	1222.4
165°	1250.9	1250.2	1249.6	1248.9	1248.2	1247.7	1247.2	1246.8	1246.3	1245.9	1247.2
167.5°	1270.9	1269.9	1269.0	1268.1	1267.1	1266.7	1266.7	1266.8	1266.8	1266.9	1268.2
170°	1282.1	1281.0	1279.9	1278.8	1277.7	1277.2	1277.5	1277.7	1277.9	1278.1	1279.5
172.5°	1290.2	1289.3	1288.4	1287.4	1286.5	1286.0	1286.1	1286.1	1286.2	1286.2	1287.7
175°	1301.3	1300.2	1299.1	1298.0	1296.9	1296.2	1296.0	1295.7	1295.5	1295.3	1296.9
177.5°	1304.9	1304.0	1303.1	1302.2	1301.3	1300.9	1300.9	1300.9	1300.9	1300.9	1302.1
180°	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3



TEST NUMBER: P332614-840

CATALOG NUMBER: S124DIP-S795D1035U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6
2.5°	1335.7	1337.7	1339.6	1340.5	1340.3	1340.1	1339.9	1339.7
5°	1328.6	1331.2	1333.8	1334.9	1334.4	1334.0	1333.5	1333.0
7.5°	1313.8	1316.0	1318.0	1318.9	1318.7	1318.4	1318.1	1317.8
10°	1301.4	1303.3	1305.3	1306.0	1305.5	1304.9	1304.5	1304.0
12.5°	1286.4	1288.4	1290.5	1291.2	1290.6	1289.9	1289.2	1288.6
15°	1257.5	1258.9	1260.3	1260.7	1260.0	1259.3	1258.6	1257.9
17.5°	1224.7	1225.6	1226.5	1226.7	1226.2	1225.7	1225.3	1224.8
20°	1200.2	1200.9	1201.6	1201.7	1201.2	1200.8	1200.3	1199.8
22.5°	1174.7	1176.0	1177.3	1177.5	1176.6	1175.8	1174.9	1174.1
25°	1132.7	1132.9	1133.2	1132.8	1131.9	1130.8	1129.9	1128.9
27.5°	1085.5	1084.9	1084.3	1083.5	1082.3	1081.1	1079.8	1078.6
30°	1052.9	1052.0	1051.0	1050.0	1048.7	1047.5	1046.3	1045.2
32.5°	1019.9	1018.8	1017.6	1016.4	1015.2	1014.0	1012.8	1011.7
35°	967.8	966.0	964.3	962.9	961.7	960.6	959.4	958.2
37.5°	913.0	911.2	909.5	907.8	906.2	904.6	903.0	901.4
40°	874.9	872.6	870.2	868.4	867.2	866.1	864.8	863.6
42.5°	838.1	835.4	832.5	830.8	830.0	829.2	828.4	827.6
45°	781.0	778.4	775.8	774.2	773.4	772.6	771.9	771.2
47.5°	725.8	722.9	719.8	717.5	715.7	713.9	712.1	710.2
50°	687.2	683.9	680.5	678.1	676.7	675.3	673.9	672.5
52.5°	647.6	644.6	641.7	639.3	637.5	635.7	633.9	632.1
55°	589.4	586.5	583.6	581.5	580.1	578.7	577.1	575.7
57.5°	531.0	528.3	525.5	523.5	522.1	520.7	519.4	518.0
60°	490.9	488.8	486.6	484.9	483.7	482.5	481.3	480.2
62.5°	451.7	449.8	447.9	446.3	445.0	443.8	442.7	441.5
65°	394.9	392.4	390.0	388.3	387.1	385.9	384.7	383.4
67.5°	336.2	333.9	331.5	330.2	329.9	329.6	329.2	328.9
70°	299.1	297.2	295.3	294.0	293.3	292.6	291.9	291.1
72.5°	262.1	260.5	259.0	257.9	257.1	256.4	255.7	255.0
75°	208.6	207.6	206.7	206.1	205.9	205.6	205.4	205.2
77.5°	157.9	157.6	157.4	156.9	156.3	155.7	155.1	154.5
80°	125.8	125.3	124.8	124.5	124.2	124.0	123.8	123.5
82.5°	96.9	96.6	96.3	96.1	95.9	95.6	95.4	95.1
85°	55.8	55.8	55.8	55.7	55.5	55.2	55.0	54.7
87.5°	25.5	25.9	26.2	26.4	26.4	26.5	26.6	26.7
90°	24.8	26.3	27.6	28.5	28.9	29.4	29.8	30.2
92.5°	41.5	42.3	43.1	43.7	43.9	44.2	44.5	44.7
95°	78.0	78.7	79.3	79.7	79.7	79.7	79.7	79.7
97.5°	122.8	123.6	124.4	124.8	124.8	124.8	124.8	124.8
100°	155.1	155.5	156.0	156.2	156.2	156.2	156.2	156.2
102.5°	189.3	190.0	190.6	191.0	191.2	191.4	191.6	191.7
105°	241.3	242.0	242.6	243.3	243.9	244.6	245.3	245.9
107.5°	297.4	298.0	298.6	298.9	298.9	298.8	298.8	298.7
110°	334.8	334.3	333.9	334.0	334.7	335.3	336.0	336.7



TEST NUMBER: P332614-840

CATALOG NUMBER: S124DIP-S795D1035U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	375.0	374.9	374.9	374.9	375.0	375.1	375.3	375.4
115°	437.0	436.8	436.6	436.4	436.2	435.9	435.7	435.5
117.5°	496.7	495.8	495.1	494.5	494.0	493.6	493.1	492.7
120°	537.0	535.9	534.8	534.4	534.9	535.3	535.8	536.2
122.5°	578.0	577.3	576.5	575.7	574.9	574.1	573.3	572.5
125°	638.1	637.7	637.2	636.8	636.4	635.9	635.5	635.0
127.5°	695.6	695.2	694.7	694.3	694.0	693.6	693.3	692.9
130°	736.0	735.5	735.1	734.4	733.5	732.6	731.6	730.7
132.5°	773.9	773.4	773.0	772.5	772.1	771.8	771.4	771.1
135°	830.7	830.2	829.8	829.2	828.6	827.9	827.2	826.6
137.5°	885.7	885.0	884.5	884.2	884.4	884.5	884.6	884.8
140°	921.9	921.6	921.4	921.2	921.0	920.7	920.5	920.3
142.5°	956.0	956.0	956.0	955.9	955.9	955.8	955.8	955.7
145°	1007.5	1007.3	1007.0	1006.6	1005.9	1005.3	1004.6	1003.9
147.5°	1054.2	1054.0	1053.8	1053.6	1053.4	1053.2	1053.0	1052.8
150°	1083.6	1083.6	1083.6	1083.5	1083.3	1083.0	1082.8	1082.6
152.5°	1111.3	1111.8	1112.4	1112.4	1111.8	1111.2	1110.5	1109.9
155°	1149.9	1150.7	1151.7	1151.7	1150.7	1149.9	1149.0	1148.1
157.5°	1183.9	1184.6	1185.3	1185.2	1184.5	1183.7	1183.0	1182.1
160°	1204.9	1205.6	1206.2	1206.0	1204.9	1203.8	1202.6	1201.5
162.5°	1223.7	1224.9	1226.1	1226.2	1225.1	1224.0	1222.8	1221.6
165°	1248.6	1249.9	1251.2	1251.4	1250.6	1249.7	1248.8	1247.9
167.5°	1269.5	1270.9	1272.2	1272.2	1270.8	1269.4	1268.0	1266.7
170°	1280.8	1282.1	1283.5	1283.3	1281.8	1280.2	1278.7	1277.1
172.5°	1289.2	1290.7	1292.3	1292.2	1290.7	1289.1	1287.6	1286.0
175°	1298.4	1300.0	1301.5	1301.5	1300.0	1298.4	1296.9	1295.3
177.5°	1303.4	1304.6	1306.0	1305.9	1304.4	1302.9	1301.5	1300.1
180°	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3

(END OF REPORT)