

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332977-840

Luminaire Tested: **S124RDIP-S1020D1035U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332977-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIP-S1020D1035U840-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1035 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7832.9 lumens
Efficiency: N/A
Efficacy: 129.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332977-840

CATALOG NUMBER: S124RDIP-S1020D1035U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

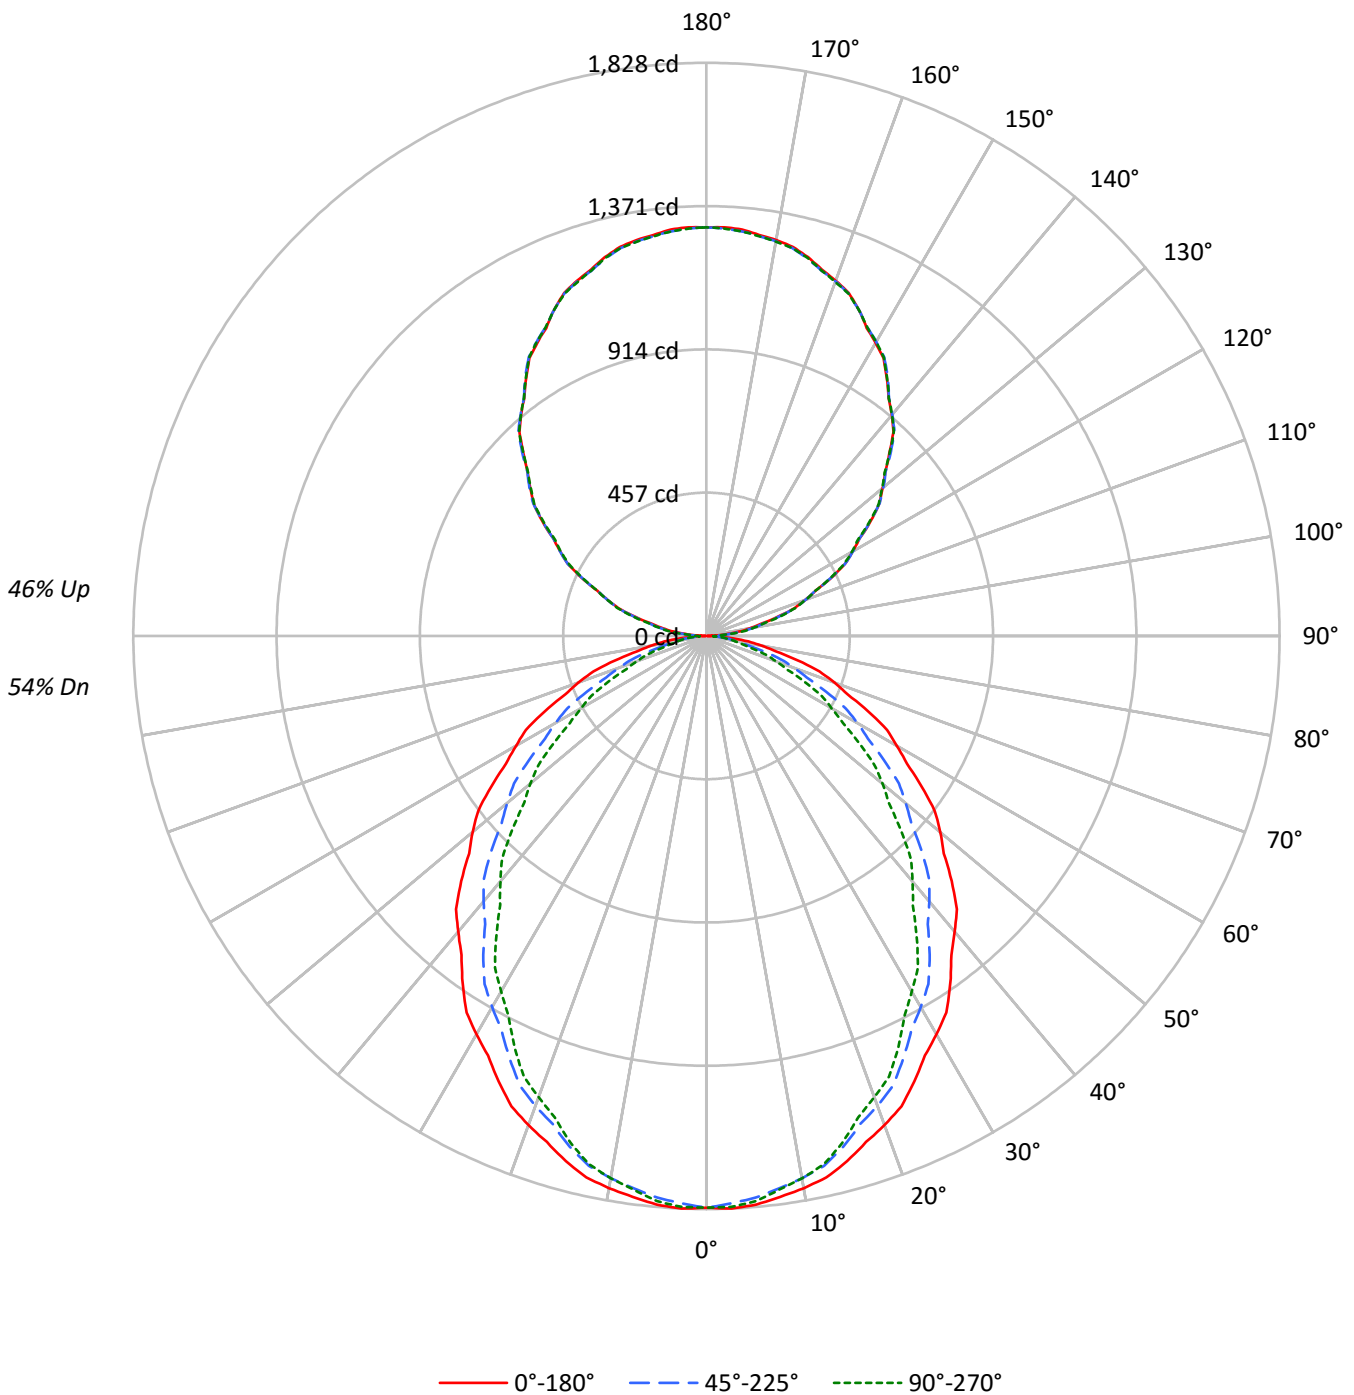



TEST NUMBER: P332977-840

CATALOG NUMBER: S124RDIP-S1020D1035U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	60	60	60	54
1	99	95	91	87	92	88	85	82	75	73	71	64	62	61	53	52	51	46
2	90	83	77	72	84	77	72	68	66	62	59	56	54	51	47	45	43	39
3	83	73	66	60	76	68	62	57	59	54	50	50	46	43	42	39	37	33
4	76	65	57	51	70	61	54	48	52	47	43	45	41	37	38	35	32	29
5	70	58	50	44	64	54	47	42	47	41	37	40	36	33	34	31	28	25
6	64	52	44	38	59	49	42	36	42	37	33	37	32	29	31	28	25	22
7	59	47	39	34	55	44	37	32	39	33	29	33	29	26	28	25	22	20
8	55	43	35	30	51	40	33	28	35	30	26	31	26	23	26	23	20	18
9	51	39	32	27	48	37	30	26	32	27	23	28	24	21	24	21	18	16
10	48	36	29	24	45	34	27	23	30	25	21	26	22	19	22	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14721	14721	14721
5°	14755	14574	14665
10°	14662	14399	14399
15°	14493	14097	13992
20°	14262	13698	13447
25°	13967	13233	12897
30°	13679	12743	12209
35°	13361	12232	11517
40°	12978	11653	10771
45°	12625	11079	10011
50°	12223	10417	9207
55°	11792	9728	8332
60°	11317	8972	7440
65°	10883	8029	6562
70°	10249	6987	5570
75°	9451	5792	4529
80°	8243	4412	4156
85°	6984	4011	3751



TEST NUMBER: P332977-840

CATALOG NUMBER: S124RDIP-S1020D1035U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	171.3	2.2
10°-20°	477.7	6.1
20°-30°	689.8	8.8
30°-40°	781.8	10.0
40°-50°	755.0	9.6
50°-60°	627.8	8.0
60°-70°	433.5	5.5
70°-80°	219.7	2.8
80°-90°	60.3	0.8
90°-100°	86.0	1.1
100°-110°	254.7	3.3
110°-120°	432.2	5.5
120°-130°	569.9	7.3
130°-140°	640.1	8.2
140°-150°	629.0	8.0
150°-160°	529.0	6.8
160°-170°	352.0	4.5
170°-180°	123.2	1.6
0°-30°	1338.7	17.1
0°-40°	2120.6	27.1
0°-60°	3503.4	44.7
0°-90°	4216.9	53.8
90°-120°	772.9	9.9
90°-150°	2611.8	33.3
90°-180°	3616.0	46.2
0°-180°	7832.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1824	1824	1824	1824	1824	
5°	1821	1814	1798	1811	1810	173
15°	1734	1720	1687	1683	1674	488
25°	1568	1541	1486	1462	1448	722
35°	1356	1310	1241	1195	1169	847
45°	1106	1052	970	904	877	852
55°	838	780	691	621	592	749
65°	570	508	420	363	344	562
75°	303	251	186	155	145	320
85°	75	49	43	41	40	85
90°	3	14	22	28	30	7
95°	60	69	77	80	80	67
105°	235	236	240	243	246	249
115°	440	439	438	436	436	433
125°	640	640	639	637	635	570
135°	826	831	832	830	827	638
145°	1003	1007	1008	1007	1004	627
155°	1149	1149	1148	1152	1148	528
165°	1251	1248	1246	1251	1248	352
175°	1301	1297	1295	1302	1295	123
180°	1303	1303	1303	1303	1303	



TEST NUMBER: P332977-840

CATALOG NUMBER: S124RDIP-S1020D1035U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5
2.5°	1828.0	1826.9	1825.9	1825.0	1824.0	1822.1	1819.4	1816.6	1813.9	1811.2	1813.9
5°	1820.7	1819.5	1818.3	1816.9	1815.7	1813.2	1809.6	1805.8	1802.1	1798.4	1801.5
7.5°	1804.2	1802.9	1801.6	1800.3	1799.0	1795.9	1791.1	1786.2	1781.4	1776.6	1778.6
10°	1788.6	1787.1	1785.4	1783.9	1782.4	1778.8	1773.2	1767.7	1762.0	1756.5	1757.7
12.5°	1768.5	1766.7	1764.8	1763.1	1761.3	1757.1	1750.5	1743.9	1737.4	1730.8	1731.5
15°	1734.1	1731.3	1728.6	1725.8	1722.9	1717.7	1709.9	1702.1	1694.5	1686.7	1686.1
17.5°	1692.5	1688.5	1684.5	1680.4	1676.4	1669.7	1660.4	1651.1	1641.8	1632.4	1630.7
20°	1660.1	1656.1	1652.0	1648.0	1644.0	1636.7	1626.2	1615.6	1605.1	1594.5	1592.1
22.5°	1624.4	1619.8	1615.3	1610.8	1606.3	1598.3	1587.1	1575.8	1564.5	1553.2	1549.4
25°	1568.0	1562.4	1556.8	1551.3	1545.6	1536.5	1523.8	1511.1	1498.3	1485.6	1480.4
27.5°	1508.7	1501.8	1494.8	1487.7	1480.8	1470.5	1456.8	1443.3	1429.7	1416.0	1409.6
30°	1467.4	1459.7	1452.0	1444.2	1436.4	1425.2	1410.7	1396.0	1381.5	1367.0	1359.2
32.5°	1423.9	1415.1	1406.3	1397.7	1388.9	1377.0	1361.9	1346.9	1331.7	1316.7	1307.7
35°	1355.7	1345.8	1335.8	1326.0	1316.1	1303.3	1287.8	1272.3	1256.8	1241.2	1230.7
37.5°	1282.8	1272.6	1262.4	1252.1	1241.9	1228.2	1211.0	1193.9	1176.6	1159.4	1147.6
40°	1231.5	1221.2	1211.0	1200.7	1190.5	1176.6	1158.9	1141.1	1123.5	1105.8	1092.8
42.5°	1182.3	1171.6	1160.8	1150.1	1139.4	1124.8	1106.4	1087.9	1069.5	1051.1	1037.8
45°	1105.8	1094.4	1082.9	1071.4	1059.9	1044.8	1026.2	1007.6	989.0	970.4	955.2
47.5°	1026.8	1014.9	1003.1	991.3	979.4	963.8	944.4	925.0	905.6	886.4	870.6
50°	973.2	961.1	949.0	936.9	924.7	908.8	889.0	869.1	849.2	829.4	813.9
52.5°	918.5	906.6	894.7	882.9	871.0	855.0	834.6	814.3	793.9	773.6	757.8
55°	837.8	825.4	812.9	800.5	788.1	771.8	751.6	731.4	711.3	691.2	675.0
57.5°	757.9	745.0	732.1	719.1	706.3	689.8	670.0	650.2	630.3	610.5	594.1
60°	700.9	688.5	676.1	663.7	651.3	635.1	615.3	595.4	575.5	555.7	539.6
62.5°	649.5	636.6	623.7	610.8	597.9	581.3	560.9	540.6	520.2	499.9	484.9
65°	569.7	556.3	543.0	529.7	516.3	499.7	479.9	460.0	440.1	420.3	407.0
67.5°	486.8	473.9	461.2	448.4	435.6	420.0	401.5	383.1	364.7	346.3	334.8
70°	434.2	421.2	408.2	395.2	382.1	366.8	349.1	331.3	313.7	296.0	285.8
72.5°	378.4	366.6	354.8	343.1	331.2	317.0	300.3	283.6	266.9	250.2	241.5
75°	303.0	291.5	280.0	268.5	257.1	244.0	229.4	214.9	200.3	185.7	178.5
77.5°	226.5	216.7	207.0	197.2	187.5	176.7	164.9	153.2	141.4	129.6	125.4
80°	177.3	168.3	159.4	150.4	141.4	132.2	122.9	113.6	104.2	94.9	94.0
82.5°	134.9	126.6	118.4	110.1	101.9	95.0	89.8	84.4	79.1	73.7	73.0
85°	75.4	69.2	63.0	56.8	50.6	47.0	46.0	45.1	44.2	43.3	42.6
87.5°	26.3	24.8	23.3	21.8	20.3	19.6	19.7	19.9	20.0	20.1	20.1
90°	3.0	5.5	8.0	10.4	12.9	15.0	16.8	18.6	20.4	22.2	23.5
92.5°	21.6	24.4	27.2	30.0	32.8	34.9	36.2	37.4	38.7	39.9	40.7
95°	60.5	62.5	64.5	66.6	68.6	70.3	71.9	73.5	75.0	76.6	77.3
97.5°	105.6	107.2	108.9	110.5	112.1	113.8	115.6	117.4	119.4	121.2	122.0
100°	141.1	142.0	142.9	143.8	144.7	146.1	148.1	150.2	152.2	154.2	154.7
102.5°	178.2	178.5	178.9	179.3	179.7	180.8	182.6	184.4	186.2	188.1	188.7
105°	234.9	235.1	235.3	235.5	235.8	236.3	237.2	238.1	239.0	239.9	240.5
107.5°	294.4	294.6	294.9	295.2	295.4	295.6	295.8	295.9	296.0	296.2	296.8
110°	334.7	335.1	335.6	336.0	336.5	336.6	336.6	336.1	335.9	335.7	335.2



TEST NUMBER: P332977-840

CATALOG NUMBER: S124RDIP-S1020D1035U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	376.6	376.7	376.8	376.9	377.0	376.8	376.4	376.0	375.6	375.2	375.1
115°	439.5	439.5	439.5	439.5	439.5	439.3	438.8	438.4	437.9	437.5	437.3
117.5°	498.8	499.0	499.1	499.3	499.5	499.4	499.1	498.8	498.5	498.2	497.4
120°	538.3	539.2	540.1	541.0	541.9	542.0	541.3	540.6	540.0	539.3	538.2
122.5°	579.4	579.8	580.1	580.5	580.8	580.9	580.6	580.2	579.9	579.6	578.9
125°	640.1	640.1	640.1	640.1	640.1	640.0	639.7	639.5	639.2	639.0	638.6
127.5°	695.1	695.8	696.4	697.1	697.8	697.9	697.6	697.2	696.9	696.5	696.1
130°	733.8	734.5	735.2	735.8	736.5	736.8	736.8	736.8	736.8	736.8	736.4
132.5°	773.4	773.9	774.3	774.8	775.3	775.5	775.3	775.1	774.9	774.8	774.3
135°	825.6	826.9	828.2	829.6	830.9	831.6	831.6	831.6	831.6	831.6	831.1
137.5°	882.4	883.0	883.6	884.2	884.9	885.3	885.8	886.2	886.5	886.9	886.3
140°	920.3	920.7	921.2	921.6	922.1	922.3	922.3	922.3	922.3	922.3	922.1
142.5°	954.9	955.4	955.8	956.3	956.7	956.8	956.7	956.5	956.3	956.1	956.1
145°	1002.9	1003.8	1004.7	1005.6	1006.5	1007.0	1007.3	1007.5	1007.7	1007.9	1007.7
147.5°	1050.6	1051.6	1052.7	1053.8	1054.8	1055.3	1055.1	1054.9	1054.7	1054.6	1054.4
150°	1079.5	1080.5	1081.4	1082.3	1083.2	1083.6	1083.6	1083.6	1083.6	1083.6	1083.6
152.5°	1107.0	1107.5	1108.0	1108.6	1109.1	1109.4	1109.6	1109.8	1110.0	1110.1	1110.8
155°	1149.1	1149.1	1149.1	1149.1	1149.1	1149.0	1148.7	1148.5	1148.3	1148.1	1149.0
157.5°	1184.6	1184.2	1183.8	1183.4	1183.0	1182.8	1182.7	1182.7	1182.7	1182.6	1183.3
160°	1205.6	1205.3	1205.1	1204.9	1204.7	1204.5	1204.2	1204.0	1203.8	1203.6	1204.2
162.5°	1224.9	1224.4	1223.8	1223.1	1222.5	1222.1	1221.9	1221.7	1221.5	1221.2	1222.4
165°	1250.9	1250.2	1249.6	1248.9	1248.2	1247.7	1247.2	1246.8	1246.3	1245.9	1247.2
167.5°	1270.9	1269.9	1269.0	1268.1	1267.1	1266.7	1266.7	1266.8	1266.8	1266.9	1268.2
170°	1282.1	1281.0	1279.9	1278.8	1277.7	1277.2	1277.5	1277.7	1277.9	1278.1	1279.5
172.5°	1290.2	1289.3	1288.4	1287.4	1286.5	1286.0	1286.1	1286.1	1286.2	1286.2	1287.7
175°	1301.3	1300.2	1299.1	1298.0	1296.9	1296.2	1296.0	1295.7	1295.5	1295.3	1296.9
177.5°	1304.9	1304.0	1303.1	1302.2	1301.3	1300.9	1300.9	1300.9	1300.9	1300.9	1302.1
180°	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3



TEST NUMBER: P332977-840

CATALOG NUMBER: S124RDIP-S1020D1035U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5
2.5°	1816.6	1819.4	1822.1	1823.4	1823.1	1822.9	1822.6	1822.4
5°	1804.5	1807.7	1810.8	1812.0	1811.4	1810.8	1810.2	1809.6
7.5°	1780.6	1782.5	1784.5	1785.0	1784.0	1783.0	1782.0	1781.0
10°	1759.0	1760.2	1761.4	1761.4	1760.2	1759.0	1757.7	1756.5
12.5°	1732.2	1733.0	1733.7	1733.2	1731.5	1729.8	1728.1	1726.4
15°	1685.5	1684.8	1684.2	1682.7	1680.6	1678.4	1676.3	1674.1
17.5°	1629.0	1627.3	1625.6	1623.1	1619.7	1616.5	1613.2	1609.8
20°	1589.5	1587.1	1584.6	1581.3	1577.3	1573.3	1569.2	1565.2
22.5°	1545.7	1542.0	1538.3	1534.8	1531.5	1528.2	1524.9	1521.7
25°	1475.0	1469.8	1464.5	1460.3	1457.2	1454.1	1451.0	1447.9
27.5°	1403.0	1396.5	1390.0	1384.5	1380.1	1375.5	1371.1	1366.7
30°	1351.4	1343.6	1335.8	1329.5	1324.5	1319.6	1314.6	1309.7
32.5°	1298.7	1289.7	1280.7	1273.8	1269.1	1264.4	1259.7	1255.0
35°	1220.1	1209.6	1199.0	1191.0	1185.4	1179.8	1174.3	1168.6
37.5°	1135.9	1124.1	1112.3	1103.6	1098.0	1092.4	1086.8	1081.3
40°	1079.7	1066.7	1053.7	1044.4	1038.8	1033.2	1027.6	1022.1
42.5°	1024.5	1011.3	997.9	988.5	982.6	976.7	970.9	965.1
45°	940.0	924.7	909.6	899.2	893.6	888.0	882.4	876.9
47.5°	854.9	839.1	823.2	812.3	806.2	800.0	793.9	787.8
50°	798.3	782.8	767.3	756.6	750.7	744.8	738.9	733.1
52.5°	741.9	726.2	710.4	699.5	693.4	687.2	681.1	675.0
55°	658.8	642.8	626.6	615.6	609.7	603.8	597.9	592.0
57.5°	577.6	561.3	544.9	534.5	530.0	525.5	521.1	516.6
60°	523.4	507.3	491.2	480.6	475.6	470.7	465.7	460.8
62.5°	470.1	455.1	440.3	430.8	426.9	422.9	418.9	415.0
65°	393.5	380.2	366.9	358.4	354.7	350.9	347.2	343.5
67.5°	323.3	311.8	300.3	292.6	288.4	284.4	280.2	276.2
70°	275.5	265.3	255.1	248.3	245.3	242.2	239.0	236.0
72.5°	232.7	224.0	215.2	209.4	206.5	203.7	200.9	198.0
75°	171.5	164.3	157.1	152.7	150.8	149.0	147.0	145.2
77.5°	121.3	117.1	112.9	110.6	110.0	109.5	108.9	108.4
80°	93.1	92.2	91.2	90.6	90.3	90.0	89.7	89.4
82.5°	72.3	71.7	71.0	70.5	70.2	69.9	69.6	69.3
85°	42.0	41.4	40.8	40.5	40.5	40.5	40.5	40.5
87.5°	20.1	20.1	20.2	20.3	20.7	21.0	21.3	21.7
90°	24.8	26.3	27.6	28.5	28.9	29.4	29.8	30.2
92.5°	41.5	42.3	43.1	43.7	43.9	44.2	44.5	44.7
95°	78.0	78.7	79.3	79.7	79.7	79.7	79.7	79.7
97.5°	122.8	123.6	124.4	124.8	124.8	124.8	124.8	124.8
100°	155.1	155.5	156.0	156.2	156.2	156.2	156.2	156.2
102.5°	189.3	190.0	190.6	191.0	191.2	191.4	191.6	191.7
105°	241.3	242.0	242.6	243.3	243.9	244.6	245.3	245.9
107.5°	297.4	298.0	298.6	298.9	298.9	298.8	298.8	298.7
110°	334.8	334.3	333.9	334.0	334.7	335.3	336.0	336.7



TEST NUMBER: P332977-840

CATALOG NUMBER: S124RDIP-S1020D1035U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	375.0	374.9	374.9	374.9	375.0	375.1	375.3	375.4
115°	437.0	436.8	436.6	436.4	436.2	435.9	435.7	435.5
117.5°	496.7	495.8	495.1	494.5	494.0	493.6	493.1	492.7
120°	537.0	535.9	534.8	534.4	534.9	535.3	535.8	536.2
122.5°	578.0	577.3	576.5	575.7	574.9	574.1	573.3	572.5
125°	638.1	637.7	637.2	636.8	636.4	635.9	635.5	635.0
127.5°	695.6	695.2	694.7	694.3	694.0	693.6	693.3	692.9
130°	736.0	735.5	735.1	734.4	733.5	732.6	731.6	730.7
132.5°	773.9	773.4	773.0	772.5	772.1	771.8	771.4	771.1
135°	830.7	830.2	829.8	829.2	828.6	827.9	827.2	826.6
137.5°	885.7	885.0	884.5	884.2	884.4	884.5	884.6	884.8
140°	921.9	921.6	921.4	921.2	921.0	920.7	920.5	920.3
142.5°	956.0	956.0	956.0	955.9	955.9	955.8	955.8	955.7
145°	1007.5	1007.3	1007.0	1006.6	1005.9	1005.3	1004.6	1003.9
147.5°	1054.2	1054.0	1053.8	1053.6	1053.4	1053.2	1053.0	1052.8
150°	1083.6	1083.6	1083.6	1083.5	1083.3	1083.0	1082.8	1082.6
152.5°	1111.3	1111.8	1112.4	1112.4	1111.8	1111.2	1110.5	1109.9
155°	1149.9	1150.7	1151.7	1151.7	1150.7	1149.9	1149.0	1148.1
157.5°	1183.9	1184.6	1185.3	1185.2	1184.5	1183.7	1183.0	1182.1
160°	1204.9	1205.6	1206.2	1206.0	1204.9	1203.8	1202.6	1201.5
162.5°	1223.7	1224.9	1226.1	1226.2	1225.1	1224.0	1222.8	1221.6
165°	1248.6	1249.9	1251.2	1251.4	1250.6	1249.7	1248.8	1247.9
167.5°	1269.5	1270.9	1272.2	1272.2	1270.8	1269.4	1268.0	1266.7
170°	1280.8	1282.1	1283.5	1283.3	1281.8	1280.2	1278.7	1277.1
172.5°	1289.2	1290.7	1292.3	1292.2	1290.7	1289.1	1287.6	1286.0
175°	1298.4	1300.0	1301.5	1301.5	1300.0	1298.4	1296.9	1295.3
177.5°	1303.4	1304.6	1306.0	1305.9	1304.4	1302.9	1301.5	1300.1
180°	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3	1303.3

(END OF REPORT)