

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332971-840

Luminaire Tested: **S124RDIP-S1020D810U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332971-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIP-S1020D810U840-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7048.3 lumens
Efficiency: N/A
Efficacy: 129.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332971-840

CATALOG NUMBER: S124RDIP-S1020D810U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

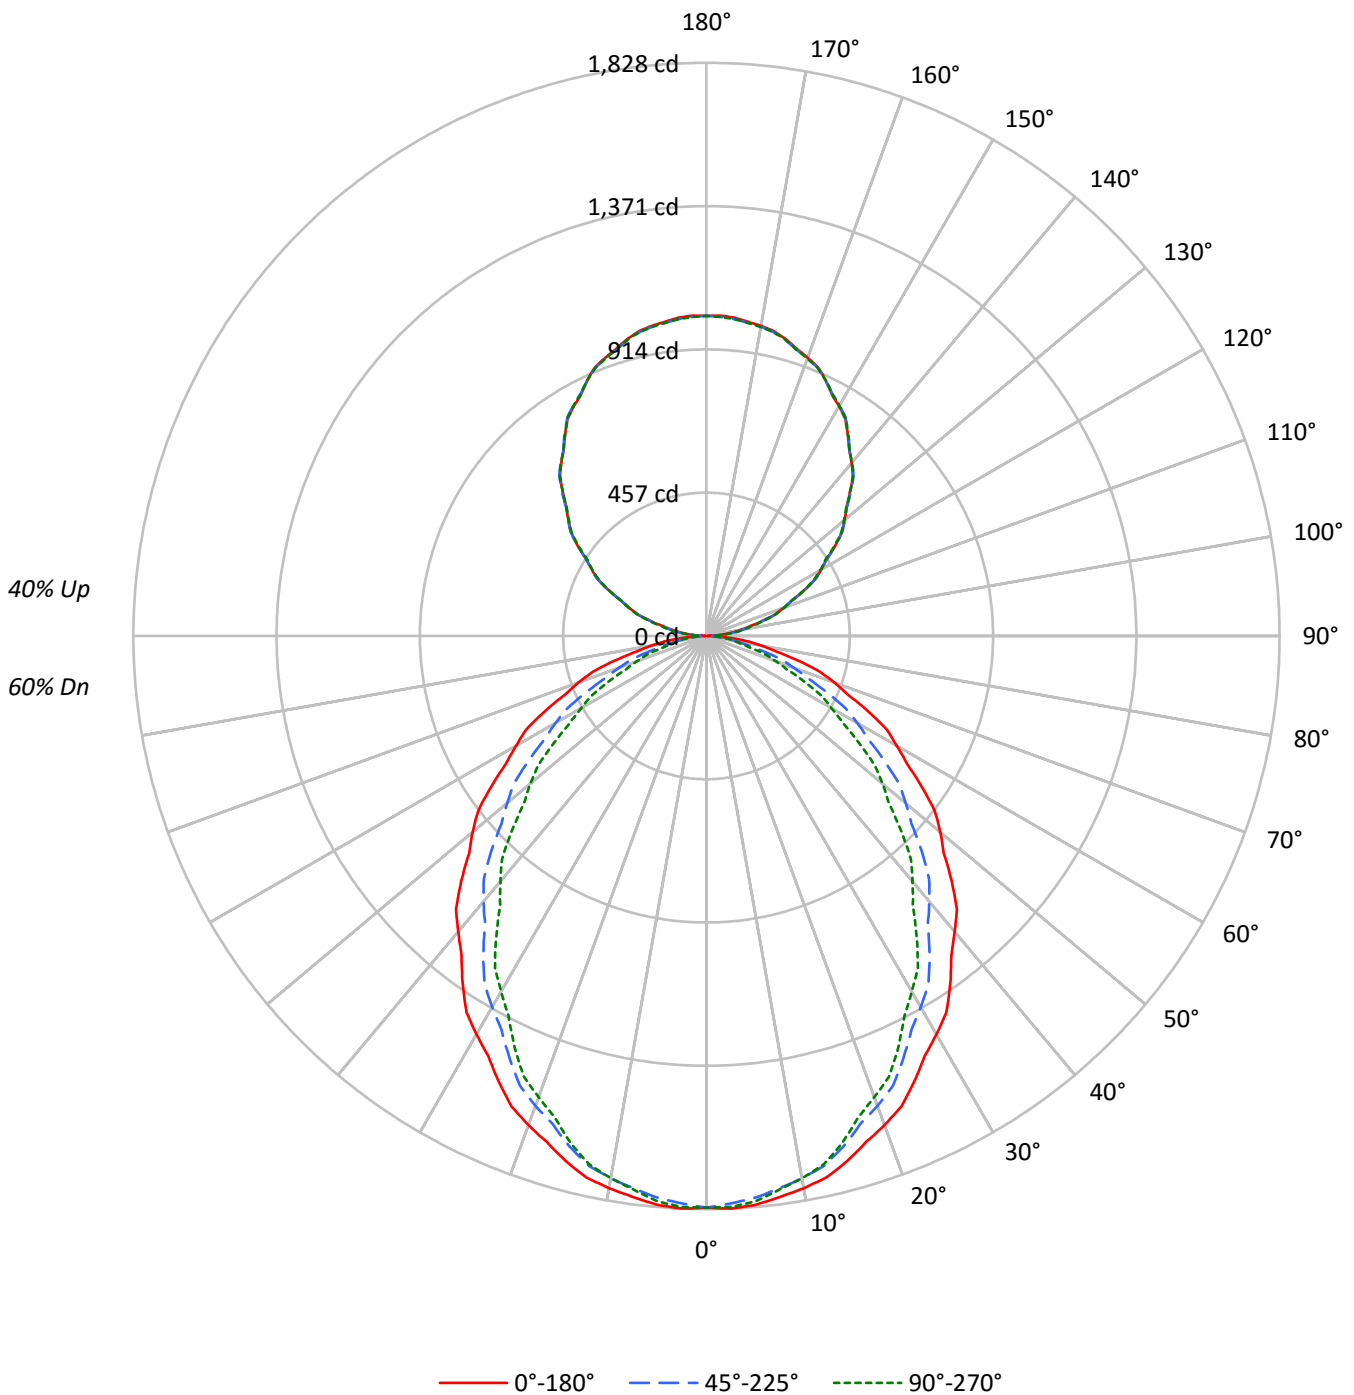



TEST NUMBER: P332971-840

CATALOG NUMBER: S124RDIP-S1020D810U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	109	109	109	109	102	102	102	102	89	89	89		76	76	76		65	65	65	60
1	100	96	92	89	94	90	87	84	78	76	74		68	66	64		58	57	56	51
2	92	84	78	73	85	79	74	69	69	65	62		60	57	54		52	49	47	43
3	84	74	67	61	78	70	63	58	61	56	52		53	49	46		46	43	41	37
4	77	66	58	52	72	62	55	50	55	49	45		48	43	40		41	38	35	32
5	71	59	51	45	66	56	48	43	49	43	39		43	38	35		37	34	31	28
6	65	53	45	39	61	50	43	37	44	38	34		39	34	31		34	30	27	25
7	60	48	40	35	56	45	38	33	40	34	30		36	31	27		31	27	24	22
8	56	44	36	31	52	41	34	29	37	31	27		33	28	24		29	25	22	20
9	52	40	33	27	49	38	31	26	34	28	24		30	25	22		26	23	20	18
10	49	37	30	25	46	35	28	24	31	26	22		28	23	20		25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14721	14721	14721
5°	14755	14574	14665
10°	14662	14399	14399
15°	14493	14097	13992
20°	14262	13698	13447
25°	13967	13233	12897
30°	13679	12743	12209
35°	13361	12232	11517
40°	12978	11653	10771
45°	12625	11079	10011
50°	12223	10417	9207
55°	11792	9728	8332
60°	11317	8972	7440
65°	10883	8029	6562
70°	10249	6987	5570
75°	9451	5792	4529
80°	8243	4412	4156
85°	6984	4011	3751



TEST NUMBER: P332971-840

CATALOG NUMBER: S124RDIP-S1020D810U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	171.3	2.4
10°-20°	477.7	6.8
20°-30°	689.8	9.8
30°-40°	781.8	11.1
40°-50°	755.0	10.7
50°-60°	627.8	8.9
60°-70°	433.5	6.2
70°-80°	219.7	3.1
80°-90°	59.4	0.8
90°-100°	67.3	1.0
100°-110°	199.5	2.8
110°-120°	338.5	4.8
120°-130°	446.4	6.3
130°-140°	501.3	7.1
140°-150°	492.6	7.0
150°-160°	414.3	5.9
160°-170°	275.7	3.9
170°-180°	96.5	1.4
0°-30°	1338.7	19.0
0°-40°	2120.6	30.1
0°-60°	3503.4	49.7
0°-90°	4216.1	59.8
90°-120°	605.4	8.6
90°-150°	2045.7	29.0
90°-180°	2832.0	40.2
0°-180°	7048.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1824	1824	1824	1824	1824	
5°	1821	1814	1798	1811	1810	173
15°	1734	1720	1687	1683	1674	488
25°	1568	1541	1486	1462	1448	722
35°	1356	1310	1241	1195	1169	847
45°	1106	1052	970	904	877	852
55°	838	780	691	621	592	749
65°	570	508	420	363	344	562
75°	303	251	186	155	145	320
85°	75	49	43	41	40	85
90°	2	11	17	22	24	7
95°	47	54	60	62	62	53
105°	184	185	188	190	193	195
115°	344	344	343	342	341	339
125°	501	501	501	499	497	447
135°	647	651	651	650	647	500
145°	786	789	790	789	786	491
155°	900	900	899	902	899	414
165°	980	977	976	980	977	276
175°	1019	1015	1014	1020	1014	97
180°	1021	1021	1021	1021	1021	



TEST NUMBER: P332971-840

CATALOG NUMBER: S124RDIP-S1020D810U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5
2.5°	1828.0	1826.9	1825.9	1825.0	1824.0	1822.1	1819.4	1816.6	1813.9	1811.2	1813.9
5°	1820.7	1819.5	1818.3	1816.9	1815.7	1813.2	1809.6	1805.8	1802.1	1798.4	1801.5
7.5°	1804.2	1802.9	1801.6	1800.3	1799.0	1795.9	1791.1	1786.2	1781.4	1776.6	1778.6
10°	1788.6	1787.1	1785.4	1783.9	1782.4	1778.8	1773.2	1767.7	1762.0	1756.5	1757.7
12.5°	1768.5	1766.7	1764.8	1763.1	1761.3	1757.1	1750.5	1743.9	1737.4	1730.8	1731.5
15°	1734.1	1731.3	1728.6	1725.8	1722.9	1717.7	1709.9	1702.1	1694.5	1686.7	1686.1
17.5°	1692.5	1688.5	1684.5	1680.4	1676.4	1669.7	1660.4	1651.1	1641.8	1632.4	1630.7
20°	1660.1	1656.1	1652.0	1648.0	1644.0	1636.7	1626.2	1615.6	1605.1	1594.5	1592.1
22.5°	1624.4	1619.8	1615.3	1610.8	1606.3	1598.3	1587.1	1575.8	1564.5	1553.2	1549.4
25°	1568.0	1562.4	1556.8	1551.3	1545.6	1536.5	1523.8	1511.1	1498.3	1485.6	1480.4
27.5°	1508.7	1501.8	1494.8	1487.7	1480.8	1470.5	1456.8	1443.3	1429.7	1416.0	1409.6
30°	1467.4	1459.7	1452.0	1444.2	1436.4	1425.2	1410.7	1396.0	1381.5	1367.0	1359.2
32.5°	1423.9	1415.1	1406.3	1397.7	1388.9	1377.0	1361.9	1346.9	1331.7	1316.7	1307.7
35°	1355.7	1345.8	1335.8	1326.0	1316.1	1303.3	1287.8	1272.3	1256.8	1241.2	1230.7
37.5°	1282.8	1272.6	1262.4	1252.1	1241.9	1228.2	1211.0	1193.9	1176.6	1159.4	1147.6
40°	1231.5	1221.2	1211.0	1200.7	1190.5	1176.6	1158.9	1141.1	1123.5	1105.8	1092.8
42.5°	1182.3	1171.6	1160.8	1150.1	1139.4	1124.8	1106.4	1087.9	1069.5	1051.1	1037.8
45°	1105.8	1094.4	1082.9	1071.4	1059.9	1044.8	1026.2	1007.6	989.0	970.4	955.2
47.5°	1026.8	1014.9	1003.1	991.3	979.4	963.8	944.4	925.0	905.6	886.4	870.6
50°	973.2	961.1	949.0	936.9	924.7	908.8	889.0	869.1	849.2	829.4	813.9
52.5°	918.5	906.6	894.7	882.9	871.0	855.0	834.6	814.3	793.9	773.6	757.8
55°	837.8	825.4	812.9	800.5	788.1	771.8	751.6	731.4	711.3	691.2	675.0
57.5°	757.9	745.0	732.1	719.1	706.3	689.8	670.0	650.2	630.3	610.5	594.1
60°	700.9	688.5	676.1	663.7	651.3	635.1	615.3	595.4	575.5	555.7	539.6
62.5°	649.5	636.6	623.7	610.8	597.9	581.3	560.9	540.6	520.2	499.9	484.9
65°	569.7	556.3	543.0	529.7	516.3	499.7	479.9	460.0	440.1	420.3	407.0
67.5°	486.8	473.9	461.2	448.4	435.6	420.0	401.5	383.1	364.7	346.3	334.8
70°	434.2	421.2	408.2	395.2	382.1	366.8	349.1	331.3	313.7	296.0	285.8
72.5°	378.4	366.6	354.8	343.1	331.2	317.0	300.3	283.6	266.9	250.2	241.5
75°	303.0	291.5	280.0	268.5	257.1	244.0	229.4	214.9	200.3	185.7	178.5
77.5°	226.5	216.7	207.0	197.2	187.5	176.7	164.9	153.2	141.4	129.6	125.4
80°	177.3	168.3	159.4	150.4	141.4	132.2	122.9	113.6	104.2	94.9	94.0
82.5°	134.9	126.6	118.4	110.1	101.9	95.0	89.8	84.4	79.1	73.7	73.0
85°	75.4	69.2	63.0	56.8	50.6	47.0	46.0	45.1	44.2	43.3	42.6
87.5°	26.2	24.5	22.9	21.4	19.8	19.0	19.0	19.1	19.1	19.1	19.1
90°	2.3	4.3	6.3	8.2	10.1	11.7	13.1	14.5	16.0	17.4	18.4
92.5°	16.9	19.1	21.3	23.5	25.8	27.4	28.3	29.3	30.3	31.3	31.9
95°	47.4	49.0	50.5	52.1	53.7	55.1	56.4	57.6	58.8	60.0	60.5
97.5°	82.7	84.0	85.2	86.5	87.8	89.2	90.6	92.0	93.4	94.9	95.5
100°	110.6	111.2	111.9	112.6	113.3	114.5	116.0	117.6	119.2	120.8	121.2
102.5°	139.6	139.9	140.2	140.5	140.7	141.6	143.0	144.4	145.9	147.3	147.8
105°	184.0	184.1	184.3	184.5	184.7	185.1	185.8	186.5	187.2	187.9	188.4
107.5°	230.6	230.8	231.0	231.2	231.4	231.6	231.7	231.8	231.9	232.0	232.5
110°	262.2	262.5	262.8	263.2	263.5	263.6	263.5	263.3	263.1	262.9	262.6



TEST NUMBER: P332971-840

CATALOG NUMBER: S124RDIP-S1020D810U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	295.0	295.0	295.1	295.2	295.3	295.1	294.8	294.5	294.2	293.9	293.8
115°	344.3	344.3	344.3	344.3	344.3	344.1	343.7	343.4	343.0	342.6	342.4
117.5°	390.6	390.8	390.9	391.0	391.2	391.1	390.9	390.6	390.4	390.2	389.6
120°	421.6	422.3	423.0	423.7	424.4	424.4	423.9	423.4	422.9	422.4	421.5
122.5°	453.8	454.0	454.3	454.6	454.9	454.9	454.7	454.4	454.2	453.9	453.3
125°	501.3	501.3	501.3	501.3	501.3	501.2	501.1	500.9	500.7	500.6	500.2
127.5°	544.4	544.9	545.5	546.0	546.5	546.6	546.3	546.1	545.8	545.5	545.2
130°	574.7	575.3	575.8	576.3	576.8	577.1	577.1	577.1	577.1	577.1	576.7
132.5°	605.7	606.1	606.5	606.8	607.2	607.3	607.2	607.1	606.9	606.8	606.4
135°	646.6	647.6	648.7	649.7	650.9	651.4	651.4	651.4	651.4	651.4	651.0
137.5°	691.2	691.7	692.1	692.6	693.1	693.5	693.8	694.1	694.3	694.6	694.2
140°	720.8	721.1	721.5	721.9	722.3	722.4	722.4	722.4	722.4	722.4	722.3
142.5°	748.0	748.3	748.7	749.0	749.4	749.5	749.3	749.2	749.0	748.9	748.9
145°	785.6	786.3	787.0	787.7	788.4	788.8	789.0	789.1	789.3	789.5	789.3
147.5°	822.8	823.6	824.5	825.4	826.2	826.6	826.4	826.3	826.1	826.0	825.9
150°	845.6	846.3	847.0	847.7	848.4	848.7	848.7	848.7	848.7	848.7	848.7
152.5°	867.1	867.5	867.9	868.3	868.7	869.0	869.1	869.3	869.4	869.6	870.0
155°	900.0	900.0	900.0	900.0	900.0	899.9	899.8	899.6	899.4	899.3	899.9
157.5°	927.9	927.5	927.2	926.9	926.6	926.3	926.3	926.3	926.2	926.2	926.8
160°	944.2	944.0	943.9	943.7	943.5	943.3	943.2	943.0	942.8	942.7	943.2
162.5°	959.4	959.0	958.5	958.1	957.6	957.3	957.0	956.9	956.7	956.5	957.6
165°	979.8	979.3	978.8	978.2	977.7	977.2	976.8	976.5	976.1	975.8	976.8
167.5°	995.4	994.6	993.9	993.2	992.5	992.1	992.1	992.2	992.2	992.2	993.3
170°	1004.2	1003.4	1002.5	1001.6	1000.8	1000.4	1000.6	1000.8	1000.9	1001.1	1002.1
172.5°	1010.6	1009.9	1009.1	1008.4	1007.6	1007.2	1007.3	1007.3	1007.3	1007.4	1008.6
175°	1019.3	1018.3	1017.4	1016.6	1015.7	1015.2	1015.0	1014.8	1014.7	1014.5	1015.7
177.5°	1022.1	1021.4	1020.7	1020.0	1019.3	1019.0	1019.0	1019.0	1019.0	1019.0	1019.9
180°	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8



TEST NUMBER: P332971-840

CATALOG NUMBER: S124RDIP-S1020D810U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5
2.5°	1816.6	1819.4	1822.1	1823.4	1823.1	1822.9	1822.6	1822.4
5°	1804.5	1807.7	1810.8	1812.0	1811.4	1810.8	1810.2	1809.6
7.5°	1780.6	1782.5	1784.5	1785.0	1784.0	1783.0	1782.0	1781.0
10°	1759.0	1760.2	1761.4	1761.4	1760.2	1759.0	1757.7	1756.5
12.5°	1732.2	1733.0	1733.7	1733.2	1731.5	1729.8	1728.1	1726.4
15°	1685.5	1684.8	1684.2	1682.7	1680.6	1678.4	1676.3	1674.1
17.5°	1629.0	1627.3	1625.6	1623.1	1619.7	1616.5	1613.2	1609.8
20°	1589.5	1587.1	1584.6	1581.3	1577.3	1573.3	1569.2	1565.2
22.5°	1545.7	1542.0	1538.3	1534.8	1531.5	1528.2	1524.9	1521.7
25°	1475.0	1469.8	1464.5	1460.3	1457.2	1454.1	1451.0	1447.9
27.5°	1403.0	1396.5	1390.0	1384.5	1380.1	1375.5	1371.1	1366.7
30°	1351.4	1343.6	1335.8	1329.5	1324.5	1319.6	1314.6	1309.7
32.5°	1298.7	1289.7	1280.7	1273.8	1269.1	1264.4	1259.7	1255.0
35°	1220.1	1209.6	1199.0	1191.0	1185.4	1179.8	1174.3	1168.6
37.5°	1135.9	1124.1	1112.3	1103.6	1098.0	1092.4	1086.8	1081.3
40°	1079.7	1066.7	1053.7	1044.4	1038.8	1033.2	1027.6	1022.1
42.5°	1024.5	1011.3	997.9	988.5	982.6	976.7	970.9	965.1
45°	940.0	924.7	909.6	899.2	893.6	888.0	882.4	876.9
47.5°	854.9	839.1	823.2	812.3	806.2	800.0	793.9	787.8
50°	798.3	782.8	767.3	756.6	750.7	744.8	738.9	733.1
52.5°	741.9	726.2	710.4	699.5	693.4	687.2	681.1	675.0
55°	658.8	642.8	626.6	615.6	609.7	603.8	597.9	592.0
57.5°	577.6	561.3	544.9	534.5	530.0	525.5	521.1	516.6
60°	523.4	507.3	491.2	480.6	475.6	470.7	465.7	460.8
62.5°	470.1	455.1	440.3	430.8	426.9	422.9	418.9	415.0
65°	393.5	380.2	366.9	358.4	354.7	350.9	347.2	343.5
67.5°	323.3	311.8	300.3	292.6	288.4	284.4	280.2	276.2
70°	275.5	265.3	255.1	248.3	245.3	242.2	239.0	236.0
72.5°	232.7	224.0	215.2	209.4	206.5	203.7	200.9	198.0
75°	171.5	164.3	157.1	152.7	150.8	149.0	147.0	145.2
77.5°	121.3	117.1	112.9	110.6	110.0	109.5	108.9	108.4
80°	93.1	92.2	91.2	90.6	90.3	90.0	89.7	89.4
82.5°	72.3	71.7	71.0	70.5	70.2	69.9	69.6	69.3
85°	42.0	41.4	40.8	40.5	40.5	40.5	40.5	40.5
87.5°	19.1	19.0	19.0	19.1	19.4	19.7	20.1	20.4
90°	19.5	20.5	21.6	22.3	22.6	23.0	23.3	23.7
92.5°	32.5	33.1	33.8	34.2	34.4	34.6	34.8	35.0
95°	61.1	61.6	62.1	62.4	62.4	62.4	62.4	62.4
97.5°	96.1	96.7	97.5	97.8	97.8	97.8	97.8	97.8
100°	121.5	121.9	122.2	122.4	122.4	122.4	122.4	122.4
102.5°	148.3	148.8	149.3	149.6	149.8	149.9	150.1	150.2
105°	188.9	189.5	190.0	190.6	191.1	191.6	192.1	192.7
107.5°	233.0	233.4	233.9	234.2	234.1	234.1	234.1	234.0
110°	262.2	261.9	261.5	261.6	262.2	262.7	263.2	263.7



TEST NUMBER: P332971-840

CATALOG NUMBER: S124RDIP-S1020D810U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	293.7	293.7	293.6	293.6	293.7	293.8	293.9	294.0
115°	342.2	342.1	341.9	341.7	341.6	341.4	341.2	341.0
117.5°	389.0	388.4	387.8	387.3	387.0	386.6	386.3	385.9
120°	420.6	419.7	418.9	418.6	419.0	419.3	419.7	420.0
122.5°	452.7	452.2	451.6	451.0	450.3	449.7	449.1	448.5
125°	499.9	499.5	499.2	498.8	498.5	498.1	497.8	497.4
127.5°	544.8	544.5	544.1	543.8	543.5	543.3	543.0	542.7
130°	576.4	576.0	575.7	575.2	574.5	573.8	573.1	572.4
132.5°	606.1	605.7	605.4	605.1	604.8	604.5	604.2	604.0
135°	650.7	650.3	649.9	649.4	648.9	648.4	647.9	647.4
137.5°	693.7	693.3	692.8	692.6	692.7	692.8	692.9	693.1
140°	722.1	721.9	721.6	721.5	721.3	721.1	720.9	720.8
142.5°	748.8	748.8	748.8	748.7	748.7	748.7	748.6	748.6
145°	789.1	789.0	788.8	788.4	787.9	787.4	786.9	786.4
147.5°	825.7	825.6	825.4	825.3	825.1	824.9	824.8	824.6
150°	848.7	848.7	848.7	848.6	848.5	848.3	848.1	847.9
152.5°	870.4	870.8	871.2	871.2	870.8	870.3	869.9	869.4
155°	900.6	901.3	902.0	902.0	901.3	900.6	899.9	899.3
157.5°	927.3	927.9	928.4	928.3	927.8	927.2	926.6	925.9
160°	943.7	944.2	944.7	944.6	943.7	942.8	942.0	941.1
162.5°	958.5	959.4	960.4	960.4	959.5	958.7	957.8	956.8
165°	978.0	979.0	980.1	980.2	979.5	978.8	978.1	977.4
167.5°	994.3	995.4	996.4	996.4	995.3	994.2	993.2	992.1
170°	1003.2	1004.2	1005.3	1005.2	1004.0	1002.8	1001.5	1000.3
172.5°	1009.8	1011.0	1012.2	1012.2	1011.0	1009.7	1008.5	1007.2
175°	1016.9	1018.1	1019.5	1019.5	1018.1	1016.9	1015.7	1014.5
177.5°	1020.9	1021.9	1022.9	1022.8	1021.7	1020.6	1019.5	1018.2
180°	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8	1020.8

(END OF REPORT)