

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332888-840

Luminaire Tested: **S124RDIP-S350D1035U840-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332888-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIP-S350D1035U840-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1035 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5177.3 lumens
Efficiency: N/A
Efficacy: 138.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 37.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332888-840

CATALOG NUMBER: S124RDIP-S350D1035U840-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

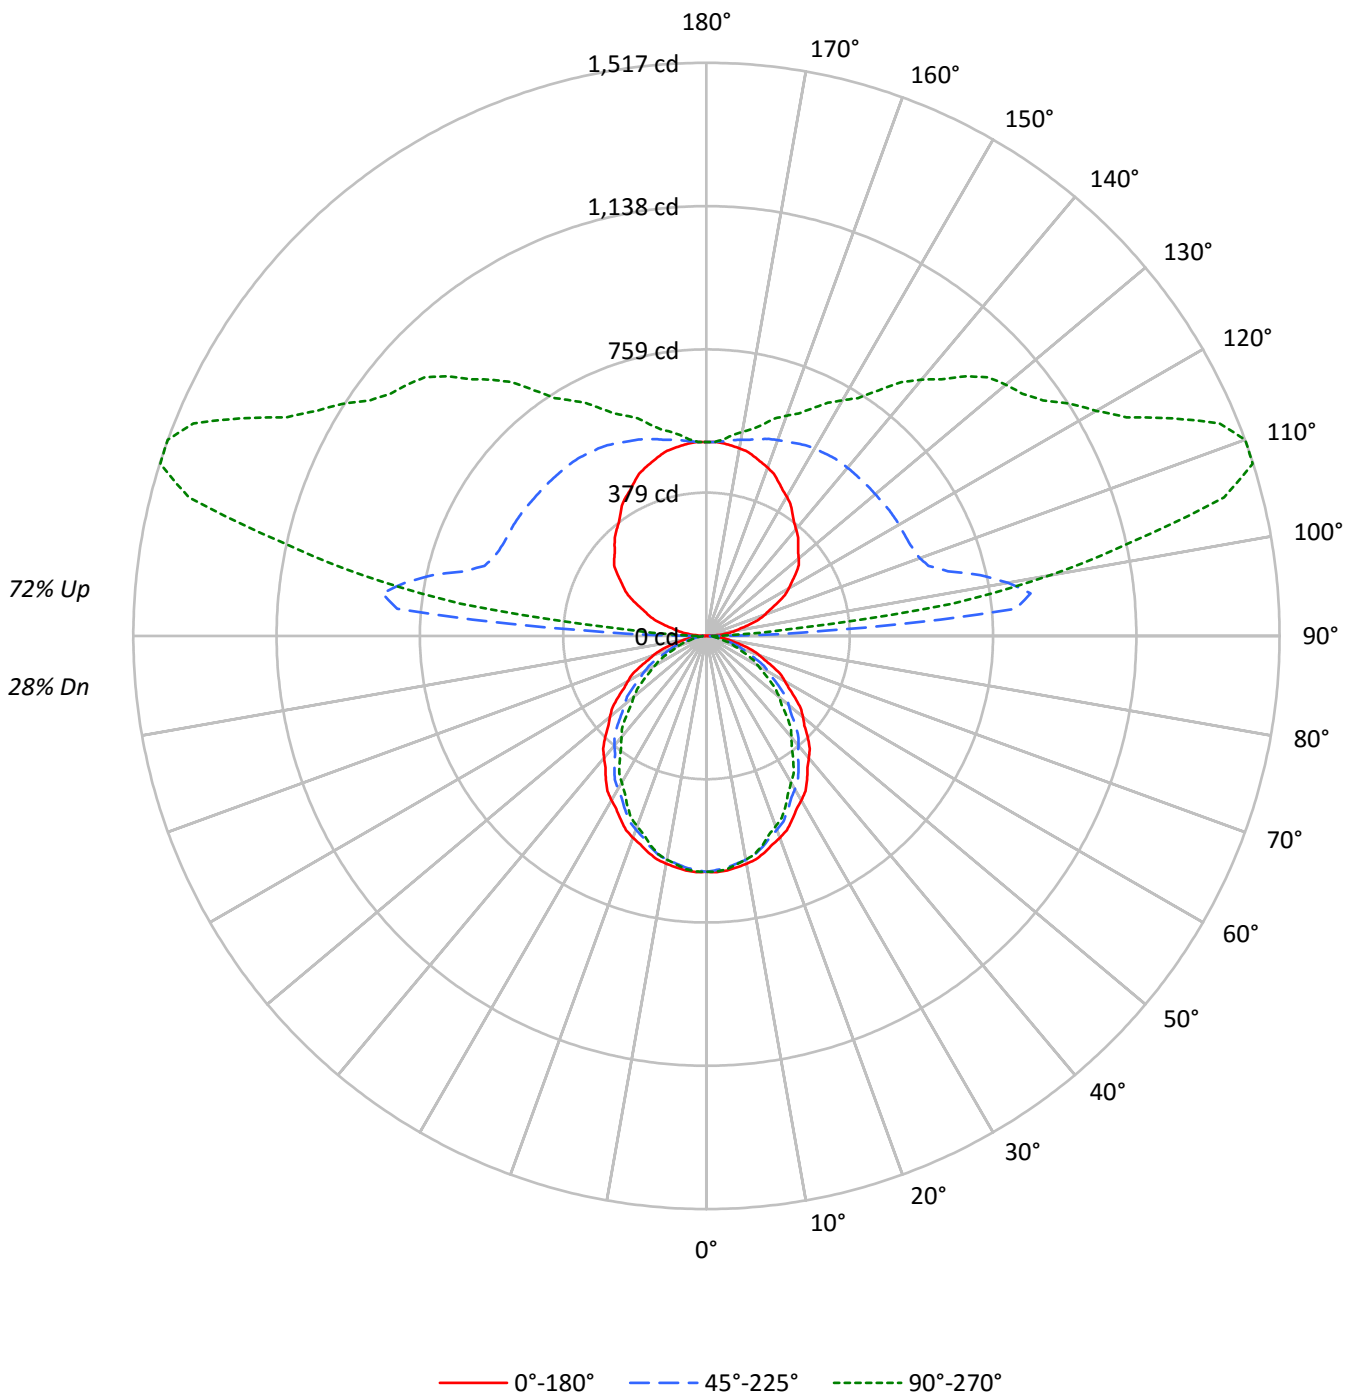



TEST NUMBER: P332888-840

CATALOG NUMBER: S124RDIP-S350D1035U840-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	28
1	93	89	85	82	83	80	77	74	62	60	58	46	45	44	32	31	30	24
2	85	78	72	67	76	70	65	61	55	51	49	41	39	37	28	27	26	20
3	77	68	61	56	69	61	56	51	48	44	41	36	34	31	25	24	22	17
4	71	60	53	47	63	54	48	43	43	38	35	32	29	27	22	21	19	15
5	65	54	46	40	58	48	42	37	38	34	30	29	26	23	20	18	17	13
6	60	48	40	35	53	43	37	32	35	30	26	26	23	20	18	16	15	11
7	55	43	36	30	49	39	33	28	31	26	23	24	20	18	17	15	13	10
8	51	39	32	27	46	36	29	25	28	24	20	22	18	16	15	13	12	9
9	47	36	29	24	42	32	26	22	26	21	18	20	17	14	14	12	11	8
10	44	33	26	21	40	30	24	19	24	19	16	18	15	13	13	11	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5040	5040	5040
5°	5051	4989	5020
10°	5019	4930	4930
15°	4962	4826	4790
20°	4883	4689	4603
25°	4782	4530	4415
30°	4683	4363	4180
35°	4574	4188	3943
40°	4443	3990	3687
45°	4322	3793	3427
50°	4185	3567	3152
55°	4037	3330	2853
60°	3873	3073	2546
65°	3725	2749	2245
70°	3510	2391	1907
75°	3235	1984	1550
80°	2822	1511	1423
85°	2399	1371	1278



TEST NUMBER: P332888-840

CATALOG NUMBER: S124RDIP-S350D1035U840-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.6	1.1
10°-20°	163.5	3.2
20°-30°	236.1	4.6
30°-40°	267.7	5.2
40°-50°	258.5	5.0
50°-60°	214.9	4.2
60°-70°	148.4	2.9
70°-80°	75.2	1.5
80°-90°	22.1	0.4
90°-100°	370.6	7.2
100°-110°	771.4	14.9
110°-120°	690.9	13.3
120°-130°	581.2	11.2
130°-140°	484.6	9.4
140°-150°	370.2	7.2
150°-160°	260.2	5.0
160°-170°	153.1	3.0
170°-180°	49.8	1.0
0°-30°	458.3	8.9
0°-40°	726.0	14.0
0°-60°	1199.4	23.2
0°-90°	1445.2	27.9
90°-120°	1833.0	35.4
90°-150°	3269.0	63.1
90°-180°	3732.0	72.1
0°-180°	5177.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	624	624	624	624	624	
5°	623	621	616	620	620	59
15°	594	589	577	576	573	167
25°	537	528	509	501	496	247
35°	464	448	425	409	400	290
45°	379	360	332	310	300	292
55°	287	267	237	213	203	256
65°	195	174	144	124	118	193
75°	104	86	64	53	50	110
85°	26	17	15	14	14	29
90°	1	8	18	20	21	3
95°	33	105	822	407	246	37
105°	118	171	661	1424	1418	126
115°	208	261	590	1133	1362	206
125°	289	344	587	964	1087	258
135°	344	409	582	856	972	266
145°	396	454	579	722	794	249
155°	451	486	563	637	664	208
165°	491	506	539	571	580	139
175°	512	513	517	524	522	49
180°	513	513	513	513	513	



TEST NUMBER: P332888-840

CATALOG NUMBER: S124RDIP-S350D1035U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3
2.5°	625.8	625.4	625.1	624.8	624.4	623.8	622.9	622.0	621.0	620.1	621.0
5°	623.3	622.9	622.5	622.1	621.6	620.8	619.5	618.2	616.9	615.7	616.7
7.5°	617.6	617.2	616.8	616.3	615.9	614.8	613.2	611.5	609.9	608.2	608.8
10°	612.3	611.8	611.3	610.8	610.2	608.9	607.0	605.1	603.2	601.4	601.8
12.5°	605.4	604.8	604.2	603.6	603.0	601.6	599.3	597.0	594.8	592.5	592.8
15°	593.7	592.7	591.8	590.8	589.9	588.0	585.4	582.7	580.1	577.4	577.2
17.5°	579.5	578.0	576.6	575.3	573.9	571.6	568.5	565.2	562.1	558.9	558.3
20°	568.4	566.9	565.6	564.2	562.8	560.4	556.7	553.1	549.5	545.8	545.0
22.5°	556.1	554.5	553.0	551.5	549.9	547.1	543.3	539.5	535.6	531.7	530.5
25°	536.8	534.9	533.0	531.1	529.2	526.0	521.7	517.4	512.9	508.6	506.8
27.5°	516.5	514.1	511.7	509.4	507.0	503.4	498.8	494.1	489.5	484.8	482.5
30°	502.4	499.7	497.1	494.4	491.8	488.0	482.9	478.0	472.9	468.0	465.3
32.5°	487.5	484.4	481.5	478.5	475.4	471.4	466.3	461.1	456.0	450.8	447.7
35°	464.1	460.7	457.4	453.9	450.5	446.2	440.9	435.6	430.3	425.0	421.3
37.5°	439.2	435.7	432.2	428.7	425.2	420.5	414.5	408.7	402.8	397.0	392.9
40°	421.6	418.1	414.5	411.1	407.6	402.8	396.8	390.7	384.7	378.6	374.2
42.5°	404.8	401.1	397.4	393.7	390.1	385.1	378.8	372.4	366.2	359.8	355.3
45°	378.6	374.7	370.7	366.8	362.8	357.7	351.3	345.0	338.6	332.2	327.0
47.5°	351.5	347.5	343.5	339.3	335.3	329.9	323.4	316.7	310.0	303.5	298.0
50°	333.2	329.0	324.9	320.7	316.6	311.1	304.4	297.5	290.7	284.0	278.6
52.5°	314.5	310.3	306.3	302.3	298.2	292.7	285.7	278.7	271.8	264.8	259.4
55°	286.8	282.6	278.3	274.1	269.8	264.2	257.3	250.4	243.5	236.6	231.1
57.5°	259.4	255.0	250.6	246.2	241.8	236.2	229.3	222.6	215.8	208.9	203.4
60°	239.9	235.7	231.5	227.2	223.0	217.4	210.7	203.8	197.0	190.3	184.7
62.5°	222.4	217.9	213.5	209.1	204.7	199.0	192.1	185.1	178.1	171.2	166.0
65°	195.0	190.5	185.9	181.4	176.7	171.1	164.3	157.4	150.7	143.9	139.4
67.5°	166.6	162.3	157.8	153.5	149.2	143.8	137.4	131.2	124.8	118.6	114.6
70°	148.7	144.2	139.8	135.3	130.8	125.5	119.5	113.4	107.3	101.3	97.9
72.5°	129.6	125.5	121.5	117.4	113.4	108.6	102.8	97.0	91.4	85.6	82.7
75°	103.7	99.8	95.8	91.9	88.0	83.5	78.6	73.5	68.6	63.6	61.1
77.5°	77.6	74.2	70.9	67.6	64.2	60.5	56.5	52.4	48.4	44.3	42.9
80°	60.7	57.7	54.5	51.5	48.4	45.2	42.1	38.9	35.6	32.5	32.2
82.5°	46.2	43.3	40.5	37.7	34.8	32.5	30.7	28.9	27.1	25.2	25.0
85°	25.9	23.7	21.6	19.4	17.3	16.1	15.8	15.5	15.1	14.8	14.6
87.5°	9.0	8.7	8.7	8.2	7.7	7.3	8.4	8.4	8.7	9.0	8.7
90°	1.0	3.0	6.1	7.1	8.1	8.1	14.1	14.1	16.2	18.2	17.2
92.5°	11.5	16.8	26.3	38.5	53.2	74.2	125.4	203.7	279.8	319.8	266.4
95°	33.2	36.3	46.4	59.5	83.7	126.0	213.7	379.1	620.1	821.6	844.9
97.5°	59.7	59.7	68.4	80.5	101.2	136.7	204.3	340.7	580.3	865.4	1061.4
100°	76.6	76.6	83.7	95.7	114.9	147.2	206.7	320.6	526.2	810.5	1068.6
102.5°	92.7	94.3	100.6	111.9	130.3	160.9	214.7	315.0	490.0	742.0	1008.1
105°	118.0	121.0	126.0	138.1	156.2	185.5	233.9	317.6	458.7	661.4	898.3
107.5°	145.8	147.8	152.8	165.7	183.1	211.9	256.3	332.4	453.0	616.2	809.5
110°	164.3	166.3	171.4	183.5	201.7	228.8	273.2	343.8	454.6	600.9	765.2



TEST NUMBER: P332888-840

CATALOG NUMBER: S124RDIP-S350D1035U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	182.1	184.1	190.0	201.3	219.3	246.6	289.3	355.9	459.5	593.6	740.2
115°	207.7	210.7	217.7	227.8	247.0	274.2	314.6	375.1	468.8	589.8	716.8
117.5°	234.3	237.1	243.4	254.5	272.4	300.6	338.9	394.6	478.7	588.8	706.3
120°	252.1	254.1	261.2	272.2	289.3	317.6	355.9	408.3	485.9	588.8	700.6
122.5°	268.2	270.1	277.2	287.5	306.3	333.7	372.0	421.2	493.2	587.9	694.2
125°	289.3	293.4	299.4	310.5	329.6	357.9	394.2	440.6	504.1	586.7	683.6
127.5°	308.1	311.3	318.6	331.2	351.2	379.7	414.8	457.3	512.7	584.5	669.2
130°	318.6	322.7	330.6	345.8	365.0	394.2	428.5	467.8	519.2	583.7	660.4
132.5°	329.0	332.2	342.7	357.1	377.9	405.5	439.8	478.3	524.8	582.9	652.3
135°	343.8	347.8	357.9	375.1	396.2	422.4	455.7	492.0	533.3	581.7	640.2
137.5°	358.5	362.3	373.4	389.7	411.7	436.8	467.8	501.7	538.4	581.5	629.7
140°	369.0	372.0	383.1	400.2	421.4	445.7	475.8	508.1	542.4	580.7	624.1
142.5°	380.3	383.3	393.5	409.9	430.3	453.6	483.1	512.9	545.6	580.7	619.2
145°	396.2	399.2	409.3	423.4	442.6	464.7	491.0	518.2	547.4	578.7	611.0
147.5°	414.1	415.2	424.0	438.6	454.4	474.4	499.1	522.8	548.5	575.0	603.5
150°	425.5	426.5	434.5	446.7	461.7	480.9	503.1	525.2	548.5	572.6	597.8
152.5°	436.0	436.2	444.2	455.4	469.0	486.6	506.3	526.8	546.8	568.6	591.4
155°	450.6	451.6	457.7	467.8	478.9	494.0	511.1	528.3	544.4	562.6	581.7
157.5°	464.9	464.9	470.6	478.5	488.2	500.1	514.5	528.3	541.8	556.3	571.8
160°	473.8	473.8	477.9	484.9	493.0	504.1	516.1	528.3	539.4	551.5	564.6
162.5°	481.9	481.1	484.3	490.6	497.9	506.5	517.8	528.3	536.9	546.6	558.2
165°	491.0	491.0	493.0	498.1	503.1	509.1	518.2	526.2	532.3	539.4	547.4
167.5°	500.1	499.1	500.1	503.9	506.8	511.3	518.0	523.8	527.5	532.1	537.8
170°	504.1	503.1	504.1	507.2	509.1	512.1	517.2	522.2	524.2	527.3	531.3
172.5°	508.1	507.2	507.3	509.5	510.7	512.9	516.3	520.6	521.0	522.4	525.6
175°	512.1	511.1	511.1	512.1	513.1	513.1	515.1	518.2	517.2	517.2	519.2
177.5°	513.9	513.1	512.3	513.1	513.1	513.1	513.9	515.5	513.9	513.9	514.7
180°	513.1	513.1	513.1	513.1	513.1	513.1	513.1	513.1	513.1	513.1	513.1



TEST NUMBER: P332888-840

CATALOG NUMBER: S124RDIP-S350D1035U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3
2.5°	622.0	622.9	623.8	624.2	624.1	624.1	624.0	623.9
5°	617.8	618.8	620.0	620.4	620.2	620.0	619.7	619.5
7.5°	609.6	610.3	611.0	611.1	610.8	610.5	610.1	609.8
10°	602.2	602.6	603.0	603.0	602.6	602.2	601.8	601.4
12.5°	593.0	593.3	593.6	593.4	592.8	592.2	591.6	591.0
15°	577.0	576.8	576.5	576.1	575.3	574.6	573.9	573.1
17.5°	557.6	557.1	556.5	555.6	554.5	553.4	552.3	551.2
20°	544.2	543.3	542.5	541.4	540.0	538.6	537.2	535.8
22.5°	529.2	527.9	526.6	525.4	524.3	523.2	522.1	520.9
25°	504.9	503.2	501.4	500.0	498.9	497.8	496.8	495.6
27.5°	480.3	478.1	475.8	474.0	472.4	470.9	469.4	467.9
30°	462.6	460.0	457.4	455.1	453.4	451.8	450.1	448.4
32.5°	444.6	441.5	438.5	436.1	434.4	432.8	431.2	429.6
35°	417.7	414.1	410.5	407.8	405.9	403.9	402.0	400.1
37.5°	388.9	384.9	380.8	377.8	375.9	374.0	372.0	370.1
40°	369.6	365.2	360.7	357.6	355.7	353.8	351.8	349.9
42.5°	350.7	346.2	341.6	338.4	336.4	334.4	332.3	330.4
45°	321.8	316.6	311.3	307.8	305.9	304.0	302.1	300.2
47.5°	292.7	287.2	281.9	278.1	276.0	273.9	271.8	269.7
50°	273.3	268.0	262.7	259.0	257.0	255.0	253.0	251.0
52.5°	254.0	248.6	243.3	239.4	237.4	235.3	233.2	231.1
55°	225.6	220.0	214.5	210.8	208.7	206.7	204.7	202.7
57.5°	197.7	192.2	186.5	183.0	181.5	180.0	178.3	176.8
60°	179.2	173.7	168.1	164.5	162.8	161.2	159.5	157.7
62.5°	161.0	155.8	150.8	147.5	146.1	144.8	143.4	142.1
65°	134.7	130.2	125.6	122.7	121.4	120.2	118.9	117.5
67.5°	110.7	106.7	102.8	100.2	98.8	97.4	95.9	94.5
70°	94.3	90.8	87.4	85.0	83.9	82.9	81.8	80.8
72.5°	79.7	76.6	73.7	71.7	70.7	69.8	68.8	67.8
75°	58.7	56.2	53.8	52.3	51.6	51.0	50.4	49.7
77.5°	41.5	40.1	38.7	37.9	37.7	37.5	37.3	37.1
80°	31.9	31.5	31.2	31.0	30.9	30.8	30.7	30.6
82.5°	24.7	24.5	24.3	24.1	24.0	23.9	23.8	23.7
85°	14.4	14.1	13.9	13.8	13.8	13.8	13.8	13.8
87.5°	8.8	8.9	9.1	9.1	9.3	9.6	9.5	9.6
90°	18.2	19.2	20.2	20.2	21.2	22.2	21.2	21.2
92.5°	198.0	149.1	118.6	98.4	86.5	81.1	77.7	77.7
95°	747.0	590.8	455.7	357.9	308.5	277.2	259.1	246.0
97.5°	1103.8	1045.6	947.1	841.8	769.4	708.7	678.5	657.5
100°	1215.9	1236.0	1186.6	1112.0	1024.3	962.8	932.5	924.5
102.5°	1210.2	1310.2	1324.5	1293.4	1239.6	1195.1	1163.3	1156.8
105°	1129.1	1303.5	1403.3	1444.7	1446.7	1438.7	1424.5	1418.5
107.5°	1014.0	1199.7	1340.3	1430.2	1480.0	1503.0	1513.1	1515.7
110°	944.6	1119.0	1265.3	1376.1	1447.7	1490.1	1508.2	1517.3



TEST NUMBER: P332888-840

CATALOG NUMBER: S124RDIP-S350D1035U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	893.8	1048.0	1186.2	1297.1	1378.4	1429.6	1455.0	1469.7
115°	842.8	966.8	1084.8	1181.5	1261.2	1321.7	1353.9	1362.0
117.5°	817.8	920.5	1013.2	1095.3	1163.3	1214.1	1246.7	1252.9
120°	806.5	900.3	981.0	1052.5	1109.9	1154.4	1180.5	1191.6
122.5°	796.9	887.4	960.8	1023.5	1072.1	1109.9	1132.2	1143.3
125°	780.3	867.0	936.5	992.0	1032.4	1061.6	1080.8	1086.8
127.5°	760.1	843.0	912.4	965.0	1005.5	1031.6	1047.6	1053.7
130°	744.1	823.6	892.2	945.6	986.9	1012.2	1028.3	1034.4
132.5°	727.1	801.9	868.8	922.3	962.8	991.2	1006.5	1012.6
135°	703.7	769.2	830.7	881.1	921.5	949.7	965.8	971.9
137.5°	682.6	738.0	789.8	835.4	873.0	900.9	914.2	921.5
140°	670.4	717.8	763.2	805.5	840.8	863.0	877.1	885.1
142.5°	659.1	700.8	739.8	776.5	807.7	828.3	840.8	846.5
145°	643.2	677.5	707.7	736.0	761.1	778.3	788.4	793.5
147.5°	630.1	657.3	681.6	703.7	722.3	737.0	744.7	746.4
150°	622.1	645.2	665.4	683.6	699.6	712.8	718.8	719.8
152.5°	613.2	633.1	651.7	666.6	680.3	690.9	694.6	695.6
155°	599.9	616.0	631.1	643.2	653.3	661.4	664.4	664.4
157.5°	585.5	599.1	611.8	621.5	629.0	635.1	636.9	636.9
160°	576.6	587.7	598.8	606.9	613.0	619.0	620.1	620.1
162.5°	567.7	577.2	585.9	593.2	597.6	603.7	604.7	603.9
165°	555.5	561.6	568.6	573.6	577.6	581.7	580.7	579.7
167.5°	543.6	548.3	553.9	556.9	559.0	561.6	561.4	560.6
170°	536.3	539.4	543.4	546.4	548.5	549.5	548.5	548.5
172.5°	529.9	532.1	534.5	536.7	538.0	539.0	538.0	536.3
175°	521.2	522.2	524.2	524.2	524.2	526.2	524.2	522.2
177.5°	515.5	516.3	516.3	517.2	516.3	517.2	515.5	513.9
180°	513.1	513.1	513.1	513.1	513.1	513.1	513.1	513.1

(END OF REPORT)