

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332876-840

Luminaire Tested: **S124RDIP-S350D590U840-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332876-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-18,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIP-S350D590U840-4F0-1E-UDD-F4
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 590 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3576.5 lumens
Efficiency: N/A
Efficacy: 139.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 25.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332876-840

CATALOG NUMBER: S124RDIP-S350D590U840-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

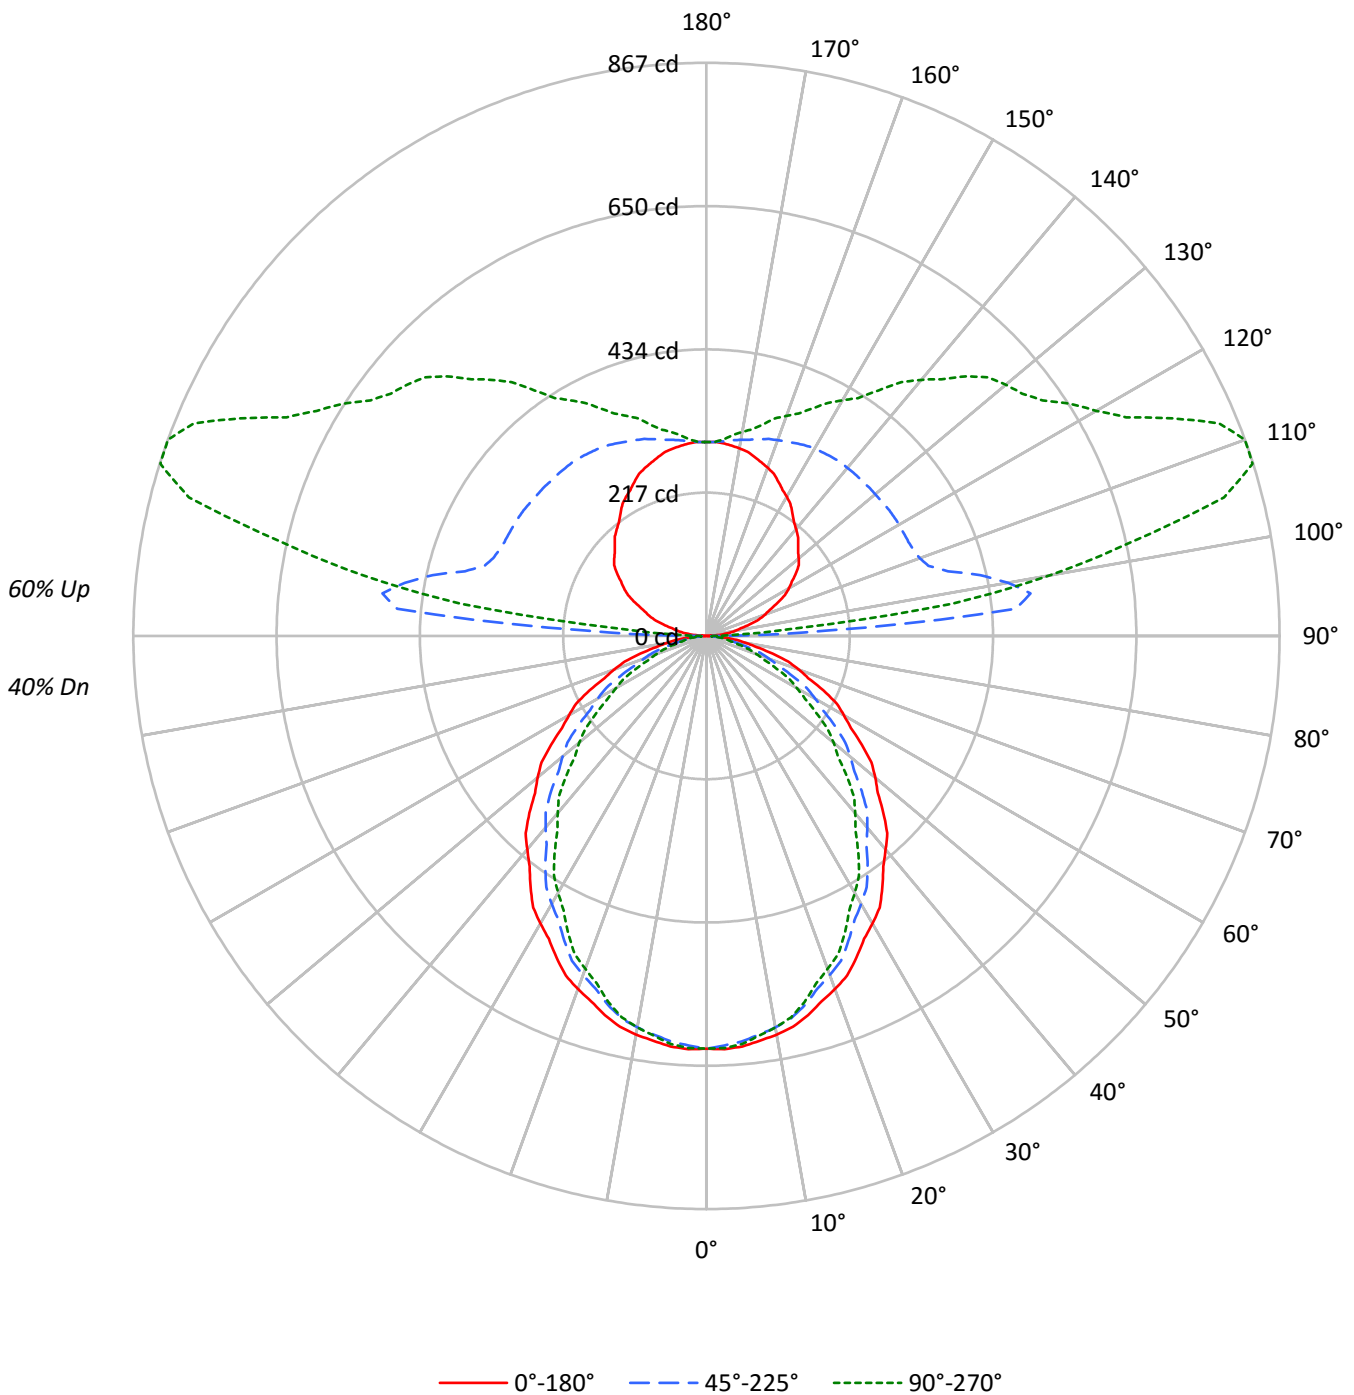



TEST NUMBER: P332876-840

CATALOG NUMBER: S124RDIP-S350D590U840-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	40
1	96	92	88	85	87	84	80	78	69	66	64	55	53	52	42	41	40	34
2	87	80	74	69	79	73	68	64	60	57	54	48	46	44	37	36	34	29
3	80	71	64	58	72	65	59	54	53	49	45	43	40	37	33	31	29	25
4	73	63	55	49	66	57	51	46	48	43	39	38	35	32	30	27	25	22
5	67	56	48	42	61	51	44	39	43	37	33	34	31	28	27	24	22	19
6	62	50	42	37	56	46	39	34	38	33	29	31	27	24	24	22	20	17
7	57	45	37	32	52	42	35	30	35	30	26	28	24	22	22	20	18	15
8	53	41	33	28	48	38	31	26	32	27	23	26	22	19	21	18	16	13
9	49	37	30	25	45	35	28	24	29	24	20	24	20	17	19	16	14	12
10	46	34	27	23	42	32	25	21	27	22	18	22	18	16	18	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5040	5040	5040
5°	5051	4989	5020
10°	5019	4930	4930
15°	4962	4826	4790
20°	4883	4689	4603
25°	4782	4530	4415
30°	4683	4363	4180
35°	4574	4188	3943
40°	4443	3990	3687
45°	4322	3793	3427
50°	4185	3567	3152
55°	4037	3330	2853
60°	3873	3073	2546
65°	3725	2749	2245
70°	3510	2391	1907
75°	3235	1984	1550
80°	2822	1511	1423
85°	2399	1371	1278



TEST NUMBER: P332876-840

CATALOG NUMBER: S124RDIP-S350D590U840-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.6	1.6
10°-20°	163.5	4.6
20°-30°	236.1	6.6
30°-40°	267.7	7.5
40°-50°	258.5	7.2
50°-60°	214.9	6.0
60°-70°	148.4	4.1
70°-80°	75.2	2.1
80°-90°	20.9	0.6
90°-100°	211.8	5.9
100°-110°	440.8	12.3
110°-120°	394.8	11.0
120°-130°	332.1	9.3
130°-140°	276.9	7.7
140°-150°	211.5	5.9
150°-160°	148.7	4.2
160°-170°	87.5	2.4
170°-180°	28.5	0.8
0°-30°	458.3	12.8
0°-40°	726.0	20.3
0°-60°	1199.4	33.5
0°-90°	1443.9	40.4
90°-120°	1047.4	29.3
90°-150°	1868.0	52.2
90°-180°	2133.0	59.6
0°-180°	3576.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	624	624	624	624	624	
5°	623	621	616	620	620	59
15°	594	589	577	576	573	167
25°	537	528	509	501	496	247
35°	464	448	425	409	400	290
45°	379	360	332	310	300	292
55°	287	267	237	213	203	256
65°	195	174	144	124	118	193
75°	104	86	64	53	50	110
85°	26	17	15	14	14	29
90°	1	5	10	12	12	2
95°	19	60	470	232	141	21
105°	67	98	378	814	810	72
115°	119	149	337	648	778	118
125°	165	196	335	551	621	147
135°	196	234	332	489	555	152
145°	226	259	331	412	453	142
155°	258	278	321	364	380	119
165°	280	289	308	326	331	79
175°	293	293	296	300	298	28
180°	293	293	293	293	293	



TEST NUMBER: P332876-840

CATALOG NUMBER: S124RDIP-S350D590U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3
2.5°	625.8	625.4	625.1	624.8	624.4	623.8	622.9	622.0	621.0	620.1	621.0
5°	623.3	622.9	622.5	622.1	621.6	620.8	619.5	618.2	616.9	615.7	616.7
7.5°	617.6	617.2	616.8	616.3	615.9	614.8	613.2	611.5	609.9	608.2	608.8
10°	612.3	611.8	611.3	610.8	610.2	608.9	607.0	605.1	603.2	601.4	601.8
12.5°	605.4	604.8	604.2	603.6	603.0	601.6	599.3	597.0	594.8	592.5	592.8
15°	593.7	592.7	591.8	590.8	589.9	588.0	585.4	582.7	580.1	577.4	577.2
17.5°	579.5	578.0	576.6	575.3	573.9	571.6	568.5	565.2	562.1	558.9	558.3
20°	568.4	566.9	565.6	564.2	562.8	560.4	556.7	553.1	549.5	545.8	545.0
22.5°	556.1	554.5	553.0	551.5	549.9	547.1	543.3	539.5	535.6	531.7	530.5
25°	536.8	534.9	533.0	531.1	529.2	526.0	521.7	517.4	512.9	508.6	506.8
27.5°	516.5	514.1	511.7	509.4	507.0	503.4	498.8	494.1	489.5	484.8	482.5
30°	502.4	499.7	497.1	494.4	491.8	488.0	482.9	478.0	472.9	468.0	465.3
32.5°	487.5	484.4	481.5	478.5	475.4	471.4	466.3	461.1	456.0	450.8	447.7
35°	464.1	460.7	457.4	453.9	450.5	446.2	440.9	435.6	430.3	425.0	421.3
37.5°	439.2	435.7	432.2	428.7	425.2	420.5	414.5	408.7	402.8	397.0	392.9
40°	421.6	418.1	414.5	411.1	407.6	402.8	396.8	390.7	384.7	378.6	374.2
42.5°	404.8	401.1	397.4	393.7	390.1	385.1	378.8	372.4	366.2	359.8	355.3
45°	378.6	374.7	370.7	366.8	362.8	357.7	351.3	345.0	338.6	332.2	327.0
47.5°	351.5	347.5	343.5	339.3	335.3	329.9	323.4	316.7	310.0	303.5	298.0
50°	333.2	329.0	324.9	320.7	316.6	311.1	304.4	297.5	290.7	284.0	278.6
52.5°	314.5	310.3	306.3	302.3	298.2	292.7	285.7	278.7	271.8	264.8	259.4
55°	286.8	282.6	278.3	274.1	269.8	264.2	257.3	250.4	243.5	236.6	231.1
57.5°	259.4	255.0	250.6	246.2	241.8	236.2	229.3	222.6	215.8	208.9	203.4
60°	239.9	235.7	231.5	227.2	223.0	217.4	210.7	203.8	197.0	190.3	184.7
62.5°	222.4	217.9	213.5	209.1	204.7	199.0	192.1	185.1	178.1	171.2	166.0
65°	195.0	190.5	185.9	181.4	176.7	171.1	164.3	157.4	150.7	143.9	139.4
67.5°	166.6	162.3	157.8	153.5	149.2	143.8	137.4	131.2	124.8	118.6	114.6
70°	148.7	144.2	139.8	135.3	130.8	125.5	119.5	113.4	107.3	101.3	97.9
72.5°	129.6	125.5	121.5	117.4	113.4	108.6	102.8	97.0	91.4	85.6	82.7
75°	103.7	99.8	95.8	91.9	88.0	83.5	78.6	73.5	68.6	63.6	61.1
77.5°	77.6	74.2	70.9	67.6	64.2	60.5	56.5	52.4	48.4	44.3	42.9
80°	60.7	57.7	54.5	51.5	48.4	45.2	42.1	38.9	35.6	32.5	32.2
82.5°	46.2	43.3	40.5	37.7	34.8	32.5	30.7	28.9	27.1	25.2	25.0
85°	25.9	23.7	21.6	19.4	17.3	16.1	15.8	15.5	15.1	14.8	14.6
87.5°	8.9	8.5	8.1	7.6	7.0	6.7	7.3	7.2	7.3	7.5	7.3
90°	0.6	1.7	3.4	4.0	4.6	4.6	8.1	8.1	9.2	10.4	9.8
92.5°	6.6	9.6	14.9	22.0	30.4	42.4	71.7	116.3	160.0	182.7	152.2
95°	19.0	20.7	26.5	34.0	47.8	72.0	122.1	216.6	354.3	469.5	482.7
97.5°	34.1	34.1	39.1	45.9	57.9	78.2	116.7	194.7	331.6	494.5	606.5
100°	43.8	43.8	47.8	54.7	65.6	84.1	118.1	183.2	300.7	463.1	610.7
102.5°	53.0	53.9	57.5	63.9	74.4	91.9	122.7	180.0	279.9	424.0	576.0
105°	67.4	69.2	72.0	79.0	89.3	106.0	133.6	181.5	262.2	377.9	513.3
107.5°	83.3	84.4	87.4	94.7	104.6	121.1	146.4	190.0	258.9	352.1	462.6
110°	93.9	95.0	98.0	104.8	115.2	130.8	156.1	196.4	259.8	343.4	437.3



TEST NUMBER: P332876-840

CATALOG NUMBER: S124RDIP-S350D590U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	104.0	105.2	108.6	115.0	125.3	140.9	165.3	203.4	262.6	339.2	422.9
115°	118.7	120.4	124.4	130.2	141.2	156.7	179.8	214.3	267.9	337.0	409.6
117.5°	133.9	135.5	139.1	145.4	155.6	171.8	193.7	225.5	273.5	336.4	403.6
120°	144.0	145.2	149.2	155.5	165.3	181.5	203.4	233.3	277.7	336.4	400.4
122.5°	153.2	154.4	158.4	164.3	175.0	190.7	212.6	240.7	281.9	336.0	396.7
125°	165.3	167.6	171.1	177.4	188.3	204.5	225.2	251.8	288.0	335.3	390.6
127.5°	176.0	177.9	182.1	189.2	200.7	216.9	237.0	261.4	293.0	334.0	382.4
130°	182.1	184.3	188.9	197.6	208.5	225.2	244.8	267.3	296.7	333.6	377.3
132.5°	188.0	189.9	195.9	204.1	215.9	231.7	251.3	273.3	299.9	333.1	372.7
135°	196.4	198.7	204.5	214.3	226.4	241.4	260.3	281.1	304.8	332.3	365.8
137.5°	204.9	207.0	213.4	222.7	235.3	249.5	267.3	286.7	307.6	332.2	359.8
140°	210.9	212.6	218.9	228.7	240.8	254.6	272.0	290.3	309.9	331.8	356.6
142.5°	217.3	219.0	224.9	234.2	245.9	259.2	276.1	293.1	311.7	331.8	353.9
145°	226.4	228.1	233.9	242.0	252.9	265.6	280.5	296.1	312.9	330.6	349.1
147.5°	236.6	237.2	242.3	250.5	259.7	271.1	285.2	298.7	313.4	328.6	344.9
150°	243.1	243.7	248.3	255.2	263.9	274.8	287.5	300.1	313.4	327.2	341.6
152.5°	249.1	249.2	253.8	260.2	268.0	278.0	289.3	301.0	312.5	324.9	337.9
155°	257.5	258.1	261.6	267.3	273.7	282.3	292.1	301.8	311.0	321.4	332.3
157.5°	265.7	265.7	268.9	273.4	278.9	285.7	294.1	301.8	309.6	317.9	326.8
160°	270.7	270.7	273.1	277.1	281.7	288.0	295.0	301.8	308.2	315.1	322.7
162.5°	275.4	274.9	276.7	280.3	284.5	289.4	295.9	301.8	306.8	312.4	318.9
165°	280.5	280.5	281.7	284.6	287.5	290.9	296.1	300.7	304.2	308.2	312.9
167.5°	285.7	285.2	285.7	287.9	289.5	292.2	296.0	299.3	301.4	304.1	307.3
170°	288.0	287.5	288.0	289.7	290.9	292.7	295.5	298.4	299.5	301.2	303.6
172.5°	290.3	289.7	289.8	291.1	291.9	293.1	295.1	297.5	297.7	298.5	300.3
175°	292.7	292.1	292.1	292.7	293.3	293.3	294.4	296.1	295.5	295.5	296.7
177.5°	293.7	293.3	292.8	293.3	293.3	293.3	293.7	294.6	293.7	293.7	294.2
180°	293.3	293.3	293.3	293.3	293.3	293.3	293.3	293.3	293.3	293.3	293.3



TEST NUMBER: P332876-840

CATALOG NUMBER: S124RDIP-S350D590U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3
2.5°	622.0	622.9	623.8	624.2	624.1	624.1	624.0	623.9
5°	617.8	618.8	620.0	620.4	620.2	620.0	619.7	619.5
7.5°	609.6	610.3	611.0	611.1	610.8	610.5	610.1	609.8
10°	602.2	602.6	603.0	603.0	602.6	602.2	601.8	601.4
12.5°	593.0	593.3	593.6	593.4	592.8	592.2	591.6	591.0
15°	577.0	576.8	576.5	576.1	575.3	574.6	573.9	573.1
17.5°	557.6	557.1	556.5	555.6	554.5	553.4	552.3	551.2
20°	544.2	543.3	542.5	541.4	540.0	538.6	537.2	535.8
22.5°	529.2	527.9	526.6	525.4	524.3	523.2	522.1	520.9
25°	504.9	503.2	501.4	500.0	498.9	497.8	496.8	495.6
27.5°	480.3	478.1	475.8	474.0	472.4	470.9	469.4	467.9
30°	462.6	460.0	457.4	455.1	453.4	451.8	450.1	448.4
32.5°	444.6	441.5	438.5	436.1	434.4	432.8	431.2	429.6
35°	417.7	414.1	410.5	407.8	405.9	403.9	402.0	400.1
37.5°	388.9	384.9	380.8	377.8	375.9	374.0	372.0	370.1
40°	369.6	365.2	360.7	357.6	355.7	353.8	351.8	349.9
42.5°	350.7	346.2	341.6	338.4	336.4	334.4	332.3	330.4
45°	321.8	316.6	311.3	307.8	305.9	304.0	302.1	300.2
47.5°	292.7	287.2	281.9	278.1	276.0	273.9	271.8	269.7
50°	273.3	268.0	262.7	259.0	257.0	255.0	253.0	251.0
52.5°	254.0	248.6	243.3	239.4	237.4	235.3	233.2	231.1
55°	225.6	220.0	214.5	210.8	208.7	206.7	204.7	202.7
57.5°	197.7	192.2	186.5	183.0	181.5	180.0	178.3	176.8
60°	179.2	173.7	168.1	164.5	162.8	161.2	159.5	157.7
62.5°	161.0	155.8	150.8	147.5	146.1	144.8	143.4	142.1
65°	134.7	130.2	125.6	122.7	121.4	120.2	118.9	117.5
67.5°	110.7	106.7	102.8	100.2	98.8	97.4	95.9	94.5
70°	94.3	90.8	87.4	85.0	83.9	82.9	81.8	80.8
72.5°	79.7	76.6	73.7	71.7	70.7	69.8	68.8	67.8
75°	58.7	56.2	53.8	52.3	51.6	51.0	50.4	49.7
77.5°	41.5	40.1	38.7	37.9	37.7	37.5	37.3	37.1
80°	31.9	31.5	31.2	31.0	30.9	30.8	30.7	30.6
82.5°	24.7	24.5	24.3	24.1	24.0	23.9	23.8	23.7
85°	14.4	14.1	13.9	13.8	13.8	13.8	13.8	13.8
87.5°	7.3	7.3	7.3	7.3	7.5	7.7	7.7	7.8
90°	10.4	10.9	11.5	11.5	12.1	12.6	12.1	12.1
92.5°	113.1	85.1	67.8	56.2	49.4	46.4	44.3	44.3
95°	426.9	337.6	260.3	204.5	176.3	158.4	148.0	140.6
97.5°	630.7	597.5	541.2	481.0	439.7	405.0	387.7	375.7
100°	694.8	706.3	678.0	635.4	585.3	550.2	532.9	528.3
102.5°	691.6	748.7	756.9	739.1	708.3	682.9	664.7	661.0
105°	645.2	744.9	801.9	825.6	826.7	822.0	814.0	810.5
107.5°	579.5	685.5	765.9	817.2	845.7	858.8	864.5	866.1
110°	539.8	639.4	723.0	786.4	827.3	851.4	861.8	867.0



TEST NUMBER: P332876-840

CATALOG NUMBER: S124RDIP-S350D590U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	510.8	598.8	677.8	741.1	787.6	816.9	831.4	839.8
115°	481.6	552.5	619.9	675.2	720.6	755.3	773.7	778.3
117.5°	467.3	525.9	579.0	625.8	664.7	693.7	712.4	716.0
120°	460.9	514.4	560.5	601.4	634.3	659.6	674.6	681.0
122.5°	455.3	507.1	549.0	584.8	612.6	634.3	646.9	653.3
125°	445.9	495.4	535.1	566.8	589.9	606.6	617.5	621.0
127.5°	434.3	481.7	521.4	551.4	574.6	589.5	598.6	602.1
130°	425.2	470.7	509.8	540.4	564.0	578.3	587.6	591.1
132.5°	415.5	458.2	496.4	526.9	550.2	566.4	575.1	578.7
135°	402.1	439.6	474.6	503.5	526.5	542.7	551.9	555.3
137.5°	390.0	421.7	451.3	477.4	498.9	514.8	522.4	526.5
140°	383.0	410.2	436.1	460.3	480.5	493.1	501.2	505.8
142.5°	376.7	400.5	422.7	443.7	461.5	473.3	480.5	483.6
145°	367.5	387.1	404.5	420.5	434.9	444.7	450.5	453.3
147.5°	360.0	375.6	389.4	402.1	412.7	421.1	425.5	426.6
150°	355.5	368.7	380.2	390.6	399.8	407.3	410.7	411.3
152.5°	350.3	361.7	372.3	380.9	388.7	394.9	396.9	397.5
155°	342.7	351.9	360.6	367.5	373.3	377.9	379.6	379.6
157.5°	334.6	342.3	349.5	355.1	359.5	362.9	364.0	364.0
160°	329.5	335.9	342.1	346.8	350.2	353.8	354.3	354.3
162.5°	324.5	329.8	334.8	339.0	341.5	345.0	345.6	345.1
165°	317.4	320.8	324.9	327.8	330.1	332.3	331.8	331.2
167.5°	310.6	313.3	316.5	318.2	319.4	320.8	320.7	320.3
170°	306.5	308.2	310.5	312.3	313.4	314.0	313.4	313.4
172.5°	302.8	304.1	305.5	306.7	307.4	308.0	307.4	306.5
175°	297.8	298.4	299.5	299.5	299.5	300.7	299.5	298.4
177.5°	294.6	295.1	295.1	295.5	295.1	295.5	294.6	293.7
180°	293.3	293.3	293.3	293.3	293.3	293.3	293.3	293.3

(END OF REPORT)