

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332923-840

Luminaire Tested: **S124RDIP-S575D1205U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332923-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIP-S575D1205U840-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6584.6 lumens
Efficiency: N/A
Efficacy: 133.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332923-840

CATALOG NUMBER: S124RDIP-S575D1205U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

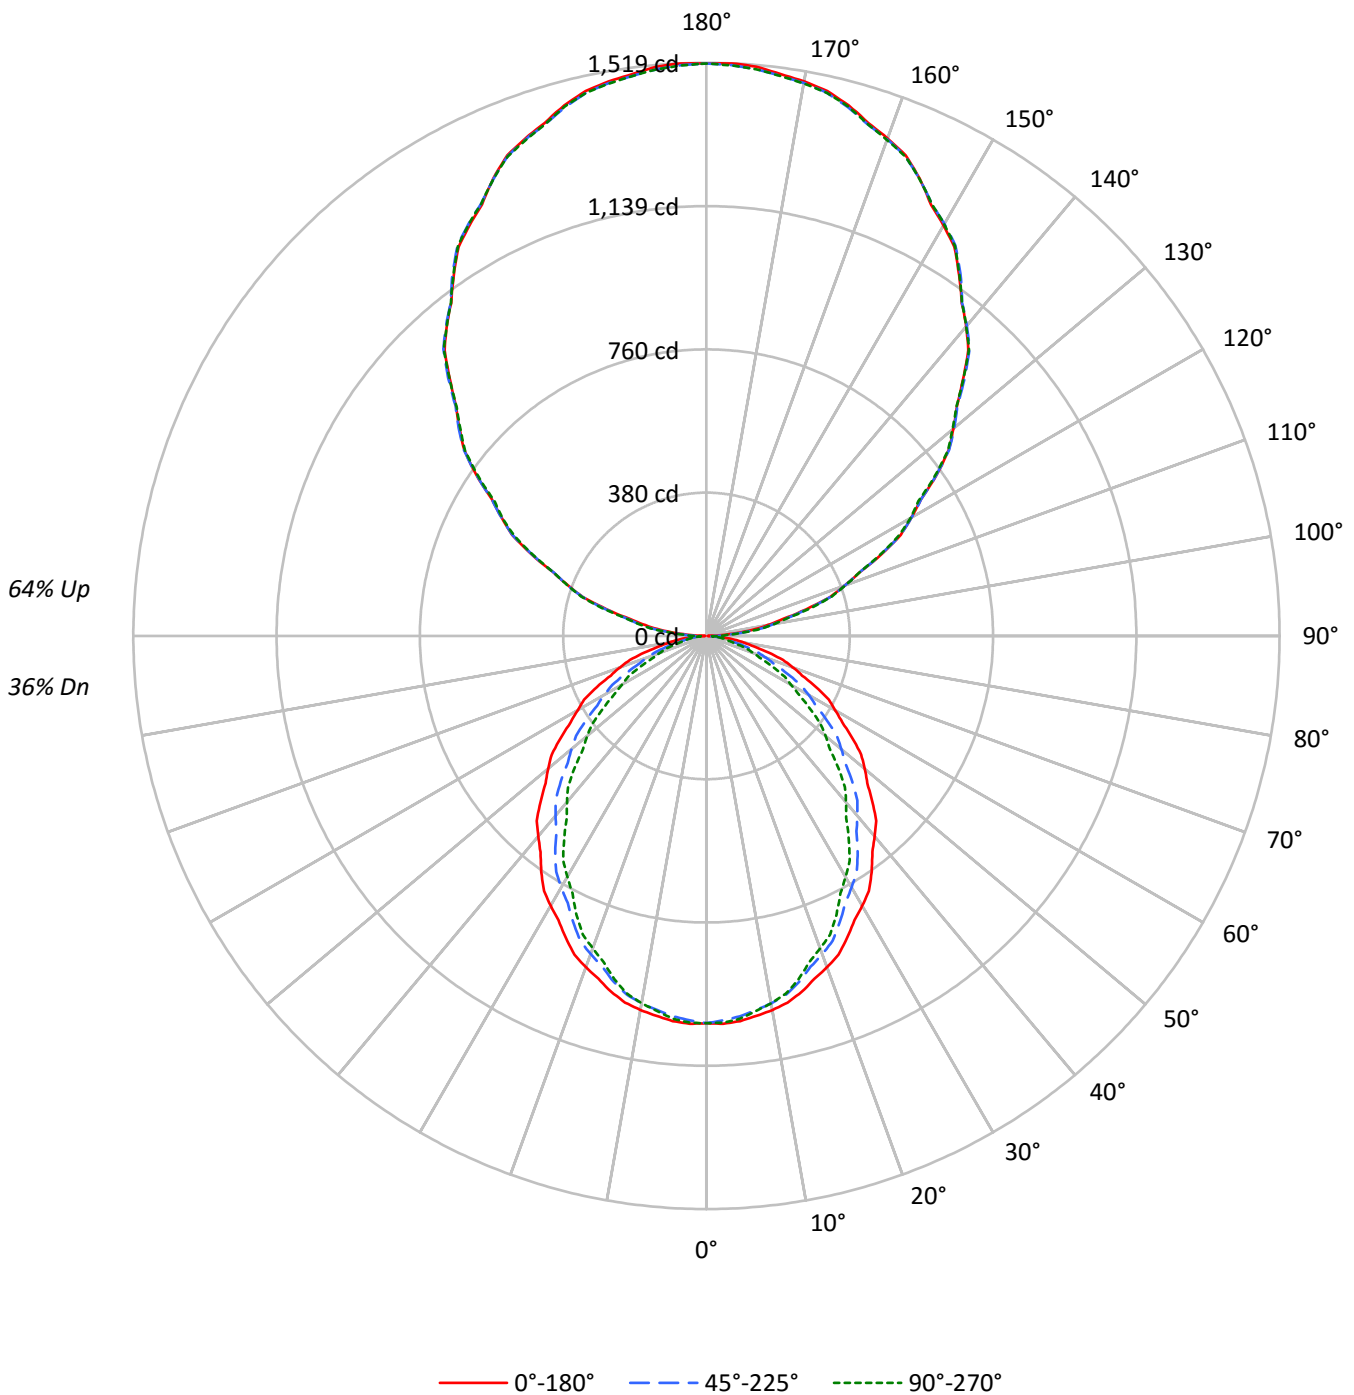



TEST NUMBER: P332923-840

CATALOG NUMBER: S124RDIP-S575D1205U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	104	104	104	104	94	94	94	94	76	76	76		59	59	59		43	43	43	36
1	95	91	87	84	86	82	79	76	66	64	62		52	51	49		39	38	37	31
2	86	79	73	69	78	72	67	63	58	55	52		46	43	41		34	33	31	26
3	79	70	63	57	71	64	58	53	52	47	44		41	38	35		30	29	27	22
4	72	62	54	48	65	56	50	45	46	41	37		36	33	30		27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32		33	29	26		25	22	20	17
6	61	49	42	36	55	45	38	33	37	32	28		29	26	23		22	20	18	15
7	56	45	37	31	51	41	34	29	34	28	25		27	23	20		20	18	16	13
8	52	40	33	28	47	37	30	26	31	26	22		24	21	18		19	16	14	12
9	49	37	30	25	44	34	27	23	28	23	20		23	19	16		17	15	13	11
10	45	34	27	22	41	31	25	21	26	21	18		21	17	15		16	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8285	8285	8285
5°	8304	8203	8253
10°	8252	8104	8104
15°	8157	7934	7875
20°	8027	7710	7568
25°	7861	7448	7259
30°	7699	7171	6871
35°	7521	6885	6482
40°	7304	6559	6062
45°	7106	6235	5634
50°	6880	5863	5181
55°	6636	5475	4690
60°	6370	5050	4187
65°	6124	4518	3692
70°	5769	3932	3135
75°	5321	3260	2548
80°	4640	2483	2338
85°	3927	2251	2112



TEST NUMBER: P332923-840

CATALOG NUMBER: S124RDIP-S575D1205U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	96.4	1.5
10°-20°	268.8	4.1
20°-30°	388.2	5.9
30°-40°	440.0	6.7
40°-50°	424.9	6.5
50°-60°	353.4	5.4
60°-70°	244.0	3.7
70°-80°	123.7	1.9
80°-90°	36.3	0.6
90°-100°	100.1	1.5
100°-110°	296.4	4.5
110°-120°	503.1	7.6
120°-130°	663.4	10.1
130°-140°	745.0	11.3
140°-150°	732.1	11.1
150°-160°	615.7	9.4
160°-170°	409.7	6.2
170°-180°	143.5	2.2
0°-30°	753.5	11.4
0°-40°	1193.5	18.1
0°-60°	1971.8	29.9
0°-90°	2375.7	36.1
90°-120°	899.6	13.7
90°-150°	3040.1	46.2
90°-180°	4209.0	63.9
0°-180°	6584.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1026	1026	1026	1026	1026	
5°	1025	1021	1012	1020	1018	97
15°	976	968	949	948	942	275
25°	882	867	836	823	815	406
35°	763	737	699	673	658	477
45°	622	592	546	509	494	480
55°	472	439	389	350	333	422
65°	321	286	236	204	193	317
75°	171	141	104	87	82	180
85°	42	28	24	23	23	48
90°	4	16	26	33	35	6
95°	70	81	89	92	93	78
105°	273	275	279	283	286	290
115°	512	511	509	508	507	504
125°	745	745	744	741	739	664
135°	961	968	968	966	962	743
145°	1167	1172	1173	1172	1169	730
155°	1338	1337	1336	1340	1336	615
165°	1456	1453	1450	1456	1452	410
175°	1515	1509	1508	1515	1508	144
180°	1517	1517	1517	1517	1517	



TEST NUMBER: P332923-840

CATALOG NUMBER: S124RDIP-S575D1205U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1026.3	1026.3	1026.3	1026.3	1026.3	1026.3	1026.3	1026.3	1026.3	1026.3	1026.3
2.5°	1028.9	1028.2	1027.7	1027.1	1026.6	1025.5	1024.0	1022.5	1020.9	1019.4	1020.9
5°	1024.7	1024.0	1023.3	1022.6	1022.0	1020.6	1018.4	1016.3	1014.2	1012.2	1013.9
7.5°	1015.4	1014.7	1014.0	1013.3	1012.5	1010.8	1008.0	1005.3	1002.6	999.9	1001.0
10°	1006.6	1005.8	1004.9	1004.0	1003.2	1001.2	998.0	994.8	991.7	988.6	989.3
12.5°	995.3	994.3	993.3	992.3	991.3	989.0	985.2	981.5	977.9	974.1	974.5
15°	976.0	974.4	972.9	971.3	969.7	966.7	962.4	958.1	953.6	949.3	949.0
17.5°	952.6	950.3	948.1	945.7	943.5	939.8	934.5	929.3	924.0	918.8	917.9
20°	934.3	932.1	929.8	927.6	925.2	921.2	915.2	909.3	903.3	897.5	896.1
22.5°	914.2	911.7	909.2	906.6	904.0	899.6	893.2	886.9	880.5	874.1	872.0
25°	882.5	879.4	876.2	873.0	869.9	864.7	857.6	850.4	843.2	836.2	833.1
27.5°	849.2	845.3	841.3	837.4	833.3	827.6	819.9	812.3	804.7	797.0	793.3
30°	825.9	821.5	817.2	812.8	808.5	802.1	794.0	785.8	777.5	769.3	765.0
32.5°	801.4	796.5	791.5	786.6	781.7	775.0	766.5	758.0	749.5	741.0	736.0
35°	763.1	757.5	751.8	746.3	740.7	733.6	724.8	716.1	707.3	698.6	692.7
37.5°	722.1	716.3	710.5	704.8	698.9	691.3	681.6	671.9	662.3	652.6	645.9
40°	693.1	687.3	681.6	675.8	670.0	662.2	652.3	642.3	632.4	622.4	615.0
42.5°	665.4	659.4	653.4	647.3	641.3	633.1	622.7	612.3	602.0	591.6	584.1
45°	622.4	615.9	609.5	603.0	596.5	588.0	577.5	567.1	556.6	546.1	537.6
47.5°	577.9	571.3	564.5	557.8	551.2	542.4	531.5	520.7	509.8	498.9	490.0
50°	547.8	540.9	534.1	527.3	520.5	511.5	500.3	489.2	478.0	466.8	458.1
52.5°	516.9	510.3	503.6	497.0	490.2	481.2	469.7	458.3	446.8	435.4	426.5
55°	471.5	464.5	457.6	450.5	443.5	434.3	423.0	411.7	400.3	389.0	379.9
57.5°	426.6	419.3	412.0	404.8	397.5	388.3	377.1	365.9	354.8	343.6	334.4
60°	394.5	387.5	380.5	373.5	366.6	357.5	346.3	335.1	324.0	312.8	303.7
62.5°	365.6	358.3	351.0	343.8	336.5	327.2	315.7	304.3	292.8	281.3	273.0
65°	320.6	313.2	305.6	298.1	290.5	281.2	270.0	258.9	247.7	236.5	229.0
67.5°	274.0	266.7	259.5	252.4	245.2	236.4	226.0	215.6	205.3	194.9	188.4
70°	244.4	237.0	229.7	222.4	215.1	206.4	196.4	186.5	176.5	166.6	160.9
72.5°	213.0	206.3	199.7	193.1	186.4	178.4	169.1	159.7	150.2	140.8	135.9
75°	170.6	164.1	157.6	151.2	144.7	137.3	129.2	120.9	112.7	104.5	100.5
77.5°	127.4	122.0	116.5	111.0	105.5	99.5	92.8	86.2	79.6	72.9	70.6
80°	99.8	94.7	89.7	84.6	79.6	74.4	69.2	63.9	58.7	53.4	52.9
82.5°	75.9	71.3	66.7	62.0	57.4	53.5	50.5	47.5	44.5	41.5	41.1
85°	42.4	39.0	35.4	31.9	28.5	26.5	26.0	25.4	24.8	24.3	24.0
87.5°	15.1	14.6	14.0	13.5	13.0	12.8	13.1	13.4	13.7	13.9	14.1
90°	3.5	6.4	9.3	12.1	14.9	17.5	19.6	21.6	23.7	25.9	27.4
92.5°	25.1	28.4	31.7	34.9	38.3	40.6	42.1	43.5	45.0	46.5	47.4
95°	70.4	72.7	75.1	77.5	79.8	81.9	83.7	85.5	87.4	89.2	90.0
97.5°	123.0	124.8	126.7	128.6	130.5	132.5	134.6	136.7	138.9	141.0	142.0
100°	164.3	165.3	166.3	167.3	168.4	170.2	172.5	174.8	177.1	179.6	180.1
102.5°	207.4	207.8	208.2	208.6	209.1	210.4	212.5	214.7	216.8	218.9	219.6
105°	273.4	273.7	273.9	274.2	274.4	275.1	276.1	277.1	278.2	279.2	280.0
107.5°	342.5	343.0	343.3	343.6	343.9	344.1	344.3	344.4	344.6	344.7	345.5
110°	389.5	390.0	390.5	391.1	391.6	391.7	391.5	391.2	390.9	390.7	390.2



TEST NUMBER: P332923-840

CATALOG NUMBER: S124RDIP-S575D1205U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	438.3	438.5	438.6	438.7	438.8	438.6	438.1	437.7	437.2	436.7	436.6
115°	511.5	511.5	511.5	511.5	511.5	511.3	510.8	510.3	509.7	509.2	509.0
117.5°	580.6	580.8	581.0	581.2	581.4	581.3	580.9	580.6	580.2	579.9	579.0
120°	626.5	627.5	628.6	629.7	630.7	630.9	630.1	629.2	628.4	627.7	626.4
122.5°	674.4	674.8	675.2	675.6	676.1	676.1	675.7	675.4	675.0	674.6	673.8
125°	745.0	745.0	745.0	745.0	745.0	744.9	744.7	744.4	744.1	743.9	743.4
127.5°	809.1	809.9	810.6	811.4	812.2	812.4	811.9	811.5	811.1	810.7	810.2
130°	854.1	855.0	855.7	856.5	857.3	857.7	857.7	857.7	857.7	857.7	857.2
132.5°	900.1	900.7	901.3	901.8	902.4	902.6	902.4	902.2	902.0	901.8	901.2
135°	960.9	962.5	964.0	965.6	967.1	968.0	968.0	968.0	968.0	968.0	967.5
137.5°	1027.0	1027.8	1028.5	1029.3	1030.0	1030.6	1031.0	1031.4	1031.8	1032.2	1031.6
140°	1071.2	1071.7	1072.3	1072.8	1073.3	1073.5	1073.5	1073.5	1073.5	1073.5	1073.3
142.5°	1111.6	1112.1	1112.6	1113.1	1113.7	1113.8	1113.6	1113.4	1113.2	1113.0	1112.9
145°	1167.4	1168.4	1169.5	1170.5	1171.5	1172.3	1172.5	1172.8	1173.0	1173.3	1173.0
147.5°	1222.7	1224.1	1225.3	1226.5	1227.8	1228.3	1228.1	1227.9	1227.7	1227.5	1227.3
150°	1256.6	1257.6	1258.7	1259.7	1260.7	1261.2	1261.2	1261.2	1261.2	1261.2	1261.2
152.5°	1288.5	1289.1	1289.7	1290.3	1291.0	1291.4	1291.6	1291.8	1292.0	1292.2	1292.8
155°	1337.5	1337.5	1337.5	1337.5	1337.5	1337.4	1337.2	1336.9	1336.6	1336.4	1337.4
157.5°	1378.8	1378.4	1377.9	1377.5	1377.0	1376.6	1376.6	1376.5	1376.5	1376.4	1377.3
160°	1403.2	1403.0	1402.7	1402.4	1402.2	1401.9	1401.7	1401.4	1401.1	1400.9	1401.7
162.5°	1425.7	1425.0	1424.4	1423.7	1423.0	1422.6	1422.3	1422.1	1421.8	1421.5	1422.9
165°	1456.0	1455.2	1454.4	1453.7	1452.9	1452.2	1451.7	1451.2	1450.7	1450.2	1451.7
167.5°	1479.3	1478.1	1477.0	1475.9	1474.9	1474.3	1474.4	1474.4	1474.5	1474.5	1476.1
170°	1492.4	1491.1	1489.8	1488.4	1487.1	1486.6	1486.9	1487.1	1487.4	1487.7	1489.2
172.5°	1501.8	1500.7	1499.5	1498.4	1497.4	1496.8	1496.9	1497.0	1497.0	1497.1	1498.8
175°	1514.7	1513.4	1512.1	1510.8	1509.4	1508.6	1508.4	1508.1	1507.9	1507.6	1509.4
177.5°	1518.9	1517.8	1516.8	1515.8	1514.7	1514.2	1514.2	1514.2	1514.2	1514.2	1515.7
180°	1517.0	1517.0	1517.0	1517.0	1517.0	1517.0	1517.0	1517.0	1517.0	1517.0	1517.0



TEST NUMBER: P332923-840

CATALOG NUMBER: S124RDIP-S575D1205U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1026.3	1026.3	1026.3	1026.3	1026.3	1026.3	1026.3	1026.3
2.5°	1022.5	1024.0	1025.5	1026.2	1026.1	1025.9	1025.8	1025.7
5°	1015.6	1017.4	1019.2	1019.9	1019.5	1019.2	1018.8	1018.4
7.5°	1002.1	1003.2	1004.4	1004.6	1004.1	1003.5	1003.0	1002.4
10°	990.0	990.7	991.4	991.4	990.7	990.0	989.3	988.6
12.5°	974.9	975.3	975.8	975.5	974.5	973.6	972.6	971.6
15°	948.6	948.3	947.9	947.2	945.8	944.6	943.4	942.2
17.5°	916.9	915.8	914.8	913.4	911.6	909.8	907.9	906.1
20°	894.6	893.2	891.8	890.0	887.8	885.4	883.2	880.9
22.5°	870.0	867.9	865.8	863.8	861.9	860.1	858.3	856.4
25°	830.2	827.2	824.3	821.9	820.1	818.4	816.7	814.9
27.5°	789.6	786.0	782.3	779.2	776.7	774.2	771.7	769.2
30°	760.6	756.2	751.8	748.3	745.5	742.7	739.9	737.1
32.5°	730.9	725.9	720.7	716.9	714.3	711.7	708.9	706.3
35°	686.7	680.8	674.9	670.3	667.2	664.0	660.9	657.7
37.5°	639.2	632.7	626.0	621.2	617.9	614.8	611.7	608.5
40°	607.7	600.4	593.0	587.8	584.6	581.5	578.3	575.2
42.5°	576.6	569.2	561.7	556.3	553.0	549.8	546.4	543.2
45°	529.1	520.5	511.9	506.0	502.9	499.8	496.7	493.5
47.5°	481.1	472.2	463.3	457.2	453.7	450.3	446.9	443.3
50°	449.3	440.6	431.8	425.9	422.5	419.2	415.9	412.5
52.5°	417.6	408.7	399.9	393.7	390.2	386.8	383.3	379.9
55°	370.8	361.7	352.6	346.5	343.2	339.8	336.5	333.2
57.5°	325.1	315.9	306.7	300.8	298.3	295.8	293.3	290.7
60°	294.6	285.5	276.4	270.5	267.7	264.9	262.2	259.3
62.5°	264.6	256.2	247.8	242.5	240.2	238.0	235.8	233.6
65°	221.6	214.0	206.5	201.7	199.7	197.5	195.4	193.3
67.5°	182.0	175.5	169.1	164.7	162.4	160.1	157.7	155.4
70°	155.1	149.4	143.5	139.8	138.0	136.3	134.5	132.8
72.5°	131.0	126.0	121.1	117.9	116.2	114.6	113.0	111.4
75°	96.4	92.5	88.5	85.9	84.8	83.8	82.8	81.7
77.5°	68.3	65.9	63.5	62.2	61.9	61.6	61.3	61.0
80°	52.4	51.9	51.3	51.0	50.8	50.6	50.5	50.3
82.5°	40.7	40.3	40.0	39.7	39.5	39.3	39.2	39.0
85°	23.6	23.3	22.9	22.8	22.8	22.8	22.8	22.8
87.5°	14.3	14.4	14.6	14.8	15.1	15.3	15.6	15.9
90°	29.0	30.5	32.1	33.1	33.6	34.1	34.6	35.2
92.5°	48.4	49.3	50.2	50.8	51.2	51.5	51.8	52.1
95°	90.7	91.5	92.3	92.7	92.7	92.7	92.7	92.7
97.5°	142.9	143.8	144.8	145.2	145.2	145.2	145.2	145.2
100°	180.6	181.1	181.6	181.9	181.9	181.9	181.9	181.9
102.5°	220.4	221.2	221.9	222.3	222.6	222.8	223.0	223.2
105°	280.8	281.6	282.4	283.2	284.0	284.7	285.5	286.3
107.5°	346.2	346.9	347.6	348.0	347.9	347.9	347.8	347.8
110°	389.6	389.1	388.6	388.7	389.5	390.3	391.1	391.8



TEST NUMBER: P332923-840

CATALOG NUMBER: S124RDIP-S575D1205U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	436.5	436.4	436.3	436.3	436.5	436.6	436.8	437.0
115°	508.7	508.4	508.2	507.9	507.7	507.4	507.2	506.9
117.5°	578.0	577.1	576.2	575.6	575.0	574.5	574.0	573.5
120°	625.1	623.8	622.5	622.1	622.6	623.1	623.7	624.2
122.5°	672.9	672.0	671.1	670.1	669.2	668.3	667.3	666.4
125°	742.8	742.3	741.7	741.2	740.7	740.2	739.6	739.1
127.5°	809.7	809.2	808.6	808.2	807.8	807.3	806.9	806.5
130°	856.6	856.1	855.6	854.7	853.7	852.7	851.6	850.6
132.5°	900.7	900.2	899.7	899.2	898.8	898.4	898.0	897.6
135°	966.9	966.3	965.8	965.2	964.4	963.6	962.8	962.1
137.5°	1030.9	1030.2	1029.6	1029.3	1029.5	1029.6	1029.8	1029.9
140°	1073.0	1072.8	1072.5	1072.3	1072.0	1071.7	1071.5	1071.2
142.5°	1112.9	1112.8	1112.8	1112.7	1112.7	1112.6	1112.6	1112.5
145°	1172.8	1172.5	1172.3	1171.6	1170.9	1170.1	1169.3	1168.6
147.5°	1227.1	1226.9	1226.6	1226.4	1226.2	1225.9	1225.6	1225.4
150°	1261.2	1261.2	1261.2	1261.1	1260.8	1260.6	1260.3	1260.1
152.5°	1293.4	1294.1	1294.7	1294.7	1294.0	1293.3	1292.6	1292.0
155°	1338.5	1339.5	1340.5	1340.5	1339.5	1338.5	1337.4	1336.4
157.5°	1378.1	1378.8	1379.6	1379.6	1378.7	1377.8	1376.8	1376.0
160°	1402.4	1403.2	1404.0	1403.7	1402.4	1401.1	1399.9	1398.6
162.5°	1424.3	1425.7	1427.1	1427.2	1425.9	1424.6	1423.3	1422.0
165°	1453.3	1454.8	1456.4	1456.6	1455.6	1454.6	1453.5	1452.5
167.5°	1477.6	1479.3	1480.8	1480.8	1479.1	1477.5	1475.9	1474.3
170°	1490.9	1492.4	1494.0	1493.8	1492.0	1490.2	1488.3	1486.5
172.5°	1500.7	1502.4	1504.2	1504.2	1502.3	1500.5	1498.6	1496.8
175°	1511.3	1513.1	1514.9	1514.9	1513.1	1511.3	1509.4	1507.6
177.5°	1517.1	1518.6	1520.0	1519.9	1518.2	1516.6	1514.9	1513.3
180°	1517.0	1517.0	1517.0	1517.0	1517.0	1517.0	1517.0	1517.0

(END OF REPORT)