

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332667-940

Luminaire Tested: **S124DIP-S1020D1205U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332667-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIP-S1020D1205U940-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1205 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8237.5 lumens
Efficiency: N/A
Efficacy: 126.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332667-940

CATALOG NUMBER: S124DIP-S1020D1205U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

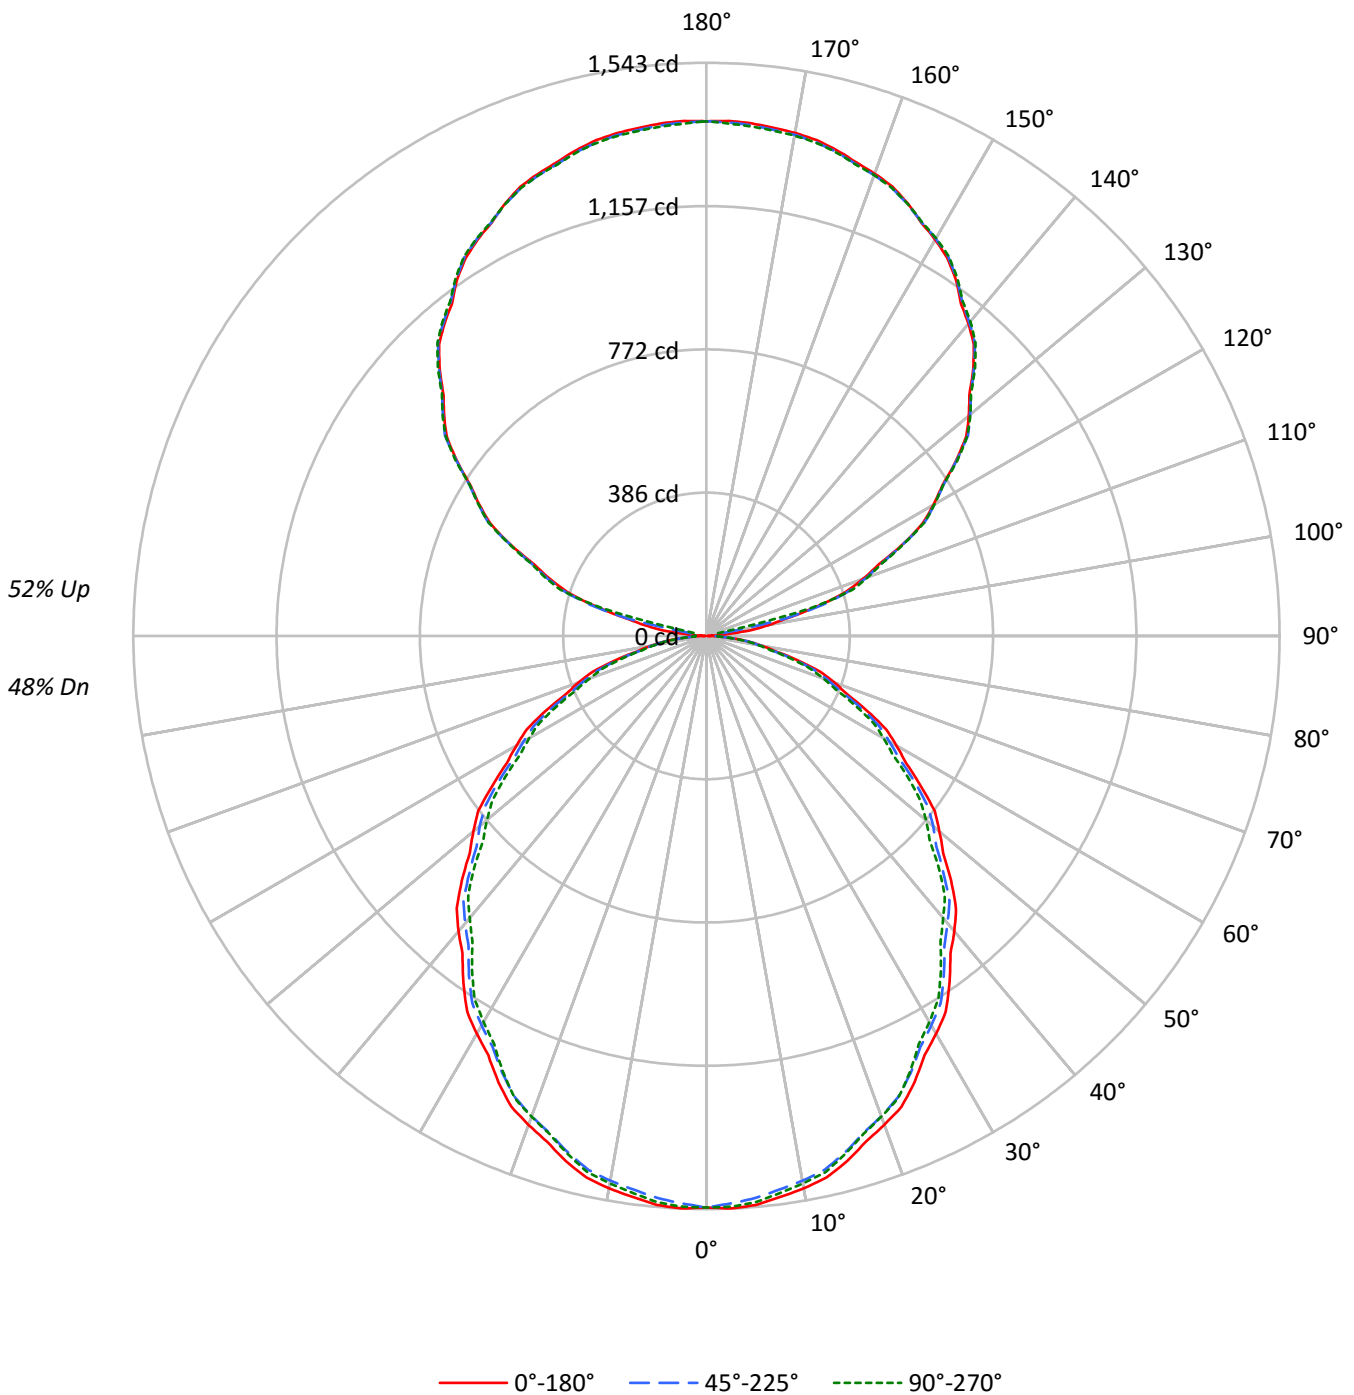



TEST NUMBER: P332667-940

CATALOG NUMBER: S124DIP-S1020D1205U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	54	54	54	48
1	97	93	89	86	89	86	82	79	72	70	67	59	58	56	48	47	46	40
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	42	40	38	34
3	81	71	64	58	74	66	59	54	56	51	47	46	43	40	37	35	33	29
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	31	28	25
5	68	56	48	42	62	52	45	40	44	39	34	37	33	29	30	27	25	21
6	62	50	42	36	57	47	40	34	40	34	30	33	29	26	27	24	22	19
7	58	45	38	32	53	42	35	30	36	30	26	30	26	23	25	22	19	17
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	20	17	15
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	16	13
10	47	35	27	23	43	32	26	21	28	23	19	24	19	17	20	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12421	12421	12421
5°	12459	12309	12399
10°	12381	12209	12269
15°	12232	12035	12066
20°	12032	11820	11832
25°	11805	11575	11541
30°	11527	11286	11182
35°	11239	10984	10838
40°	10940	10642	10446
45°	10628	10304	10106
50°	10282	10003	9693
55°	9909	9614	9301
60°	9536	9177	8898
65°	9116	8760	8407
70°	8641	8207	7886
75°	7923	7539	7346
80°	7053	6760	6592
85°	6169	5937	5826



TEST NUMBER: P332667-940

CATALOG NUMBER: S124DIP-S1020D1205U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.9	1.8
10°-20°	408.3	5.0
20°-30°	600.9	7.3
30°-40°	698.6	8.5
40°-50°	698.6	8.5
50°-60°	611.1	7.4
60°-70°	453.8	5.5
70°-80°	257.8	3.1
80°-90°	78.4	1.0
90°-100°	47.4	0.6
100°-110°	302.1	3.7
110°-120°	577.9	7.0
120°-130°	733.6	8.9
130°-140°	784.9	9.5
140°-150°	734.0	8.9
150°-160°	591.9	7.2
160°-170°	381.8	4.6
170°-180°	131.6	1.6
0°-30°	1154.1	14.0
0°-40°	1852.6	22.5
0°-60°	3162.3	38.4
0°-90°	3952.4	48.0
90°-120°	927.4	11.3
90°-150°	3179.9	38.6
90°-180°	4285.0	52.0
0°-180°	8237.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1539	1539	1539	1539	1539	
5°	1537	1532	1519	1532	1530	146
15°	1464	1458	1440	1447	1444	412
25°	1325	1316	1300	1300	1296	609
35°	1140	1131	1114	1106	1100	713
45°	931	922	902	889	885	717
55°	704	700	683	669	661	630
65°	477	471	459	447	440	472
75°	254	248	242	237	236	270
85°	67	66	64	64	63	73
90°	3	14	23	29	31	6
95°	57	24	23	29	30	73
105°	312	318	323	330	295	326
115°	582	585	584	586	586	573
125°	818	822	821	824	825	730
135°	1015	1015	1018	1021	1023	782
145°	1171	1174	1174	1175	1177	731
155°	1284	1285	1282	1285	1283	592
165°	1354	1349	1349	1356	1348	383
175°	1385	1379	1380	1388	1377	132
180°	1385	1385	1385	1385	1385	



TEST NUMBER: P332667-940

CATALOG NUMBER: S124DIP-S1020D1205U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6
2.5°	1542.6	1541.9	1541.2	1540.6	1540.0	1538.4	1536.0	1533.6	1531.2	1528.7	1531.0
5°	1537.4	1536.3	1535.3	1534.1	1533.0	1531.0	1527.9	1524.9	1522.0	1518.9	1522.0
7.5°	1523.1	1522.0	1520.9	1519.8	1518.8	1516.5	1513.1	1509.8	1506.5	1503.2	1505.6
10°	1510.3	1509.2	1508.1	1507.0	1505.9	1503.6	1500.0	1496.5	1492.9	1489.3	1491.5
12.5°	1493.5	1492.5	1491.3	1490.2	1489.2	1486.7	1482.9	1479.2	1475.3	1471.6	1474.0
15°	1463.5	1462.3	1461.2	1460.2	1459.0	1456.4	1452.3	1448.2	1444.1	1440.0	1441.6
17.5°	1427.2	1425.8	1424.4	1423.1	1421.7	1419.1	1415.1	1411.3	1407.4	1403.6	1404.5
20°	1400.5	1399.2	1397.8	1396.4	1395.1	1392.3	1388.2	1384.1	1380.0	1375.9	1376.7
22.5°	1372.0	1370.1	1368.3	1366.5	1364.8	1361.7	1357.6	1353.5	1349.4	1345.3	1346.8
25°	1325.3	1323.5	1321.5	1319.6	1317.7	1314.8	1311.0	1307.2	1303.3	1299.5	1299.8
27.5°	1272.1	1270.2	1268.1	1266.1	1264.2	1261.4	1257.8	1254.3	1250.7	1247.1	1246.5
30°	1236.6	1234.4	1232.2	1230.0	1227.8	1224.9	1221.4	1217.8	1214.2	1210.7	1209.6
32.5°	1199.1	1197.1	1195.2	1193.2	1191.2	1188.3	1184.5	1180.8	1177.0	1173.2	1171.9
35°	1140.4	1138.5	1136.6	1134.7	1132.7	1129.9	1126.1	1122.2	1118.4	1114.5	1112.6
37.5°	1078.5	1076.7	1075.0	1073.3	1071.5	1068.6	1064.4	1060.3	1056.2	1052.1	1050.1
40°	1038.1	1035.9	1033.7	1031.5	1029.3	1026.2	1022.1	1018.0	1013.9	1009.8	1007.0
42.5°	994.7	993.4	992.0	990.8	989.4	986.5	982.0	977.4	972.9	968.3	965.1
45°	930.9	928.9	927.0	925.1	923.2	920.0	915.6	911.2	906.9	902.5	899.5
47.5°	864.0	862.7	861.4	860.1	858.7	856.0	852.0	847.9	843.9	839.8	836.4
50°	818.7	817.5	816.5	815.4	814.2	811.8	808.0	804.1	800.3	796.5	792.6
52.5°	774.3	772.9	771.6	770.3	769.0	766.3	762.2	758.2	754.1	750.1	746.7
55°	704.0	703.1	702.3	701.5	700.7	698.4	694.6	690.7	686.9	683.1	679.8
57.5°	636.9	636.0	635.1	634.1	633.2	630.8	627.1	623.3	619.5	615.7	612.6
60°	590.6	589.2	587.8	586.5	585.1	582.6	579.1	575.5	571.9	568.4	565.9
62.5°	545.2	544.0	542.9	541.7	540.6	538.1	534.3	530.6	526.7	523.0	520.8
65°	477.2	475.7	474.4	473.1	471.6	469.6	466.8	464.1	461.4	458.6	455.9
67.5°	408.6	407.3	406.1	404.8	403.5	401.6	399.0	396.4	393.7	391.1	388.4
70°	366.1	364.3	362.3	360.4	358.5	356.4	354.3	352.0	349.9	347.7	345.4
72.5°	320.8	318.9	317.0	315.0	313.2	311.3	309.5	307.8	306.0	304.3	302.6
75°	254.0	252.6	251.2	249.9	248.5	247.1	245.8	244.4	243.0	241.7	240.6
77.5°	190.1	189.5	188.9	188.3	187.7	186.8	185.6	184.4	183.2	182.0	181.6
80°	151.7	150.8	150.0	149.2	148.4	147.7	147.1	146.6	146.1	145.4	144.9
82.5°	114.1	113.8	113.4	113.0	112.6	112.4	112.3	112.2	112.1	111.9	111.6
85°	66.6	66.6	66.6	66.6	66.6	66.3	65.7	65.2	64.6	64.1	64.1
87.5°	26.3	26.6	26.8	27.1	27.4	27.6	27.8	27.9	28.1	28.3	28.5
90°	3.1	5.6	8.2	10.7	13.2	15.4	17.3	19.1	21.0	22.8	24.2
92.5°	13.0	13.2	13.4	13.5	13.6	14.6	16.4	18.3	20.2	21.9	23.4
95°	57.0	49.1	41.3	33.5	25.7	21.8	22.1	22.3	22.6	22.8	24.2
97.5°	121.0	125.9	130.8	135.6	140.5	130.1	104.4	78.7	53.1	27.4	27.5
100°	170.0	174.1	178.3	182.4	186.5	172.7	140.9	109.1	77.4	45.6	41.6
102.5°	224.6	227.7	230.7	233.7	236.7	236.2	232.1	227.9	223.8	219.6	177.5
105°	311.8	313.3	314.6	316.0	317.4	318.7	319.9	320.9	322.1	323.2	325.4
107.5°	392.9	393.6	394.3	394.9	395.7	396.8	398.3	399.9	401.4	403.1	404.0
110°	447.6	448.3	449.0	449.7	450.4	451.4	452.8	454.1	455.6	456.9	457.4



TEST NUMBER: P332667-940

CATALOG NUMBER: S124DIP-S1020D1205U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	500.7	501.9	503.1	504.4	505.6	506.6	507.2	507.8	508.5	509.2	509.1
115°	582.3	583.0	583.7	584.3	585.1	585.3	585.1	584.9	584.6	584.3	584.9
117.5°	655.9	656.7	657.7	658.6	659.5	660.2	660.8	661.3	661.8	662.3	662.2
120°	705.6	706.5	707.5	708.4	709.3	709.6	709.4	709.2	708.9	708.7	709.2
122.5°	752.0	752.6	753.1	753.7	754.2	754.7	755.0	755.3	755.6	756.0	756.3
125°	818.5	819.5	820.4	821.3	822.2	822.4	822.0	821.5	821.1	820.6	821.3
127.5°	881.5	881.7	882.0	882.3	882.4	883.1	884.1	885.2	886.3	887.3	887.2
130°	922.1	922.4	922.7	922.8	923.1	923.5	924.3	924.9	925.6	926.3	926.5
132.5°	959.5	959.8	960.3	960.7	961.1	961.8	962.6	963.5	964.4	965.3	965.5
135°	1015.4	1015.2	1014.9	1014.7	1014.5	1014.9	1015.7	1016.6	1017.6	1018.5	1019.0
137.5°	1065.0	1065.1	1065.1	1065.2	1065.3	1065.9	1066.8	1067.9	1068.9	1069.9	1070.4
140°	1097.3	1097.7	1098.1	1098.7	1099.1	1099.6	1100.0	1100.5	1100.9	1101.4	1102.1
142.5°	1126.2	1127.1	1127.9	1128.7	1129.6	1130.2	1130.4	1130.7	1131.0	1131.2	1131.8
145°	1170.8	1171.5	1172.2	1172.9	1173.6	1173.9	1173.9	1173.9	1173.9	1173.9	1174.2
147.5°	1206.2	1207.6	1208.8	1210.1	1211.4	1211.9	1211.7	1211.5	1211.2	1211.0	1211.2
150°	1232.0	1232.9	1233.8	1234.8	1235.6	1236.0	1235.7	1235.6	1235.3	1235.0	1235.0
152.5°	1253.5	1254.3	1255.0	1255.7	1256.4	1256.6	1256.2	1255.8	1255.4	1255.0	1255.4
155°	1283.8	1284.0	1284.2	1284.4	1284.7	1284.4	1283.8	1283.1	1282.4	1281.7	1282.6
157.5°	1309.2	1309.1	1308.9	1308.9	1308.7	1308.2	1307.4	1306.7	1305.9	1305.1	1306.3
160°	1324.2	1323.5	1322.8	1322.1	1321.4	1321.0	1320.7	1320.4	1320.3	1320.0	1321.4
162.5°	1337.4	1336.6	1335.7	1334.8	1333.9	1333.4	1333.1	1332.9	1332.7	1332.5	1333.8
165°	1354.2	1353.1	1351.9	1350.8	1349.6	1349.1	1349.1	1349.1	1349.1	1349.1	1350.9
167.5°	1367.4	1366.3	1365.1	1363.9	1362.7	1362.0	1361.9	1361.7	1361.6	1361.5	1363.5
170°	1374.9	1373.6	1372.2	1370.8	1369.4	1368.9	1369.0	1369.3	1369.5	1369.8	1371.6
172.5°	1379.9	1378.5	1377.2	1375.7	1374.4	1373.8	1374.0	1374.3	1374.5	1374.8	1376.5
175°	1385.3	1383.9	1382.5	1381.2	1379.7	1379.2	1379.4	1379.7	1379.9	1380.1	1382.2
177.5°	1387.8	1386.5	1385.2	1383.9	1382.6	1382.2	1382.5	1382.9	1383.3	1383.7	1385.1
180°	1385.3	1385.3	1385.3	1385.3	1385.3	1385.3	1385.3	1385.3	1385.3	1385.3	1385.3



TEST NUMBER: P332667-940

CATALOG NUMBER: S124DIP-S1020D1205U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6
2.5°	1533.1	1535.3	1537.6	1538.6	1538.3	1538.1	1537.8	1537.7
5°	1524.9	1527.9	1531.0	1532.2	1531.7	1531.1	1530.5	1530.0
7.5°	1508.0	1510.4	1512.8	1513.9	1513.5	1513.1	1512.8	1512.5
10°	1493.7	1495.9	1498.1	1498.9	1498.3	1497.8	1497.3	1496.7
12.5°	1476.4	1478.8	1481.2	1482.0	1481.3	1480.5	1479.7	1479.0
15°	1443.3	1444.9	1446.6	1447.0	1446.2	1445.4	1444.6	1443.7
17.5°	1405.6	1406.7	1407.7	1407.9	1407.4	1406.9	1406.3	1405.7
20°	1377.5	1378.4	1379.2	1379.3	1378.8	1378.2	1377.7	1377.2
22.5°	1348.3	1349.8	1351.2	1351.5	1350.5	1349.5	1348.5	1347.6
25°	1300.0	1300.3	1300.6	1300.1	1299.0	1298.0	1296.8	1295.7
27.5°	1245.9	1245.2	1244.6	1243.6	1242.2	1240.8	1239.4	1238.1
30°	1208.5	1207.4	1206.3	1205.1	1203.7	1202.3	1201.0	1199.6
32.5°	1170.5	1169.3	1168.0	1166.6	1165.2	1163.9	1162.5	1161.1
35°	1110.7	1108.8	1106.9	1105.2	1103.8	1102.5	1101.1	1099.7
37.5°	1047.9	1045.9	1043.8	1041.9	1040.1	1038.2	1036.4	1034.7
40°	1004.2	1001.5	998.8	996.8	995.3	994.0	992.7	991.2
42.5°	962.0	958.8	955.6	953.5	952.6	951.6	950.7	949.9
45°	896.4	893.4	890.4	888.5	887.7	886.9	886.0	885.2
47.5°	833.0	829.6	826.3	823.5	821.4	819.3	817.3	815.2
50°	788.8	785.0	781.1	778.4	776.7	775.1	773.5	771.8
52.5°	743.3	739.9	736.5	733.8	731.6	729.6	727.5	725.4
55°	676.5	673.2	669.9	667.4	665.8	664.1	662.5	660.8
57.5°	609.5	606.4	603.2	600.8	599.2	597.7	596.1	594.5
60°	563.5	561.0	558.5	556.6	555.2	553.8	552.5	551.1
62.5°	518.5	516.2	514.0	512.2	510.9	509.4	508.1	506.8
65°	453.2	450.4	447.6	445.6	444.3	442.9	441.5	440.1
67.5°	385.8	383.2	380.6	379.1	378.6	378.3	377.9	377.6
70°	343.3	341.1	338.9	337.4	336.6	335.7	334.9	334.1
72.5°	300.8	299.0	297.3	296.0	295.2	294.4	293.6	292.7
75°	239.4	238.4	237.3	236.6	236.3	236.0	235.8	235.5
77.5°	181.3	181.0	180.7	180.1	179.4	178.7	178.0	177.3
80°	144.4	143.8	143.3	142.9	142.6	142.3	142.0	141.8
82.5°	111.3	110.9	110.7	110.3	110.0	109.8	109.5	109.2
85°	64.1	64.1	64.1	63.9	63.7	63.4	63.1	62.9
87.5°	28.8	29.1	29.3	29.5	29.6	29.7	29.8	29.9
90°	25.6	26.9	28.4	29.2	29.7	30.1	30.6	31.1
92.5°	24.7	26.1	27.5	28.3	28.4	28.4	28.5	28.6
95°	25.6	26.9	28.4	29.2	29.3	29.6	29.8	30.1
97.5°	27.6	27.7	27.9	28.1	28.4	28.5	28.8	29.0
100°	37.7	33.9	30.0	28.1	28.4	28.5	28.8	29.0
102.5°	135.2	93.0	50.7	29.7	29.7	29.8	29.8	29.9
105°	327.4	329.5	331.5	328.4	320.1	311.8	303.6	295.3
107.5°	405.1	406.1	407.1	408.0	408.9	409.8	410.6	411.5
110°	457.9	458.3	458.8	459.3	460.0	460.7	461.5	462.1



TEST NUMBER: P332667-940

CATALOG NUMBER: S124DIP-S1020D1205U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	509.0	508.9	508.8	509.2	510.1	511.0	511.8	512.6
115°	585.3	585.8	586.2	586.5	586.5	586.5	586.5	586.5
117.5°	662.1	662.0	661.9	661.8	661.7	661.6	661.6	661.5
120°	709.6	710.1	710.5	710.5	710.1	709.6	709.2	708.7
122.5°	756.5	756.8	757.1	757.0	756.5	756.1	755.5	755.1
125°	822.0	822.7	823.4	823.9	824.0	824.3	824.6	824.7
127.5°	887.1	886.9	886.8	886.6	886.4	886.3	886.1	885.9
130°	926.8	927.0	927.2	927.3	927.3	927.3	927.3	927.3
132.5°	965.7	966.0	966.2	966.2	966.0	965.8	965.6	965.5
135°	1019.4	1019.8	1020.4	1020.8	1021.3	1021.7	1022.2	1022.6
137.5°	1070.9	1071.4	1071.9	1072.1	1072.0	1071.8	1071.7	1071.6
140°	1102.8	1103.5	1104.2	1104.7	1104.8	1105.1	1105.3	1105.5
142.5°	1132.3	1132.7	1133.3	1133.5	1133.6	1133.6	1133.7	1133.7
145°	1174.4	1174.7	1174.8	1175.2	1175.6	1176.1	1176.6	1177.1
147.5°	1211.4	1211.6	1211.7	1211.9	1212.2	1212.5	1212.6	1212.9
150°	1235.0	1235.0	1235.0	1235.2	1235.4	1235.6	1235.9	1236.1
152.5°	1255.7	1256.1	1256.4	1256.5	1256.4	1256.2	1256.2	1256.0
155°	1283.5	1284.4	1285.4	1285.5	1284.8	1284.1	1283.4	1282.7
157.5°	1307.5	1308.7	1309.9	1309.9	1308.7	1307.5	1306.3	1305.1
160°	1322.8	1324.2	1325.5	1325.5	1324.2	1322.8	1321.4	1320.0
162.5°	1335.2	1336.6	1338.0	1337.9	1336.3	1334.8	1333.2	1331.6
165°	1352.7	1354.6	1356.4	1356.3	1354.2	1352.1	1350.1	1348.0
167.5°	1365.6	1367.5	1369.6	1369.4	1367.2	1364.9	1362.5	1360.2
170°	1373.4	1375.3	1377.2	1376.9	1374.6	1372.3	1370.0	1367.7
172.5°	1378.4	1380.3	1382.1	1381.8	1379.3	1376.8	1374.3	1371.8
175°	1384.3	1386.3	1388.4	1388.0	1385.3	1382.5	1379.7	1377.0
177.5°	1386.6	1388.0	1389.6	1389.2	1387.0	1384.7	1382.5	1380.4
180°	1385.3	1385.3	1385.3	1385.3	1385.3	1385.3	1385.3	1385.3

(END OF REPORT)