

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332527-940

Luminaire Tested: **S124DIP-S350D1205U940-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332527-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124DIP-S350D1205U940-4F0-1E-UDD-A1  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 350 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5126.0 lumens  
Efficiency: N/A  
Efficacy: 121.5 lumens/watt  
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41  
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 42.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

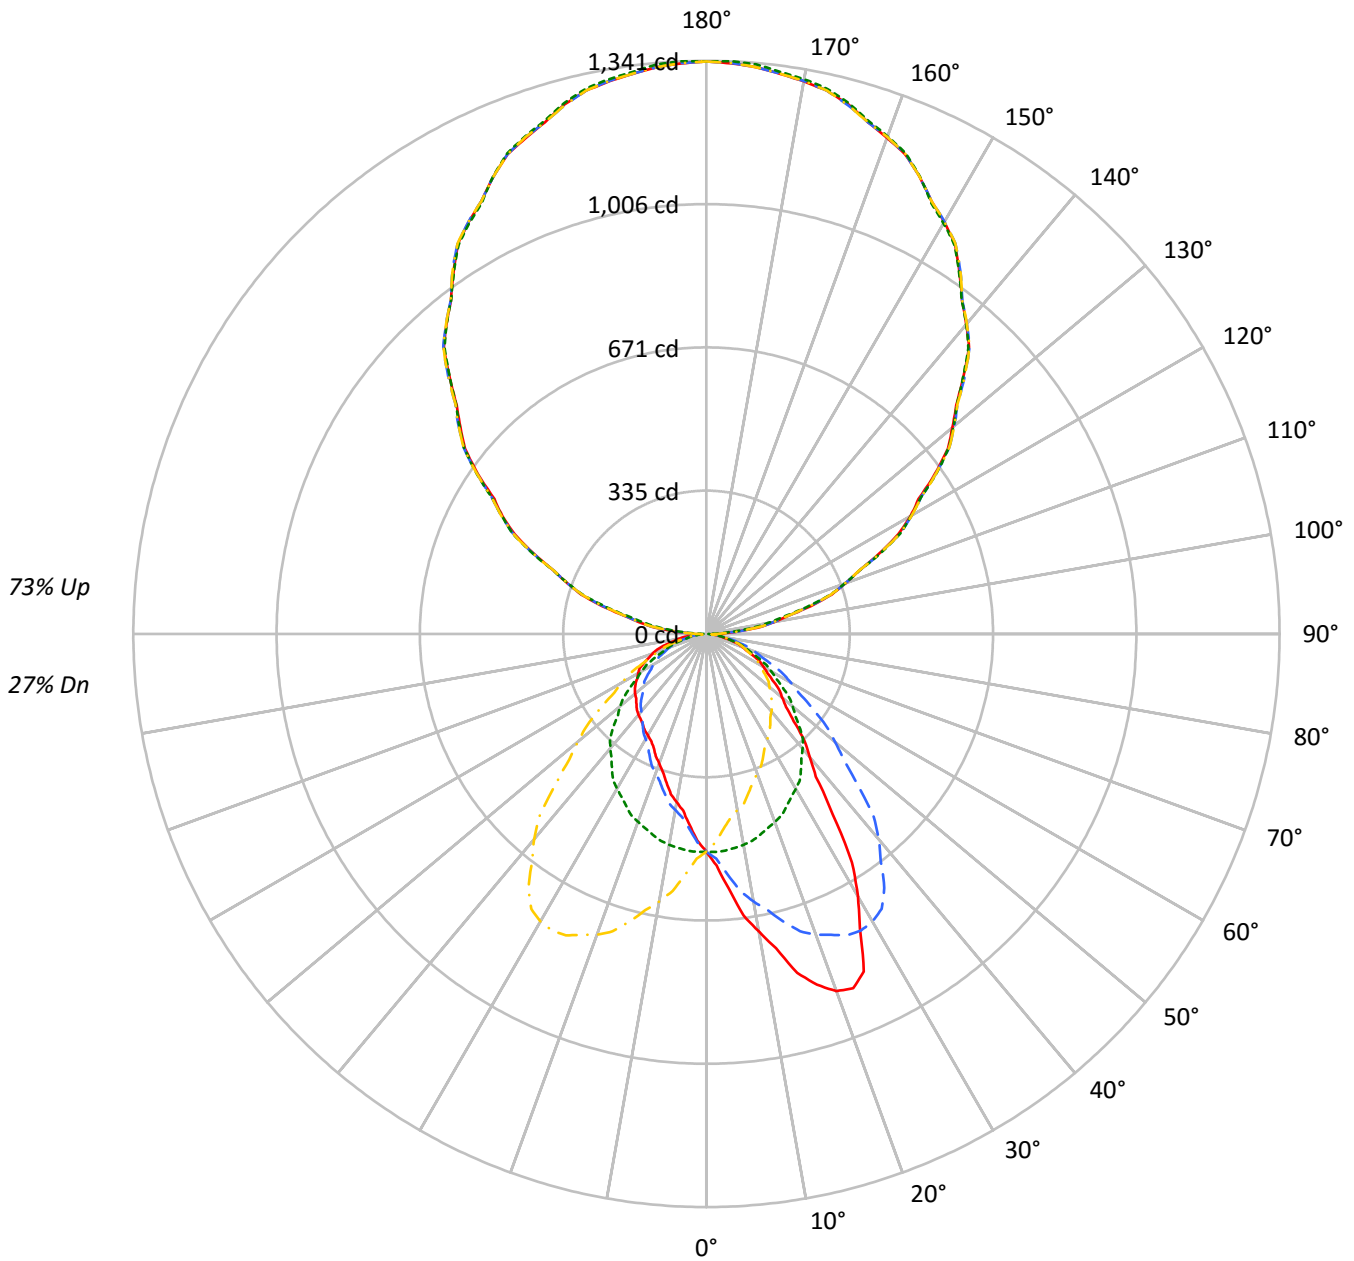

— 0°-180°    - - 45°-225°    - - - 90°-270°    - · - · 135°-315°



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	52	52	52	35	35	35	27
1	93	89	85	82	83	79	76	74	62	60	58	46	45	44	31	31	30	23
2	85	78	72	67	75	70	65	60	54	51	48	41	38	37	28	27	25	20
3	77	68	61	56	69	61	55	51	48	44	41	36	33	31	25	23	22	17
4	71	60	53	47	63	54	48	43	43	38	35	32	29	27	22	20	19	15
5	65	54	46	40	58	48	42	37	38	33	30	29	26	23	20	18	16	13
6	60	48	40	35	53	43	37	32	34	29	26	26	23	20	18	16	15	11
7	55	43	36	30	49	39	32	28	31	26	23	24	20	18	17	14	13	10
8	51	39	32	27	45	35	29	24	28	23	20	22	18	16	15	13	12	9
9	47	36	28	24	42	32	26	22	26	21	18	20	16	14	14	12	10	8
10	44	32	26	21	39	29	23	19	24	19	16	18	15	13	13	11	9	7

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	4112	4112	4112	4112
5°	4843	4123	3639	4123
10°	5799	4105	3277	4105
15°	6861	4064	3010	4064
20°	7640	4021	2770	4021
25°	7764	3958	2605	3958
30°	6605	3899	2553	3899
35°	5078	3802	2553	3802
40°	3959	3687	2602	3687
45°	3301	3515	2646	3515
50°	2905	3304	2735	3304
55°	2662	3054	2846	3054
60°	2493	2827	2977	2827
65°	2321	2575	3089	2575
70°	2122	2325	3158	2325
75°	1896	2046	3119	2046
80°	1590	1678	3022	1678
85°	1176	1213	2890	1213



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	49.6	1.0
10°-20°	153.0	3.0
20°-30°	242.6	4.7
30°-40°	270.0	5.3
40°-50°	245.7	4.8
50°-60°	200.8	3.9
60°-70°	143.4	2.8
70°-80°	78.9	1.5
80°-90°	25.6	0.5
90°-100°	88.4	1.7
100°-110°	261.7	5.1
110°-120°	444.2	8.7
120°-130°	585.7	11.4
130°-140°	657.8	12.8
140°-150°	646.4	12.6
150°-160°	543.7	10.6
160°-170°	361.7	7.1
170°-180°	126.7	2.5
0°-30°	445.2	8.7
0°-40°	715.2	14.0
0°-60°	1161.7	22.7
0°-90°	1409.6	27.5
90°-120°	794.3	15.5
90°-150°	2684.3	52.4
90°-180°	3716.0	72.5
0°-180°	5126.0	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	509	509	509	509	509	
5°	598	509	449	509	598	61
15°	821	486	360	486	821	232
25°	872	444	292	444	872	384
35°	515	386	259	386	515	327
45°	289	308	232	308	289	228
55°	189	217	202	217	189	171
65°	122	135	162	135	122	120
75°	61	66	100	66	61	65
85°	13	13	31	13	13	16
90°	31	3	31	3	31	16
95°	82	62	82	62	82	85
105°	253	241	253	241	253	266
115°	448	452	448	452	448	442
125°	653	658	653	658	653	582
135°	850	848	850	848	850	656
145°	1032	1031	1032	1031	1032	646
155°	1180	1181	1180	1181	1180	543
165°	1282	1286	1282	1286	1282	361
175°	1331	1338	1331	1338	1331	126
180°	1340	1340	1340	1340	1340	



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4
2.5°	542.2	542.1	540.4	540.0	538.9	537.3	537.0	534.2	528.9	526.3	525.7
5°	597.6	601.9	596.4	595.3	594.7	587.7	584.2	580.0	570.2	564.5	560.1
7.5°	663.9	664.3	661.9	660.0	654.6	648.5	639.4	629.7	618.1	606.2	597.1
10°	707.4	709.1	706.3	706.0	695.2	688.4	674.9	663.5	650.4	635.9	622.6
12.5°	753.3	751.0	749.6	740.6	738.5	726.2	710.5	698.8	678.6	661.8	644.2
15°	820.9	816.3	813.3	800.9	794.8	777.7	761.0	748.1	721.8	696.6	677.6
17.5°	860.6	865.2	858.4	853.3	837.5	825.5	808.4	781.4	760.8	729.6	705.6
20°	889.3	889.7	885.9	880.7	868.3	853.0	834.5	804.9	780.2	749.2	716.2
22.5°	897.1	897.2	895.5	890.6	881.2	868.9	850.2	825.5	795.6	761.9	728.9
25°	871.6	870.8	872.6	878.2	874.6	870.8	860.0	841.6	813.8	778.1	742.6
27.5°	776.9	782.7	793.4	806.9	819.9	829.8	832.6	828.8	811.6	782.3	745.1
30°	708.6	715.9	723.9	737.4	763.6	778.6	795.0	807.4	800.5	777.0	742.4
32.5°	633.7	635.5	647.4	662.7	686.7	715.5	741.6	767.0	775.3	763.0	734.1
35°	515.3	518.4	531.2	546.4	575.7	611.0	650.2	685.3	714.2	725.8	711.0
37.5°	420.5	429.0	438.1	454.4	480.3	512.0	552.8	598.2	641.2	670.1	675.0
40°	375.7	380.9	387.4	399.9	421.9	453.1	488.1	540.0	585.9	627.2	640.7
42.5°	340.2	343.3	347.3	358.6	375.2	406.4	438.4	484.0	529.9	579.4	602.1
45°	289.1	292.3	299.1	305.6	318.3	339.7	369.5	407.1	453.3	501.0	542.8
47.5°	252.3	254.2	258.2	265.3	276.1	290.3	314.4	345.8	388.6	435.0	479.5
50°	231.3	233.0	236.1	242.5	250.7	263.4	283.2	312.5	346.1	392.7	436.4
52.5°	214.7	215.4	217.8	222.0	228.6	239.2	255.6	279.8	311.0	352.6	396.1
55°	189.1	189.9	192.1	195.2	200.9	207.7	220.1	238.3	265.5	301.6	339.4
57.5°	168.0	168.6	170.3	171.6	176.3	181.7	191.4	204.3	224.9	255.6	289.3
60°	154.4	154.1	156.1	157.2	160.4	165.1	172.5	184.9	202.8	227.5	258.5
62.5°	141.3	140.7	142.5	143.9	145.7	149.6	155.7	165.4	180.0	202.3	229.2
65°	121.5	120.7	121.8	123.5	125.1	127.2	131.7	140.4	151.9	168.0	188.4
67.5°	101.7	102.6	102.8	103.6	104.6	107.5	110.5	116.6	124.8	137.7	155.0
70°	89.9	90.2	91.0	91.0	91.6	94.2	96.7	100.2	108.3	120.1	134.2
72.5°	78.1	79.0	78.6	79.3	79.8	81.5	83.3	86.8	93.5	102.4	114.3
75°	60.8	61.4	61.4	61.6	62.2	62.9	64.4	66.9	71.8	78.3	86.5
77.5°	44.3	44.4	44.7	45.5	45.5	46.5	47.5	49.6	52.0	56.4	61.5
80°	34.2	34.6	34.4	34.9	34.9	35.7	36.1	38.6	39.7	42.6	46.6
82.5°	25.1	25.5	25.4	26.0	26.4	26.6	27.1	28.2	29.2	31.8	33.4
85°	12.7	13.1	12.7	13.1	13.7	13.9	14.5	14.8	15.6	16.2	17.7
87.5°	9.9	10.3	10.3	10.3	10.6	10.5	10.4	10.0	10.4	10.3	10.6
90°	31.1	30.6	30.1	29.7	29.2	28.4	26.9	25.6	24.2	22.8	21.0
92.5°	46.0	45.7	45.5	45.2	44.9	44.3	43.5	42.7	41.8	41.0	39.8
95°	81.9	81.9	81.9	81.9	81.9	81.5	80.8	80.1	79.5	78.7	77.1
97.5°	128.2	128.2	128.2	128.2	128.2	127.9	127.0	126.2	125.4	124.5	122.6
100°	160.6	160.6	160.6	160.6	160.6	160.3	159.9	159.4	159.0	158.5	156.4
102.5°	197.1	196.9	196.7	196.5	196.3	195.9	195.3	194.6	193.9	193.3	191.5
105°	252.8	252.1	251.4	250.7	250.0	249.3	248.6	248.0	247.3	246.6	245.7
107.5°	307.1	307.1	307.2	307.2	307.3	306.9	306.3	305.7	305.1	304.3	304.3
110°	346.0	345.4	344.6	343.9	343.2	343.1	343.6	344.0	344.6	345.0	345.2



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	385.8	385.7	385.5	385.4	385.2	385.2	385.3	385.4	385.5	385.6	386.0
115°	447.5	447.8	448.0	448.3	448.4	448.7	448.9	449.2	449.4	449.6	450.0
117.5°	506.4	506.8	507.3	507.7	508.3	508.8	509.6	510.4	511.2	512.0	512.3
120°	551.2	550.7	550.2	549.7	549.3	549.7	550.8	552.0	553.1	554.3	554.9
122.5°	588.4	589.2	590.1	590.9	591.7	592.5	593.3	594.1	594.9	595.7	596.0
125°	652.6	653.1	653.6	654.1	654.5	655.0	655.4	655.9	656.4	656.8	657.0
127.5°	712.1	712.5	712.8	713.3	713.6	714.0	714.5	715.0	715.4	715.9	716.2
130°	751.1	752.0	753.0	753.9	754.7	755.5	755.9	756.3	756.9	757.3	757.3
132.5°	792.6	792.9	793.3	793.6	794.0	794.4	794.9	795.3	795.8	796.3	796.5
135°	849.5	850.2	850.9	851.6	852.3	852.8	853.3	853.8	854.3	854.7	854.7
137.5°	909.4	909.3	909.1	909.0	908.8	909.1	909.6	910.3	910.9	911.4	911.1
140°	945.8	946.1	946.3	946.6	946.8	947.0	947.3	947.4	947.7	947.9	947.9
142.5°	982.3	982.4	982.4	982.5	982.5	982.6	982.6	982.7	982.7	982.8	982.9
145°	1031.9	1032.5	1033.2	1033.9	1034.6	1035.1	1035.3	1035.5	1035.7	1036.0	1035.7
147.5°	1082.0	1082.2	1082.4	1082.7	1082.9	1083.1	1083.3	1083.5	1083.7	1083.9	1084.1
150°	1112.7	1112.9	1113.1	1113.3	1113.6	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7
152.5°	1140.9	1141.4	1142.0	1142.6	1143.3	1143.3	1142.7	1142.1	1141.6	1141.0	1140.9
155°	1180.0	1180.9	1181.9	1182.8	1183.7	1183.7	1182.8	1181.9	1180.9	1180.0	1180.2
157.5°	1215.0	1215.8	1216.6	1217.4	1218.2	1218.2	1217.5	1216.8	1216.1	1215.4	1215.5
160°	1234.9	1236.1	1237.2	1238.3	1239.5	1239.7	1239.0	1238.3	1237.7	1237.0	1237.2
162.5°	1255.6	1256.8	1257.9	1259.1	1260.3	1260.2	1258.9	1257.7	1256.4	1255.2	1255.4
165°	1282.5	1283.4	1284.4	1285.3	1286.2	1286.0	1284.6	1283.3	1281.8	1280.5	1280.9
167.5°	1301.8	1303.2	1304.7	1306.1	1307.5	1307.5	1306.2	1304.8	1303.4	1302.0	1302.0
170°	1312.6	1314.2	1315.8	1317.4	1319.0	1319.2	1317.8	1316.4	1315.0	1313.7	1313.4
172.5°	1321.7	1323.3	1324.9	1326.5	1328.2	1328.2	1326.6	1325.1	1323.5	1322.0	1321.9
175°	1331.2	1332.8	1334.4	1336.1	1337.7	1337.7	1336.1	1334.4	1332.8	1331.2	1331.5
177.5°	1336.2	1337.7	1339.2	1340.6	1342.1	1342.2	1341.0	1339.6	1338.4	1337.0	1337.0
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4
2.5°	525.8	523.4	521.7	520.4	516.7	514.5	512.8	510.5	507.7	504.9	501.3
5°	555.6	548.5	543.2	535.2	527.6	521.3	514.7	508.8	501.7	493.8	488.1
7.5°	587.0	576.3	562.7	550.8	537.4	525.8	515.5	504.9	493.8	483.0	473.2
10°	607.0	593.3	578.0	560.1	543.2	528.2	514.3	500.8	487.7	474.7	463.4
12.5°	628.4	611.3	588.8	567.8	548.9	528.9	512.1	495.5	479.7	466.0	453.0
15°	657.2	632.5	606.5	578.5	553.6	530.1	507.1	486.2	468.5	450.3	437.7
17.5°	674.8	644.3	614.7	585.3	555.2	525.6	500.8	476.7	454.5	436.5	420.5
20°	686.5	656.1	619.2	589.9	554.0	523.6	494.9	468.1	444.9	425.7	409.2
22.5°	696.6	661.6	624.6	585.9	550.3	518.0	486.6	459.7	436.0	415.7	399.9
25°	702.1	661.8	621.7	583.3	542.8	504.6	476.1	444.4	419.1	397.8	380.9
27.5°	702.8	659.6	614.2	571.6	529.8	494.2	458.3	429.9	403.7	381.1	364.9
30°	700.9	655.9	607.2	561.0	519.0	480.4	449.1	418.3	391.5	369.1	352.2
32.5°	694.9	648.2	598.1	549.1	505.6	467.8	435.6	406.3	380.1	358.1	340.4
35°	677.9	631.6	578.3	527.4	482.9	444.7	415.5	385.8	359.6	338.8	321.6
37.5°	651.1	609.4	555.1	502.5	458.7	420.4	391.5	364.6	341.0	319.8	302.3
40°	627.9	591.1	536.6	485.4	438.1	401.6	374.6	349.9	326.5	306.4	289.7
42.5°	601.0	569.0	518.8	464.5	418.8	382.2	355.9	333.7	311.7	293.1	276.4
45°	553.1	532.0	484.7	434.5	387.0	352.4	327.3	307.9	289.4	271.2	257.3
47.5°	498.1	487.6	447.8	400.1	355.1	320.9	299.2	281.2	264.9	249.6	237.3
50°	461.1	456.0	421.7	375.7	332.6	300.5	278.6	263.1	249.2	235.8	224.1
52.5°	424.6	424.5	393.4	351.3	311.5	280.6	258.8	244.4	232.4	221.4	211.0
55°	368.9	374.8	350.5	313.0	277.3	249.4	229.8	217.0	208.5	199.5	191.6
57.5°	317.7	327.5	307.5	274.4	244.6	219.0	201.9	192.3	183.2	177.7	172.0
60°	284.3	293.6	277.9	250.1	222.0	200.1	183.8	175.1	167.4	163.5	159.5
62.5°	254.6	262.8	251.3	225.4	201.1	179.9	166.2	157.9	152.7	148.6	145.9
65°	212.1	219.1	209.1	190.4	169.4	152.6	141.4	134.8	129.8	128.1	125.1
67.5°	171.5	177.8	172.5	156.5	139.7	126.9	118.2	111.9	108.9	107.5	105.3
70°	147.3	153.6	147.9	134.0	121.1	110.4	102.1	98.5	95.4	94.8	91.8
72.5°	126.9	131.2	125.5	114.6	103.6	94.5	88.1	84.4	82.8	81.6	80.0
75°	95.1	99.0	95.1	86.8	78.9	72.6	67.1	65.6	63.8	63.1	62.1
77.5°	67.3	70.6	67.8	62.5	56.6	51.7	48.8	46.9	46.5	45.4	45.9
80°	51.5	53.6	50.8	47.3	42.6	39.2	37.2	36.1	34.9	34.4	35.2
82.5°	37.0	37.9	36.5	34.1	30.7	28.4	27.0	25.8	25.5	25.6	25.6
85°	19.2	19.0	18.8	16.7	15.6	14.2	13.3	13.1	12.8	13.3	13.7
87.5°	10.3	10.1	9.5	8.4	7.4	6.3	5.7	5.0	5.7	6.3	7.0
90°	19.1	17.3	15.4	13.2	10.7	8.2	5.6	3.1	5.6	8.2	10.7
92.5°	38.4	37.2	35.8	33.8	30.9	28.0	25.1	22.2	25.1	28.0	30.9
95°	75.5	73.9	72.3	70.4	68.4	66.3	64.2	62.2	64.2	66.3	68.4
97.5°	120.7	118.9	117.0	115.2	113.5	111.9	110.2	108.6	110.2	111.9	113.5
100°	154.4	152.3	150.3	148.7	147.8	146.9	146.0	145.1	146.0	146.9	147.8
102.5°	189.6	187.6	185.7	184.7	184.2	183.9	183.5	183.2	183.5	183.9	184.2
105°	244.7	243.8	242.9	242.3	242.1	241.8	241.7	241.4	241.7	241.8	242.1
107.5°	304.1	304.0	303.8	303.6	303.4	303.1	302.8	302.5	302.8	303.1	303.4
110°	345.4	345.7	345.9	345.8	345.4	344.8	344.4	343.9	344.4	344.8	345.4





TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	386.5	386.8	387.3	387.4	387.4	387.3	387.2	387.0	387.2	387.3	387.4
115°	450.6	451.0	451.5	451.7	451.7	451.7	451.7	451.7	451.7	451.7	451.7
117.5°	512.6	512.9	513.3	513.4	513.2	513.0	512.8	512.6	512.8	513.0	513.2
120°	555.6	556.3	557.1	556.9	556.0	555.1	554.1	553.2	554.1	555.1	556.0
122.5°	596.4	596.6	597.0	597.0	596.6	596.2	595.8	595.5	595.8	596.2	596.6
125°	657.3	657.5	657.7	657.8	657.8	657.8	657.8	657.8	657.8	657.8	657.8
127.5°	716.6	716.9	717.4	717.2	716.5	715.8	715.2	714.4	715.2	715.8	716.5
130°	757.3	757.3	757.3	757.0	756.3	755.5	754.9	754.2	754.9	755.5	756.3
132.5°	796.7	796.8	797.0	796.8	796.3	795.9	795.3	794.8	795.3	795.9	796.3
135°	854.7	854.7	854.7	854.0	852.7	851.2	849.9	848.5	849.9	851.2	852.7
137.5°	910.7	910.3	910.0	909.5	908.8	908.2	907.6	906.9	907.6	908.2	908.8
140°	947.9	947.9	947.9	947.7	947.3	946.8	946.3	945.8	946.3	946.8	947.3
142.5°	983.1	983.3	983.5	983.4	982.8	982.4	982.0	981.5	982.0	982.4	982.8
145°	1035.5	1035.3	1035.1	1034.5	1033.6	1032.7	1031.7	1030.8	1031.7	1032.7	1033.6
147.5°	1084.2	1084.4	1084.6	1084.1	1083.0	1081.9	1080.8	1079.7	1080.8	1081.9	1083.0
150°	1113.7	1113.7	1113.7	1113.2	1112.3	1111.4	1110.4	1109.6	1110.4	1111.4	1112.3
152.5°	1140.7	1140.5	1140.3	1140.0	1139.3	1138.8	1138.3	1137.7	1138.3	1138.8	1139.3
155°	1180.4	1180.7	1180.9	1181.0	1181.0	1181.0	1181.0	1181.0	1181.0	1181.0	1181.0
157.5°	1215.5	1215.6	1215.6	1215.8	1216.3	1216.7	1217.1	1217.5	1217.1	1216.7	1216.3
160°	1237.4	1237.7	1237.9	1238.1	1238.3	1238.6	1238.9	1239.0	1238.9	1238.6	1238.3
162.5°	1255.7	1255.9	1256.2	1256.5	1257.1	1257.8	1258.3	1258.9	1258.3	1257.8	1257.1
165°	1281.4	1281.8	1282.3	1282.9	1283.6	1284.2	1285.0	1285.7	1285.0	1284.2	1283.6
167.5°	1301.9	1301.9	1301.8	1302.3	1303.2	1304.2	1305.2	1306.2	1305.2	1304.2	1303.2
170°	1313.1	1313.0	1312.7	1313.1	1314.3	1315.5	1316.6	1317.8	1316.6	1315.5	1314.3
172.5°	1321.9	1321.8	1321.7	1322.2	1323.1	1324.1	1325.1	1326.1	1325.1	1324.1	1323.1
175°	1331.7	1331.9	1332.1	1332.8	1334.0	1335.2	1336.3	1337.5	1336.3	1335.2	1334.0
177.5°	1337.0	1337.0	1337.0	1337.5	1338.5	1339.3	1340.2	1341.2	1340.2	1339.3	1338.5
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4
2.5°	499.6	498.1	496.0	492.9	490.4	487.7	487.0	486.0	488.0	486.3	485.8
5°	483.3	478.8	473.1	466.6	462.8	457.4	456.3	454.1	452.0	451.8	449.7
7.5°	465.9	459.4	451.9	445.3	439.2	433.1	429.2	428.4	425.3	423.4	421.3
10°	454.8	446.7	438.1	431.8	424.6	418.3	413.8	411.3	409.2	406.9	404.7
12.5°	441.7	433.1	426.0	419.1	410.6	405.8	398.5	394.1	393.7	393.7	388.3
15°	426.3	417.9	406.9	397.2	392.5	383.3	379.2	374.2	371.0	367.8	365.3
17.5°	408.8	398.2	389.7	378.5	369.7	362.3	357.0	354.0	349.2	344.7	341.5
20°	397.8	386.6	377.6	365.7	356.1	347.0	342.5	338.3	334.7	330.9	327.3
22.5°	386.6	375.0	363.9	352.4	343.4	333.8	329.5	323.8	320.4	318.3	314.7
25°	369.1	356.4	343.8	332.8	323.5	315.0	309.4	305.0	301.1	299.4	297.1
27.5°	350.0	337.4	325.2	312.7	302.2	296.0	291.5	288.2	286.0	283.7	282.7
30°	337.9	324.8	311.7	300.1	290.4	284.3	280.1	277.8	276.1	275.0	273.9
32.5°	325.6	312.6	298.9	288.3	279.6	274.1	270.9	268.6	267.8	267.4	267.0
35°	305.8	292.7	280.1	270.5	262.3	260.2	257.4	256.2	255.7	257.3	257.9
37.5°	286.7	274.6	262.9	253.7	248.3	245.2	244.2	244.3	245.8	247.1	248.6
40°	274.4	262.5	251.6	243.5	238.4	236.6	236.1	237.2	238.9	240.4	242.1
42.5°	262.3	250.7	240.8	233.3	229.7	227.9	228.2	229.3	231.7	233.4	235.9
45°	243.8	234.1	224.4	218.2	215.3	215.7	215.7	217.6	219.9	222.7	225.4
47.5°	226.2	216.4	208.5	203.3	201.8	201.4	202.6	205.1	208.4	211.8	215.6
50°	214.5	205.1	198.1	193.5	191.8	192.4	194.1	196.4	200.5	204.7	208.7
52.5°	202.4	193.9	187.5	183.2	182.0	183.2	184.9	188.5	192.1	196.6	201.4
55°	183.8	176.6	171.6	168.4	168.0	168.6	170.5	174.5	179.6	185.3	189.9
57.5°	165.3	159.3	154.6	152.5	152.7	153.3	156.4	161.1	166.6	172.6	178.6
60°	152.8	147.3	143.5	141.8	142.0	143.3	147.1	151.5	158.3	164.2	170.5
62.5°	141.0	136.2	132.5	131.0	130.7	133.5	137.1	141.7	148.5	155.1	161.9
65°	122.0	118.2	115.2	114.4	115.0	117.2	121.8	127.9	133.6	140.5	147.8
67.5°	103.4	100.3	98.3	98.6	99.4	102.5	106.4	111.6	118.2	125.4	132.4
70°	91.6	88.6	86.9	87.1	88.5	92.2	95.6	100.9	107.8	115.2	121.1
72.5°	79.5	77.5	76.0	76.9	78.1	80.7	85.0	90.2	96.4	103.3	109.5
75°	61.0	61.0	60.2	60.8	62.7	65.2	68.4	73.8	80.0	85.5	90.5
77.5°	45.2	44.8	45.3	46.1	47.2	50.2	53.9	57.8	62.3	67.9	72.1
80°	34.6	34.9	35.8	37.2	37.5	39.9	43.7	47.3	50.8	55.5	59.5
82.5°	26.0	26.2	26.8	28.4	28.8	31.3	33.7	37.3	40.6	43.7	47.0
85°	14.2	14.2	15.2	15.9	16.9	18.5	20.1	22.2	25.1	27.2	30.4
87.5°	8.0	8.5	9.5	10.3	11.1	12.3	12.9	15.1	16.1	17.1	18.8
90°	13.2	15.4	17.3	19.1	21.0	22.8	24.2	25.6	26.9	28.4	29.2
92.5°	33.8	35.8	37.2	38.4	39.8	41.0	41.8	42.7	43.5	44.3	44.9
95°	70.4	72.3	73.9	75.5	77.1	78.7	79.5	80.1	80.8	81.5	81.9
97.5°	115.2	117.0	118.9	120.7	122.6	124.5	125.4	126.2	127.0	127.9	128.2
100°	148.7	150.3	152.3	154.4	156.4	158.5	159.0	159.4	159.9	160.3	160.6
102.5°	184.7	185.7	187.6	189.6	191.5	193.3	193.9	194.6	195.3	195.9	196.3
105°	242.3	242.9	243.8	244.7	245.7	246.6	247.3	248.0	248.6	249.3	250.0
107.5°	303.6	303.8	304.0	304.1	304.3	304.3	305.1	305.7	306.3	306.9	307.3
110°	345.8	345.9	345.7	345.4	345.2	345.0	344.6	344.0	343.6	343.1	343.2



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	387.4	387.3	386.8	386.5	386.0	385.6	385.5	385.4	385.3	385.2	385.2
115°	451.7	451.5	451.0	450.6	450.0	449.6	449.4	449.2	448.9	448.7	448.4
117.5°	513.4	513.3	512.9	512.6	512.3	512.0	511.2	510.4	509.6	508.8	508.3
120°	556.9	557.1	556.3	555.6	554.9	554.3	553.1	552.0	550.8	549.7	549.3
122.5°	597.0	597.0	596.6	596.4	596.0	595.7	594.9	594.1	593.3	592.5	591.7
125°	657.8	657.7	657.5	657.3	657.0	656.8	656.4	655.9	655.4	655.0	654.5
127.5°	717.2	717.4	716.9	716.6	716.2	715.9	715.4	715.0	714.5	714.0	713.6
130°	757.0	757.3	757.3	757.3	757.3	757.3	756.9	756.3	755.9	755.5	754.7
132.5°	796.8	797.0	796.8	796.7	796.5	796.3	795.8	795.3	794.9	794.4	794.0
135°	854.0	854.7	854.7	854.7	854.7	854.7	854.3	853.8	853.3	852.8	852.3
137.5°	909.5	910.0	910.3	910.7	911.1	911.4	910.9	910.3	909.6	909.1	908.8
140°	947.7	947.9	947.9	947.9	947.9	947.9	947.7	947.4	947.3	947.0	946.8
142.5°	983.4	983.5	983.3	983.1	982.9	982.8	982.7	982.7	982.6	982.6	982.5
145°	1034.5	1035.1	1035.3	1035.5	1035.7	1036.0	1035.7	1035.5	1035.3	1035.1	1034.6
147.5°	1084.1	1084.6	1084.4	1084.2	1084.1	1083.9	1083.7	1083.5	1083.3	1083.1	1082.9
150°	1113.2	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.6
152.5°	1140.0	1140.3	1140.5	1140.7	1140.9	1141.0	1141.6	1142.1	1142.7	1143.3	1143.3
155°	1181.0	1180.9	1180.7	1180.4	1180.2	1180.0	1180.9	1181.9	1182.8	1183.7	1183.7
157.5°	1215.8	1215.6	1215.6	1215.5	1215.5	1215.4	1216.1	1216.8	1217.5	1218.2	1218.2
160°	1238.1	1237.9	1237.7	1237.4	1237.2	1237.0	1237.7	1238.3	1239.0	1239.7	1239.5
162.5°	1256.5	1256.2	1255.9	1255.7	1255.4	1255.2	1256.4	1257.7	1258.9	1260.2	1260.3
165°	1282.9	1282.3	1281.8	1281.4	1280.9	1280.5	1281.8	1283.3	1284.6	1286.0	1286.2
167.5°	1302.3	1301.8	1301.9	1301.9	1302.0	1302.0	1303.4	1304.8	1306.2	1307.5	1307.5
170°	1313.1	1312.7	1313.0	1313.1	1313.4	1313.7	1315.0	1316.4	1317.8	1319.2	1319.0
172.5°	1322.2	1321.7	1321.8	1321.9	1321.9	1322.0	1323.5	1325.1	1326.6	1328.2	1328.2
175°	1332.8	1332.1	1331.9	1331.7	1331.5	1331.2	1332.8	1334.4	1336.1	1337.7	1337.7
177.5°	1337.5	1337.0	1337.0	1337.0	1337.0	1337.0	1338.4	1339.6	1341.0	1342.2	1342.1
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4
2.5°	485.4	485.2	483.9	483.8	483.9	485.2	485.4	485.8	486.3	488.0	486.0
5°	448.4	447.4	446.7	449.1	446.7	447.4	448.4	449.7	451.8	452.0	454.1
7.5°	420.5	419.7	417.9	417.2	417.9	419.7	420.5	421.3	423.4	425.3	428.4
10°	402.7	401.8	400.1	399.7	400.1	401.8	402.7	404.7	406.9	409.2	411.3
12.5°	385.4	383.8	383.4	383.9	383.4	383.8	385.4	388.3	393.7	393.7	394.1
15°	362.6	361.7	359.4	360.1	359.4	361.7	362.6	365.3	367.8	371.0	374.2
17.5°	340.0	339.0	336.2	338.7	336.2	339.0	340.0	341.5	344.7	349.2	354.0
20°	325.8	324.1	322.7	322.4	322.7	324.1	325.8	327.3	330.9	334.7	338.3
22.5°	312.4	310.9	310.7	309.3	310.7	310.9	312.4	314.7	318.3	320.4	323.8
25°	295.4	294.0	293.6	292.5	293.6	294.0	295.4	297.1	299.4	301.1	305.0
27.5°	282.5	281.8	281.0	281.3	281.0	281.8	282.5	282.7	283.7	286.0	288.2
30°	274.6	274.4	273.9	273.9	273.9	274.4	274.6	273.9	275.0	276.1	277.8
32.5°	268.0	268.0	268.2	268.2	268.2	268.0	268.0	267.0	267.4	267.8	268.6
35°	258.8	259.4	259.8	259.1	259.8	259.4	258.8	257.9	257.3	255.7	256.2
37.5°	250.4	251.0	251.6	252.4	251.6	251.0	250.4	248.6	247.1	245.8	244.3
40°	244.0	245.4	245.8	246.9	245.8	245.4	244.0	242.1	240.4	238.9	237.2
42.5°	237.9	239.5	240.6	240.9	240.6	239.5	237.9	235.9	233.4	231.7	229.3
45°	228.5	230.2	231.8	231.8	231.8	230.2	228.5	225.4	222.7	219.9	217.6
47.5°	218.9	221.3	222.8	223.2	222.8	221.3	218.9	215.6	211.8	208.4	205.1
50°	212.3	215.3	216.8	217.8	216.8	215.3	212.3	208.7	204.7	200.5	196.4
52.5°	205.9	208.8	210.8	211.3	210.8	208.8	205.9	201.4	196.6	192.1	188.5
55°	194.7	199.0	201.3	202.2	201.3	199.0	194.7	189.9	185.3	179.6	174.5
57.5°	184.3	188.2	190.9	191.5	190.9	188.2	184.3	178.6	172.6	166.6	161.1
60°	176.2	180.5	183.8	184.4	183.8	180.5	176.2	170.5	164.2	158.3	151.5
62.5°	167.9	172.4	175.4	177.0	175.4	172.4	167.9	161.9	155.1	148.5	141.7
65°	153.6	158.1	161.0	161.7	161.0	158.1	153.6	147.8	140.5	133.6	127.9
67.5°	138.0	142.5	144.4	145.6	144.4	142.5	138.0	132.4	125.4	118.2	111.6
70°	127.1	130.6	132.8	133.8	132.8	130.6	127.1	121.1	115.2	107.8	100.9
72.5°	114.6	118.3	120.7	121.0	120.7	118.3	114.6	109.5	103.3	96.4	90.2
75°	95.4	98.8	100.0	100.0	100.0	98.8	95.4	90.5	85.5	80.0	73.8
77.5°	75.5	77.2	78.8	79.2	78.8	77.2	75.5	72.1	67.9	62.3	57.8
80°	62.7	63.8	65.0	65.0	65.0	63.8	62.7	59.5	55.5	50.8	47.3
82.5°	49.5	50.4	51.6	51.5	51.6	50.4	49.5	47.0	43.7	40.6	37.3
85°	30.0	31.8	31.7	31.2	31.7	31.8	30.0	30.4	27.2	25.1	22.2
87.5°	19.4	19.7	20.3	20.8	20.3	19.7	19.4	18.8	17.1	16.1	15.1
90°	29.7	30.1	30.6	31.1	30.6	30.1	29.7	29.2	28.4	26.9	25.6
92.5°	45.2	45.5	45.7	46.0	45.7	45.5	45.2	44.9	44.3	43.5	42.7
95°	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.9	81.5	80.8	80.1
97.5°	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	127.9	127.0	126.2
100°	160.6	160.6	160.6	160.6	160.6	160.6	160.6	160.6	160.3	159.9	159.4
102.5°	196.5	196.7	196.9	197.1	196.9	196.7	196.5	196.3	195.9	195.3	194.6
105°	250.7	251.4	252.1	252.8	252.1	251.4	250.7	250.0	249.3	248.6	248.0
107.5°	307.2	307.2	307.1	307.1	307.1	307.2	307.2	307.3	306.9	306.3	305.7
110°	343.9	344.6	345.4	346.0	345.4	344.6	343.9	343.2	343.1	343.6	344.0



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	385.4	385.5	385.7	385.8	385.7	385.5	385.4	385.2	385.2	385.3	385.4
115°	448.3	448.0	447.8	447.5	447.8	448.0	448.3	448.4	448.7	448.9	449.2
117.5°	507.7	507.3	506.8	506.4	506.8	507.3	507.7	508.3	508.8	509.6	510.4
120°	549.7	550.2	550.7	551.2	550.7	550.2	549.7	549.3	549.7	550.8	552.0
122.5°	590.9	590.1	589.2	588.4	589.2	590.1	590.9	591.7	592.5	593.3	594.1
125°	654.1	653.6	653.1	652.6	653.1	653.6	654.1	654.5	655.0	655.4	655.9
127.5°	713.3	712.8	712.5	712.1	712.5	712.8	713.3	713.6	714.0	714.5	715.0
130°	753.9	753.0	752.0	751.1	752.0	753.0	753.9	754.7	755.5	755.9	756.3
132.5°	793.6	793.3	792.9	792.6	792.9	793.3	793.6	794.0	794.4	794.9	795.3
135°	851.6	850.9	850.2	849.5	850.2	850.9	851.6	852.3	852.8	853.3	853.8
137.5°	909.0	909.1	909.3	909.4	909.3	909.1	909.0	908.8	909.1	909.6	910.3
140°	946.6	946.3	946.1	945.8	946.1	946.3	946.6	946.8	947.0	947.3	947.4
142.5°	982.5	982.4	982.4	982.3	982.4	982.4	982.5	982.5	982.6	982.6	982.7
145°	1033.9	1033.2	1032.5	1031.9	1032.5	1033.2	1033.9	1034.6	1035.1	1035.3	1035.5
147.5°	1082.7	1082.4	1082.2	1082.0	1082.2	1082.4	1082.7	1082.9	1083.1	1083.3	1083.5
150°	1113.3	1113.1	1112.9	1112.7	1112.9	1113.1	1113.3	1113.6	1113.7	1113.7	1113.7
152.5°	1142.6	1142.0	1141.4	1140.9	1141.4	1142.0	1142.6	1143.3	1143.3	1142.7	1142.1
155°	1182.8	1181.9	1180.9	1180.0	1180.9	1181.9	1182.8	1183.7	1183.7	1182.8	1181.9
157.5°	1217.4	1216.6	1215.8	1215.0	1215.8	1216.6	1217.4	1218.2	1218.2	1217.5	1216.8
160°	1238.3	1237.2	1236.1	1234.9	1236.1	1237.2	1238.3	1239.5	1239.7	1239.0	1238.3
162.5°	1259.1	1257.9	1256.8	1255.6	1256.8	1257.9	1259.1	1260.3	1260.2	1258.9	1257.7
165°	1285.3	1284.4	1283.4	1282.5	1283.4	1284.4	1285.3	1286.2	1286.0	1284.6	1283.3
167.5°	1306.1	1304.7	1303.2	1301.8	1303.2	1304.7	1306.1	1307.5	1307.5	1306.2	1304.8
170°	1317.4	1315.8	1314.2	1312.6	1314.2	1315.8	1317.4	1319.0	1319.2	1317.8	1316.4
172.5°	1326.5	1324.9	1323.3	1321.7	1323.3	1324.9	1326.5	1328.2	1328.2	1326.6	1325.1
175°	1336.1	1334.4	1332.8	1331.2	1332.8	1334.4	1336.1	1337.7	1337.7	1336.1	1334.4
177.5°	1340.6	1339.2	1337.7	1336.2	1337.7	1339.2	1340.6	1342.1	1342.2	1341.0	1339.6
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4
2.5°	487.0	487.7	490.4	492.9	496.0	498.1	499.6	501.3	504.9	507.7	510.5
5°	456.3	457.4	462.8	466.6	473.1	478.8	483.3	488.1	493.8	501.7	508.8
7.5°	429.2	433.1	439.2	445.3	451.9	459.4	465.9	473.2	483.0	493.8	504.9
10°	413.8	418.3	424.6	431.8	438.1	446.7	454.8	463.4	474.7	487.7	500.8
12.5°	398.5	405.8	410.6	419.1	426.0	433.1	441.7	453.0	466.0	479.7	495.5
15°	379.2	383.3	392.5	397.2	406.9	417.9	426.3	437.7	450.3	468.5	486.2
17.5°	357.0	362.3	369.7	378.5	389.7	398.2	408.8	420.5	436.5	454.5	476.7
20°	342.5	347.0	356.1	365.7	377.6	386.6	397.8	409.2	425.7	444.9	468.1
22.5°	329.5	333.8	343.4	352.4	363.9	375.0	386.6	399.9	415.7	436.0	459.7
25°	309.4	315.0	323.5	332.8	343.8	356.4	369.1	380.9	397.8	419.1	444.4
27.5°	291.5	296.0	302.2	312.7	325.2	337.4	350.0	364.9	381.1	403.7	429.9
30°	280.1	284.3	290.4	300.1	311.7	324.8	337.9	352.2	369.1	391.5	418.3
32.5°	270.9	274.1	279.6	288.3	298.9	312.6	325.6	340.4	358.1	380.1	406.3
35°	257.4	260.2	262.3	270.5	280.1	292.7	305.8	321.6	338.8	359.6	385.8
37.5°	244.2	245.2	248.3	253.7	262.9	274.6	286.7	302.3	319.8	341.0	364.6
40°	236.1	236.6	238.4	243.5	251.6	262.5	274.4	289.7	306.4	326.5	349.9
42.5°	228.2	227.9	229.7	233.3	240.8	250.7	262.3	276.4	293.1	311.7	333.7
45°	215.7	215.7	215.3	218.2	224.4	234.1	243.8	257.3	271.2	289.4	307.9
47.5°	202.6	201.4	201.8	203.3	208.5	216.4	226.2	237.3	249.6	264.9	281.2
50°	194.1	192.4	191.8	193.5	198.1	205.1	214.5	224.1	235.8	249.2	263.1
52.5°	184.9	183.2	182.0	183.2	187.5	193.9	202.4	211.0	221.4	232.4	244.4
55°	170.5	168.6	168.0	168.4	171.6	176.6	183.8	191.6	199.5	208.5	217.0
57.5°	156.4	153.3	152.7	152.5	154.6	159.3	165.3	172.0	177.7	183.2	192.3
60°	147.1	143.3	142.0	141.8	143.5	147.3	152.8	159.5	163.5	167.4	175.1
62.5°	137.1	133.5	130.7	131.0	132.5	136.2	141.0	145.9	148.6	152.7	157.9
65°	121.8	117.2	115.0	114.4	115.2	118.2	122.0	125.1	128.1	129.8	134.8
67.5°	106.4	102.5	99.4	98.6	98.3	100.3	103.4	105.3	107.5	108.9	111.9
70°	95.6	92.2	88.5	87.1	86.9	88.6	91.6	91.8	94.8	95.4	98.5
72.5°	85.0	80.7	78.1	76.9	76.0	77.5	79.5	80.0	81.6	82.8	84.4
75°	68.4	65.2	62.7	60.8	60.2	61.0	61.0	62.1	63.1	63.8	65.6
77.5°	53.9	50.2	47.2	46.1	45.3	44.8	45.2	45.9	45.4	46.5	46.9
80°	43.7	39.9	37.5	37.2	35.8	34.9	34.6	35.2	34.4	34.9	36.1
82.5°	33.7	31.3	28.8	28.4	26.8	26.2	26.0	25.6	25.6	25.5	25.8
85°	20.1	18.5	16.9	15.9	15.2	14.2	14.2	13.7	13.3	12.8	13.1
87.5°	12.9	12.3	11.1	10.3	9.5	8.5	8.0	7.0	6.3	5.7	5.0
90°	24.2	22.8	21.0	19.1	17.3	15.4	13.2	10.7	8.2	5.6	3.1
92.5°	41.8	41.0	39.8	38.4	37.2	35.8	33.8	30.9	28.0	25.1	22.2
95°	79.5	78.7	77.1	75.5	73.9	72.3	70.4	68.4	66.3	64.2	62.2
97.5°	125.4	124.5	122.6	120.7	118.9	117.0	115.2	113.5	111.9	110.2	108.6
100°	159.0	158.5	156.4	154.4	152.3	150.3	148.7	147.8	146.9	146.0	145.1
102.5°	193.9	193.3	191.5	189.6	187.6	185.7	184.7	184.2	183.9	183.5	183.2
105°	247.3	246.6	245.7	244.7	243.8	242.9	242.3	242.1	241.8	241.7	241.4
107.5°	305.1	304.3	304.3	304.1	304.0	303.8	303.6	303.4	303.1	302.8	302.5
110°	344.6	345.0	345.2	345.4	345.7	345.9	345.8	345.4	344.8	344.4	343.9



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	385.5	385.6	386.0	386.5	386.8	387.3	387.4	387.4	387.3	387.2	387.0
115°	449.4	449.6	450.0	450.6	451.0	451.5	451.7	451.7	451.7	451.7	451.7
117.5°	511.2	512.0	512.3	512.6	512.9	513.3	513.4	513.2	513.0	512.8	512.6
120°	553.1	554.3	554.9	555.6	556.3	557.1	556.9	556.0	555.1	554.1	553.2
122.5°	594.9	595.7	596.0	596.4	596.6	597.0	597.0	596.6	596.2	595.8	595.5
125°	656.4	656.8	657.0	657.3	657.5	657.7	657.8	657.8	657.8	657.8	657.8
127.5°	715.4	715.9	716.2	716.6	716.9	717.4	717.2	716.5	715.8	715.2	714.4
130°	756.9	757.3	757.3	757.3	757.3	757.3	757.0	756.3	755.5	754.9	754.2
132.5°	795.8	796.3	796.5	796.7	796.8	797.0	796.8	796.3	795.9	795.3	794.8
135°	854.3	854.7	854.7	854.7	854.7	854.7	854.0	852.7	851.2	849.9	848.5
137.5°	910.9	911.4	911.1	910.7	910.3	910.0	909.5	908.8	908.2	907.6	906.9
140°	947.7	947.9	947.9	947.9	947.9	947.9	947.7	947.3	946.8	946.3	945.8
142.5°	982.7	982.8	982.9	983.1	983.3	983.5	983.4	982.8	982.4	982.0	981.5
145°	1035.7	1036.0	1035.7	1035.5	1035.3	1035.1	1034.5	1033.6	1032.7	1031.7	1030.8
147.5°	1083.7	1083.9	1084.1	1084.2	1084.4	1084.6	1084.1	1083.0	1081.9	1080.8	1079.7
150°	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.2	1112.3	1111.4	1110.4	1109.6
152.5°	1141.6	1141.0	1140.9	1140.7	1140.5	1140.3	1140.0	1139.3	1138.8	1138.3	1137.7
155°	1180.9	1180.0	1180.2	1180.4	1180.7	1180.9	1181.0	1181.0	1181.0	1181.0	1181.0
157.5°	1216.1	1215.4	1215.5	1215.5	1215.6	1215.6	1215.8	1216.3	1216.7	1217.1	1217.5
160°	1237.7	1237.0	1237.2	1237.4	1237.7	1237.9	1238.1	1238.3	1238.6	1238.9	1239.0
162.5°	1256.4	1255.2	1255.4	1255.7	1255.9	1256.2	1256.5	1257.1	1257.8	1258.3	1258.9
165°	1281.8	1280.5	1280.9	1281.4	1281.8	1282.3	1282.9	1283.6	1284.2	1285.0	1285.7
167.5°	1303.4	1302.0	1302.0	1301.9	1301.9	1301.8	1302.3	1303.2	1304.2	1305.2	1306.2
170°	1315.0	1313.7	1313.4	1313.1	1313.0	1312.7	1313.1	1314.3	1315.5	1316.6	1317.8
172.5°	1323.5	1322.0	1321.9	1321.9	1321.8	1321.7	1322.2	1323.1	1324.1	1325.1	1326.1
175°	1332.8	1331.2	1331.5	1331.7	1331.9	1332.1	1332.8	1334.0	1335.2	1336.3	1337.5
177.5°	1338.4	1337.0	1337.0	1337.0	1337.0	1337.0	1337.5	1338.5	1339.3	1340.2	1341.2
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4	509.4
2.5°	512.8	514.5	516.7	520.4	521.7	523.4	525.8	525.7	526.3	528.9	534.2
5°	514.7	521.3	527.6	535.2	543.2	548.5	555.6	560.1	564.5	570.2	580.0
7.5°	515.5	525.8	537.4	550.8	562.7	576.3	587.0	597.1	606.2	618.1	629.7
10°	514.3	528.2	543.2	560.1	578.0	593.3	607.0	622.6	635.9	650.4	663.5
12.5°	512.1	528.9	548.9	567.8	588.8	611.3	628.4	644.2	661.8	678.6	698.8
15°	507.1	530.1	553.6	578.5	606.5	632.5	657.2	677.6	696.6	721.8	748.1
17.5°	500.8	525.6	555.2	585.3	614.7	644.3	674.8	705.6	729.6	760.8	781.4
20°	494.9	523.6	554.0	589.9	619.2	656.1	686.5	716.2	749.2	780.2	804.9
22.5°	486.6	518.0	550.3	585.9	624.6	661.6	696.6	728.9	761.9	795.6	825.5
25°	476.1	504.6	542.8	583.3	621.7	661.8	702.1	742.6	778.1	813.8	841.6
27.5°	458.3	494.2	529.8	571.6	614.2	659.6	702.8	745.1	782.3	811.6	828.8
30°	449.1	480.4	519.0	561.0	607.2	655.9	700.9	742.4	777.0	800.5	807.4
32.5°	435.6	467.8	505.6	549.1	598.1	648.2	694.9	734.1	763.0	775.3	767.0
35°	415.5	444.7	482.9	527.4	578.3	631.6	677.9	711.0	725.8	714.2	685.3
37.5°	391.5	420.4	458.7	502.5	555.1	609.4	651.1	675.0	670.1	641.2	598.2
40°	374.6	401.6	438.1	485.4	536.6	591.1	627.9	640.7	627.2	585.9	540.0
42.5°	355.9	382.2	418.8	464.5	518.8	569.0	601.0	602.1	579.4	529.9	484.0
45°	327.3	352.4	387.0	434.5	484.7	532.0	553.1	542.8	501.0	453.3	407.1
47.5°	299.2	320.9	355.1	400.1	447.8	487.6	498.1	479.5	435.0	388.6	345.8
50°	278.6	300.5	332.6	375.7	421.7	456.0	461.1	436.4	392.7	346.1	312.5
52.5°	258.8	280.6	311.5	351.3	393.4	424.5	424.6	396.1	352.6	311.0	279.8
55°	229.8	249.4	277.3	313.0	350.5	374.8	368.9	339.4	301.6	265.5	238.3
57.5°	201.9	219.0	244.6	274.4	307.5	327.5	317.7	289.3	255.6	224.9	204.3
60°	183.8	200.1	222.0	250.1	277.9	293.6	284.3	258.5	227.5	202.8	184.9
62.5°	166.2	179.9	201.1	225.4	251.3	262.8	254.6	229.2	202.3	180.0	165.4
65°	141.4	152.6	169.4	190.4	209.1	219.1	212.1	188.4	168.0	151.9	140.4
67.5°	118.2	126.9	139.7	156.5	172.5	177.8	171.5	155.0	137.7	124.8	116.6
70°	102.1	110.4	121.1	134.0	147.9	153.6	147.3	134.2	120.1	108.3	100.2
72.5°	88.1	94.5	103.6	114.6	125.5	131.2	126.9	114.3	102.4	93.5	86.8
75°	67.1	72.6	78.9	86.8	95.1	99.0	95.1	86.5	78.3	71.8	66.9
77.5°	48.8	51.7	56.6	62.5	67.8	70.6	67.3	61.5	56.4	52.0	49.6
80°	37.2	39.2	42.6	47.3	50.8	53.6	51.5	46.6	42.6	39.7	38.6
82.5°	27.0	28.4	30.7	34.1	36.5	37.9	37.0	33.4	31.8	29.2	28.2
85°	13.3	14.2	15.6	16.7	18.8	19.0	19.2	17.7	16.2	15.6	14.8
87.5°	5.7	6.3	7.4	8.4	9.5	10.1	10.3	10.6	10.3	10.4	10.0
90°	5.6	8.2	10.7	13.2	15.4	17.3	19.1	21.0	22.8	24.2	25.6
92.5°	25.1	28.0	30.9	33.8	35.8	37.2	38.4	39.8	41.0	41.8	42.7
95°	64.2	66.3	68.4	70.4	72.3	73.9	75.5	77.1	78.7	79.5	80.1
97.5°	110.2	111.9	113.5	115.2	117.0	118.9	120.7	122.6	124.5	125.4	126.2
100°	146.0	146.9	147.8	148.7	150.3	152.3	154.4	156.4	158.5	159.0	159.4
102.5°	183.5	183.9	184.2	184.7	185.7	187.6	189.6	191.5	193.3	193.9	194.6
105°	241.7	241.8	242.1	242.3	242.9	243.8	244.7	245.7	246.6	247.3	248.0
107.5°	302.8	303.1	303.4	303.6	303.8	304.0	304.1	304.3	304.3	305.1	305.7
110°	344.4	344.8	345.4	345.8	345.9	345.7	345.4	345.2	345.0	344.6	344.0





TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	387.2	387.3	387.4	387.4	387.3	386.8	386.5	386.0	385.6	385.5	385.4
115°	451.7	451.7	451.7	451.7	451.5	451.0	450.6	450.0	449.6	449.4	449.2
117.5°	512.8	513.0	513.2	513.4	513.3	512.9	512.6	512.3	512.0	511.2	510.4
120°	554.1	555.1	556.0	556.9	557.1	556.3	555.6	554.9	554.3	553.1	552.0
122.5°	595.8	596.2	596.6	597.0	597.0	596.6	596.4	596.0	595.7	594.9	594.1
125°	657.8	657.8	657.8	657.8	657.7	657.5	657.3	657.0	656.8	656.4	655.9
127.5°	715.2	715.8	716.5	717.2	717.4	716.9	716.6	716.2	715.9	715.4	715.0
130°	754.9	755.5	756.3	757.0	757.3	757.3	757.3	757.3	757.3	756.9	756.3
132.5°	795.3	795.9	796.3	796.8	797.0	796.8	796.7	796.5	796.3	795.8	795.3
135°	849.9	851.2	852.7	854.0	854.7	854.7	854.7	854.7	854.7	854.3	853.8
137.5°	907.6	908.2	908.8	909.5	910.0	910.3	910.7	911.1	911.4	910.9	910.3
140°	946.3	946.8	947.3	947.7	947.9	947.9	947.9	947.9	947.9	947.7	947.4
142.5°	982.0	982.4	982.8	983.4	983.5	983.3	983.1	982.9	982.8	982.7	982.7
145°	1031.7	1032.7	1033.6	1034.5	1035.1	1035.3	1035.5	1035.7	1036.0	1035.7	1035.5
147.5°	1080.8	1081.9	1083.0	1084.1	1084.6	1084.4	1084.2	1084.1	1083.9	1083.7	1083.5
150°	1110.4	1111.4	1112.3	1113.2	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7
152.5°	1138.3	1138.8	1139.3	1140.0	1140.3	1140.5	1140.7	1140.9	1141.0	1141.6	1142.1
155°	1181.0	1181.0	1181.0	1181.0	1180.9	1180.7	1180.4	1180.2	1180.0	1180.9	1181.9
157.5°	1217.1	1216.7	1216.3	1215.8	1215.6	1215.6	1215.5	1215.5	1215.4	1216.1	1216.8
160°	1238.9	1238.6	1238.3	1238.1	1237.9	1237.7	1237.4	1237.2	1237.0	1237.7	1238.3
162.5°	1258.3	1257.8	1257.1	1256.5	1256.2	1255.9	1255.7	1255.4	1255.2	1256.4	1257.7
165°	1285.0	1284.2	1283.6	1282.9	1282.3	1281.8	1281.4	1280.9	1280.5	1281.8	1283.3
167.5°	1305.2	1304.2	1303.2	1302.3	1301.8	1301.9	1301.9	1302.0	1302.0	1303.4	1304.8
170°	1316.6	1315.5	1314.3	1313.1	1312.7	1313.0	1313.1	1313.4	1313.7	1315.0	1316.4
172.5°	1325.1	1324.1	1323.1	1322.2	1321.7	1321.8	1321.9	1321.9	1322.0	1323.5	1325.1
175°	1336.3	1335.2	1334.0	1332.8	1332.1	1331.9	1331.7	1331.5	1331.2	1332.8	1334.4
177.5°	1340.2	1339.3	1338.5	1337.5	1337.0	1337.0	1337.0	1337.0	1337.0	1338.4	1339.6
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	509.4	509.4	509.4	509.4	509.4	509.4	509.4
2.5°	537.0	537.3	538.9	540.0	540.4	542.1	542.2
5°	584.2	587.7	594.7	595.3	596.4	601.9	597.6
7.5°	639.4	648.5	654.6	660.0	661.9	664.3	663.9
10°	674.9	688.4	695.2	706.0	706.3	709.1	707.4
12.5°	710.5	726.2	738.5	740.6	749.6	751.0	753.3
15°	761.0	777.7	794.8	800.9	813.3	816.3	820.9
17.5°	808.4	825.5	837.5	853.3	858.4	865.2	860.6
20°	834.5	853.0	868.3	880.7	885.9	889.7	889.3
22.5°	850.2	868.9	881.2	890.6	895.5	897.2	897.1
25°	860.0	870.8	874.6	878.2	872.6	870.8	871.6
27.5°	832.6	829.8	819.9	806.9	793.4	782.7	776.9
30°	795.0	778.6	763.6	737.4	723.9	715.9	708.6
32.5°	741.6	715.5	686.7	662.7	647.4	635.5	633.7
35°	650.2	611.0	575.7	546.4	531.2	518.4	515.3
37.5°	552.8	512.0	480.3	454.4	438.1	429.0	420.5
40°	488.1	453.1	421.9	399.9	387.4	380.9	375.7
42.5°	438.4	406.4	375.2	358.6	347.3	343.3	340.2
45°	369.5	339.7	318.3	305.6	299.1	292.3	289.1
47.5°	314.4	290.3	276.1	265.3	258.2	254.2	252.3
50°	283.2	263.4	250.7	242.5	236.1	233.0	231.3
52.5°	255.6	239.2	228.6	222.0	217.8	215.4	214.7
55°	220.1	207.7	200.9	195.2	192.1	189.9	189.1
57.5°	191.4	181.7	176.3	171.6	170.3	168.6	168.0
60°	172.5	165.1	160.4	157.2	156.1	154.1	154.4
62.5°	155.7	149.6	145.7	143.9	142.5	140.7	141.3
65°	131.7	127.2	125.1	123.5	121.8	120.7	121.5
67.5°	110.5	107.5	104.6	103.6	102.8	102.6	101.7
70°	96.7	94.2	91.6	91.0	91.0	90.2	89.9
72.5°	83.3	81.5	79.8	79.3	78.6	79.0	78.1
75°	64.4	62.9	62.2	61.6	61.4	61.4	60.8
77.5°	47.5	46.5	45.5	45.5	44.7	44.4	44.3
80°	36.1	35.7	34.9	34.9	34.4	34.6	34.2
82.5°	27.1	26.6	26.4	26.0	25.4	25.5	25.1
85°	14.5	13.9	13.7	13.1	12.7	13.1	12.7
87.5°	10.4	10.5	10.6	10.3	10.3	10.3	9.9
90°	26.9	28.4	29.2	29.7	30.1	30.6	31.1
92.5°	43.5	44.3	44.9	45.2	45.5	45.7	46.0
95°	80.8	81.5	81.9	81.9	81.9	81.9	81.9
97.5°	127.0	127.9	128.2	128.2	128.2	128.2	128.2
100°	159.9	160.3	160.6	160.6	160.6	160.6	160.6
102.5°	195.3	195.9	196.3	196.5	196.7	196.9	197.1
105°	248.6	249.3	250.0	250.7	251.4	252.1	252.8
107.5°	306.3	306.9	307.3	307.2	307.2	307.1	307.1
110°	343.6	343.1	343.2	343.9	344.6	345.4	346.0



TEST NUMBER: P332527-940

CATALOG NUMBER: S124DIP-S350D1205U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	385.3	385.2	385.2	385.4	385.5	385.7	385.8
115°	448.9	448.7	448.4	448.3	448.0	447.8	447.5
117.5°	509.6	508.8	508.3	507.7	507.3	506.8	506.4
120°	550.8	549.7	549.3	549.7	550.2	550.7	551.2
122.5°	593.3	592.5	591.7	590.9	590.1	589.2	588.4
125°	655.4	655.0	654.5	654.1	653.6	653.1	652.6
127.5°	714.5	714.0	713.6	713.3	712.8	712.5	712.1
130°	755.9	755.5	754.7	753.9	753.0	752.0	751.1
132.5°	794.9	794.4	794.0	793.6	793.3	792.9	792.6
135°	853.3	852.8	852.3	851.6	850.9	850.2	849.5
137.5°	909.6	909.1	908.8	909.0	909.1	909.3	909.4
140°	947.3	947.0	946.8	946.6	946.3	946.1	945.8
142.5°	982.6	982.6	982.5	982.5	982.4	982.4	982.3
145°	1035.3	1035.1	1034.6	1033.9	1033.2	1032.5	1031.9
147.5°	1083.3	1083.1	1082.9	1082.7	1082.4	1082.2	1082.0
150°	1113.7	1113.7	1113.6	1113.3	1113.1	1112.9	1112.7
152.5°	1142.7	1143.3	1143.3	1142.6	1142.0	1141.4	1140.9
155°	1182.8	1183.7	1183.7	1182.8	1181.9	1180.9	1180.0
157.5°	1217.5	1218.2	1218.2	1217.4	1216.6	1215.8	1215.0
160°	1239.0	1239.7	1239.5	1238.3	1237.2	1236.1	1234.9
162.5°	1258.9	1260.2	1260.3	1259.1	1257.9	1256.8	1255.6
165°	1284.6	1286.0	1286.2	1285.3	1284.4	1283.4	1282.5
167.5°	1306.2	1307.5	1307.5	1306.1	1304.7	1303.2	1301.8
170°	1317.8	1319.2	1319.0	1317.4	1315.8	1314.2	1312.6
172.5°	1326.6	1328.2	1328.2	1326.5	1324.9	1323.3	1321.7
175°	1336.1	1337.7	1337.7	1336.1	1334.4	1332.8	1331.2
177.5°	1341.0	1342.2	1342.1	1340.6	1339.2	1337.7	1336.2
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5

(END OF REPORT)