

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332550-940

Luminaire Tested: **S124DIP-S575D590U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332550-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124DIP-S575D590U940-4F0-1E-UDD-F  
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 590 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4327.8 lumens  
Efficiency: N/A  
Efficacy: 131.9 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 32.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332550-940

CATALOG NUMBER: S124DIP-S575D590U940-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

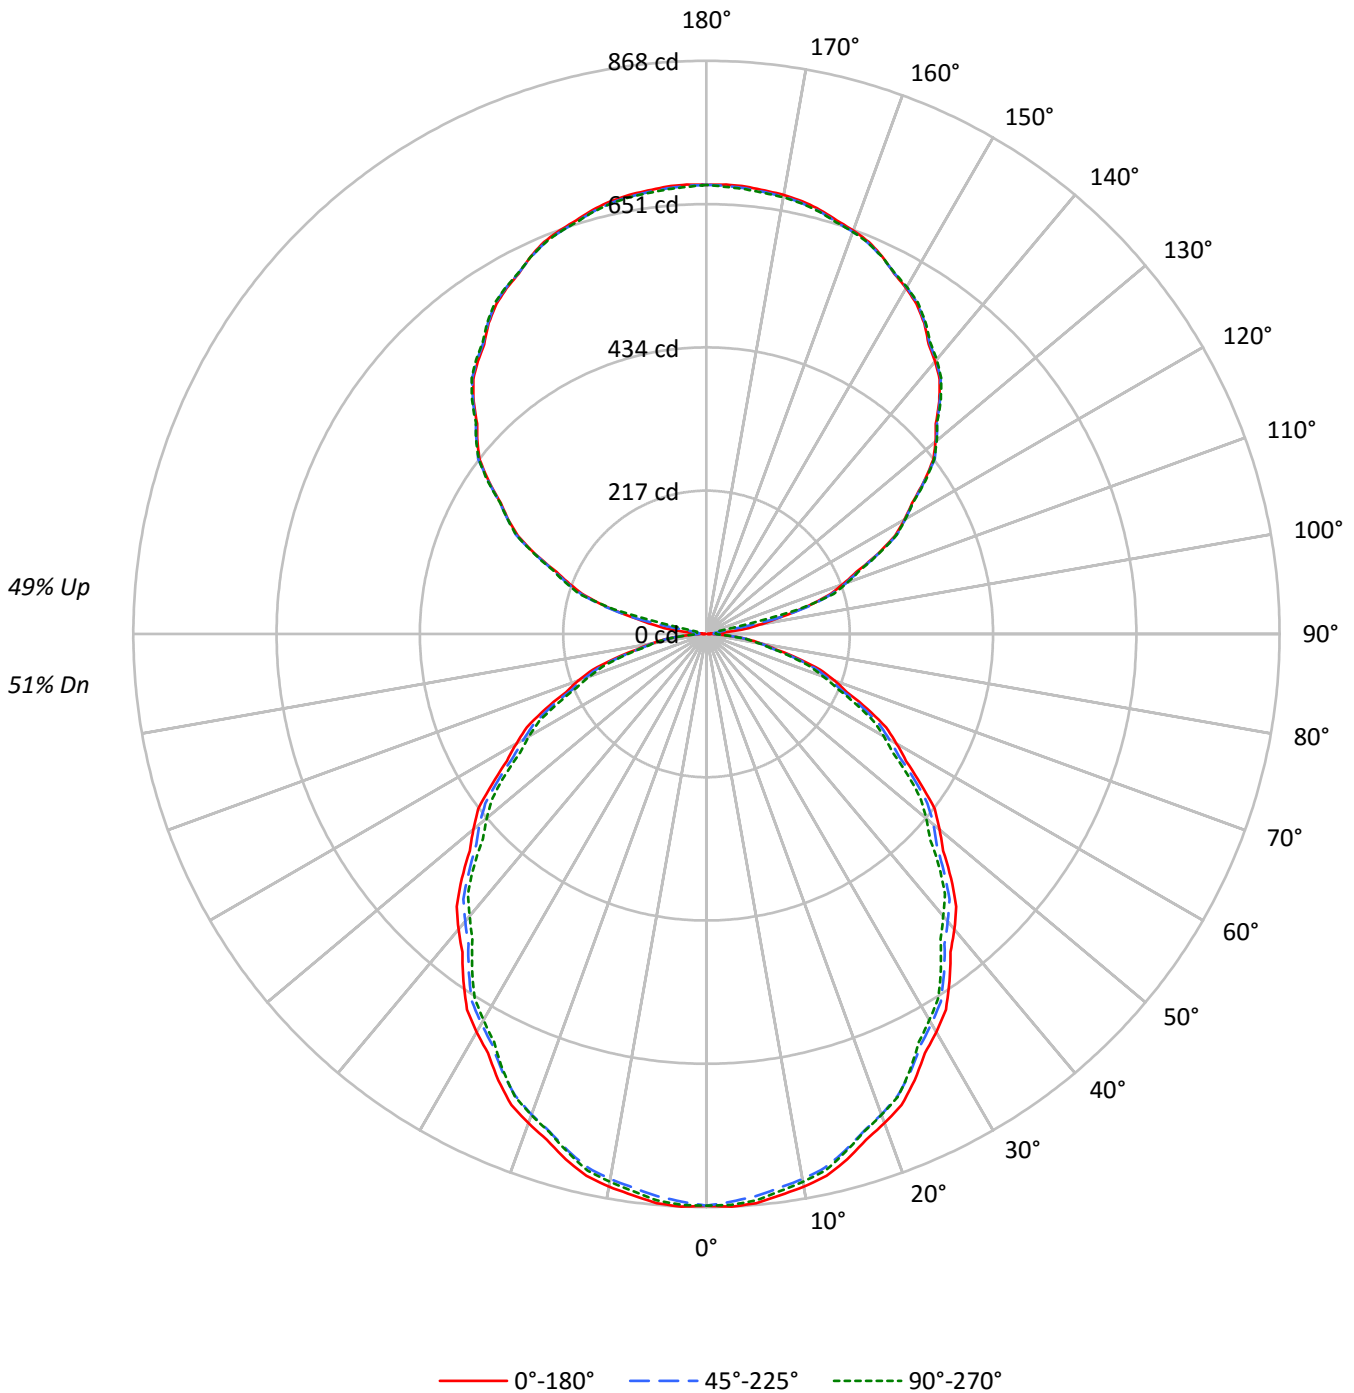



TEST NUMBER: P332550-940

CATALOG NUMBER: S124DIP-S575D590U940-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51	51	51	51	
1	98	94	90	86	90	87	83	80	74	71	69	62	60	58	51	49	48	43	43	43	43	
2	89	82	76	70	82	76	70	66	65	61	57	54	51	49	45	43	41	36	36	36	36	
3	81	72	65	59	75	67	60	55	57	52	48	48	44	41	39	37	35	31	31	31	31	
4	74	64	56	50	69	59	52	47	51	45	41	43	39	35	35	32	30	26	26	26	26	
5	68	57	49	43	63	53	45	40	45	40	35	38	34	31	32	29	26	23	23	23	23	
6	63	51	43	37	58	47	40	35	41	35	31	35	30	27	29	26	23	20	20	20	20	
7	58	46	38	32	54	43	36	31	37	31	27	32	27	24	26	23	20	18	18	18	18	
8	54	42	34	29	50	39	32	27	34	28	24	29	24	21	24	21	18	16	16	16	16	
9	50	38	31	25	47	36	29	24	31	25	22	27	22	19	22	19	16	14	14	14	14	
10	47	35	28	23	44	33	26	22	29	23	19	25	20	17	21	17	15	13	13	13	13	

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6990	6990	6990
5°	7012	6928	6978
10°	6968	6871	6906
15°	6884	6774	6791
20°	6772	6653	6659
25°	6644	6515	6495
30°	6488	6352	6293
35°	6326	6182	6099
40°	6157	5989	5879
45°	5981	5799	5688
50°	5786	5630	5456
55°	5576	5410	5234
60°	5365	5165	5007
65°	5129	4932	4732
70°	4865	4617	4440
75°	4457	4242	4133
80°	3966	3808	3710
85°	3473	3344	3279



TEST NUMBER: P332550-940

CATALOG NUMBER: S124DIP-S575D590U940-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	81.6	1.9
10°-20°	229.8	5.3
20°-30°	338.2	7.8
30°-40°	393.2	9.1
40°-50°	393.2	9.1
50°-60°	343.9	7.9
60°-70°	255.4	5.9
70°-80°	145.1	3.4
80°-90°	43.8	1.0
90°-100°	23.3	0.5
100°-110°	148.3	3.4
110°-120°	283.7	6.6
120°-130°	360.1	8.3
130°-140°	385.3	8.9
140°-150°	360.3	8.3
150°-160°	290.6	6.7
160°-170°	187.4	4.3
170°-180°	64.6	1.5
0°-30°	649.5	15.0
0°-40°	1042.7	24.1
0°-60°	1779.8	41.1
0°-90°	2224.2	51.4
90°-120°	455.3	10.5
90°-150°	1561.1	36.1
90°-180°	2104.0	48.6
0°-180°	4327.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	866	866	866	866	866	
5°	865	862	855	862	861	82
15°	824	820	810	814	812	232
25°	746	741	731	732	729	343
35°	642	637	627	622	619	401
45°	524	519	508	501	498	404
55°	396	394	384	376	372	355
65°	268	265	258	251	248	266
75°	143	139	136	133	132	152
85°	38	37	36	36	35	41
90°	2	7	11	14	15	3
95°	28	12	11	14	15	36
105°	153	156	159	162	145	160
115°	286	287	287	288	288	281
125°	402	404	403	404	405	359
135°	498	498	500	501	502	384
145°	575	576	576	577	578	359
155°	630	631	629	631	630	290
165°	665	662	662	666	662	188
175°	680	677	678	682	676	65
180°	680	680	680	680	680	



TEST NUMBER: P332550-940

CATALOG NUMBER: S124DIP-S575D590U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9
2.5°	868.2	867.8	867.5	867.1	866.7	865.9	864.5	863.2	861.7	860.4	861.7
5°	865.3	864.7	864.1	863.4	862.8	861.7	860.0	858.3	856.6	854.9	856.6
7.5°	857.2	856.6	856.0	855.4	854.8	853.5	851.7	849.8	847.8	846.0	847.4
10°	850.0	849.4	848.8	848.2	847.6	846.2	844.3	842.2	840.3	838.2	839.5
12.5°	840.6	840.0	839.4	838.7	838.1	836.8	834.6	832.5	830.4	828.2	829.6
15°	823.7	823.0	822.4	821.8	821.2	819.7	817.4	815.1	812.8	810.5	811.4
17.5°	803.3	802.5	801.7	800.9	800.1	798.7	796.5	794.3	792.1	790.0	790.5
20°	788.3	787.5	786.8	786.0	785.2	783.6	781.3	779.0	776.7	774.4	774.8
22.5°	772.1	771.2	770.2	769.1	768.1	766.4	764.1	761.8	759.5	757.2	758.0
25°	745.9	744.8	743.8	742.7	741.6	740.0	737.8	735.7	733.5	731.4	731.6
27.5°	716.0	714.9	713.7	712.7	711.5	710.0	707.9	706.0	703.9	702.0	701.6
30°	696.0	694.7	693.5	692.2	691.1	689.4	687.4	685.4	683.4	681.4	680.8
32.5°	674.8	673.8	672.6	671.5	670.5	668.8	666.7	664.6	662.5	660.3	659.6
35°	641.9	640.8	639.7	638.6	637.6	635.9	633.7	631.6	629.5	627.3	626.2
37.5°	607.0	606.0	605.0	604.0	603.1	601.5	599.1	596.8	594.5	592.2	591.0
40°	584.2	583.0	581.8	580.6	579.3	577.6	575.2	572.9	570.6	568.3	566.8
42.5°	559.8	559.1	558.4	557.6	556.9	555.2	552.7	550.1	547.5	545.0	543.2
45°	523.9	522.8	521.7	520.7	519.6	517.8	515.3	512.8	510.4	507.9	506.2
47.5°	486.2	485.5	484.8	484.0	483.3	481.8	479.6	477.2	474.9	472.7	470.7
50°	460.7	460.1	459.5	458.9	458.3	456.9	454.8	452.5	450.4	448.3	446.1
52.5°	435.8	435.1	434.3	433.5	432.8	431.3	429.0	426.8	424.5	422.1	420.3
55°	396.2	395.7	395.3	394.8	394.4	393.1	390.9	388.7	386.6	384.4	382.5
57.5°	358.5	357.9	357.4	356.9	356.3	355.1	352.9	350.8	348.7	346.5	344.7
60°	332.3	331.6	330.8	330.0	329.3	327.9	325.9	323.9	321.9	319.9	318.5
62.5°	306.8	306.2	305.5	304.9	304.3	302.8	300.8	298.6	296.5	294.4	293.1
65°	268.5	267.8	267.0	266.3	265.5	264.3	262.8	261.2	259.7	258.2	256.5
67.5°	230.0	229.3	228.5	227.8	227.1	226.0	224.5	223.1	221.6	220.1	218.6
70°	206.1	205.0	203.9	202.9	201.8	200.6	199.4	198.1	196.9	195.6	194.5
72.5°	180.6	179.5	178.4	177.3	176.2	175.2	174.2	173.3	172.3	171.2	170.2
75°	142.9	142.1	141.4	140.6	139.8	139.1	138.3	137.5	136.8	136.0	135.4
77.5°	107.0	106.6	106.3	106.0	105.7	105.1	104.4	103.8	103.1	102.5	102.2
80°	85.3	84.9	84.4	84.0	83.5	83.1	82.8	82.5	82.2	81.9	81.6
82.5°	64.3	64.0	63.8	63.6	63.4	63.2	63.2	63.1	63.0	63.0	62.8
85°	37.5	37.5	37.5	37.5	37.5	37.3	37.0	36.7	36.4	36.1	36.1
87.5°	14.7	14.9	15.0	15.1	15.2	15.3	15.4	15.4	15.5	15.6	15.7
90°	1.5	2.8	4.0	5.3	6.5	7.6	8.5	9.4	10.3	11.1	11.9
92.5°	6.4	6.5	6.5	6.6	6.7	7.1	8.1	9.0	9.9	10.8	11.5
95°	28.0	24.2	20.3	16.4	12.6	10.7	10.9	11.0	11.1	11.1	11.9
97.5°	59.4	61.8	64.2	66.6	69.0	63.8	51.3	38.7	26.0	13.5	13.5
100°	83.4	85.4	87.5	89.5	91.6	84.8	69.2	53.6	38.0	22.4	20.4
102.5°	110.3	111.7	113.2	114.8	116.3	116.0	114.0	111.9	109.9	107.8	87.1
105°	153.1	153.8	154.4	155.2	155.8	156.4	157.0	157.6	158.1	158.7	159.7
107.5°	192.9	193.2	193.6	193.9	194.2	194.7	195.6	196.4	197.1	197.9	198.4
110°	219.7	220.1	220.4	220.8	221.1	221.6	222.3	222.9	223.6	224.4	224.5



TEST NUMBER: P332550-940

CATALOG NUMBER: S124DIP-S575D590U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	245.8	246.4	247.0	247.6	248.3	248.7	249.0	249.3	249.7	249.9	249.9
115°	285.9	286.2	286.5	286.9	287.2	287.3	287.2	287.1	287.0	286.9	287.1
117.5°	322.0	322.4	322.9	323.3	323.8	324.1	324.4	324.7	324.9	325.1	325.1
120°	346.4	346.9	347.3	347.8	348.2	348.4	348.3	348.1	348.0	347.9	348.1
122.5°	369.2	369.4	369.7	370.0	370.2	370.5	370.7	370.8	371.0	371.1	371.2
125°	401.8	402.3	402.8	403.2	403.7	403.8	403.5	403.3	403.1	402.9	403.2
127.5°	432.7	432.8	433.0	433.1	433.2	433.5	434.1	434.5	435.1	435.6	435.5
130°	452.7	452.8	452.9	453.1	453.2	453.3	453.7	454.1	454.4	454.8	454.9
132.5°	471.0	471.2	471.4	471.6	471.8	472.2	472.6	473.0	473.4	473.9	473.9
135°	498.5	498.4	498.3	498.1	498.0	498.2	498.6	499.1	499.5	500.0	500.2
137.5°	522.8	522.8	522.9	522.9	523.0	523.3	523.7	524.2	524.8	525.2	525.5
140°	538.7	538.9	539.1	539.3	539.6	539.8	540.0	540.3	540.5	540.7	541.0
142.5°	552.9	553.3	553.8	554.1	554.6	554.8	554.9	555.1	555.2	555.4	555.6
145°	574.8	575.2	575.4	575.8	576.1	576.3	576.3	576.3	576.3	576.3	576.4
147.5°	592.2	592.8	593.4	594.1	594.7	594.9	594.9	594.8	594.6	594.5	594.6
150°	604.8	605.2	605.7	606.2	606.6	606.8	606.6	606.5	606.5	606.3	606.3
152.5°	615.4	615.7	616.1	616.4	616.8	616.9	616.7	616.5	616.3	616.1	616.3
155°	630.3	630.4	630.4	630.5	630.7	630.5	630.3	629.9	629.5	629.2	629.6
157.5°	642.7	642.7	642.6	642.6	642.5	642.2	641.9	641.5	641.1	640.7	641.3
160°	650.1	649.7	649.3	649.1	648.7	648.5	648.4	648.3	648.1	648.0	648.7
162.5°	656.6	656.1	655.7	655.3	654.9	654.6	654.4	654.3	654.2	654.2	654.8
165°	664.8	664.2	663.7	663.1	662.5	662.3	662.3	662.3	662.3	662.3	663.2
167.5°	671.3	670.7	670.1	669.6	669.0	668.6	668.6	668.5	668.4	668.3	669.4
170°	675.0	674.3	673.6	673.0	672.3	672.0	672.1	672.2	672.3	672.4	673.3
172.5°	677.4	676.7	676.1	675.4	674.8	674.4	674.6	674.7	674.8	674.8	675.8
175°	680.1	679.4	678.7	678.1	677.3	677.1	677.2	677.3	677.4	677.5	678.5
177.5°	681.3	680.6	680.0	679.4	678.8	678.5	678.7	678.9	679.0	679.2	680.0
180°	680.1	680.1	680.1	680.1	680.1	680.1	680.1	680.1	680.1	680.1	680.1



TEST NUMBER: P332550-940

CATALOG NUMBER: S124DIP-S575D590U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9
2.5°	862.9	864.2	865.4	865.9	865.8	865.7	865.6	865.4
5°	858.3	860.0	861.7	862.4	862.0	861.7	861.4	861.1
7.5°	848.7	850.1	851.4	852.0	851.9	851.7	851.5	851.2
10°	840.7	842.0	843.2	843.6	843.3	843.0	842.7	842.4
12.5°	831.0	832.3	833.7	834.1	833.7	833.2	832.9	832.4
15°	812.3	813.2	814.1	814.4	814.0	813.5	813.0	812.5
17.5°	791.1	791.7	792.3	792.4	792.1	791.8	791.5	791.2
20°	775.3	775.8	776.2	776.3	776.0	775.7	775.4	775.1
22.5°	758.8	759.6	760.5	760.6	760.1	759.6	759.0	758.4
25°	731.6	731.8	732.0	731.7	731.1	730.5	729.9	729.2
27.5°	701.2	700.8	700.4	699.9	699.1	698.4	697.6	696.8
30°	680.2	679.6	678.9	678.2	677.4	676.7	675.9	675.1
32.5°	658.8	658.1	657.4	656.6	655.9	655.1	654.2	653.5
35°	625.1	624.0	622.9	622.1	621.3	620.5	619.7	618.9
37.5°	589.9	588.6	587.5	586.4	585.4	584.3	583.4	582.3
40°	565.3	563.7	562.1	561.0	560.2	559.5	558.7	557.9
42.5°	541.4	539.6	537.8	536.6	536.2	535.7	535.1	534.6
45°	504.5	502.8	501.1	500.1	499.6	499.2	498.6	498.2
47.5°	468.9	466.9	465.0	463.5	462.4	461.1	459.9	458.8
50°	443.9	441.8	439.6	438.1	437.1	436.2	435.3	434.4
52.5°	418.3	416.4	414.6	413.0	411.8	410.6	409.5	408.3
55°	380.8	378.9	377.0	375.6	374.7	373.8	372.8	371.9
57.5°	343.0	341.3	339.5	338.1	337.2	336.4	335.5	334.6
60°	317.1	315.8	314.3	313.3	312.5	311.7	310.9	310.1
62.5°	291.9	290.5	289.3	288.3	287.5	286.8	286.0	285.2
65°	255.0	253.5	252.0	250.8	250.0	249.2	248.5	247.7
67.5°	217.1	215.7	214.2	213.3	213.1	212.9	212.7	212.5
70°	193.2	192.0	190.7	189.9	189.4	189.0	188.5	188.1
72.5°	169.2	168.3	167.3	166.6	166.1	165.7	165.2	164.7
75°	134.7	134.1	133.6	133.1	133.0	132.9	132.7	132.5
77.5°	102.0	101.8	101.7	101.4	100.9	100.6	100.1	99.8
80°	81.2	81.0	80.6	80.4	80.3	80.1	80.0	79.8
82.5°	62.6	62.4	62.2	62.1	62.0	61.8	61.6	61.4
85°	36.1	36.1	36.1	36.0	35.8	35.7	35.6	35.4
87.5°	15.9	16.0	16.1	16.2	16.2	16.3	16.3	16.4
90°	12.6	13.2	13.9	14.4	14.6	14.8	15.1	15.2
92.5°	12.1	12.8	13.5	13.8	13.9	13.9	14.0	14.0
95°	12.6	13.2	13.9	14.3	14.4	14.5	14.6	14.7
97.5°	13.6	13.6	13.7	13.8	13.9	14.0	14.1	14.3
100°	18.5	16.6	14.7	13.8	13.9	14.0	14.1	14.3
102.5°	66.3	45.7	24.9	14.5	14.6	14.6	14.6	14.6
105°	160.8	161.8	162.7	161.2	157.2	153.1	149.0	145.0
107.5°	198.9	199.4	199.8	200.3	200.7	201.2	201.6	202.1
110°	224.8	225.0	225.2	225.5	225.9	226.1	226.5	226.9





TEST NUMBER: P332550-940

CATALOG NUMBER: S124DIP-S575D590U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	249.9	249.9	249.8	249.9	250.4	250.8	251.3	251.6
115°	287.3	287.6	287.8	287.9	287.9	287.9	287.9	287.9
117.5°	325.0	325.0	324.9	324.9	324.9	324.9	324.8	324.8
120°	348.4	348.6	348.8	348.8	348.6	348.4	348.1	347.9
122.5°	371.4	371.5	371.7	371.6	371.4	371.1	371.0	370.7
125°	403.5	403.9	404.2	404.5	404.6	404.7	404.7	404.9
127.5°	435.5	435.4	435.3	435.2	435.2	435.1	435.0	434.9
130°	455.0	455.0	455.2	455.2	455.2	455.2	455.2	455.2
132.5°	474.1	474.2	474.3	474.3	474.2	474.1	474.0	473.9
135°	500.4	500.7	500.9	501.1	501.3	501.6	501.9	502.0
137.5°	525.8	526.0	526.2	526.3	526.3	526.2	526.1	526.0
140°	541.4	541.7	542.1	542.2	542.4	542.5	542.6	542.7
142.5°	555.8	556.1	556.3	556.5	556.5	556.5	556.5	556.6
145°	576.5	576.7	576.8	576.9	577.1	577.4	577.7	577.8
147.5°	594.7	594.8	594.9	594.9	595.1	595.2	595.3	595.4
150°	606.3	606.3	606.3	606.4	606.5	606.6	606.7	606.8
152.5°	616.4	616.6	616.8	616.9	616.8	616.7	616.6	616.6
155°	630.1	630.5	631.0	631.1	630.7	630.4	630.1	629.7
157.5°	641.9	642.5	643.0	643.0	642.5	641.9	641.3	640.7
160°	649.3	650.1	650.8	650.8	650.1	649.3	648.7	648.0
162.5°	655.5	656.1	656.8	656.8	656.0	655.2	654.5	653.7
165°	664.1	664.9	665.9	665.8	664.8	663.8	662.8	661.7
167.5°	670.4	671.4	672.3	672.3	671.2	670.0	668.9	667.8
170°	674.2	675.1	676.1	675.9	674.8	673.7	672.5	671.5
172.5°	676.7	677.6	678.5	678.3	677.2	675.9	674.7	673.4
175°	679.6	680.6	681.6	681.4	680.1	678.7	677.3	676.0
177.5°	680.7	681.4	682.2	682.0	680.9	679.8	678.7	677.6
180°	680.1	680.1	680.1	680.1	680.1	680.1	680.1	680.1

(END OF REPORT)