

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332953-940

Luminaire Tested: **S124RDIP-S795D1205U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332953-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIP-S795D1205U940-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6582.4 lumens
Efficiency: N/A
Efficacy: 115.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332953-940

CATALOG NUMBER: S124RDIP-S795D1205U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

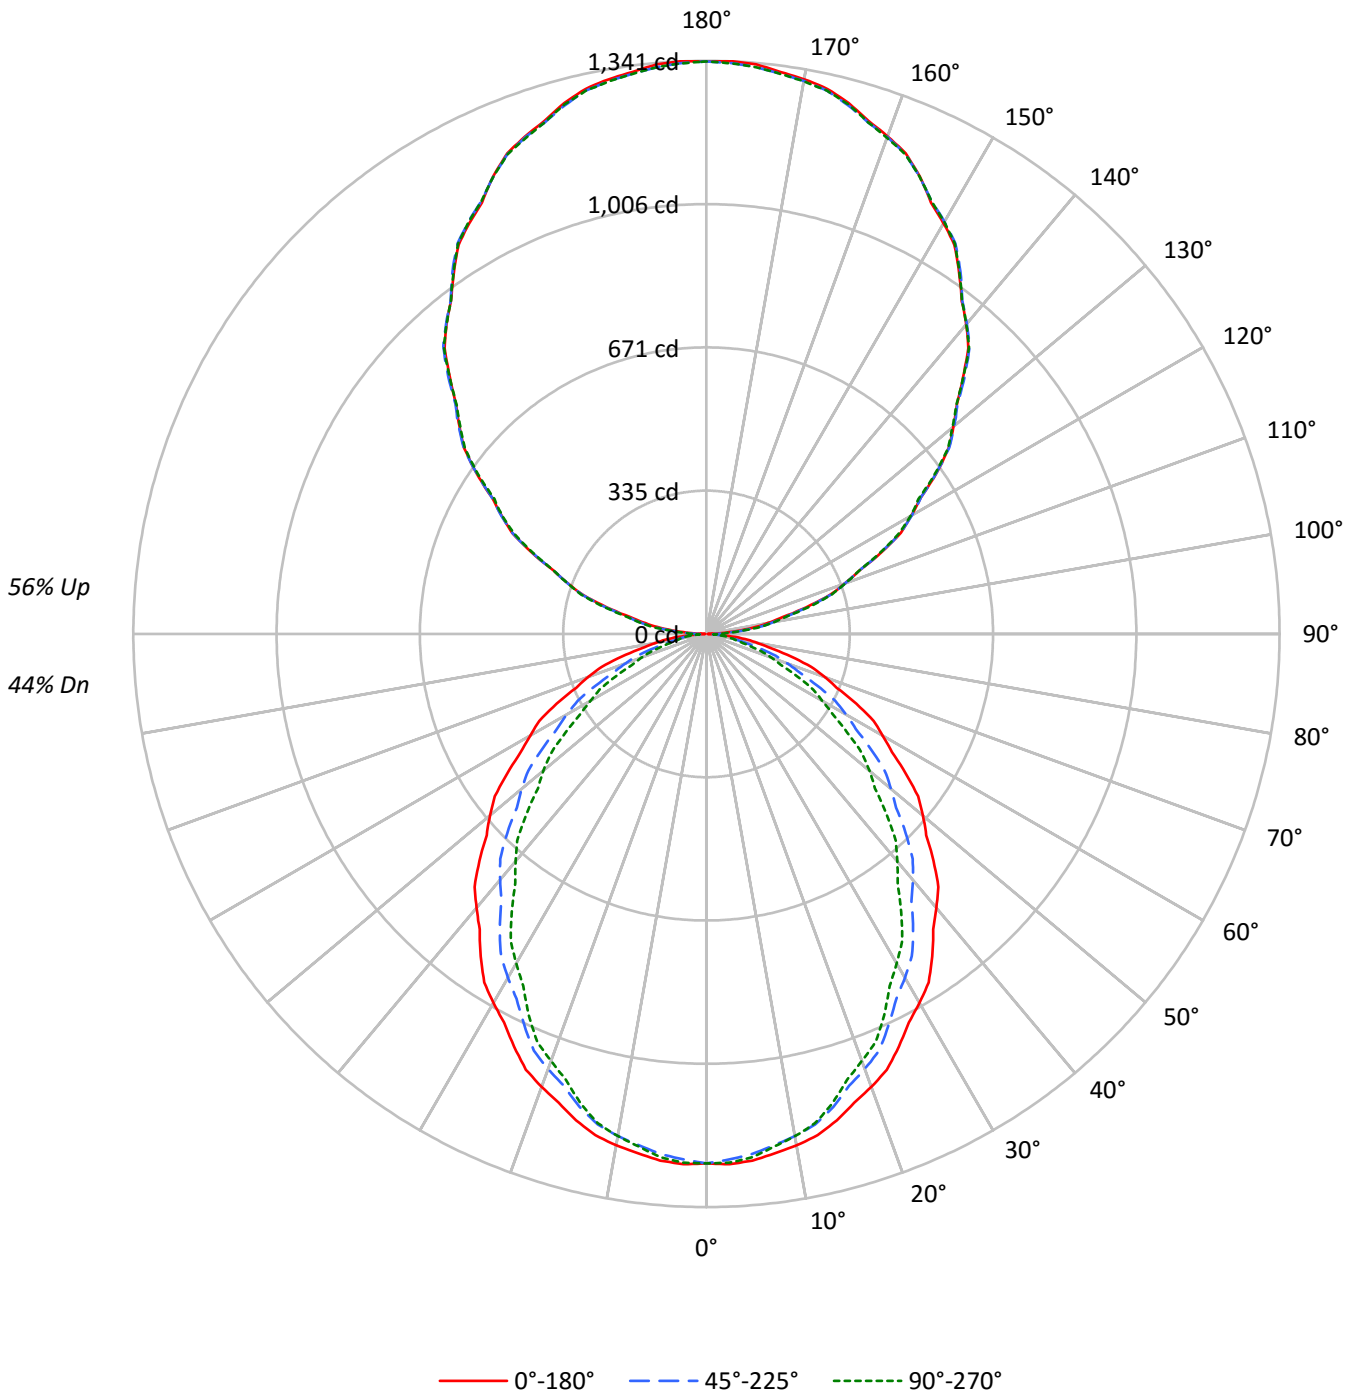



TEST NUMBER: P332953-940

CATALOG NUMBER: S124RDIP-S795D1205U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	64	64	64	50	50	50	44
1	97	92	89	85	88	85	81	79	70	68	66	57	55	54	45	44	43	37
2	88	81	75	70	80	74	69	65	62	58	55	50	48	45	40	38	36	31
3	80	71	64	58	73	66	59	54	55	50	46	45	41	39	35	33	31	27
4	74	63	55	50	67	58	51	46	49	44	40	40	36	33	32	29	27	23
5	68	56	48	43	62	52	45	40	44	38	34	36	32	29	29	26	24	20
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	26	23	21	18
7	58	46	38	32	53	42	35	30	36	30	26	30	26	23	24	21	19	16
8	54	41	34	29	49	38	32	27	33	27	23	27	23	20	22	19	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	13
10	47	35	28	23	43	32	26	22	27	22	19	23	19	16	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10001	10001	10001
5°	10023	9900	9961
10°	9960	9781	9781
15°	9845	9576	9504
20°	9688	9306	9135
25°	9487	8989	8761
30°	9292	8655	8294
35°	9077	8310	7824
40°	8816	7917	7317
45°	8576	7526	6801
50°	8303	7076	6253
55°	8010	6608	5661
60°	7689	6095	5054
65°	7393	5454	4458
70°	6963	4747	3784
75°	6419	3936	3075
80°	5602	2999	2822
85°	4742	2723	2547



TEST NUMBER: P332953-940

CATALOG NUMBER: S124RDIP-S795D1205U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.4	1.8
10°-20°	324.5	4.9
20°-30°	468.6	7.1
30°-40°	531.1	8.1
40°-50°	512.9	7.8
50°-60°	426.5	6.5
60°-70°	294.5	4.5
70°-80°	149.3	2.3
80°-90°	42.3	0.6
90°-100°	88.4	1.3
100°-110°	261.7	4.0
110°-120°	444.2	6.7
120°-130°	585.7	8.9
130°-140°	657.8	10.0
140°-150°	646.4	9.8
150°-160°	543.7	8.3
160°-170°	361.7	5.5
170°-180°	126.7	1.9
0°-30°	909.4	13.8
0°-40°	1440.5	21.9
0°-60°	2379.9	36.2
0°-90°	2866.0	43.5
90°-120°	794.3	12.1
90°-150°	2684.3	40.8
90°-180°	3716.0	56.5
0°-180°	6582.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1239	1239	1239	1239	1239	
5°	1237	1233	1222	1230	1229	117
15°	1178	1169	1146	1144	1137	332
25°	1065	1047	1009	993	984	491
35°	921	890	843	812	794	575
45°	751	715	659	614	596	579
55°	569	530	470	422	402	509
65°	387	345	286	246	233	382
75°	206	170	126	105	99	217
85°	51	33	29	28	28	58
90°	3	14	23	29	31	6
95°	62	71	79	82	82	69
105°	241	243	247	250	253	256
115°	452	452	450	449	448	445
125°	658	658	657	655	653	586
135°	848	854	855	853	850	656
145°	1031	1035	1036	1035	1032	645
155°	1181	1181	1180	1184	1180	543
165°	1286	1283	1280	1286	1282	362
175°	1338	1332	1331	1338	1331	127
180°	1340	1340	1340	1340	1340	



TEST NUMBER: P332953-940

CATALOG NUMBER: S124RDIP-S795D1205U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8
2.5°	1241.8	1241.1	1240.4	1239.7	1239.0	1237.8	1235.9	1234.1	1232.3	1230.4	1232.3
5°	1236.8	1236.0	1235.1	1234.3	1233.4	1231.8	1229.2	1226.7	1224.1	1221.6	1223.8
7.5°	1225.7	1224.8	1223.9	1223.0	1222.1	1220.0	1216.7	1213.4	1210.1	1206.8	1208.2
10°	1215.0	1214.0	1212.9	1211.8	1210.8	1208.4	1204.6	1200.8	1197.0	1193.2	1194.0
12.5°	1201.3	1200.2	1198.9	1197.7	1196.5	1193.6	1189.2	1184.6	1180.2	1175.7	1176.3
15°	1178.0	1176.2	1174.2	1172.3	1170.5	1166.9	1161.5	1156.3	1151.0	1145.8	1145.3
17.5°	1149.8	1147.0	1144.2	1141.6	1138.8	1134.3	1127.9	1121.6	1115.3	1108.9	1107.8
20°	1127.7	1125.0	1122.3	1119.5	1116.8	1111.9	1104.7	1097.5	1090.3	1083.2	1081.5
22.5°	1103.5	1100.4	1097.3	1094.2	1091.2	1085.7	1078.1	1070.4	1062.7	1055.1	1052.6
25°	1065.1	1061.3	1057.6	1053.7	1050.0	1043.7	1035.1	1026.4	1017.8	1009.1	1005.6
27.5°	1024.9	1020.2	1015.4	1010.7	1005.8	998.9	989.6	980.4	971.2	962.0	957.5
30°	996.8	991.6	986.3	981.1	975.8	968.2	958.3	948.4	938.4	928.5	923.3
32.5°	967.2	961.4	955.4	949.4	943.5	935.4	925.1	914.9	904.6	894.4	888.3
35°	921.0	914.3	907.5	900.7	894.0	885.4	874.9	864.2	853.7	843.2	836.1
37.5°	871.5	864.5	857.6	850.6	843.6	834.4	822.7	811.0	799.3	787.6	779.6
40°	836.6	829.6	822.7	815.7	808.8	799.2	787.2	775.3	763.2	751.2	742.3
42.5°	803.2	795.9	788.6	781.3	774.0	764.1	751.6	739.0	726.6	714.0	705.0
45°	751.2	743.4	735.6	727.8	720.0	709.8	697.1	684.5	671.8	659.2	648.9
47.5°	697.5	689.5	681.4	673.3	665.3	654.7	641.6	628.4	615.3	602.1	591.4
50°	661.1	652.9	644.6	636.4	628.2	617.3	603.9	590.4	576.8	563.4	552.9
52.5°	623.9	615.9	607.8	599.8	591.7	580.8	566.9	553.1	539.3	525.5	514.8
55°	569.1	560.6	552.2	543.8	535.4	524.3	510.6	496.9	483.2	469.5	458.5
57.5°	514.9	506.0	497.3	488.6	479.7	468.6	455.1	441.7	428.2	414.6	403.6
60°	476.2	467.7	459.3	450.8	442.4	431.5	417.9	404.5	391.0	377.5	366.5
62.5°	441.2	432.5	423.7	414.9	406.2	394.8	381.0	367.2	353.4	339.6	329.4
65°	387.0	377.9	368.8	359.8	350.7	339.5	325.9	312.5	299.0	285.5	276.4
67.5°	330.6	322.0	313.3	304.6	295.9	285.3	272.8	260.3	247.7	235.2	227.4
70°	295.0	286.1	277.2	268.4	259.6	249.1	237.1	225.1	213.1	201.1	194.1
72.5°	257.1	249.1	241.0	233.0	225.0	215.3	204.0	192.6	181.3	170.0	164.0
75°	205.8	198.0	190.2	182.4	174.6	165.8	155.9	146.0	136.1	126.2	121.3
77.5°	153.8	147.2	140.6	134.0	127.3	120.0	112.1	104.1	96.0	88.0	85.2
80°	120.5	114.3	108.3	102.1	96.0	89.8	83.5	77.1	70.8	64.5	63.8
82.5°	91.7	86.1	80.4	74.8	69.2	64.6	61.0	57.3	53.7	50.1	49.6
85°	51.2	47.0	42.8	38.6	34.3	31.9	31.3	30.7	30.1	29.4	29.0
87.5°	18.1	17.2	16.4	15.5	14.7	14.4	14.6	14.8	15.0	15.2	15.2
90°	3.1	5.6	8.2	10.7	13.2	15.4	17.3	19.1	21.0	22.8	24.2
92.5°	22.2	25.1	28.0	30.9	33.8	35.8	37.2	38.4	39.8	41.0	41.8
95°	62.2	64.2	66.3	68.4	70.4	72.3	73.9	75.5	77.1	78.7	79.5
97.5°	108.6	110.2	111.9	113.5	115.2	117.0	118.9	120.7	122.6	124.5	125.4
100°	145.1	146.0	146.9	147.8	148.7	150.3	152.3	154.4	156.4	158.5	159.0
102.5°	183.2	183.5	183.9	184.2	184.7	185.7	187.6	189.6	191.5	193.3	193.9
105°	241.4	241.7	241.8	242.1	242.3	242.9	243.8	244.7	245.7	246.6	247.3
107.5°	302.5	302.8	303.1	303.4	303.6	303.8	304.0	304.1	304.3	304.3	305.1
110°	343.9	344.4	344.8	345.4	345.8	345.9	345.7	345.4	345.2	345.0	344.6



TEST NUMBER: P332953-940

CATALOG NUMBER: S124RDIP-S795D1205U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	387.0	387.2	387.3	387.4	387.4	387.3	386.8	386.5	386.0	385.6	385.5
115°	451.7	451.7	451.7	451.7	451.7	451.5	451.0	450.6	450.0	449.6	449.4
117.5°	512.6	512.8	513.0	513.2	513.4	513.3	512.9	512.6	512.3	512.0	511.2
120°	553.2	554.1	555.1	556.0	556.9	557.1	556.3	555.6	554.9	554.3	553.1
122.5°	595.5	595.8	596.2	596.6	597.0	597.0	596.6	596.4	596.0	595.7	594.9
125°	657.8	657.8	657.8	657.8	657.8	657.7	657.5	657.3	657.0	656.8	656.4
127.5°	714.4	715.2	715.8	716.5	717.2	717.4	716.9	716.6	716.2	715.9	715.4
130°	754.2	754.9	755.5	756.3	757.0	757.3	757.3	757.3	757.3	757.3	756.9
132.5°	794.8	795.3	795.9	796.3	796.8	797.0	796.8	796.7	796.5	796.3	795.8
135°	848.5	849.9	851.2	852.7	854.0	854.7	854.7	854.7	854.7	854.7	854.3
137.5°	906.9	907.6	908.2	908.8	909.5	910.0	910.3	910.7	911.1	911.4	910.9
140°	945.8	946.3	946.8	947.3	947.7	947.9	947.9	947.9	947.9	947.9	947.7
142.5°	981.5	982.0	982.4	982.8	983.4	983.5	983.3	983.1	982.9	982.8	982.7
145°	1030.8	1031.7	1032.7	1033.6	1034.5	1035.1	1035.3	1035.5	1035.7	1036.0	1035.7
147.5°	1079.7	1080.8	1081.9	1083.0	1084.1	1084.6	1084.4	1084.2	1084.1	1083.9	1083.7
150°	1109.6	1110.4	1111.4	1112.3	1113.2	1113.7	1113.7	1113.7	1113.7	1113.7	1113.7
152.5°	1137.7	1138.3	1138.8	1139.3	1140.0	1140.3	1140.5	1140.7	1140.9	1141.0	1141.6
155°	1181.0	1181.0	1181.0	1181.0	1181.0	1180.9	1180.7	1180.4	1180.2	1180.0	1180.9
157.5°	1217.5	1217.1	1216.7	1216.3	1215.8	1215.6	1215.6	1215.5	1215.5	1215.4	1216.1
160°	1239.0	1238.9	1238.6	1238.3	1238.1	1237.9	1237.7	1237.4	1237.2	1237.0	1237.7
162.5°	1258.9	1258.3	1257.8	1257.1	1256.5	1256.2	1255.9	1255.7	1255.4	1255.2	1256.4
165°	1285.7	1285.0	1284.2	1283.6	1282.9	1282.3	1281.8	1281.4	1280.9	1280.5	1281.8
167.5°	1306.2	1305.2	1304.2	1303.2	1302.3	1301.8	1301.9	1301.9	1302.0	1302.0	1303.4
170°	1317.8	1316.6	1315.5	1314.3	1313.1	1312.7	1313.0	1313.1	1313.4	1313.7	1315.0
172.5°	1326.1	1325.1	1324.1	1323.1	1322.2	1321.7	1321.8	1321.9	1321.9	1322.0	1323.5
175°	1337.5	1336.3	1335.2	1334.0	1332.8	1332.1	1331.9	1331.7	1331.5	1331.2	1332.8
177.5°	1341.2	1340.2	1339.3	1338.5	1337.5	1337.0	1337.0	1337.0	1337.0	1337.0	1338.4
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5



TEST NUMBER: P332953-940

CATALOG NUMBER: S124RDIP-S795D1205U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8
2.5°	1234.1	1235.9	1237.8	1238.7	1238.5	1238.3	1238.1	1238.0
5°	1225.8	1228.0	1230.1	1230.9	1230.5	1230.1	1229.7	1229.2
7.5°	1209.5	1210.9	1212.3	1212.5	1211.9	1211.2	1210.6	1209.9
10°	1194.9	1195.7	1196.6	1196.6	1195.7	1194.9	1194.0	1193.2
12.5°	1176.8	1177.2	1177.8	1177.4	1176.3	1175.1	1173.8	1172.7
15°	1145.0	1144.5	1144.1	1143.2	1141.7	1140.1	1138.7	1137.2
17.5°	1106.6	1105.5	1104.2	1102.5	1100.3	1098.1	1095.8	1093.6
20°	1079.8	1078.1	1076.4	1074.2	1071.5	1068.7	1066.0	1063.3
22.5°	1050.1	1047.5	1045.0	1042.6	1040.4	1038.1	1035.9	1033.7
25°	1002.0	998.4	994.9	992.0	989.9	987.8	985.7	983.6
27.5°	953.1	948.7	944.2	940.5	937.5	934.4	931.4	928.4
30°	918.0	912.8	907.5	903.1	899.8	896.4	893.0	889.7
32.5°	882.2	876.1	870.0	865.3	862.1	858.9	855.7	852.5
35°	828.8	821.7	814.6	809.0	805.3	801.5	797.6	793.9
37.5°	771.6	763.6	755.5	749.7	745.9	742.1	738.3	734.5
40°	733.5	724.6	715.8	709.4	705.7	701.9	698.1	694.3
42.5°	696.0	687.0	678.0	671.5	667.4	663.5	659.6	655.6
45°	638.6	628.2	617.9	610.8	607.0	603.2	599.4	595.7
47.5°	580.7	570.0	559.3	551.8	547.7	543.5	539.3	535.1
50°	542.3	531.8	521.2	514.0	510.0	506.0	501.9	497.9
52.5°	504.1	493.4	482.6	475.2	471.0	466.8	462.7	458.5
55°	447.5	436.6	425.7	418.2	414.2	410.2	406.2	402.2
57.5°	392.4	381.3	370.1	363.1	360.1	357.0	354.0	351.0
60°	355.6	344.6	333.7	326.5	323.2	319.8	316.4	313.0
62.5°	319.3	309.2	299.1	292.7	290.0	287.3	284.5	281.9
65°	267.3	258.3	249.2	243.4	240.9	238.4	235.9	233.4
67.5°	219.6	211.9	204.0	198.8	196.0	193.1	190.4	187.6
70°	187.2	180.2	173.3	168.7	166.7	164.5	162.4	160.3
72.5°	158.1	152.1	146.2	142.2	140.4	138.4	136.4	134.5
75°	116.5	111.6	106.7	103.7	102.5	101.2	99.9	98.6
77.5°	82.4	79.5	76.7	75.1	74.7	74.4	74.0	73.6
80°	63.2	62.6	62.0	61.5	61.3	61.1	60.9	60.7
82.5°	49.1	48.7	48.2	47.9	47.7	47.4	47.3	47.1
85°	28.5	28.2	27.7	27.5	27.5	27.5	27.5	27.5
87.5°	15.4	15.5	15.6	15.8	16.1	16.3	16.6	16.9
90°	25.6	26.9	28.4	29.2	29.7	30.1	30.6	31.1
92.5°	42.7	43.5	44.3	44.9	45.2	45.5	45.7	46.0
95°	80.1	80.8	81.5	81.9	81.9	81.9	81.9	81.9
97.5°	126.2	127.0	127.9	128.2	128.2	128.2	128.2	128.2
100°	159.4	159.9	160.3	160.6	160.6	160.6	160.6	160.6
102.5°	194.6	195.3	195.9	196.3	196.5	196.7	196.9	197.1
105°	248.0	248.6	249.3	250.0	250.7	251.4	252.1	252.8
107.5°	305.7	306.3	306.9	307.3	307.2	307.2	307.1	307.1
110°	344.0	343.6	343.1	343.2	343.9	344.6	345.4	346.0



TEST NUMBER: P332953-940

CATALOG NUMBER: S124RDIP-S795D1205U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	385.4	385.3	385.2	385.2	385.4	385.5	385.7	385.8
115°	449.2	448.9	448.7	448.4	448.3	448.0	447.8	447.5
117.5°	510.4	509.6	508.8	508.3	507.7	507.3	506.8	506.4
120°	552.0	550.8	549.7	549.3	549.7	550.2	550.7	551.2
122.5°	594.1	593.3	592.5	591.7	590.9	590.1	589.2	588.4
125°	655.9	655.4	655.0	654.5	654.1	653.6	653.1	652.6
127.5°	715.0	714.5	714.0	713.6	713.3	712.8	712.5	712.1
130°	756.3	755.9	755.5	754.7	753.9	753.0	752.0	751.1
132.5°	795.3	794.9	794.4	794.0	793.6	793.3	792.9	792.6
135°	853.8	853.3	852.8	852.3	851.6	850.9	850.2	849.5
137.5°	910.3	909.6	909.1	908.8	909.0	909.1	909.3	909.4
140°	947.4	947.3	947.0	946.8	946.6	946.3	946.1	945.8
142.5°	982.7	982.6	982.6	982.5	982.5	982.4	982.4	982.3
145°	1035.5	1035.3	1035.1	1034.6	1033.9	1033.2	1032.5	1031.9
147.5°	1083.5	1083.3	1083.1	1082.9	1082.7	1082.4	1082.2	1082.0
150°	1113.7	1113.7	1113.7	1113.6	1113.3	1113.1	1112.9	1112.7
152.5°	1142.1	1142.7	1143.3	1143.3	1142.6	1142.0	1141.4	1140.9
155°	1181.9	1182.8	1183.7	1183.7	1182.8	1181.9	1180.9	1180.0
157.5°	1216.8	1217.5	1218.2	1218.2	1217.4	1216.6	1215.8	1215.0
160°	1238.3	1239.0	1239.7	1239.5	1238.3	1237.2	1236.1	1234.9
162.5°	1257.7	1258.9	1260.2	1260.3	1259.1	1257.9	1256.8	1255.6
165°	1283.3	1284.6	1286.0	1286.2	1285.3	1284.4	1283.4	1282.5
167.5°	1304.8	1306.2	1307.5	1307.5	1306.1	1304.7	1303.2	1301.8
170°	1316.4	1317.8	1319.2	1319.0	1317.4	1315.8	1314.2	1312.6
172.5°	1325.1	1326.6	1328.2	1328.2	1326.5	1324.9	1323.3	1321.7
175°	1334.4	1336.1	1337.7	1337.7	1336.1	1334.4	1332.8	1331.2
177.5°	1339.6	1341.0	1342.2	1342.1	1340.6	1339.2	1337.7	1336.2
180°	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5	1339.5

(END OF REPORT)