

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333257-927

Luminaire Tested: **S125DIP-S1090D365U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333257-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1090D365U927-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4522.2 lumens
Efficiency: N/A
Efficacy: 104.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 43.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333257-927

CATALOG NUMBER: S125DIP-S1090D365U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

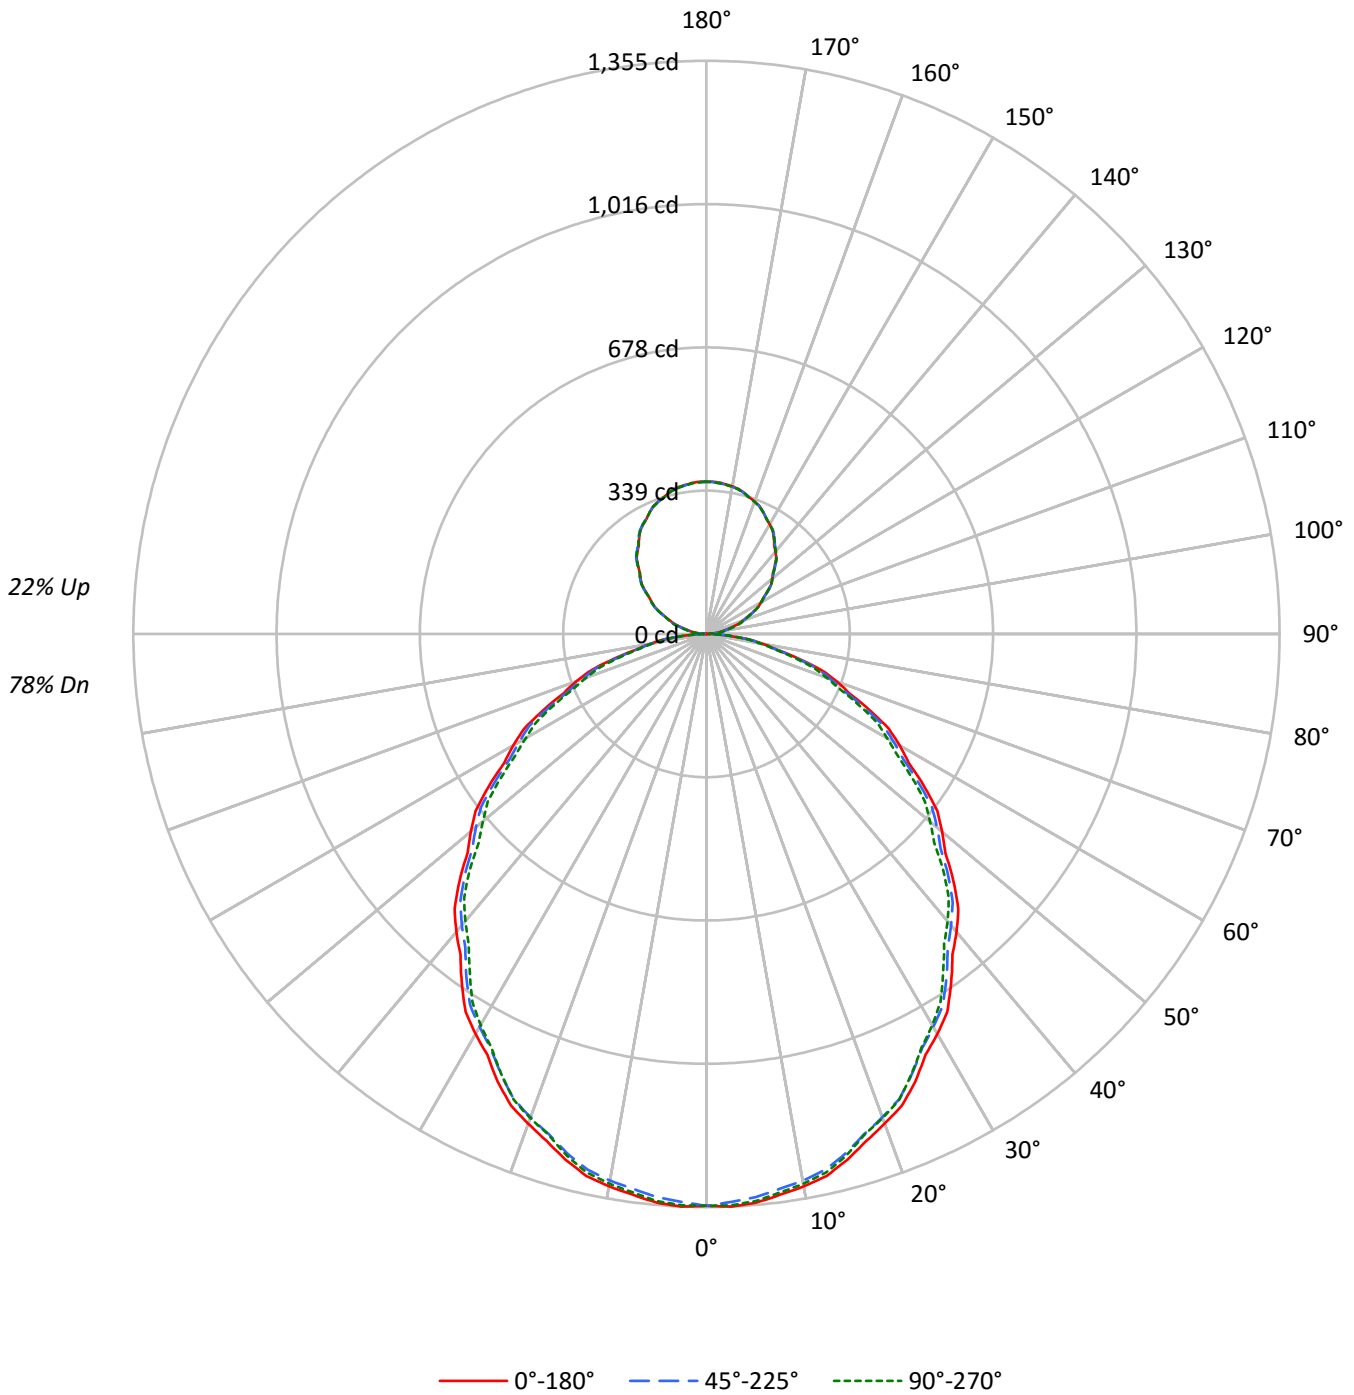



TEST NUMBER: P333257-927

CATALOG NUMBER: S125DIP-S1090D365U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	114	114	114	114	109	109	109	109	99	99	99	90	90	90	82	82	82	78
1	104	99	95	92	99	95	91	88	87	84	81	79	77	75	72	70	69	65
2	95	87	80	75	90	83	77	72	76	71	67	69	66	62	63	60	58	55
3	86	76	69	62	82	73	66	60	67	61	57	61	57	53	56	52	49	46
4	79	68	59	53	75	65	57	51	60	53	48	55	50	45	50	46	42	40
5	73	60	52	46	69	58	50	44	53	47	42	49	44	39	45	41	37	34
6	67	54	46	40	64	52	44	39	48	42	37	45	39	35	41	36	33	30
7	62	49	41	35	59	47	40	34	44	37	32	41	35	31	38	33	29	27
8	58	45	37	31	55	43	36	30	40	34	29	37	32	27	35	30	26	24
9	54	41	33	28	51	40	32	27	37	31	26	34	29	25	32	27	24	22
10	51	38	30	25	48	37	30	25	34	28	24	32	26	23	30	25	21	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8730	8730	8730
5°	8749	8666	8722
10°	8697	8605	8655
15°	8602	8501	8538
20°	8467	8357	8372
25°	8322	8185	8177
30°	8143	7999	7959
35°	7950	7799	7689
40°	7754	7583	7474
45°	7541	7384	7237
50°	7306	7145	6931
55°	7080	6875	6683
60°	6810	6603	6368
65°	6487	6276	6062
70°	6180	5897	5695
75°	5629	5445	5255
80°	5013	4932	4813
85°	4357	4439	4194



TEST NUMBER: P333257-927

CATALOG NUMBER: S125DIP-S1090D365U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.5	2.8
10°-20°	360.0	8.0
20°-30°	531.6	11.8
30°-40°	620.3	13.7
40°-50°	623.0	13.8
50°-60°	546.9	12.1
60°-70°	407.5	9.0
70°-80°	233.0	5.2
80°-90°	68.6	1.5
90°-100°	24.1	0.5
100°-110°	71.2	1.6
110°-120°	120.5	2.7
120°-130°	158.6	3.5
130°-140°	177.7	3.9
140°-150°	174.2	3.9
150°-160°	146.3	3.2
160°-170°	97.3	2.2
170°-180°	34.0	0.8
0°-30°	1019.1	22.5
0°-40°	1639.4	36.3
0°-60°	2809.2	62.1
0°-90°	3518.3	77.8
90°-120°	215.8	4.8
90°-150°	726.3	16.1
90°-180°	1004.0	22.2
0°-180°	4522.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1352	1352	1352	1352	1352	
5°	1350	1347	1337	1346	1345	128
15°	1286	1283	1272	1277	1277	362
25°	1168	1162	1149	1150	1148	537
35°	1008	1004	989	984	975	631
45°	826	821	808	796	792	636
55°	629	625	611	601	594	561
65°	424	422	411	401	397	421
75°	226	223	218	215	211	241
85°	59	60	60	59	57	66
90°	0	3	4	6	7	4
95°	18	19	22	23	24	19
105°	64	65	67	69	70	68
115°	121	122	122	122	122	119
125°	176	178	178	178	177	158
135°	229	231	231	231	230	176
145°	278	279	279	279	279	173
155°	318	318	318	319	318	146
165°	345	345	345	346	344	97
175°	359	358	358	359	358	34
180°	360	360	360	360	360	



TEST NUMBER: P333257-927

CATALOG NUMBER: S125DIP-S1090D365U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8
2.5°	1355.2	1354.6	1354.0	1353.4	1352.9	1351.6	1349.7	1347.8	1345.9	1344.0	1345.9
5°	1349.6	1349.2	1348.7	1348.2	1347.7	1346.3	1343.9	1341.6	1339.2	1336.8	1338.9
7.5°	1337.2	1336.7	1336.3	1335.8	1335.3	1333.7	1331.1	1328.5	1325.9	1323.3	1325.4
10°	1326.1	1325.6	1325.2	1324.7	1324.2	1322.6	1320.0	1317.4	1314.8	1312.2	1314.1
12.5°	1312.4	1311.5	1310.7	1309.8	1309.0	1307.3	1304.9	1302.5	1300.1	1297.6	1299.2
15°	1286.5	1285.8	1285.1	1284.4	1283.7	1282.0	1279.4	1276.8	1274.1	1271.5	1272.7
17.5°	1256.8	1255.8	1254.7	1253.6	1252.6	1250.7	1248.0	1245.3	1242.6	1239.8	1241.3
20°	1232.0	1231.5	1231.1	1230.6	1230.1	1228.3	1225.2	1222.1	1219.0	1215.9	1217.6
22.5°	1207.1	1206.3	1205.5	1204.6	1203.7	1201.8	1199.0	1196.0	1193.2	1190.3	1191.4
25°	1167.8	1166.6	1165.5	1164.3	1163.1	1160.9	1157.9	1154.8	1151.7	1148.6	1149.1
27.5°	1121.8	1121.1	1120.4	1119.7	1119.0	1117.1	1113.8	1110.6	1107.5	1104.3	1104.4
30°	1091.9	1091.2	1090.4	1089.7	1089.0	1086.9	1083.3	1079.7	1076.2	1072.6	1072.1
32.5°	1059.4	1058.3	1057.2	1056.1	1055.0	1052.9	1049.6	1046.5	1043.3	1040.1	1039.3
35°	1008.4	1007.5	1006.5	1005.6	1004.6	1002.5	999.2	995.9	992.5	989.2	988.0
37.5°	955.6	954.4	953.2	952.0	950.9	948.7	945.5	942.5	939.3	936.2	934.4
40°	919.7	918.5	917.3	916.2	915.0	912.7	909.3	906.0	902.7	899.4	897.2
42.5°	881.2	880.2	879.2	878.2	877.2	875.0	871.7	868.4	865.1	861.7	859.8
45°	825.6	824.7	823.7	822.8	821.8	819.9	817.1	814.2	811.4	808.5	805.6
47.5°	765.7	765.7	765.8	765.9	765.9	764.2	760.8	757.3	753.9	750.5	747.6
50°	727.2	726.5	725.8	725.1	724.4	722.5	719.7	716.8	714.0	711.1	708.1
52.5°	687.9	687.3	686.8	686.3	685.8	684.0	681.0	677.9	674.9	671.8	669.1
55°	628.8	628.1	627.4	626.7	626.0	623.9	620.6	617.3	613.9	610.6	608.5
57.5°	566.6	566.2	565.9	565.5	565.1	563.5	560.6	557.9	555.1	552.2	549.5
60°	527.2	526.2	525.3	524.3	523.4	521.7	519.0	516.4	513.8	511.2	508.8
62.5°	486.2	485.4	484.7	483.9	483.2	481.6	479.3	477.1	474.9	472.7	470.1
65°	424.5	424.1	423.6	423.1	422.6	421.1	418.5	415.9	413.3	410.7	408.5
67.5°	364.9	363.8	362.9	361.9	360.9	359.4	357.4	355.5	353.6	351.6	349.8
70°	327.3	326.1	324.9	323.7	322.5	320.8	318.7	316.6	314.4	312.3	310.9
72.5°	286.2	285.3	284.6	283.8	283.0	281.9	280.5	279.1	277.7	276.3	274.7
75°	225.6	225.1	224.7	224.2	223.7	222.9	221.7	220.5	219.4	218.2	217.5
77.5°	169.8	169.6	169.4	169.3	169.1	168.7	167.9	167.3	166.7	166.0	165.6
80°	134.8	134.8	134.8	134.8	134.8	134.5	134.0	133.6	133.1	132.6	132.4
82.5°	103.9	103.5	103.2	102.8	102.4	102.2	102.1	102.0	101.9	101.8	101.4
85°	58.8	59.0	59.3	59.5	59.7	59.9	59.9	59.9	59.9	59.9	59.7
87.5°	23.1	23.3	23.4	23.4	23.5	23.5	23.4	23.4	23.2	23.1	23.2
90°	0.3	0.8	1.3	1.7	2.3	2.8	3.2	3.6	4.0	4.5	4.8
92.5°	6.8	7.1	7.4	7.8	8.2	8.6	9.1	9.7	10.2	10.8	11.2
95°	18.2	18.3	18.5	18.5	18.7	19.1	19.7	20.3	20.9	21.5	22.0
97.5°	30.3	30.3	30.3	30.4	30.4	30.9	31.8	32.6	33.4	34.3	34.8
100°	39.2	39.2	39.2	39.2	39.2	39.6	40.4	41.2	42.1	42.9	43.4
102.5°	48.8	49.1	49.4	49.6	49.8	50.1	50.5	50.9	51.4	51.8	52.4
105°	63.8	64.2	64.5	64.8	65.1	65.4	65.8	66.1	66.5	66.9	67.3
107.5°	80.4	80.7	81.0	81.4	81.7	82.0	82.2	82.5	82.8	83.1	83.3
110°	91.8	92.1	92.4	92.8	93.1	93.3	93.5	93.7	93.9	94.1	94.3



TEST NUMBER: P333257-927

CATALOG NUMBER: S125DIP-S1090D365U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	103.5	103.6	103.8	103.9	104.1	104.3	104.6	104.8	105.0	105.3	105.4
115°	120.6	120.9	121.2	121.4	121.7	121.8	122.0	122.1	122.2	122.4	122.3
117.5°	137.9	138.0	138.2	138.2	138.4	138.5	138.6	138.7	138.8	138.9	138.9
120°	148.7	149.0	149.3	149.6	149.9	150.1	150.2	150.2	150.3	150.4	150.4
122.5°	160.3	160.4	160.6	160.7	160.7	160.9	161.1	161.2	161.4	161.5	161.5
125°	176.1	176.5	176.9	177.2	177.6	177.8	177.9	177.9	178.0	178.1	177.9
127.5°	192.9	193.1	193.4	193.5	193.8	193.9	194.0	194.1	194.2	194.2	194.2
130°	203.0	203.3	203.6	203.9	204.2	204.5	204.5	204.7	204.9	204.9	204.9
132.5°	213.1	213.6	214.1	214.6	215.1	215.4	215.3	215.3	215.3	215.2	215.2
135°	229.0	229.4	229.8	230.1	230.5	230.8	230.8	230.8	230.9	231.0	231.0
137.5°	244.1	244.4	244.8	245.1	245.5	245.7	245.9	246.0	246.1	246.3	246.4
140°	253.7	254.0	254.3	254.6	254.9	255.2	255.3	255.6	255.7	255.9	256.0
142.5°	263.3	263.6	263.8	264.1	264.4	264.6	264.8	265.1	265.3	265.5	265.6
145°	277.5	277.7	278.0	278.2	278.5	278.7	278.8	279.1	279.2	279.4	279.4
147.5°	290.6	290.7	290.8	291.0	291.1	291.3	291.4	291.6	291.7	291.8	292.0
150°	299.3	299.3	299.2	299.1	299.0	299.1	299.4	299.7	299.9	300.2	300.2
152.5°	306.5	306.6	306.7	306.7	306.8	306.9	307.0	307.1	307.2	307.3	307.4
155°	317.5	317.5	317.5	317.5	317.5	317.5	317.6	317.7	317.7	317.8	318.1
157.5°	327.3	327.3	327.1	326.9	326.9	326.8	326.9	326.9	326.9	327.0	327.3
160°	333.2	333.0	332.8	332.6	332.5	332.4	332.5	332.5	332.6	332.6	332.9
162.5°	338.3	338.2	338.1	337.9	337.8	337.7	337.7	337.8	337.8	337.8	338.1
165°	345.2	345.1	345.0	344.8	344.8	344.7	344.8	344.8	344.9	344.9	345.2
167.5°	351.0	350.8	350.5	350.3	350.1	349.9	349.9	349.9	349.9	349.9	350.3
170°	354.2	353.9	353.7	353.5	353.2	353.1	353.1	353.1	353.1	353.1	353.5
172.5°	356.4	356.2	355.9	355.7	355.5	355.3	355.3	355.3	355.3	355.3	355.7
175°	358.9	358.7	358.5	358.2	358.0	357.8	357.8	357.8	357.8	357.8	358.2
177.5°	360.2	360.0	359.8	359.7	359.4	359.3	359.3	359.3	359.2	359.1	359.4
180°	359.8	359.8	359.8	359.8	359.8	359.8	359.8	359.8	359.8	359.8	359.8



TEST NUMBER: P333257-927

CATALOG NUMBER: S125DIP-S1090D365U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8
2.5°	1347.8	1349.7	1351.6	1352.5	1352.3	1352.1	1351.9	1351.8
5°	1341.1	1343.2	1345.4	1346.3	1346.1	1345.8	1345.6	1345.4
7.5°	1327.5	1329.6	1331.7	1332.6	1332.4	1332.1	1331.9	1331.7
10°	1316.0	1317.9	1319.8	1320.6	1320.4	1320.2	1319.9	1319.7
12.5°	1300.7	1302.2	1303.7	1304.5	1304.4	1304.3	1304.3	1304.2
15°	1273.9	1275.1	1276.3	1276.9	1276.9	1276.9	1276.9	1276.9
17.5°	1242.9	1244.3	1245.8	1245.9	1244.8	1243.6	1242.4	1241.2
20°	1219.2	1220.9	1222.6	1222.8	1221.6	1220.4	1219.2	1218.1
22.5°	1192.5	1193.6	1194.6	1194.8	1194.0	1193.2	1192.4	1191.5
25°	1149.5	1150.0	1150.5	1150.3	1149.6	1148.9	1148.2	1147.5
27.5°	1104.5	1104.5	1104.7	1104.4	1103.7	1103.0	1102.2	1101.5
30°	1071.7	1071.2	1070.7	1070.2	1069.4	1068.7	1068.0	1067.3
32.5°	1038.4	1037.5	1036.7	1035.6	1034.4	1033.1	1031.7	1030.5
35°	986.8	985.6	984.4	982.9	981.0	979.1	977.2	975.3
37.5°	932.6	930.9	929.2	927.7	926.6	925.5	924.4	923.4
40°	895.1	892.9	890.8	889.4	888.7	888.0	887.2	886.5
42.5°	857.9	855.9	854.0	852.4	851.4	850.2	849.1	848.0
45°	802.8	799.9	797.1	795.3	794.6	793.8	793.1	792.4
47.5°	744.7	741.8	738.9	736.7	735.0	733.3	731.7	730.0
50°	705.0	701.9	698.8	696.4	694.7	693.1	691.4	689.8
52.5°	666.4	663.7	661.0	658.7	656.8	655.0	653.2	651.3
55°	606.3	604.2	602.1	600.2	598.5	596.8	595.2	593.5
57.5°	546.8	544.0	541.2	539.4	538.5	537.6	536.7	535.8
60°	506.4	504.1	501.7	499.6	498.0	496.3	494.6	493.0
62.5°	467.5	465.0	462.4	460.5	459.2	458.0	456.6	455.3
65°	406.4	404.3	402.1	400.5	399.6	398.6	397.7	396.7
67.5°	348.0	346.2	344.4	343.2	342.6	342.1	341.5	341.0
70°	309.4	308.0	306.6	305.4	304.4	303.5	302.5	301.6
72.5°	273.1	271.5	269.9	268.6	267.7	266.7	265.8	264.8
75°	216.7	216.0	215.3	214.4	213.5	212.5	211.6	210.6
77.5°	165.1	164.7	164.3	163.7	163.0	162.4	161.7	161.1
80°	132.1	131.9	131.7	131.3	130.8	130.3	129.8	129.4
82.5°	100.9	100.5	100.1	99.8	99.7	99.7	99.6	99.4
85°	59.4	59.2	58.9	58.5	58.1	57.6	57.1	56.6
87.5°	23.3	23.3	23.4	23.2	22.9	22.6	22.2	21.9
90°	5.1	5.4	5.7	5.9	6.2	6.3	6.5	6.7
92.5°	11.6	12.0	12.4	12.7	12.8	12.9	13.1	13.2
95°	22.4	22.9	23.3	23.6	23.7	23.8	23.9	24.1
97.5°	35.2	35.6	36.0	36.2	36.3	36.4	36.4	36.5
100°	44.0	44.5	45.1	45.4	45.6	45.7	45.8	45.9
102.5°	53.0	53.6	54.3	54.7	54.8	55.0	55.1	55.3
105°	67.7	68.0	68.4	68.7	68.8	69.1	69.2	69.5
107.5°	83.5	83.7	83.8	84.0	83.9	83.9	83.9	83.9
110°	94.4	94.7	94.8	94.9	94.8	94.7	94.7	94.7



TEST NUMBER: P333257-927

CATALOG NUMBER: S125DIP-S1090D365U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	105.4	105.5	105.6	105.6	105.5	105.4	105.3	105.2
115°	122.2	122.2	122.1	122.1	122.0	121.9	121.8	121.8
117.5°	139.0	139.1	139.1	139.0	138.8	138.6	138.3	138.0
120°	150.4	150.4	150.4	150.2	150.0	149.7	149.5	149.2
122.5°	161.4	161.4	161.4	161.2	161.1	160.8	160.7	160.4
125°	177.8	177.7	177.6	177.4	177.4	177.4	177.3	177.2
127.5°	194.1	194.0	193.9	193.8	193.8	193.6	193.5	193.4
130°	204.9	204.8	204.7	204.6	204.5	204.4	204.2	204.1
132.5°	215.2	215.1	215.0	214.9	214.7	214.5	214.4	214.2
135°	231.0	231.0	231.0	230.8	230.6	230.4	230.1	229.9
137.5°	246.4	246.5	246.6	246.4	246.1	245.8	245.5	245.2
140°	256.2	256.3	256.4	256.4	256.0	255.7	255.4	255.1
142.5°	265.7	265.8	265.9	265.7	265.4	265.1	264.8	264.5
145°	279.4	279.4	279.4	279.3	279.2	278.9	278.8	278.6
147.5°	292.2	292.3	292.5	292.3	291.9	291.4	291.0	290.7
150°	300.2	300.2	300.2	300.1	300.0	299.8	299.7	299.6
152.5°	307.6	307.8	307.9	307.8	307.7	307.4	307.2	307.0
155°	318.3	318.5	318.8	318.8	318.5	318.1	317.8	317.5
157.5°	327.5	327.8	328.0	328.0	327.6	327.1	326.7	326.3
160°	333.1	333.4	333.6	333.6	333.3	333.0	332.6	332.3
162.5°	338.3	338.7	339.0	339.0	338.6	338.2	337.9	337.5
165°	345.5	345.7	345.9	345.9	345.5	345.2	344.8	344.4
167.5°	350.7	351.0	351.4	351.4	351.0	350.6	350.2	349.9
170°	353.8	354.2	354.6	354.5	354.1	353.6	353.2	352.8
172.5°	356.1	356.4	356.8	356.8	356.4	356.0	355.6	355.2
175°	358.5	358.9	359.3	359.3	358.9	358.4	358.0	357.5
177.5°	359.7	360.0	360.3	360.3	360.0	359.6	359.3	358.9
180°	359.8	359.8	359.8	359.8	359.8	359.8	359.8	359.8

(END OF REPORT)