

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333266-927

Luminaire Tested: **S125DIP-S1090D590U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333266-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1090D590U927-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 590 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5139.2 lumens
Efficiency: N/A
Efficacy: 105.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333266-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

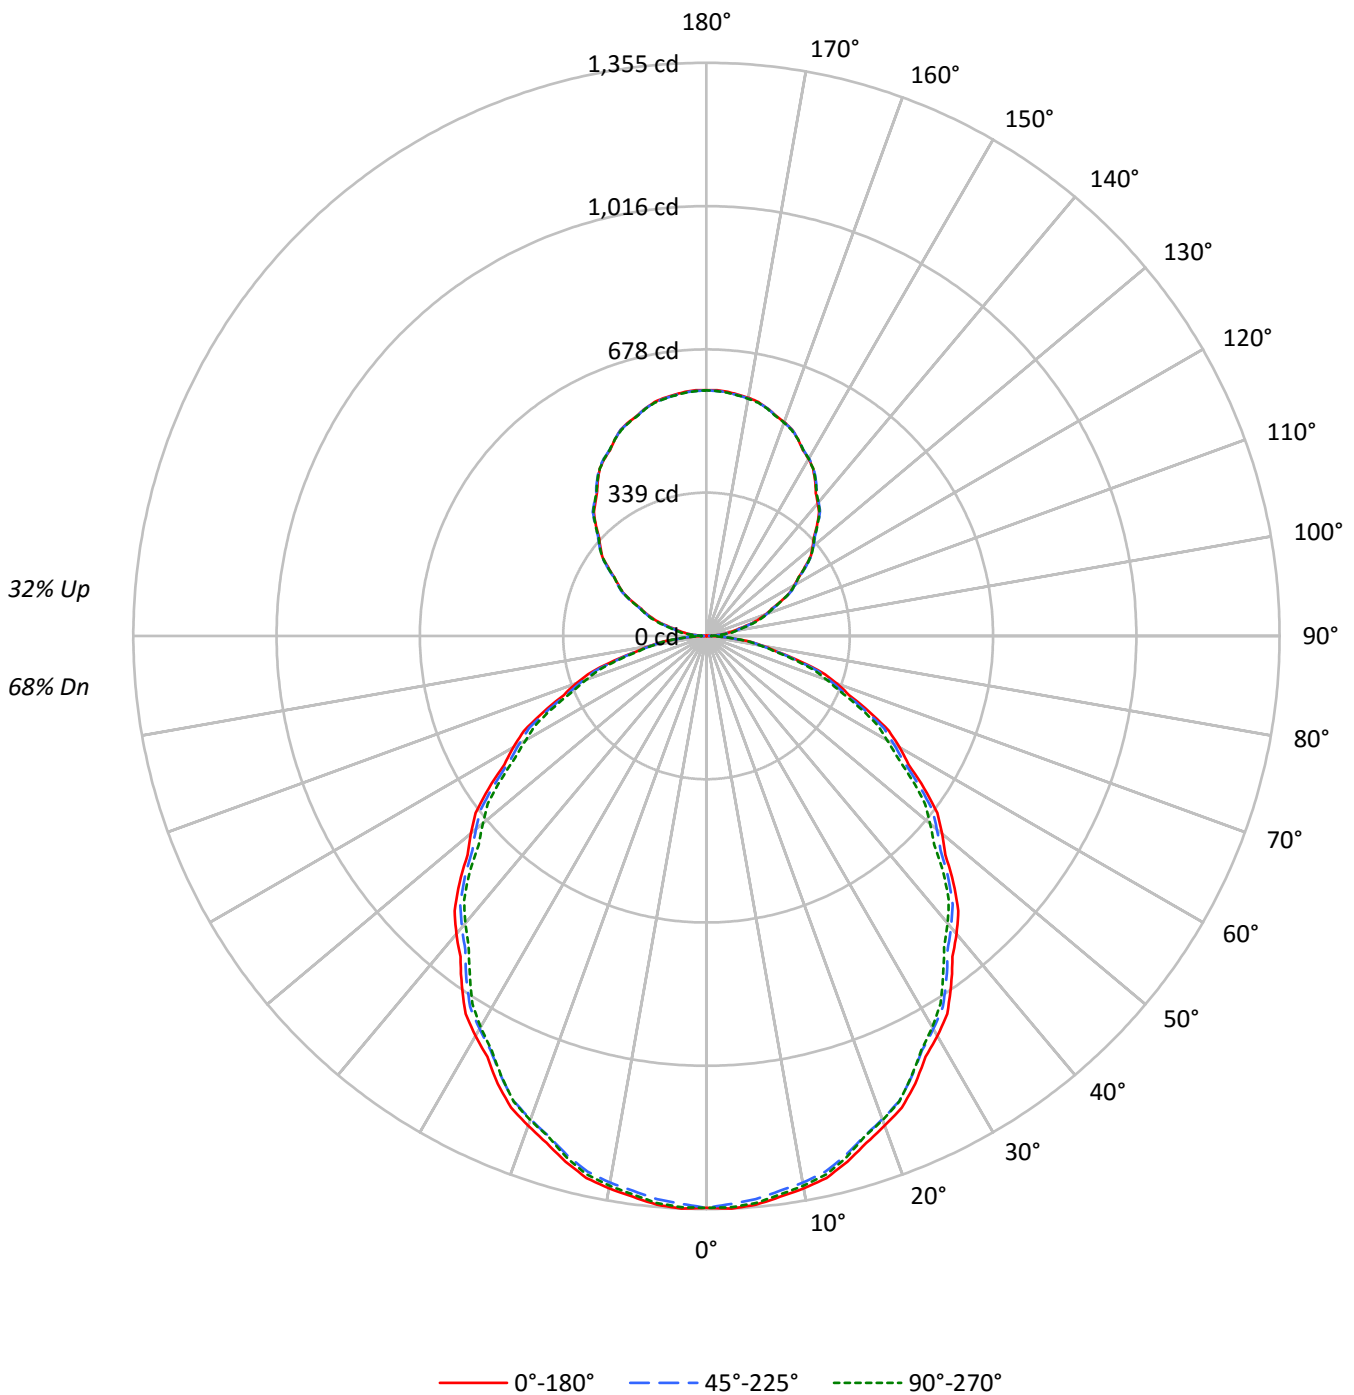



TEST NUMBER: P333266-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	112	112	112	112	105	105	105	105	94	94	94		83	83	83		73	73	73	68
1	102	97	93	90	96	92	88	85	82	79	77		73	71	69		64	63	62	57
2	93	85	79	73	87	80	75	70	72	67	64		64	61	58		57	54	52	48
3	85	75	67	61	80	71	64	58	63	58	53		57	52	49		50	47	44	41
4	77	66	58	52	73	63	55	50	56	50	46		50	46	42		45	41	38	35
5	71	59	51	44	67	56	48	43	51	44	39		45	40	36		40	36	33	30
6	66	53	45	39	62	51	43	37	46	39	35		41	36	32		37	32	29	27
7	61	48	40	34	57	46	38	33	41	35	31		37	32	28		34	29	26	24
8	56	44	36	30	53	42	34	29	38	32	27		34	29	25		31	27	23	21
9	53	40	32	27	50	38	31	26	35	29	24		32	26	23		28	24	21	19
10	49	37	29	24	47	35	28	24	32	26	22		29	24	21		26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8730	8730	8730
5°	8749	8666	8722
10°	8697	8605	8655
15°	8602	8501	8538
20°	8467	8357	8372
25°	8322	8185	8177
30°	8143	7999	7959
35°	7950	7799	7689
40°	7754	7583	7474
45°	7541	7384	7237
50°	7306	7145	6931
55°	7080	6875	6683
60°	6810	6603	6368
65°	6487	6276	6062
70°	6180	5897	5695
75°	5629	5445	5255
80°	5013	4932	4813
85°	4357	4439	4194



TEST NUMBER: P333266-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.5	2.5
10°-20°	360.0	7.0
20°-30°	531.6	10.3
30°-40°	620.3	12.1
40°-50°	623.0	12.1
50°-60°	546.9	10.6
60°-70°	407.5	7.9
70°-80°	233.0	4.5
80°-90°	69.1	1.3
90°-100°	38.9	0.8
100°-110°	114.9	2.2
110°-120°	194.5	3.8
120°-130°	256.0	5.0
130°-140°	286.9	5.6
140°-150°	281.2	5.5
150°-160°	236.2	4.6
160°-170°	157.0	3.1
170°-180°	54.9	1.1
0°-30°	1019.1	19.8
0°-40°	1639.4	31.9
0°-60°	2809.2	54.7
0°-90°	3518.8	68.5
90°-120°	348.3	6.8
90°-150°	1172.4	22.8
90°-180°	1620.0	31.5
0°-180°	5139.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1352	1352	1352	1352	1352	
5°	1350	1347	1337	1346	1345	128
15°	1286	1283	1272	1277	1277	362
25°	1168	1162	1149	1150	1148	537
35°	1008	1004	989	984	975	631
45°	826	821	808	796	792	636
55°	629	625	611	601	594	561
65°	424	422	411	401	397	421
75°	226	223	218	215	211	241
85°	59	60	60	59	57	66
90°	0	4	7	10	11	5
95°	29	30	35	38	39	31
105°	103	105	108	111	112	110
115°	195	197	198	197	197	193
125°	284	287	287	287	286	254
135°	370	372	373	373	371	285
145°	448	450	451	451	450	280
155°	512	512	513	514	512	236
165°	557	556	557	558	556	157
175°	579	578	578	580	577	55
180°	581	581	581	581	581	



TEST NUMBER: P333266-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8
2.5°	1355.2	1354.6	1354.0	1353.4	1352.9	1351.6	1349.7	1347.8	1345.9	1344.0	1345.9
5°	1349.6	1349.2	1348.7	1348.2	1347.7	1346.3	1343.9	1341.6	1339.2	1336.8	1338.9
7.5°	1337.2	1336.7	1336.3	1335.8	1335.3	1333.7	1331.1	1328.5	1325.9	1323.3	1325.4
10°	1326.1	1325.6	1325.2	1324.7	1324.2	1322.6	1320.0	1317.4	1314.8	1312.2	1314.1
12.5°	1312.4	1311.5	1310.7	1309.8	1309.0	1307.3	1304.9	1302.5	1300.1	1297.6	1299.2
15°	1286.5	1285.8	1285.1	1284.4	1283.7	1282.0	1279.4	1276.8	1274.1	1271.5	1272.7
17.5°	1256.8	1255.8	1254.7	1253.6	1252.6	1250.7	1248.0	1245.3	1242.6	1239.8	1241.3
20°	1232.0	1231.5	1231.1	1230.6	1230.1	1228.3	1225.2	1222.1	1219.0	1215.9	1217.6
22.5°	1207.1	1206.3	1205.5	1204.6	1203.7	1201.8	1199.0	1196.0	1193.2	1190.3	1191.4
25°	1167.8	1166.6	1165.5	1164.3	1163.1	1160.9	1157.9	1154.8	1151.7	1148.6	1149.1
27.5°	1121.8	1121.1	1120.4	1119.7	1119.0	1117.1	1113.8	1110.6	1107.5	1104.3	1104.4
30°	1091.9	1091.2	1090.4	1089.7	1089.0	1086.9	1083.3	1079.7	1076.2	1072.6	1072.1
32.5°	1059.4	1058.3	1057.2	1056.1	1055.0	1052.9	1049.6	1046.5	1043.3	1040.1	1039.3
35°	1008.4	1007.5	1006.5	1005.6	1004.6	1002.5	999.2	995.9	992.5	989.2	988.0
37.5°	955.6	954.4	953.2	952.0	950.9	948.7	945.5	942.5	939.3	936.2	934.4
40°	919.7	918.5	917.3	916.2	915.0	912.7	909.3	906.0	902.7	899.4	897.2
42.5°	881.2	880.2	879.2	878.2	877.2	875.0	871.7	868.4	865.1	861.7	859.8
45°	825.6	824.7	823.7	822.8	821.8	819.9	817.1	814.2	811.4	808.5	805.6
47.5°	765.7	765.7	765.8	765.9	765.9	764.2	760.8	757.3	753.9	750.5	747.6
50°	727.2	726.5	725.8	725.1	724.4	722.5	719.7	716.8	714.0	711.1	708.1
52.5°	687.9	687.3	686.8	686.3	685.8	684.0	681.0	677.9	674.9	671.8	669.1
55°	628.8	628.1	627.4	626.7	626.0	623.9	620.6	617.3	613.9	610.6	608.5
57.5°	566.6	566.2	565.9	565.5	565.1	563.5	560.6	557.9	555.1	552.2	549.5
60°	527.2	526.2	525.3	524.3	523.4	521.7	519.0	516.4	513.8	511.2	508.8
62.5°	486.2	485.4	484.7	483.9	483.2	481.6	479.3	477.1	474.9	472.7	470.1
65°	424.5	424.1	423.6	423.1	422.6	421.1	418.5	415.9	413.3	410.7	408.5
67.5°	364.9	363.8	362.9	361.9	360.9	359.4	357.4	355.5	353.6	351.6	349.8
70°	327.3	326.1	324.9	323.7	322.5	320.8	318.7	316.6	314.4	312.3	310.9
72.5°	286.2	285.3	284.6	283.8	283.0	281.9	280.5	279.1	277.7	276.3	274.7
75°	225.6	225.1	224.7	224.2	223.7	222.9	221.7	220.5	219.4	218.2	217.5
77.5°	169.8	169.6	169.4	169.3	169.1	168.7	167.9	167.3	166.7	166.0	165.6
80°	134.8	134.8	134.8	134.8	134.8	134.5	134.0	133.6	133.1	132.6	132.4
82.5°	103.9	103.5	103.2	102.8	102.4	102.2	102.1	102.0	101.9	101.8	101.4
85°	58.8	59.0	59.3	59.5	59.7	59.9	59.9	59.9	59.9	59.9	59.7
87.5°	23.2	23.4	23.5	23.7	23.8	23.9	23.8	23.8	23.8	23.7	23.8
90°	0.5	1.3	2.1	2.9	3.6	4.4	5.1	5.9	6.5	7.2	7.8
92.5°	10.9	11.5	12.0	12.6	13.2	13.9	14.7	15.6	16.5	17.3	18.0
95°	29.4	29.5	29.8	29.9	30.2	30.8	31.8	32.8	33.8	34.8	35.5
97.5°	48.8	48.9	49.0	49.0	49.1	49.8	51.3	52.6	54.0	55.4	56.1
100°	63.3	63.3	63.3	63.3	63.3	63.9	65.2	66.5	67.8	69.2	70.0
102.5°	78.8	79.2	79.6	80.0	80.4	81.0	81.6	82.3	82.9	83.6	84.6
105°	103.1	103.5	104.0	104.6	105.0	105.6	106.2	106.8	107.4	108.0	108.6
107.5°	129.8	130.3	130.8	131.3	131.8	132.3	132.8	133.2	133.6	134.1	134.4
110°	148.2	148.7	149.2	149.7	150.3	150.7	150.9	151.2	151.5	151.9	152.2



TEST NUMBER: P333266-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	167.0	167.3	167.5	167.8	168.1	168.4	168.8	169.1	169.5	169.9	170.1
115°	194.8	195.2	195.6	196.0	196.4	196.7	196.9	197.1	197.3	197.5	197.4
117.5°	222.6	222.8	223.0	223.2	223.3	223.6	223.7	223.9	224.0	224.3	224.3
120°	240.0	240.5	241.0	241.5	242.0	242.2	242.4	242.5	242.6	242.6	242.6
122.5°	258.8	259.0	259.1	259.3	259.5	259.7	260.0	260.2	260.5	260.8	260.7
125°	284.2	284.9	285.4	286.1	286.7	287.0	287.1	287.2	287.3	287.4	287.2
127.5°	311.4	311.7	312.0	312.4	312.8	313.0	313.1	313.2	313.3	313.5	313.4
130°	327.6	328.1	328.7	329.2	329.6	330.0	330.2	330.4	330.6	330.8	330.7
132.5°	343.9	344.8	345.5	346.3	347.2	347.6	347.5	347.5	347.5	347.5	347.4
135°	369.6	370.3	370.9	371.5	372.1	372.4	372.6	372.6	372.7	372.8	372.8
137.5°	393.9	394.5	395.1	395.6	396.2	396.6	396.9	397.0	397.3	397.5	397.6
140°	409.4	410.0	410.4	410.9	411.5	411.9	412.2	412.5	412.7	413.0	413.3
142.5°	425.0	425.4	425.8	426.3	426.7	427.1	427.5	427.9	428.3	428.6	428.7
145°	447.8	448.2	448.7	449.1	449.5	449.8	450.1	450.4	450.8	451.0	451.0
147.5°	469.0	469.2	469.4	469.7	469.9	470.1	470.3	470.6	470.9	471.1	471.3
150°	483.1	483.0	482.9	482.8	482.7	482.8	483.2	483.6	484.0	484.4	484.4
152.5°	494.6	494.8	495.0	495.1	495.2	495.4	495.5	495.7	495.8	496.1	496.3
155°	512.5	512.5	512.5	512.5	512.5	512.5	512.6	512.7	512.9	512.9	513.3
157.5°	528.4	528.1	527.9	527.8	527.5	527.4	527.5	527.7	527.8	527.8	528.2
160°	537.8	537.5	537.2	536.9	536.5	536.5	536.5	536.7	536.8	536.9	537.3
162.5°	546.1	545.9	545.7	545.4	545.2	545.1	545.1	545.2	545.2	545.2	545.7
165°	557.2	557.0	556.8	556.6	556.4	556.3	556.4	556.6	556.7	556.7	557.1
167.5°	566.6	566.3	565.8	565.4	565.0	564.8	564.8	564.8	564.8	564.8	565.4
170°	571.6	571.2	570.8	570.5	570.1	569.9	569.9	569.9	569.9	569.9	570.5
172.5°	575.3	574.9	574.5	574.1	573.7	573.5	573.5	573.5	573.5	573.5	574.1
175°	579.3	578.9	578.5	578.1	577.7	577.6	577.6	577.6	577.6	577.6	578.1
177.5°	581.5	581.1	580.8	580.5	580.1	580.0	579.9	579.8	579.7	579.6	580.1
180°	580.7	580.7	580.7	580.7	580.7	580.7	580.7	580.7	580.7	580.7	580.7



TEST NUMBER: P333266-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8
2.5°	1347.8	1349.7	1351.6	1352.5	1352.3	1352.1	1351.9	1351.8
5°	1341.1	1343.2	1345.4	1346.3	1346.1	1345.8	1345.6	1345.4
7.5°	1327.5	1329.6	1331.7	1332.6	1332.4	1332.1	1331.9	1331.7
10°	1316.0	1317.9	1319.8	1320.6	1320.4	1320.2	1319.9	1319.7
12.5°	1300.7	1302.2	1303.7	1304.5	1304.4	1304.3	1304.3	1304.2
15°	1273.9	1275.1	1276.3	1276.9	1276.9	1276.9	1276.9	1276.9
17.5°	1242.9	1244.3	1245.8	1245.9	1244.8	1243.6	1242.4	1241.2
20°	1219.2	1220.9	1222.6	1222.8	1221.6	1220.4	1219.2	1218.1
22.5°	1192.5	1193.6	1194.6	1194.8	1194.0	1193.2	1192.4	1191.5
25°	1149.5	1150.0	1150.5	1150.3	1149.6	1148.9	1148.2	1147.5
27.5°	1104.5	1104.5	1104.7	1104.4	1103.7	1103.0	1102.2	1101.5
30°	1071.7	1071.2	1070.7	1070.2	1069.4	1068.7	1068.0	1067.3
32.5°	1038.4	1037.5	1036.7	1035.6	1034.4	1033.1	1031.7	1030.5
35°	986.8	985.6	984.4	982.9	981.0	979.1	977.2	975.3
37.5°	932.6	930.9	929.2	927.7	926.6	925.5	924.4	923.4
40°	895.1	892.9	890.8	889.4	888.7	888.0	887.2	886.5
42.5°	857.9	855.9	854.0	852.4	851.4	850.2	849.1	848.0
45°	802.8	799.9	797.1	795.3	794.6	793.8	793.1	792.4
47.5°	744.7	741.8	738.9	736.7	735.0	733.3	731.7	730.0
50°	705.0	701.9	698.8	696.4	694.7	693.1	691.4	689.8
52.5°	666.4	663.7	661.0	658.7	656.8	655.0	653.2	651.3
55°	606.3	604.2	602.1	600.2	598.5	596.8	595.2	593.5
57.5°	546.8	544.0	541.2	539.4	538.5	537.6	536.7	535.8
60°	506.4	504.1	501.7	499.6	498.0	496.3	494.6	493.0
62.5°	467.5	465.0	462.4	460.5	459.2	458.0	456.6	455.3
65°	406.4	404.3	402.1	400.5	399.6	398.6	397.7	396.7
67.5°	348.0	346.2	344.4	343.2	342.6	342.1	341.5	341.0
70°	309.4	308.0	306.6	305.4	304.4	303.5	302.5	301.6
72.5°	273.1	271.5	269.9	268.6	267.7	266.7	265.8	264.8
75°	216.7	216.0	215.3	214.4	213.5	212.5	211.6	210.6
77.5°	165.1	164.7	164.3	163.7	163.0	162.4	161.7	161.1
80°	132.1	131.9	131.7	131.3	130.8	130.3	129.8	129.4
82.5°	100.9	100.5	100.1	99.8	99.7	99.7	99.6	99.4
85°	59.4	59.2	58.9	58.5	58.1	57.6	57.1	56.6
87.5°	23.9	24.0	24.1	24.0	23.7	23.4	23.1	22.7
90°	8.2	8.7	9.3	9.7	10.0	10.2	10.5	10.9
92.5°	18.7	19.3	20.0	20.4	20.7	20.9	21.1	21.3
95°	36.2	36.9	37.6	38.0	38.3	38.5	38.7	38.9
97.5°	56.7	57.4	58.1	58.5	58.5	58.7	58.8	58.9
100°	71.0	71.9	72.7	73.3	73.5	73.8	73.9	74.1
102.5°	85.6	86.6	87.5	88.2	88.5	88.7	89.0	89.3
105°	109.2	109.8	110.4	110.9	111.1	111.5	111.8	112.1
107.5°	134.8	135.1	135.3	135.5	135.5	135.5	135.4	135.4
110°	152.4	152.7	153.0	153.1	153.0	153.0	152.8	152.7



TEST NUMBER: P333266-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	170.2	170.3	170.5	170.5	170.3	170.1	169.9	169.8
115°	197.3	197.2	197.1	197.0	196.9	196.8	196.7	196.6
117.5°	224.4	224.5	224.6	224.4	224.0	223.6	223.2	222.8
120°	242.6	242.6	242.6	242.5	242.1	241.7	241.3	240.9
122.5°	260.6	260.5	260.5	260.2	259.9	259.6	259.3	259.0
125°	287.0	286.8	286.6	286.5	286.4	286.3	286.1	286.1
127.5°	313.2	313.1	313.1	312.9	312.7	312.5	312.3	312.1
130°	330.6	330.5	330.4	330.3	330.0	329.9	329.6	329.5
132.5°	347.2	347.1	347.1	346.8	346.6	346.3	346.0	345.7
135°	372.8	372.8	372.8	372.6	372.2	371.9	371.5	371.1
137.5°	397.8	397.8	398.0	397.8	397.3	396.8	396.3	395.8
140°	413.4	413.7	413.8	413.7	413.2	412.7	412.2	411.7
142.5°	428.8	429.0	429.0	428.9	428.4	427.9	427.4	426.9
145°	451.0	451.0	451.0	450.8	450.6	450.3	450.0	449.6
147.5°	471.6	471.8	472.1	471.8	471.1	470.5	469.8	469.1
150°	484.4	484.4	484.4	484.3	484.2	483.9	483.8	483.5
152.5°	496.5	496.8	497.0	496.9	496.5	496.2	495.8	495.5
155°	513.7	514.1	514.5	514.5	514.0	513.5	512.9	512.5
157.5°	528.6	529.0	529.4	529.3	528.6	528.0	527.4	526.6
160°	537.7	538.1	538.4	538.4	538.0	537.4	536.9	536.5
162.5°	546.1	546.6	547.2	547.1	546.5	545.9	545.3	544.7
165°	557.5	557.9	558.4	558.3	557.7	557.1	556.4	555.9
167.5°	566.0	566.6	567.2	567.2	566.6	565.9	565.3	564.7
170°	571.1	571.6	572.3	572.2	571.6	570.8	570.1	569.4
172.5°	574.7	575.3	575.9	575.9	575.3	574.6	574.0	573.4
175°	578.8	579.3	580.0	579.9	579.2	578.5	577.8	577.1
177.5°	580.6	581.1	581.5	581.5	581.0	580.4	579.8	579.2
180°	580.7	580.7	580.7	580.7	580.7	580.7	580.7	580.7

(END OF REPORT)