

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333267-927

Luminaire Tested: **S125DIP-S1090D590U927-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333267-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1090D590U927-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 590 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5199.5 lumens
Efficiency: N/A
Efficacy: 106.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333267-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

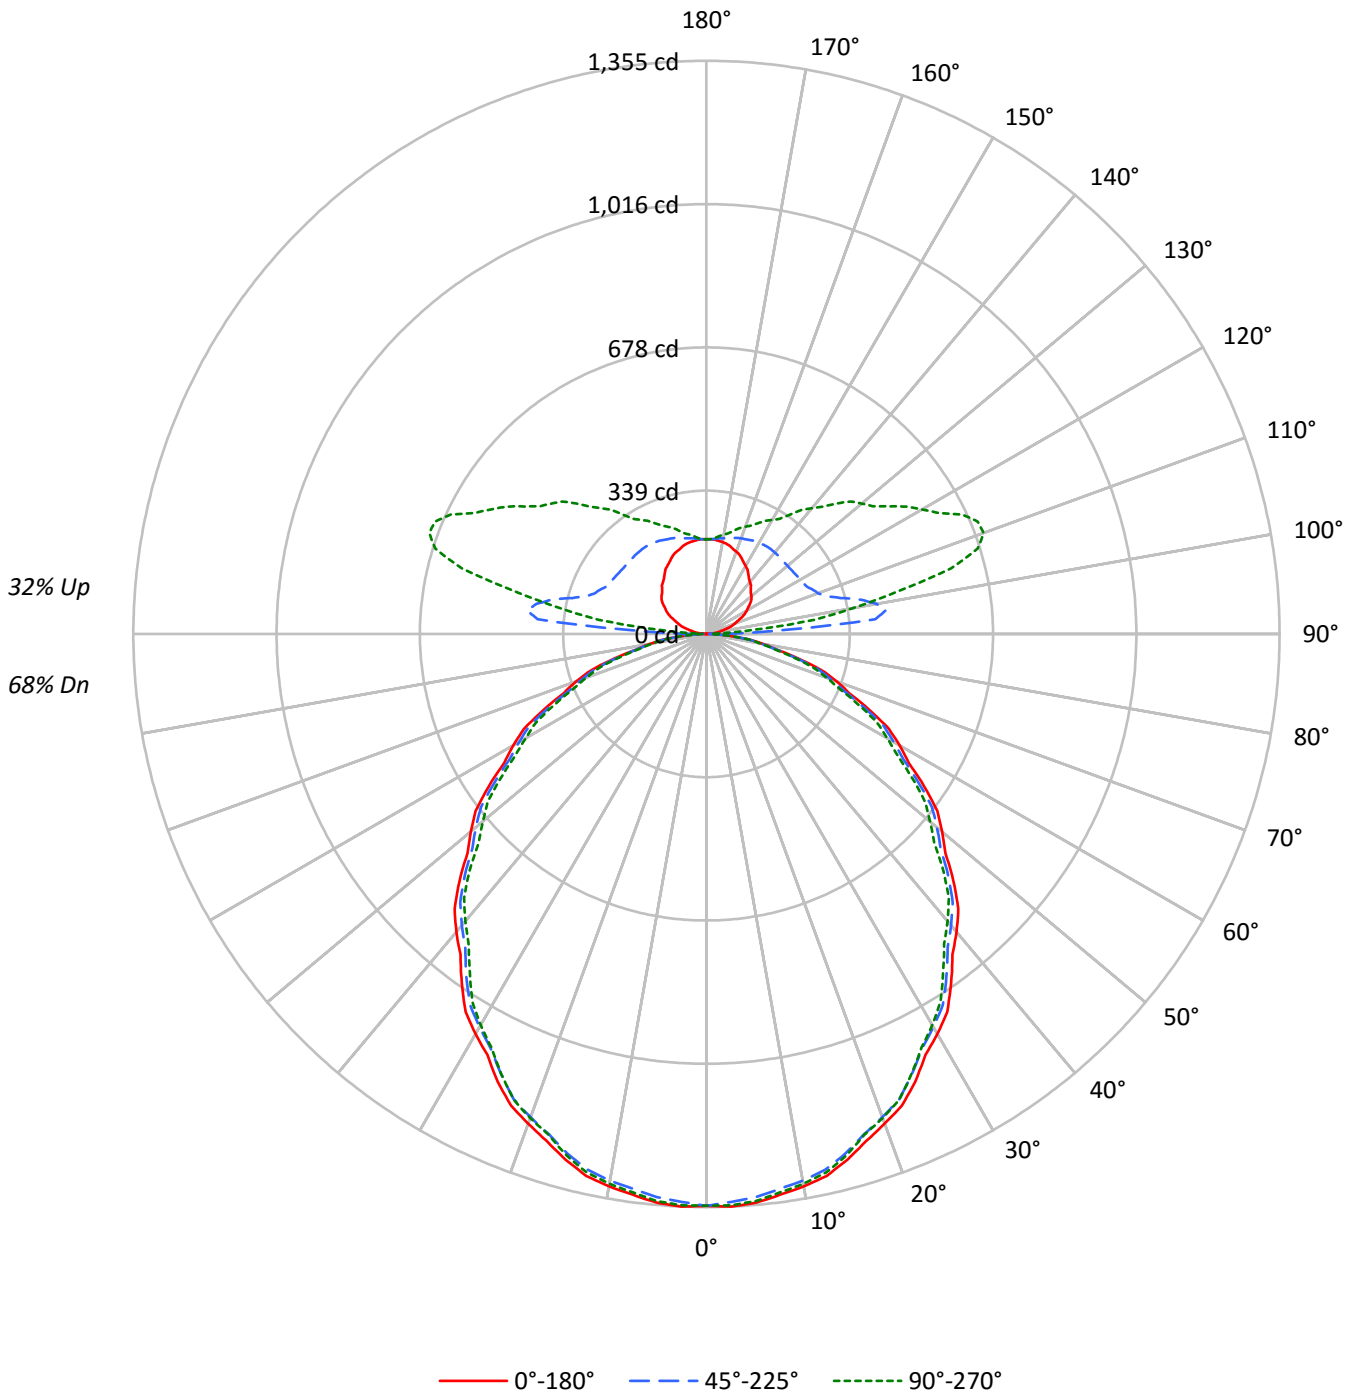



TEST NUMBER: P333267-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	111	111	111	111	105	105	105	105	93	93	93		82	82	82		72	72	72	68
1	102	97	93	90	96	92	88	85	82	79	77		72	70	69		64	62	61	57
2	93	85	78	73	87	80	75	70	72	67	63		64	60	57		56	54	51	48
3	84	75	67	61	79	71	64	58	63	58	53		56	52	48		50	46	44	40
4	77	66	58	52	73	63	55	50	56	50	45		50	45	41		44	41	38	34
5	71	59	51	44	67	56	48	43	50	44	39		45	40	36		40	36	33	30
6	66	53	45	39	62	50	43	37	45	39	34		41	36	32		36	32	29	26
7	61	48	40	34	57	46	38	33	41	35	30		37	32	28		33	29	26	23
8	56	44	36	30	53	42	34	29	38	31	27		34	29	25		31	26	23	21
9	53	40	32	27	50	38	31	26	35	29	24		31	26	23		28	24	21	19
10	49	37	29	24	46	35	28	24	32	26	22		29	24	20		26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8730	8730	8730
5°	8749	8666	8722
10°	8697	8605	8655
15°	8602	8501	8538
20°	8467	8357	8372
25°	8322	8185	8177
30°	8143	7999	7959
35°	7950	7799	7689
40°	7754	7583	7474
45°	7541	7384	7237
50°	7306	7145	6931
55°	7080	6875	6683
60°	6810	6603	6368
65°	6487	6276	6062
70°	6180	5897	5695
75°	5629	5445	5255
80°	5013	4932	4813
85°	4357	4439	4194



TEST NUMBER: P333267-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.5	2.5
10°-20°	360.0	6.9
20°-30°	531.6	10.2
30°-40°	620.3	11.9
40°-50°	623.0	12.0
50°-60°	546.9	10.5
60°-70°	407.5	7.8
70°-80°	233.0	4.5
80°-90°	69.0	1.3
90°-100°	162.5	3.1
100°-110°	349.2	6.7
110°-120°	327.8	6.3
120°-130°	265.6	5.1
130°-140°	213.2	4.1
140°-150°	160.9	3.1
150°-160°	113.2	2.2
160°-170°	66.7	1.3
170°-180°	21.7	0.4
0°-30°	1019.1	19.6
0°-40°	1639.4	31.5
0°-60°	2809.2	54.0
0°-90°	3518.7	67.7
90°-120°	839.5	16.1
90°-150°	1479.1	28.4
90°-180°	1681.0	32.3
0°-180°	5199.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1352	1352	1352	1352	1352	
5°	1350	1347	1337	1346	1345	128
15°	1286	1283	1272	1277	1277	362
25°	1168	1162	1149	1150	1148	537
35°	1008	1004	989	984	975	631
45°	826	821	808	796	792	636
55°	629	625	611	601	594	561
65°	424	422	411	401	397	421
75°	226	223	218	215	211	241
85°	59	60	60	59	57	66
90°	0	4	7	9	10	4
95°	15	44	400	182	106	16
105°	51	71	328	645	599	54
115°	91	110	263	567	667	90
125°	126	148	252	451	526	112
135°	148	178	250	378	436	115
145°	173	198	251	313	344	108
155°	197	212	245	277	289	91
165°	215	221	235	249	253	61
175°	224	224	226	228	227	21
180°	224	224	224	224	224	



TEST NUMBER: P333267-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8
2.5°	1355.2	1354.6	1354.0	1353.4	1352.9	1351.6	1349.7	1347.8	1345.9	1344.0	1345.9
5°	1349.6	1349.2	1348.7	1348.2	1347.7	1346.3	1343.9	1341.6	1339.2	1336.8	1338.9
7.5°	1337.2	1336.7	1336.3	1335.8	1335.3	1333.7	1331.1	1328.5	1325.9	1323.3	1325.4
10°	1326.1	1325.6	1325.2	1324.7	1324.2	1322.6	1320.0	1317.4	1314.8	1312.2	1314.1
12.5°	1312.4	1311.5	1310.7	1309.8	1309.0	1307.3	1304.9	1302.5	1300.1	1297.6	1299.2
15°	1286.5	1285.8	1285.1	1284.4	1283.7	1282.0	1279.4	1276.8	1274.1	1271.5	1272.7
17.5°	1256.8	1255.8	1254.7	1253.6	1252.6	1250.7	1248.0	1245.3	1242.6	1239.8	1241.3
20°	1232.0	1231.5	1231.1	1230.6	1230.1	1228.3	1225.2	1222.1	1219.0	1215.9	1217.6
22.5°	1207.1	1206.3	1205.5	1204.6	1203.7	1201.8	1199.0	1196.0	1193.2	1190.3	1191.4
25°	1167.8	1166.6	1165.5	1164.3	1163.1	1160.9	1157.9	1154.8	1151.7	1148.6	1149.1
27.5°	1121.8	1121.1	1120.4	1119.7	1119.0	1117.1	1113.8	1110.6	1107.5	1104.3	1104.4
30°	1091.9	1091.2	1090.4	1089.7	1089.0	1086.9	1083.3	1079.7	1076.2	1072.6	1072.1
32.5°	1059.4	1058.3	1057.2	1056.1	1055.0	1052.9	1049.6	1046.5	1043.3	1040.1	1039.3
35°	1008.4	1007.5	1006.5	1005.6	1004.6	1002.5	999.2	995.9	992.5	989.2	988.0
37.5°	955.6	954.4	953.2	952.0	950.9	948.7	945.5	942.5	939.3	936.2	934.4
40°	919.7	918.5	917.3	916.2	915.0	912.7	909.3	906.0	902.7	899.4	897.2
42.5°	881.2	880.2	879.2	878.2	877.2	875.0	871.7	868.4	865.1	861.7	859.8
45°	825.6	824.7	823.7	822.8	821.8	819.9	817.1	814.2	811.4	808.5	805.6
47.5°	765.7	765.7	765.8	765.9	765.9	764.2	760.8	757.3	753.9	750.5	747.6
50°	727.2	726.5	725.8	725.1	724.4	722.5	719.7	716.8	714.0	711.1	708.1
52.5°	687.9	687.3	686.8	686.3	685.8	684.0	681.0	677.9	674.9	671.8	669.1
55°	628.8	628.1	627.4	626.7	626.0	623.9	620.6	617.3	613.9	610.6	608.5
57.5°	566.6	566.2	565.9	565.5	565.1	563.5	560.6	557.9	555.1	552.2	549.5
60°	527.2	526.2	525.3	524.3	523.4	521.7	519.0	516.4	513.8	511.2	508.8
62.5°	486.2	485.4	484.7	483.9	483.2	481.6	479.3	477.1	474.9	472.7	470.1
65°	424.5	424.1	423.6	423.1	422.6	421.1	418.5	415.9	413.3	410.7	408.5
67.5°	364.9	363.8	362.9	361.9	360.9	359.4	357.4	355.5	353.6	351.6	349.8
70°	327.3	326.1	324.9	323.7	322.5	320.8	318.7	316.6	314.4	312.3	310.9
72.5°	286.2	285.3	284.6	283.8	283.0	281.9	280.5	279.1	277.7	276.3	274.7
75°	225.6	225.1	224.7	224.2	223.7	222.9	221.7	220.5	219.4	218.2	217.5
77.5°	169.8	169.6	169.4	169.3	169.1	168.7	167.9	167.3	166.7	166.0	165.6
80°	134.8	134.8	134.8	134.8	134.8	134.5	134.0	133.6	133.1	132.6	132.4
82.5°	103.9	103.5	103.2	102.8	102.4	102.2	102.1	102.0	101.9	101.8	101.4
85°	58.8	59.0	59.3	59.5	59.7	59.9	59.9	59.9	59.9	59.9	59.7
87.5°	23.2	23.3	23.4	23.6	23.8	23.9	23.8	23.8	23.7	23.7	23.8
90°	0.5	0.9	1.8	2.7	3.6	4.5	5.0	5.9	6.3	7.2	7.7
92.5°	5.5	6.7	10.5	16.1	23.8	37.1	61.7	103.1	148.1	145.7	118.0
95°	14.9	15.4	19.0	23.9	33.9	54.3	102.6	202.0	326.7	400.4	391.8
97.5°	24.8	25.3	27.8	32.8	41.7	56.4	88.4	161.2	291.8	427.5	495.7
100°	31.6	32.6	34.4	39.3	47.9	61.5	87.7	146.4	260.3	408.1	521.0
102.5°	39.2	39.8	41.2	46.6	54.4	67.6	90.9	140.3	236.4	373.7	505.8
105°	51.1	51.1	53.3	57.8	65.0	77.7	97.6	137.8	213.3	327.6	457.3
107.5°	62.7	63.5	65.7	69.4	76.9	88.3	107.6	142.0	203.5	295.9	407.8
110°	71.0	71.9	73.7	77.7	84.5	96.3	114.8	145.9	200.7	281.1	379.6



TEST NUMBER: P333267-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	79.3	80.2	81.6	85.7	92.4	103.9	121.7	151.0	200.7	272.4	358.6
115°	91.3	92.2	93.6	97.6	104.4	115.7	132.4	158.6	202.0	263.0	335.7
117.5°	102.1	103.5	105.0	109.0	116.7	127.6	143.5	167.3	204.9	258.4	322.1
120°	109.3	110.7	112.5	116.6	124.3	135.5	151.4	173.1	207.9	256.2	314.5
122.5°	116.9	118.0	119.4	123.4	131.9	143.1	159.0	179.6	210.4	254.4	308.0
125°	126.5	127.5	129.7	133.7	142.4	154.1	169.0	188.5	214.7	252.2	299.1
127.5°	134.0	135.4	138.3	143.5	152.6	164.3	178.6	196.5	219.4	251.0	291.0
130°	138.7	140.1	143.7	149.6	159.1	170.8	184.8	202.0	222.4	250.3	285.6
132.5°	142.4	144.1	148.4	155.0	164.9	176.6	190.6	206.7	225.6	250.3	281.2
135°	148.2	150.0	155.4	162.7	172.1	184.3	198.4	213.3	230.0	250.3	276.1
137.5°	155.7	157.0	162.1	169.3	178.6	191.2	203.9	218.2	234.1	250.9	271.5
140°	159.9	161.3	166.8	174.0	182.6	194.8	207.9	221.4	235.9	251.3	269.3
142.5°	165.0	166.0	171.1	178.3	186.6	198.0	210.4	223.2	236.9	251.6	267.5
145°	172.6	173.5	178.0	184.3	192.5	202.9	214.7	225.9	238.1	251.3	264.8
147.5°	180.5	181.1	185.0	190.8	197.9	207.1	217.4	227.6	238.6	250.1	262.0
150°	185.3	186.2	189.3	195.2	201.5	209.2	219.2	228.6	238.6	249.0	259.8
152.5°	190.4	190.8	193.7	198.8	204.8	211.8	220.9	229.3	238.2	247.6	257.3
155°	197.0	197.0	199.7	204.2	208.7	215.1	222.8	230.0	237.3	244.9	253.0
157.5°	203.0	202.9	205.1	209.0	212.9	217.7	224.3	230.4	236.1	242.2	249.1
160°	207.0	206.5	208.3	211.5	215.1	219.2	225.1	230.4	235.0	240.4	245.8
162.5°	210.2	209.8	211.6	214.4	217.3	220.6	225.8	230.1	233.9	238.2	243.0
165°	215.1	214.2	215.6	217.8	219.6	222.4	225.9	229.6	232.3	235.0	238.6
167.5°	218.3	217.9	218.7	220.0	221.3	222.9	225.9	228.5	229.7	231.8	234.3
170°	220.5	220.1	220.5	221.4	222.4	223.7	225.9	227.8	228.6	230.0	231.8
172.5°	222.0	221.2	221.6	222.5	223.1	223.7	225.6	227.0	227.2	227.8	229.3
175°	223.7	222.8	223.2	223.7	223.7	223.7	225.1	225.9	225.5	225.5	225.9
177.5°	224.5	223.8	223.8	224.1	223.8	223.8	224.5	224.8	224.1	224.1	224.5
180°	224.1	224.1	224.1	224.1	224.1	224.1	224.1	224.1	224.1	224.1	224.1



TEST NUMBER: P333267-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8	1351.8
2.5°	1347.8	1349.7	1351.6	1352.5	1352.3	1352.1	1351.9	1351.8
5°	1341.1	1343.2	1345.4	1346.3	1346.1	1345.8	1345.6	1345.4
7.5°	1327.5	1329.6	1331.7	1332.6	1332.4	1332.1	1331.9	1331.7
10°	1316.0	1317.9	1319.8	1320.6	1320.4	1320.2	1319.9	1319.7
12.5°	1300.7	1302.2	1303.7	1304.5	1304.4	1304.3	1304.3	1304.2
15°	1273.9	1275.1	1276.3	1276.9	1276.9	1276.9	1276.9	1276.9
17.5°	1242.9	1244.3	1245.8	1245.9	1244.8	1243.6	1242.4	1241.2
20°	1219.2	1220.9	1222.6	1222.8	1221.6	1220.4	1219.2	1218.1
22.5°	1192.5	1193.6	1194.6	1194.8	1194.0	1193.2	1192.4	1191.5
25°	1149.5	1150.0	1150.5	1150.3	1149.6	1148.9	1148.2	1147.5
27.5°	1104.5	1104.5	1104.7	1104.4	1103.7	1103.0	1102.2	1101.5
30°	1071.7	1071.2	1070.7	1070.2	1069.4	1068.7	1068.0	1067.3
32.5°	1038.4	1037.5	1036.7	1035.6	1034.4	1033.1	1031.7	1030.5
35°	986.8	985.6	984.4	982.9	981.0	979.1	977.2	975.3
37.5°	932.6	930.9	929.2	927.7	926.6	925.5	924.4	923.4
40°	895.1	892.9	890.8	889.4	888.7	888.0	887.2	886.5
42.5°	857.9	855.9	854.0	852.4	851.4	850.2	849.1	848.0
45°	802.8	799.9	797.1	795.3	794.6	793.8	793.1	792.4
47.5°	744.7	741.8	738.9	736.7	735.0	733.3	731.7	730.0
50°	705.0	701.9	698.8	696.4	694.7	693.1	691.4	689.8
52.5°	666.4	663.7	661.0	658.7	656.8	655.0	653.2	651.3
55°	606.3	604.2	602.1	600.2	598.5	596.8	595.2	593.5
57.5°	546.8	544.0	541.2	539.4	538.5	537.6	536.7	535.8
60°	506.4	504.1	501.7	499.6	498.0	496.3	494.6	493.0
62.5°	467.5	465.0	462.4	460.5	459.2	458.0	456.6	455.3
65°	406.4	404.3	402.1	400.5	399.6	398.6	397.7	396.7
67.5°	348.0	346.2	344.4	343.2	342.6	342.1	341.5	341.0
70°	309.4	308.0	306.6	305.4	304.4	303.5	302.5	301.6
72.5°	273.1	271.5	269.9	268.6	267.7	266.7	265.8	264.8
75°	216.7	216.0	215.3	214.4	213.5	212.5	211.6	210.6
77.5°	165.1	164.7	164.3	163.7	163.0	162.4	161.7	161.1
80°	132.1	131.9	131.7	131.3	130.8	130.3	129.8	129.4
82.5°	100.9	100.5	100.1	99.8	99.7	99.7	99.6	99.4
85°	59.4	59.2	58.9	58.5	58.1	57.6	57.1	56.6
87.5°	23.8	23.9	24.1	24.0	23.7	23.3	23.0	22.6
90°	8.2	8.6	9.0	9.9	9.9	9.9	10.4	10.4
92.5°	80.1	58.1	43.7	37.1	31.3	30.2	29.5	28.8
95°	324.9	256.2	200.7	162.7	130.6	117.0	113.4	106.2
97.5°	483.9	435.7	381.6	328.8	300.9	275.5	262.4	256.7
100°	555.8	533.7	487.1	440.1	408.9	376.4	359.7	352.4
102.5°	580.0	593.7	571.3	539.6	506.2	483.1	464.9	459.5
105°	565.8	627.6	647.5	642.5	628.1	613.2	604.2	598.7
107.5°	514.8	597.4	648.5	672.0	679.4	679.3	676.3	672.6
110°	477.2	563.1	626.8	665.2	685.5	694.1	697.3	697.3



TEST NUMBER: P333267-927

CATALOG NUMBER: S125DIP-S1090D590U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	447.6	529.1	593.5	638.8	668.5	683.3	691.1	694.3
115°	410.3	480.4	542.2	591.5	626.8	648.5	661.1	667.0
117.5°	386.3	446.6	499.9	545.2	580.4	602.9	615.4	619.0
120°	373.3	427.5	477.2	517.0	550.4	572.1	584.3	587.9
122.5°	363.5	413.8	458.0	495.3	525.1	544.9	557.1	560.4
125°	349.3	395.4	434.7	467.2	492.6	511.1	521.0	525.5
127.5°	334.9	377.9	414.5	445.0	467.9	484.3	493.7	495.7
130°	325.8	365.6	400.8	430.2	452.8	467.7	476.7	479.4
132.5°	316.8	354.0	386.0	414.3	436.9	451.8	460.1	463.2
135°	305.0	336.2	365.1	390.9	410.7	425.6	433.8	436.5
137.5°	295.1	320.3	344.4	366.2	384.0	397.6	405.0	408.1
140°	289.6	310.9	331.7	350.7	367.4	379.1	385.9	388.2
142.5°	284.9	302.9	320.8	337.3	351.5	361.4	367.8	369.7
145°	278.8	292.8	306.8	319.0	329.9	337.5	342.5	344.4
147.5°	273.1	284.4	295.2	304.4	313.0	319.1	322.0	322.8
150°	269.7	279.7	288.3	296.4	303.2	308.6	310.5	310.9
152.5°	266.2	275.0	282.9	289.2	294.9	299.2	301.0	301.5
155°	260.7	268.0	274.3	279.2	283.8	286.9	288.3	288.8
157.5°	255.3	261.3	266.2	270.1	273.5	276.2	277.4	277.3
160°	251.7	256.2	260.7	263.9	267.0	269.3	270.2	269.7
162.5°	247.7	251.9	255.6	258.5	260.9	262.8	263.0	262.9
165°	242.2	245.3	248.1	250.3	252.2	253.0	253.0	253.0
167.5°	236.9	239.1	241.1	242.7	243.7	244.5	244.1	244.0
170°	234.1	235.4	236.8	237.7	238.6	239.1	239.1	238.6
172.5°	230.8	232.2	233.1	233.7	233.9	234.7	234.0	233.5
175°	227.3	227.3	228.2	228.2	228.2	228.6	227.8	227.3
177.5°	224.8	225.2	225.2	225.2	224.8	225.2	224.1	224.1
180°	224.1	224.1	224.1	224.1	224.1	224.1	224.1	224.1

(END OF REPORT)